


X5R Dielectric

General Specifications

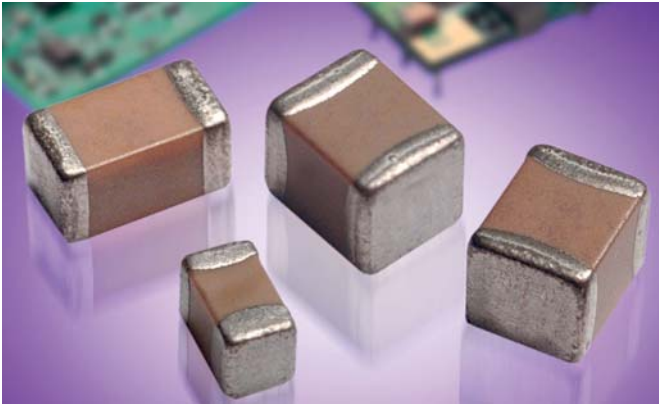

GENERAL DESCRIPTION

- General Purpose Dielectric for Ceramic Capacitors
- EIA Class II Dielectric
- Temperature variation of capacitance is within $\pm 15\%$ from -55°C to $+85^{\circ}\text{C}$
- Well suited for decoupling and filtering applications
- Available in High Capacitance values (up to $100\mu\text{F}$)

PART NUMBER (see page 2 for complete part number explanation)

1210

Size
(L" x W")
0101**
0201
0402
0603
0805
1206
1210
1812

4

Voltage
4 = 4V
6 = 6.3V
Z = 10V
Y = 16V
3 = 25V
D = 35V
5 = 50V
1 = 100V

D

Dielectric
D = X5R

107

Capacitance Code (In pF)
2 Sig. Digits +
Number of
Zeros

M

Capacitance Tolerance
K = $\pm 10\%$
M = $\pm 20\%$

A

Failure Rate
A = N/A

T

Terminations
T = Plated Ni
and Sn

2

Packaging
2 = 7" Reel
4 = 13" Reel
7 = Bulk Cass.
9 = Bulk
U = 4mm TR
(01005)

A



Special Code
A = Std.




**EIA 01005

NOTE: Contact factory for availability of Tolerance Options for Specific Part Numbers.
Contact factory for non-specified capacitance values.

TYPICAL ELECTRICAL CHARACTERISTICS

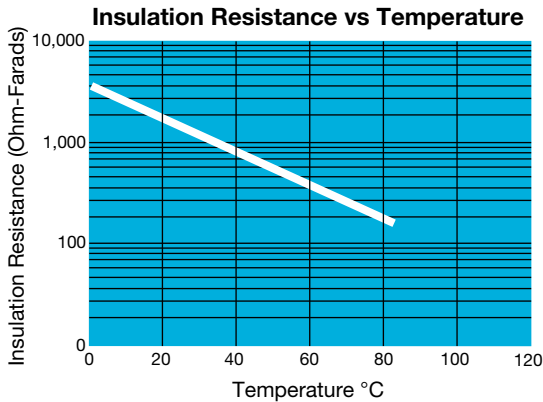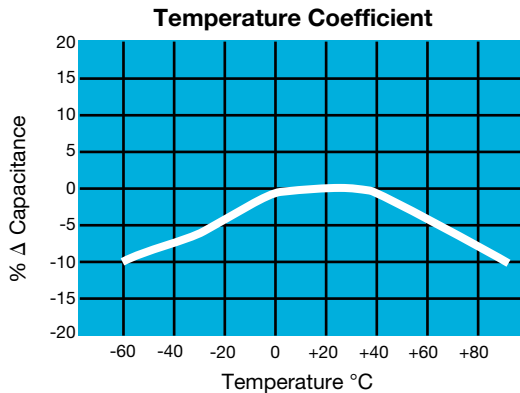

Specifications and Test Methods

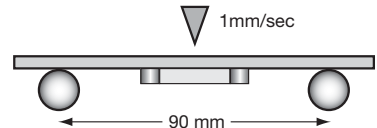Parameter/Test		X5R Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +85°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz $\pm$ 10% Voltage: 1.0Vrms $\pm$.2V For Cap > 10 μ F, 0.5Vrms @ 120Hz	
Dissipation Factor		$\leq$ 2.5% for $\geq$ 50V DC rating $\leq$ 3.0% for 25V DC rating $\leq$ 12.5% Max. for 16V DC rating and lower Contact Factory for DF by PN		
Insulation Resistance		10,000M Ω or 500M Ω - μ F, whichever is less		
Dielectric Strength		No breakdown or visual defects	Charge device with rated voltage for 120 $\pm$ 5 secs @ room temp/humidity Charge device with 300% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max)	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 	
	Capacitance Variation	$\leq \pm 12\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3		
Solderability		$\geq$ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq \pm 7.5\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq \pm 7.5\%$	Step 2: Room Temp	$\leq$ 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +85°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	$\leq$ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 $\pm$ 2 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with 1.5X rated voltage in test chamber set at 85°C $\pm$ 2°C for 1000 hours (+48, -0). Note: Contact factory for *optional specification part numbers that are tested at < 1.5X rated voltage. Remove from test chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	$\leq$ Initial Value x 2.0 (See Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature and humidity for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	$\leq$ Initial Value x 2.0 (See Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

X5R Dielectric

Capacitance Range



PREFERRED SIZES ARE SHADED

Case Size	0101*			0201			0402			0603			0805												
Soldering	Reflow Only			Reflow Only			Reflow/Wave			Reflow/Wave			Reflow/Wave												
Packaging	Paper/Embossed			All Paper			All Paper			All Paper			Paper/Embossed												
(L) Length	mm	0.40 ± 0.02 (0.016 ± 0.0008)		0.60 ± 0.03 (0.024 ± 0.001)		1.00 ± 0.10 (0.040 ± 0.004)		1.60 ± 0.15 (0.063 ± 0.006)		2.01 ± 0.20 (0.079 ± 0.008)															
(W) Width	mm	0.20 ± 0.02 (0.008 ± 0.0008)		0.30 ± 0.03 (0.011 ± 0.001)		0.50 ± 0.10 (0.020 ± 0.004)		0.81 ± 0.15 (0.032 ± 0.006)		1.25 ± 0.20 (0.049 ± 0.008)															
(t) Terminal	mm	0.10 ± 0.04 (0.004 ± 0.016)		0.15 ± 0.05 (0.006 ± 0.002)		0.25 ± 0.15 (0.010 ± 0.006)		0.35 ± 0.15 (0.014 ± 0.006)		0.50 ± 0.25 (0.020 ± 0.010)															
Voltage:	6.3	10	4	6.3	10	16	25	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50				
Cap (pF)	100 101	B					A																		
	150 151	B					A																		
	220 221	B					A			C															
	330 331	B					A			C															
	470 471	B					A			C															
	680 681	B					A			C															
	1000 102	B				A	A			C															
	1500 152	B	B			A	A			C															
	2200 222	B	B			A	A	A		C															
	3300 332	B	B			A	A	A		C															
	4700 472	B	B			A	A	A		C					G										
	6800 682	B	B			A	A	A		C					G										
Cap (µF)	0.01 103	B	B			A	A	A		C			G	G	G										
	0.015 153	B								C			G	G	G										
	0.022 223	B			A					C	C		G	G	G						N				
	0.033 333	B								C			G	G	G						N				
	0.047 473	B			A					C	C		G	G	G						N				
	0.068 683	B								C			G		G						N				
	0.1 104	B			A	A				C	C	C	C		G	G	G			N	N	N			
	0.15 154												G							N	N				
	0.22 224	B			A	A	A			C	C	C		G	G					N	N	N			
	0.33 334												G	G						N					
	0.47 474				A	A				C	C	C	C		G	J				N	P	P			
	0.68 684												G							N					
	1.0 105				A	A				C	C	C	C		G	G	G	G		N	N	P	P		
	1.5 155																								
	2.2 225				A	A				C	C	C			G	G	J	J	J		N	N	N	P	P
	3.3 335												J	J	J	J				N	N				
	4.7 475									E	E				J	J	J	G		N	N	N	N	P	P
	10 106									E	E				K	J	J			N	N	N	N	P	
	22 226														K	K				N	N	P	P		
	47 476																			P	P				
	100 107																			P					
Voltage:	6.3	10	4	6.3	10	16	25	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50				
Case Size	0101*			0201			0402			0603			0805												

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
PAPER							EMBOSS							

NOTE: Contact factory for non-specified capacitance values

*EIA 01005



X5R Dielectric

Capacitance Range



PREFERRED SIZES ARE SHADED

Case Size		1206								1210								1812							
Soldering		Reflow/Wave								Reflow Only								Reflow Only							
Packaging		Paper/Embossed								Paper/Embossed								All Embossed							
(L) Length	mm	3.20 ± 0.20								3.20 ± 0.20								4.50 ± 0.30							
	(in.)	(0.126 ± 0.008)								(0.126 ± 0.008)								(0.177 ± 0.012)							
(W) Width	mm	1.60 ± 0.20								2.50 ± 0.20								3.20 ± 0.20							
	(in.)	(0.063 ± 0.008)								(0.098 ± 0.008)								(0.126 ± 0.008)							
(T) Terminal	mm	0.50 ± 0.25								0.50 ± 0.25								0.61 ± 0.36							
	(in.)	(0.020 ± 0.010)								(0.020 ± 0.010)								(0.024 ± 0.014)							
Voltage:		4	6.3	10	16	25	35	50	100	4	6.3	10	16	25	35	50		4	6.3	10	16	25	35	50	
Cap (pF)	100	101																							
	150	151																							
	220	221																							
	330	331																							
	470	471																							
	680	681																							
	1000	102																							
	1500	152																							
	2200	222																							
	3300	332																							
	4700	472																							
	6800	682																							
Cap (µF)	0.01	103																							
	0.015	153																							
	0.022	223																							
	0.033	333																							
	0.047	473																							
	0.068	683																							
	0.1	104																							
	0.15	154																							
	0.22	224																							
	0.33	334																							
	0.47	474					Q	Q							X	X									
	0.68	684																							
	1.0	105					Q	Q	Q	Q				X	X	X									
	1.5	155																							
	2.2	225				Q	Q	Q	Q	Q	Q			X	Z	Z									
	3.3	335				Q	Q																		
	4.7	475	Q	Q	Q	Q	Q	Q	Q	X			Q	Q	Z	Z	Z								
	10	106	Q	Q	Q	Q	Q	Q	Q	X			X	X	Z	Z	Z						Z		
	22	226	Q	Q	Q	Q	Q						Z	Z	Z	Z	Z								
	47	476	Q	Q	Q								Z	Z	Z	Z				Z					
	100	107	Q	Q									Z	Z	Z	Z									
Voltage		4	6.3	10	16	25	35	50	100	4	6.3	10	16	25	35	50		4	6.3	10	16	25	35	50	
Case Size		1206								1210								1812							

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
PAPER							EMBOSS							

NOTE: Contact factory for non-specified capacitance values

*EIA 01005





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.