

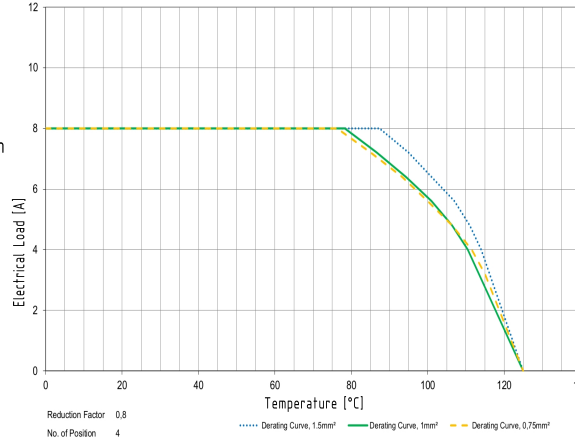
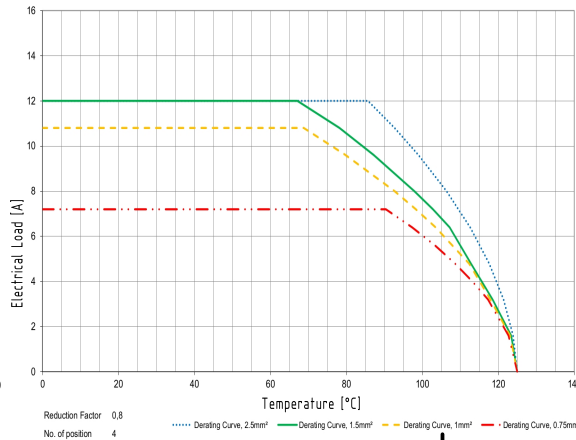
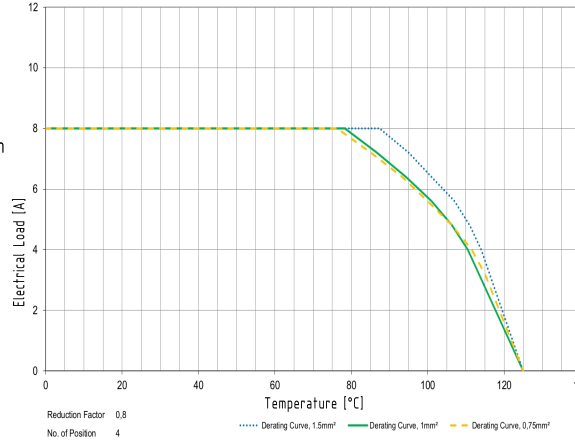
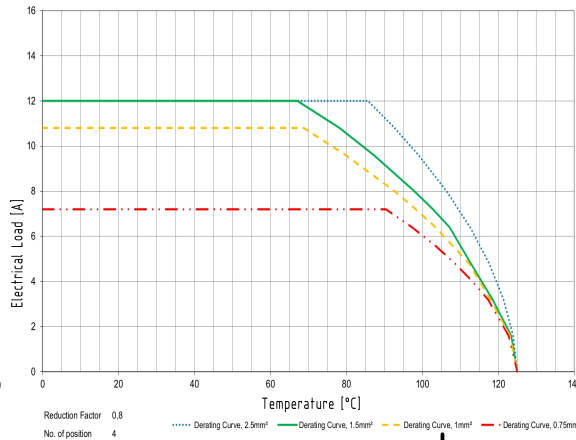
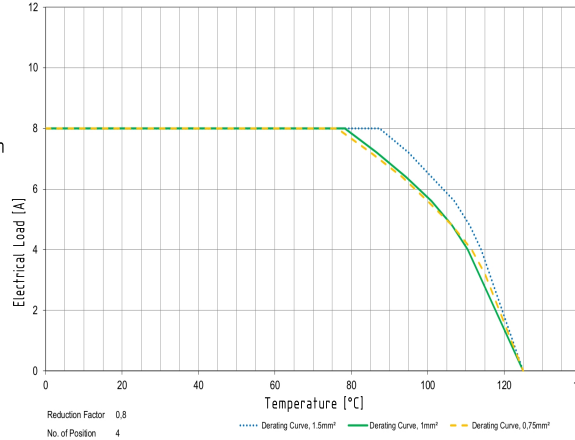


1	2	3	4	5	6	7	8																																																																																																																																																																														
A	har-flexicon female connector, horizontal, push-in RoHS compliant			Cable connection <table><tr><td>Type</td><td>har-flexicon 3.50/3.81 FPH</td><td>har-flexicon 5.00/5.08 FPH</td></tr><tr><td>Part numbers</td><td>1431xx14102xxx & 1431xx15102xxx</td><td>1431xx16102xxx & 1431xx17102xxx</td></tr><tr><td>Conductor size AWG max</td><td>14 AWG</td><td>12 AWG</td></tr><tr><td>Conductor size AWG min</td><td>30 AWG</td><td>30 AWG</td></tr><tr><td>Conductor size solid max</td><td>1.5 mm²</td><td>2.5 mm²</td></tr><tr><td>Conductor size solid min</td><td>0.14 mm²</td><td>0.2 mm²</td></tr><tr><td>Conductor size stranded max</td><td>1.5 mm²</td><td>2.5 mm²</td></tr><tr><td>Conductor size stranded min</td><td>0.14 mm²</td><td>0.2 mm²</td></tr><tr><td>Conductor size stranded for end sleeve</td><td></td><td></td></tr><tr><td>Stripping length max</td><td>10 mm</td><td>10 mm</td></tr><tr><td>Stripping length min</td><td>9 mm</td><td>10 mm</td></tr></table>				Type	har-flexicon 3.50/3.81 FPH	har-flexicon 5.00/5.08 FPH	Part numbers	1431xx14102xxx & 1431xx15102xxx	1431xx16102xxx & 1431xx17102xxx	Conductor size AWG max	14 AWG	12 AWG	Conductor size AWG min	30 AWG	30 AWG	Conductor size solid max	1.5 mm ²	2.5 mm ²	Conductor size solid min	0.14 mm ²	0.2 mm ²	Conductor size stranded max	1.5 mm ²	2.5 mm ²	Conductor size stranded min	0.14 mm ²	0.2 mm ²	Conductor size stranded for end sleeve			Stripping length max	10 mm	10 mm	Stripping length min	9 mm	10 mm	A																																																																																																																																												
Type	har-flexicon 3.50/3.81 FPH	har-flexicon 5.00/5.08 FPH																																																																																																																																																																																			
Part numbers	1431xx14102xxx & 1431xx15102xxx	1431xx16102xxx & 1431xx17102xxx																																																																																																																																																																																			
Conductor size AWG max	14 AWG	12 AWG																																																																																																																																																																																			
Conductor size AWG min	30 AWG	30 AWG																																																																																																																																																																																			
Conductor size solid max	1.5 mm ²	2.5 mm ²																																																																																																																																																																																			
Conductor size solid min	0.14 mm ²	0.2 mm ²																																																																																																																																																																																			
Conductor size stranded max	1.5 mm ²	2.5 mm ²																																																																																																																																																																																			
Conductor size stranded min	0.14 mm ²	0.2 mm ²																																																																																																																																																																																			
Conductor size stranded for end sleeve																																																																																																																																																																																					
Stripping length max	10 mm	10 mm																																																																																																																																																																																			
Stripping length min	9 mm	10 mm																																																																																																																																																																																			
B	General information <table><tr><td colspan="3">Design female connector</td></tr><tr><td>Type</td><td>har-flexicon 3.50/3.81 FPH</td><td>har-flexicon 5.00/5.08 FPH</td></tr><tr><td>Part numbers</td><td>1431xx14102xxx & 1431xx14106xxx 1431xx15102xxx & 1431xx15106xxx</td><td>1431xx16102xxx 1431xx17102xxx & 1431xx17106xxx</td></tr><tr><td>Contact pitch</td><td>3.50 mm / 3.81 mm</td><td>5 mm / 5.08 mm</td></tr><tr><td>No. of contacts</td><td>2-25 poles</td><td>2-18 poles</td></tr><tr><td>Rated surge voltage (II/2)</td><td>2,5 kV</td><td>4 kV (overvoltage cat. II / pollution degree 2)</td></tr><tr><td>Rated surge voltage (III/2)</td><td>2,5 kV</td><td>4 kV (overvoltage cat. III / pollution degree 2)</td></tr><tr><td>Rated surge voltage (III/3)</td><td>2,5 kV</td><td>4 kV (overvoltage cat. III / pollution degree 3)</td></tr><tr><td>Rated Voltage</td><td>300 V</td><td>300 V</td></tr><tr><td>Rated voltage (II/2)</td><td>300 V</td><td>600 V (overvoltage cat. II / pollution degree 2)</td></tr><tr><td>Rated voltage (III/2)</td><td>150 V</td><td>300 V (overvoltage cat. III / pollution degree 2)</td></tr><tr><td>Rated voltage (III/3):</td><td>150 V</td><td>250 V (overvoltage cat. III / pollution degree 3)</td></tr><tr><td>Working current</td><td>11 A</td><td>12 A</td></tr><tr><td>Usegroup B, rated voltage / current</td><td>300 V / 11 A stranded, 9 A solid</td><td>300 V / 12 A</td></tr><tr><td>Usegroup C, rated voltage / current</td><td>- / -</td><td>- / -</td></tr><tr><td>Usegroup D, rated voltage / current</td><td>300 V / 11 A stranded, 9 A solid</td><td>300 V / 12 A</td></tr><tr><td>Contact resistance</td><td colspan="2">max. 15 mOhm</td></tr><tr><td>Insulation resistance</td><td colspan="2">min. 10⁹ Ohm (500 V DC)</td></tr><tr><td>Temperature range</td><td colspan="2">-40°C ... +110°C</td></tr><tr><td>Termination technology</td><td colspan="2">push-in</td></tr><tr><td>Insertion force</td><td colspan="2">max. 3 N</td></tr><tr><td>Withdrawal force</td><td colspan="2">min. 1.5 N</td></tr><tr><td>Hot plugging</td><td colspan="2">No</td></tr><tr><td>Mechanical Shock IEC 61373 (05/10)</td><td>5 g, 30 ms, 5 shocks/axis and each direction no contact disturbance >= 1 µs</td><td>for p/n ...6xxx</td></tr><tr><td>Random Vibration IEC 61373 (05/10)</td><td>Cat 1 class B 5,72 m/s² no contact disturbance >=1 µs</td><td>for p/n ...6xxx</td></tr><tr><td>Vibration</td><td>10-150 Hz, 0.35 mm, 5 g, 2 h each axes -> No contact disturbance >= 1 µs</td><td>for p/n ...2xxx</td></tr><tr><td>RoHS - compliant</td><td colspan="2">Yes</td></tr><tr><td>UL file</td><td colspan="2">E314677</td></tr></table>			Design female connector			Type	har-flexicon 3.50/3.81 FPH	har-flexicon 5.00/5.08 FPH	Part numbers	1431xx14102xxx & 1431xx14106xxx 1431xx15102xxx & 1431xx15106xxx	1431xx16102xxx 1431xx17102xxx & 1431xx17106xxx	Contact pitch	3.50 mm / 3.81 mm	5 mm / 5.08 mm	No. of contacts	2-25 poles	2-18 poles	Rated surge voltage (II/2)	2,5 kV	4 kV (overvoltage cat. II / pollution degree 2)	Rated surge voltage (III/2)	2,5 kV	4 kV (overvoltage cat. III / pollution degree 2)	Rated surge voltage (III/3)	2,5 kV	4 kV (overvoltage cat. III / pollution degree 3)	Rated Voltage	300 V	300 V	Rated voltage (II/2)	300 V	600 V (overvoltage cat. II / pollution degree 2)	Rated voltage (III/2)	150 V	300 V (overvoltage cat. III / pollution degree 2)	Rated voltage (III/3):	150 V	250 V (overvoltage cat. III / pollution degree 3)	Working current	11 A	12 A	Usegroup B, rated voltage / current	300 V / 11 A stranded, 9 A solid	300 V / 12 A	Usegroup C, rated voltage / current	- / -	- / -	Usegroup D, rated voltage / current	300 V / 11 A stranded, 9 A solid	300 V / 12 A	Contact resistance	max. 15 mOhm		Insulation resistance	min. 10 ⁹ Ohm (500 V DC)		Temperature range	-40°C ... +110°C		Termination technology	push-in		Insertion force	max. 3 N		Withdrawal force	min. 1.5 N		Hot plugging	No		Mechanical Shock IEC 61373 (05/10)	5 g, 30 ms, 5 shocks/axis and each direction no contact disturbance >= 1 µs	for p/n ...6xxx	Random Vibration IEC 61373 (05/10)	Cat 1 class B 5,72 m/s ² no contact disturbance >=1 µs	for p/n ...6xxx	Vibration	10-150 Hz, 0.35 mm, 5 g, 2 h each axes -> No contact disturbance >= 1 µs	for p/n ...2xxx	RoHS - compliant	Yes		UL file	E314677		Packaging unit <table><tr><td colspan="6">types 3.50/3.81 FPH</td></tr><tr><td>Type of packaging</td><td>No. of poles (xx)</td><td>Quantity</td><td>MOQ</td><td>Index (xxx)</td><td>Remark</td></tr><tr><td>box</td><td>2</td><td>300</td><td>1</td><td>000</td><td></td></tr><tr><td>box</td><td>3</td><td>200</td><td>1</td><td>000</td><td></td></tr><tr><td>box</td><td>4 - 5</td><td>150</td><td>1</td><td>000</td><td></td></tr><tr><td>box</td><td>6 - 12</td><td>100</td><td>1</td><td>000</td><td></td></tr><tr><td>box</td><td>13 - 20</td><td>50</td><td>1</td><td>000</td><td></td></tr><tr><td>box</td><td>21 - 25</td><td>25</td><td>1</td><td>-</td><td></td></tr><tr><td colspan="6">types 5.00/5.08 FPH</td></tr><tr><td>Type of packaging</td><td>No. of poles (xx)</td><td>Quantity</td><td>1</td><td>Index (xxx)</td><td>Remark</td></tr><tr><td>box</td><td>2</td><td>300</td><td>1</td><td>-</td><td></td></tr><tr><td>box</td><td>3</td><td>200</td><td>1</td><td>-</td><td></td></tr><tr><td>box</td><td>4 - 5</td><td>150</td><td>1</td><td>-</td><td></td></tr><tr><td>box</td><td>6 - 12</td><td>100</td><td>1</td><td>-</td><td></td></tr><tr><td>box</td><td>13 - 20</td><td>50</td><td>1</td><td>-</td><td></td></tr></table>			types 3.50/3.81 FPH						Type of packaging	No. of poles (xx)	Quantity	MOQ	Index (xxx)	Remark	box	2	300	1	000		box	3	200	1	000		box	4 - 5	150	1	000		box	6 - 12	100	1	000		box	13 - 20	50	1	000		box	21 - 25	25	1	-		types 5.00/5.08 FPH						Type of packaging	No. of poles (xx)	Quantity	1	Index (xxx)	Remark	box	2	300	1	-		box	3	200	1	-		box	4 - 5	150	1	-		box	6 - 12	100	1	-		box	13 - 20	50	1	-		B
Design female connector																																																																																																																																																																																					
Type	har-flexicon 3.50/3.81 FPH	har-flexicon 5.00/5.08 FPH																																																																																																																																																																																			
Part numbers	1431xx14102xxx & 1431xx14106xxx 1431xx15102xxx & 1431xx15106xxx	1431xx16102xxx 1431xx17102xxx & 1431xx17106xxx																																																																																																																																																																																			
Contact pitch	3.50 mm / 3.81 mm	5 mm / 5.08 mm																																																																																																																																																																																			
No. of contacts	2-25 poles	2-18 poles																																																																																																																																																																																			
Rated surge voltage (II/2)	2,5 kV	4 kV (overvoltage cat. II / pollution degree 2)																																																																																																																																																																																			
Rated surge voltage (III/2)	2,5 kV	4 kV (overvoltage cat. III / pollution degree 2)																																																																																																																																																																																			
Rated surge voltage (III/3)	2,5 kV	4 kV (overvoltage cat. III / pollution degree 3)																																																																																																																																																																																			
Rated Voltage	300 V	300 V																																																																																																																																																																																			
Rated voltage (II/2)	300 V	600 V (overvoltage cat. II / pollution degree 2)																																																																																																																																																																																			
Rated voltage (III/2)	150 V	300 V (overvoltage cat. III / pollution degree 2)																																																																																																																																																																																			
Rated voltage (III/3):	150 V	250 V (overvoltage cat. III / pollution degree 3)																																																																																																																																																																																			
Working current	11 A	12 A																																																																																																																																																																																			
Usegroup B, rated voltage / current	300 V / 11 A stranded, 9 A solid	300 V / 12 A																																																																																																																																																																																			
Usegroup C, rated voltage / current	- / -	- / -																																																																																																																																																																																			
Usegroup D, rated voltage / current	300 V / 11 A stranded, 9 A solid	300 V / 12 A																																																																																																																																																																																			
Contact resistance	max. 15 mOhm																																																																																																																																																																																				
Insulation resistance	min. 10 ⁹ Ohm (500 V DC)																																																																																																																																																																																				
Temperature range	-40°C ... +110°C																																																																																																																																																																																				
Termination technology	push-in																																																																																																																																																																																				
Insertion force	max. 3 N																																																																																																																																																																																				
Withdrawal force	min. 1.5 N																																																																																																																																																																																				
Hot plugging	No																																																																																																																																																																																				
Mechanical Shock IEC 61373 (05/10)	5 g, 30 ms, 5 shocks/axis and each direction no contact disturbance >= 1 µs	for p/n ...6xxx																																																																																																																																																																																			
Random Vibration IEC 61373 (05/10)	Cat 1 class B 5,72 m/s ² no contact disturbance >=1 µs	for p/n ...6xxx																																																																																																																																																																																			
Vibration	10-150 Hz, 0.35 mm, 5 g, 2 h each axes -> No contact disturbance >= 1 µs	for p/n ...2xxx																																																																																																																																																																																			
RoHS - compliant	Yes																																																																																																																																																																																				
UL file	E314677																																																																																																																																																																																				
types 3.50/3.81 FPH																																																																																																																																																																																					
Type of packaging	No. of poles (xx)	Quantity	MOQ	Index (xxx)	Remark																																																																																																																																																																																
box	2	300	1	000																																																																																																																																																																																	
box	3	200	1	000																																																																																																																																																																																	
box	4 - 5	150	1	000																																																																																																																																																																																	
box	6 - 12	100	1	000																																																																																																																																																																																	
box	13 - 20	50	1	000																																																																																																																																																																																	
box	21 - 25	25	1	-																																																																																																																																																																																	
types 5.00/5.08 FPH																																																																																																																																																																																					
Type of packaging	No. of poles (xx)	Quantity	1	Index (xxx)	Remark																																																																																																																																																																																
box	2	300	1	-																																																																																																																																																																																	
box	3	200	1	-																																																																																																																																																																																	
box	4 - 5	150	1	-																																																																																																																																																																																	
box	6 - 12	100	1	-																																																																																																																																																																																	
box	13 - 20	50	1	-																																																																																																																																																																																	
C	Isulator material <table><tr><td>Material</td><td>PA/PPA</td></tr><tr><td>Color</td><td>green</td></tr><tr><td>UL classification</td><td>UL 94-V0</td></tr><tr><td>Material group acc. to IEC 60664-1</td><td>I (CTI > 600)</td></tr></table>			Material	PA/PPA	Color	green	UL classification	UL 94-V0	Material group acc. to IEC 60664-1	I (CTI > 600)	Contact material <table><tr><td></td><td>contact zone</td><td>termination zone (spring)</td></tr><tr><td>Contact material</td><td>Copper alloy</td><td>EN 1.4310 / AISI 301</td></tr><tr><td>Plating</td><td>Sn</td><td>no</td></tr></table>				contact zone	termination zone (spring)	Contact material	Copper alloy	EN 1.4310 / AISI 301	Plating	Sn	no	C																																																																																																																																																													
Material	PA/PPA																																																																																																																																																																																				
Color	green																																																																																																																																																																																				
UL classification	UL 94-V0																																																																																																																																																																																				
Material group acc. to IEC 60664-1	I (CTI > 600)																																																																																																																																																																																				
	contact zone	termination zone (spring)																																																																																																																																																																																			
Contact material	Copper alloy	EN 1.4310 / AISI 301																																																																																																																																																																																			
Plating	Sn	no																																																																																																																																																																																			
D	Derating The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature. Control and test procedures according to DIN IEC 60512-5 Derating: har-flexicon 3.50/3.81 FPH:  Derating: har-flexicon 5.00/5.08 FPH: 			All rights reserved Department EC PD - DE HARTING Electronics GmbH D-32339 Espelkamp Scale 1:1 Free size tol. Created by TADJE Inspected by LEHNERT Standardisation HOFFMANN Date 2015-10-15 State Final Release Title har-flexicon female connector, horizontal, push-in Type DS Number 14312302001 Doc-Key / ECM-Nr. 100579786/UGD/000/C 500000093564 Rev. C Page 1/1			D																																																																																																																																																																														
E	Derating The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature. Control and test procedures according to DIN IEC 60512-5 Derating: har-flexicon 3.50/3.81 FPH:  Derating: har-flexicon 5.00/5.08 FPH: 			All rights reserved Department EC PD - DE HARTING Electronics GmbH D-32339 Espelkamp Scale 1:1 Free size tol. Created by TADJE Inspected by LEHNERT Standardisation HOFFMANN Date 2015-10-15 State Final Release Title har-flexicon female connector, horizontal, push-in Type DS Number 14312302001 Doc-Key / ECM-Nr. 100579786/UGD/000/C 500000093564 Rev. C Page 1/1			E																																																																																																																																																																														
F	Derating The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature. Control and test procedures according to DIN IEC 60512-5 Derating: har-flexicon 3.50/3.81 FPH:  Derating: har-flexicon 5.00/5.08 FPH: 			All rights reserved Department EC PD - DE HARTING Electronics GmbH D-32339 Espelkamp Scale 1:1 Free size tol. Created by TADJE Inspected by LEHNERT Standardisation HOFFMANN Date 2015-10-15 State Final Release Title har-flexicon female connector, horizontal, push-in Type DS Number 14312302001 Doc-Key / ECM-Nr. 100579786/UGD/000/C 500000093564 Rev. C Page 1/1			F																																																																																																																																																																														
1	2	3	4	5	6	7	8																																																																																																																																																																														

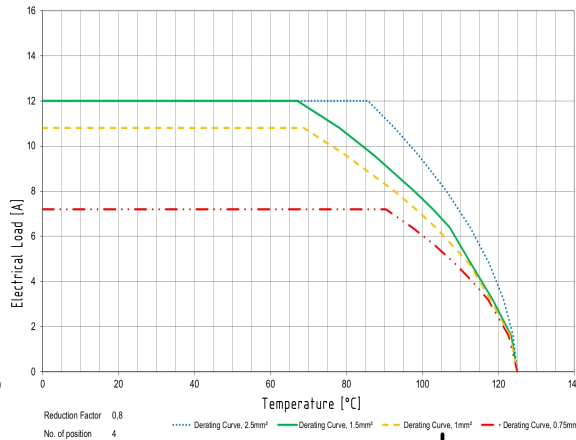

All rights reserved
Department EC PD - DE



All Dimensions in mm
Original Size DIN A3

Scale
1:1

Free size tol.

Ref.
Sub. DS 14312302001 / 500000077827 / 2014-07-31

Created by
TADJE

Inspected by
LEHNERT

Standardisation
HOFFMANN

Date
2015-10-15

State
Final Release

Title
har-flexicon female connector, horizontal, push-in

Doc-Key / ECM-Nr.
100579786/UGD/000/C
500000093564

Type
DS

Number
14312302001

Rev.
C

Page
1/1

HARTING Electronics GmbH
D-32339 Espelkamp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

<u>14310614102000</u>	<u>14310817102000</u>	<u>14311214102000</u>	<u>14311216102000</u>	<u>14310217102000</u>	<u>14310417102000</u>
<u>14310516102000</u>	<u>14310517102000</u>	<u>14310814102000</u>	<u>14310815102000</u>	<u>14311016102000</u>	<u>14311017102000</u>
<u>14310216102000</u>	<u>14310315102000</u>	<u>14310316102000</u>	<u>14310317102000</u>	<u>14310615102000</u>	<u>14310616102000</u>
<u>14311015102000</u>	<u>14310314102000</u>	<u>14310617102000</u>	<u>14310816102000</u>	<u>14311014102000</u>	<u>14311217102000</u>
<u>14310214102000</u>	<u>14310215102000</u>	<u>14310414102000</u>	<u>14310415102000</u>	<u>14310416102000</u>	<u>14311215102000</u>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.