


## SERIES 75

0.3" Diameter, 200 mA




### FEATURES

- Small Size
- Flush, Shafted, or Knobbed Shaft






### DIMENSIONS in inches (and millimeters)




#### Screwdriver Actuated

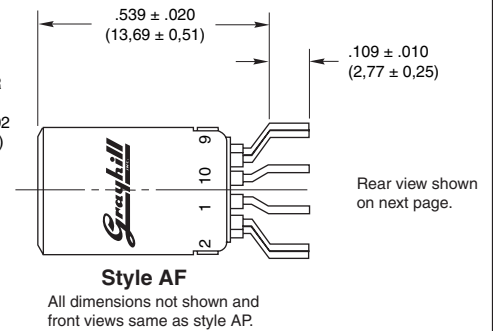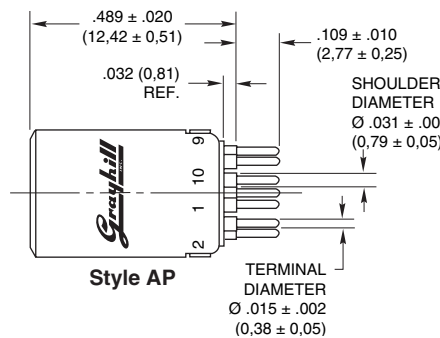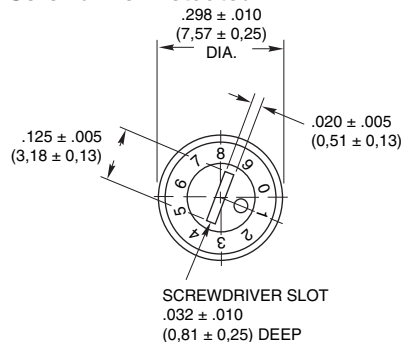

#### Shaft Actuated

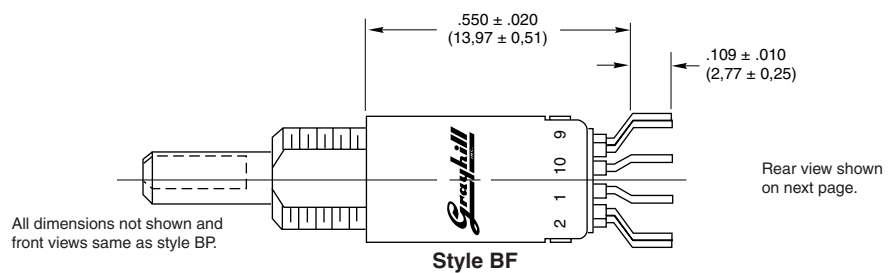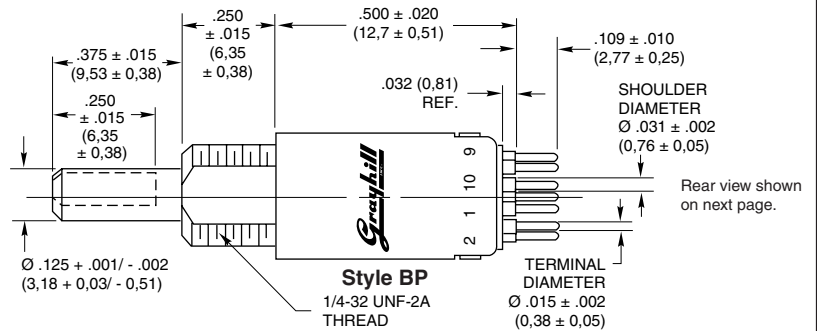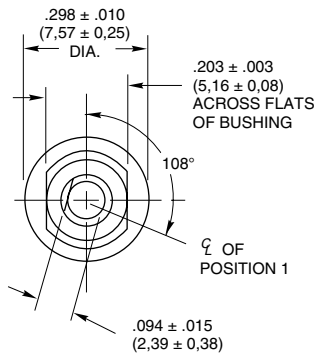


#### Integral Knob Actuated

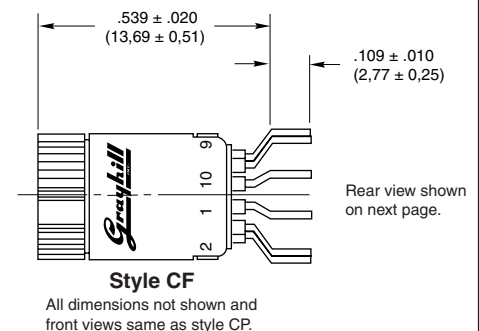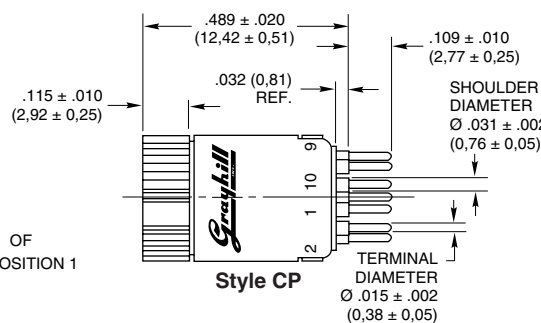

Grayhill part number and date code marked on label.  
Customer part number marked on request.


## CIRCUIT DIAGRAMS AND REAR VIEWS

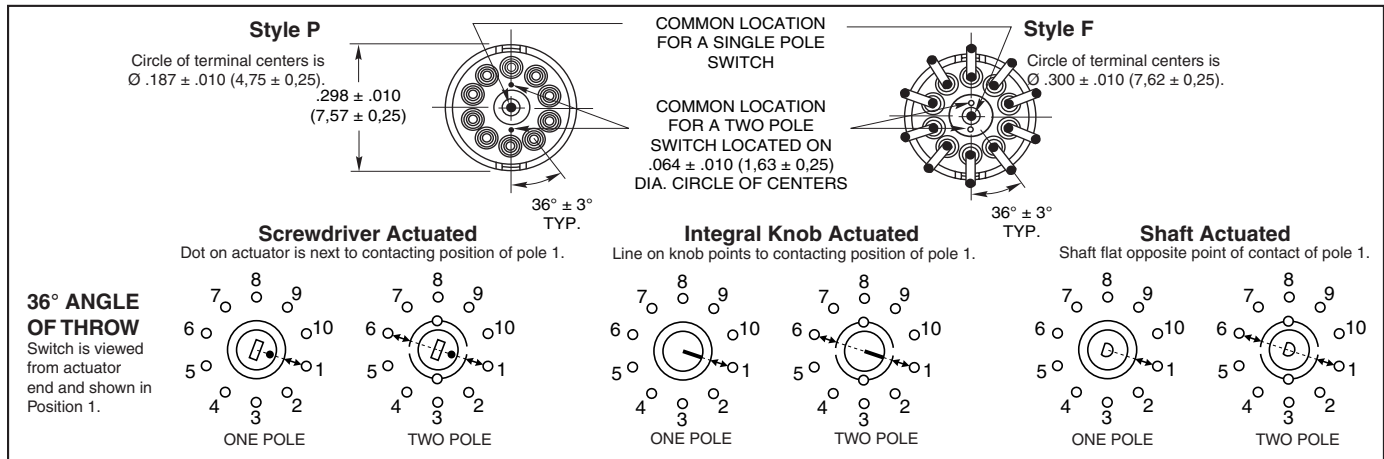

## SPECIFICATIONS

## Electrical Ratings

Chart shown for non-shorting (break before make) contacts, resistive load.



One cycle is 360° rotation and a return through all switch positions to the starting position. The data for the curve was measured at sea level, 25°C and 68% relative humidity with the following limiting criteria:

**Contact Resistance:** 50 milliohms maximum (15 milliohms initially).

**Insulation Resistance:** 10,000 Mohms

minimum between mutually insulated parts.  
**Voltage Breakdown:** 500 Vac between mutually insulated parts.

**Life Expectancy:** 10,000 cycles at 200 milliamps. One cycle is 360° rotation and a return through all switch positions to the starting position.

**Low Level Rating:** Make and break a 50 mV, 1 milliamp, resistive load for 10,000 cycles with a maximum contact resistance of 50 milliohms.

Contact Grayhill for information if the life limiting criteria is more critical than those listed, if the required cycles of operation are greater than those listed, if a larger make and break current is required than the one listed for the desired number of cycles, or if elevated temperatures or reduced pressures are part of the operating environment.

## Materials and Finishes

**Switch Base:** Diallyl per MIL-M-14

**Detent Cover and Detent Rotor in Styles AP, AF, BP, and BF:** Phenolic per MIL-M-14

**Bushing:** Brass, tin zinc plating

**Stop Pin:** Stainless steel, passivated

**Detent Balls:** Steel, nickel-plated

**Detent and Contact Springs:** Tinned music wire

**Rotor Contact:** Silver cad-oxide, gold-plated

**Terminals and Common:** Brass, gold plate .00002" minimum thickness over silver plate .0003" minimum.

**Shaft in Style BF or BP:** Zinc

**Integral Knob and Detent Rotor in Style CF or CP:** Red Thermoplastic

**Mounting Hardware for Style BF or BP:** One mounting nut .062" thick by .312" across flats and one external tooth lockwasher supplied with each switch. Mounting nut is brass, zinc plated and lockwasher is spring steel.

## Additional Characteristics

**Contact Type:** Non-shorting, wiping contacts


**Terminals:** Switches are provided with the full circle of terminals regardless of the number of active positions.

**Stop Strength:** 8 ounce-inches minimum

## CHOICES AND LIMITATIONS

| Style and Designation                         |                                               | Angle Of Throw | Stops | Terminal | Poles Per Deck | Number of Decks |              | Number of Positions/Pole |
|-----------------------------------------------|-----------------------------------------------|----------------|-------|----------|----------------|-----------------|--------------|--------------------------|
| $\varnothing$ 0.187 (4,75)<br>Circle of Term. | $\varnothing$ 0.300 (7,62)<br>Circle of Term. |                |       |          |                | Shorting        | Non-Shorting |                          |
| AP = Screwdriver Actuated                     | AF = Screwdriver Actuated                     | 36°            | Fixed | Printed  | 1<br>2         | Not Available   | 1<br>1       | 2 thru 10<br>2 thru 5    |
| BP = Shaft Operated                           | BF = Shaft Operated                           |                |       |          |                |                 |              |                          |
| CP = Integral Knob                            | CF = Integral Knob                            |                |       |          |                |                 |              |                          |

## ORDERING INFORMATION

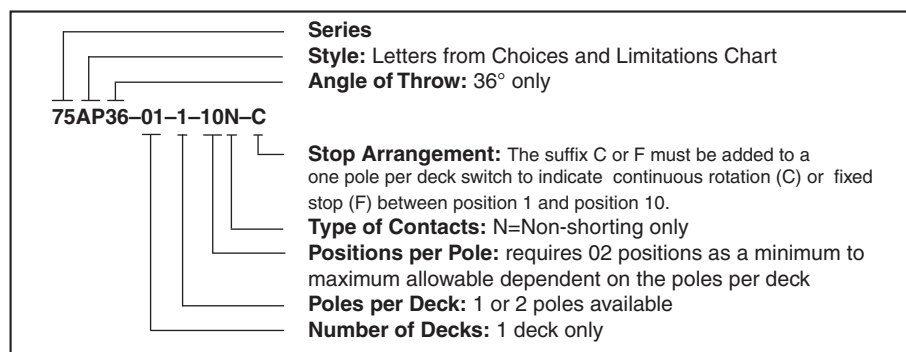

**Available from your local Grayhill Distributor.**

For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.