

Large Ferrule Crimping Dies

PANDUIT®

SPECIFICATION SHEET

specifications

Large ferrule crimping dies shall be designed to snap into the battery powered crimping tool CT-3001 or CT-3001/E and shall have a cycle time of three seconds. These crimping dies shall be used to install ferrules onto the stripped ends of #1 AWG to 500 kcmil flexible cable, classes DLO, H, I, K, and M. The ferrules shall be used to manage the individual wire strands comprising the bundle and prevent broken and turned back strands. Ferrules on mechanically terminated cable shall prevent generation of excessive heat. Ferrule crimping dies shall provide sufficient wire pullout tensile force and shall reduce the cable's outer profile to less than the ferrule's outside diameter. These crimping dies and ferrules shall be used to improve the efficiency and reliability of electrical distribution panels, switchgear, MCC panels, and transmission stations.



technical information

| | |
|------------------------------|------------------------|
| Die dimensions: | See table on next page |
| Die life: | 50,000 cycles |
| Material: | 4140 Steel/RC 32-35 |
| Mounting style: | Snap-in |
| Plating: | Chrome |
| Weight approximately: | 0.65 lb. per die set |

key features and benefits

| | |
|---|---|
| Interchangeable dies | Allows the use of one power tool for multiple wire sizes |
| Snap-in mounting | Delivers less than a 20 second exchange of die sets; no tools needed for additional labor savings |
| Durable material | Chrome plated steel to insure up to 50,000 cycles and protection against corrosion |
| Impressed die index number | Provides a quick post crimp inspection of ferrule for superior performance and quality assurance |
| Single stroke, short cycle time | 2.9 second cycle time, 26% faster than most comparable tools to deliver quick and quality terminations |
| Die closure | Designed to minimize the profile of the crimped end of wire to assist feeding into connector wire entries |
| Die sets for #1 AWG to 500 kcmil | A wide range of the wire types and sizes for use in a variety of applications |
| 6-ton tool frame of CT-3001 | Provides sufficient compression of ferrules during crimping to prevent wire pullout and deliver a secure connection |

applications

Panduit large ferrules and crimping dies are designed for electrical distribution panels, switchgear, motor control centers (MCC), transmission stations, and other applications that use large flex cable, #1 AWG to 500 kcmil, classes DLO, H, I, K, and M. These ferrules are used to improve the quality and the installation of flex cable in a variety of mechanical connectors, which are found on circuit breakers, contactors,

power distribution blocks, and other devices. The mechanical connectors can have circular or square wire entries and terminate conductors with a screw, screw-cage, or spring. The use of ferrules and their proper installation improves the efficiency, equipment reliability, and safety of the termination and overall equipment. The use of ferrules in industrial control panels is in accordance with UL 508A.

www.panduit.com

Large Ferrule Crimping Dies

| | |
|---------------------------------------|-------------|
| Wire size AWG (mm²) | |
| 1 – 1/0 (50): | CD-2001-F87 |
| 2/0 (70): | CD-2001-F89 |
| 3/0 (95): | CD-2001-F90 |
| 4/0 – 250 | |
| kcmil (120): | CD-2001-F91 |
| 300 kcmil (150): | CD-2001-F92 |
| 350 kcmil (185): | CD-2001-F93 |
| 400 – 500 kcmil (240): | CD-2001-F94 |

Related Products

Large Ferrules Non-Insulated

| | |
|---------------------------------------|----------|
| Wire size AWG (mm²) | |
| 1 – 1/0 (50): | F87-18-C |
| 1 – 1/0 (50): | F87-22-C |
| 1 – 1/0 (50): | F87-25-C |
| 1 – 1/0 (50): | F87-32-C |
| 2/0 (70): | F89-25-L |
| 2/0 (70): | F89-32-L |
| 3/0 (95): | F90-25-L |
| 3/0 (95): | F90-30-L |
| 3/0 (95): | F90-32-L |
| 4/0 – 250 | |
| kcmil (120): | F91-32-L |
| 4/0 – 250 | |
| kcmil (120): | F91-40-L |
| 300 kcmil (150): | F92-32-L |
| 300 kcmil (150): | F92-38-L |
| 350 kcmil (185): | F93-32-Q |
| 350 kcmil (185): | F93-40-Q |
| 400 – 500 kcmil (240): | F94-40-Q |

Large Insulated Ferrules DIN End Sleeve

| | |
|--|------------|
| Wire size AWG (mm²), DIN color | |
| 1 – 1/0 (50) Blue: | FSD87-20-L |
| 1 – 1/0 (50) Blue: | FSD87-25-Q |
| 2/0 (70) Yellow: | FSD89-20-Q |
| 2/0 (70) Yellow: | FSD89-27-Q |
| 3/0 (95) Red: | FSD90-25-Q |
| 4/0 – 250 | |
| kcmil (120) Blue: | FSD91-27-Q |
| 300 kcmil | |
| (150) Yellow: | FSD92-32-Q |


6-Ton, In-Line Crimping Tool, Die Type, Lithium-Ion Powered Hydraulic

| | |
|------------------------|-----------|
| Charger Voltage | |
| 120 VAC: | CT-3001 |
| 230 VAC: | CT-3001/E |

Large Ferrule Crimping Dies

| Part Number | Used with Tool* | Wire Size (AWG) | Wire Size (mm ²) | Ferrule Series | Width A (In.) | Width A (mm) | Height Top B (In.) | Height Top B (mm.) | Height Bottom C (In.) | Height Bottom C (mm) | Depth (In.) | Depth (mm) |
|-------------|-----------------|-----------------|------------------------------|----------------|---------------|--------------|--------------------|--------------------|-----------------------|----------------------|-------------|------------|
| CD-2001-F87 | CT-3001 | 1 AWG – 1/0 | 50.0 | F87, FSD87 | 1.18 | 30.1 | 1.97 | 50.2 | 1.52 | 38.7 | 1.25 | 31.8 |
| CD-2001-F89 | CT-3001 | 2/0 | 70.0 | F89, FSD89 | 1.18 | 30.1 | 1.93 | 49.0 | 1.52 | 38.7 | 1.25 | 31.8 |
| CD-2001-F90 | CT-3001 | 3/0 | 95.0 | F90, FSD90 | 1.18 | 30.1 | 1.91 | 48.6 | 1.52 | 38.7 | 1.25 | 31.8 |
| CD-2001-F91 | CT-3001 | 4/0 – 250 kcmil | 120.0 | F91, FSD91 | 1.18 | 30.1 | 1.86 | 47.2 | 1.52 | 38.7 | 1.53 | 38.9 |
| CD-2001-F92 | CT-3001 | 300 kcmil | 150.0 | F92, FSD92 | 1.18 | 30.1 | 1.83 | 46.5 | 1.52 | 38.7 | 1.53 | 38.9 |
| CD-2001-F93 | CT-3001 | 350 kcmil | 185.0 | F93 | 1.18 | 30.1 | 1.75 | 44.5 | 1.58 | 40.1 | 1.53 | 38.9 |
| CD-2001-F94 | CT-3001 | 400 – 500 kcmil | 240.0 | F94 | 1.18 | 30.1 | 1.63 | 41.4 | 1.60 | 40.6 | 1.53 | 38.9 |

*Compatible with the CT-2001 and CT-3001/E

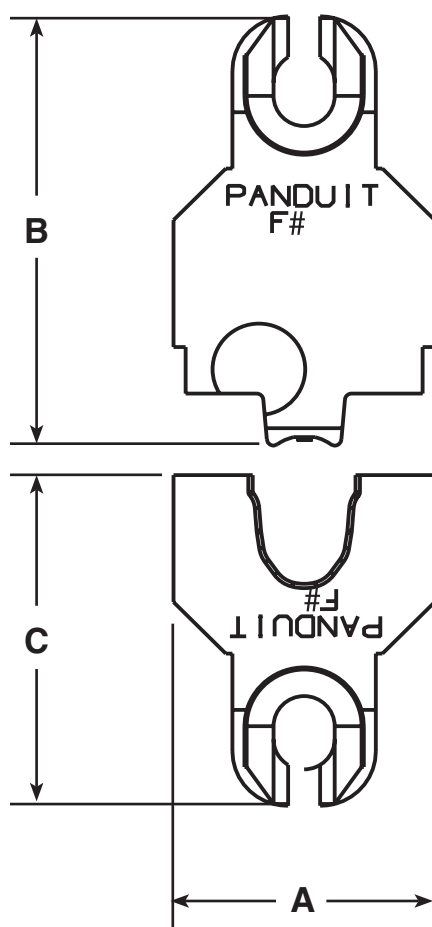

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2014 Panduit Corp.
ALL RIGHTS RESERVED.
TMSP08--WW-ENG
Replaces TMSP06--SA-ENG
5/2014



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.