

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T5	PART STATUS UPDATED	22JAN2018	RK	PS

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.



TERMINAL:
TERMINALS: BRASS, TIN PLATED. (UNLESS OTHERWISE STATED)
SCREWS: 8-32 STEEL, NICKEL PLATED. (UNLESS OTHERWISE STATED)
Q.C. TABS: BRASS, NICKEL PLATED.

MECHANICAL:
PITCH (TERMINAL SPACING): .563"
WIRE RANGE: 10-22 AWG
RECOMMENDED TIGHTENING TORQUE: 14IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

	-	-	-	-	-	-	-	-	-	-	7.886	8.323	13	1-1546310-3								
	-	-	-	-	-	-	-	12	12	12	7.323	7.760	12	4-1546310-8								
	-	8	-	-	-	12	12	12	-	-	7.323	7.760	12	4-1546310-7								
	-	-	-	-	12	12	12	-	-	-	7.323	7.760	12	4-1546310-6								
-	-	-	-	-	-	-	-	-	-	-	7.323	7.760	12	1-1546310-2								
-	-	-	-	-	-	-	-	-	-	-	6.760	7.179	11	1-1546310-1								
-	-	-	-	-	-	-	-	-	-	-	6.197	6.634	10	1-1546310-0								
-	-	-	-	-	-	-	-	-	-	-	5.634	6.071	9	1546310-								
	-	-	-	-	-	-	-	-	-	8	5.071	5.508	8	4-1546310-5								
-	-	8	8	-	-	-	-	-	-	-	5.071	5.508	8	2-1546310-9								
-	-	-	-	-	-	-	-	-	-	-	5.071	5.508	8	1546310-8								
	-	-	-	-	-	7	-	-	-	-	4.508	4.945	7	3-1546310-8								
-	-	-	-	-	-	-	-	-	-	-	4.508	4.945	7	1546310-7								
	-	-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-4								
	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	4-1546310-3								
	-	-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-2								
	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	3-1546310-1								
-	-	-	-	-	-	6	-	-	-	-	3.945	4.382	6	3-1546310-0								
-	-	6	6	-	-	-	-	-	-	-	3.945	4.382	6	2-1546310-8								
	-	1	1	-	-	5	1	-	-	-	3.945	4.382	6	2-1546310-6								
	-	-	-	-	-	-	-	6	-	-	3.945	4.382	6	2-1546310-3								
	-	-	-	-	6	-	-	-	-	-	3.945	4.382	6	2-1546310-2								
	-	-	-	-	-	-	-	-	6	6	3.945	4.382	6	2-1546310-1								
	-	-	-	-	-	-	-	6	6	-	3.945	4.382	6	1546636-1								
	-	-	-	6	-	-	-	6	-	-	3.945	4.382	6	1-1546310-9								
	-	-	-	6	-	-	-	-	-	-	3.945	4.382	6	1546589-1								
-	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	1546310-6								
-	-	-	-	-	-	5	-	-	-	-	3.382	3.819	5	3-1546310-7								
	-	1	1	-	-	-	1	-	5	-	3.382	3.819	5	2-1546310-7								
-	-	-	-	-	-	-	-	-	-	-	3.382	3.819	5	1546310-5								
	-	-	-	-	-	-	-	4	4	4	2.819	3.256	4	5-1546310-0								
	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	4-1546310-1								
	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	4-1546310-0								
	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	3-1546310-9								
-	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	1546310-4								
	-	-	-	-	-	-	-	-	-	-	2.256	2.693	3	2-1546310-5								
	-	-	-	-	-	-	-	3	1	-	2.256	2.693	3	2-1546310-4								
	-	-	-	1	2	-	-	1	-	-	2.256	2.693	3	2-1546310-0								
-	-	-	-	-	-	-	-	-	-	-	2.256	2.693	3	1546310-3								
-	-	-	-	-	-	-	2	-	2	-	1.693	2.130	2	5-1546310-1								
-	-	-	-	-	-	-	-	-	-	-	1.693	2.130	2	1546310-2								
NOTES		OTB JUMPER		.250 QC TAB 90° DOUBLE SIDE		.250 QC TAB 90°/45° DOUBLE SIDE		.250 QC TAB 90° DOUBLE SIDE		.250 QC TAB 45° DOUBLE SIDE		.250 QC TAB STRAIGHT DOUBLE SIDE		.250 QC TAB 90° SINGLE SIDE		.250 QC TAB 45° SINGLE SIDE		.250 QC TAB STRAIGHT SINGLE SIDE	DIM B	DIM A	NO. OF POSN	PART NUMBER

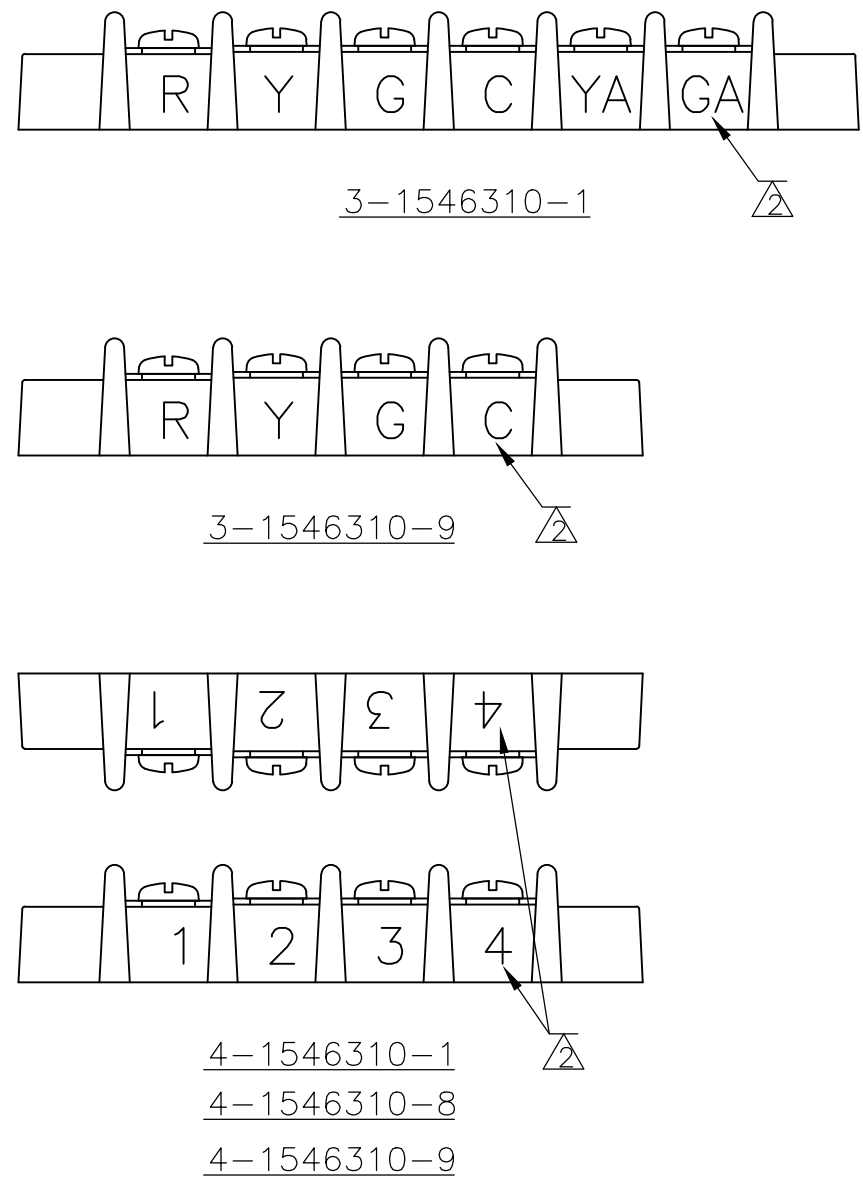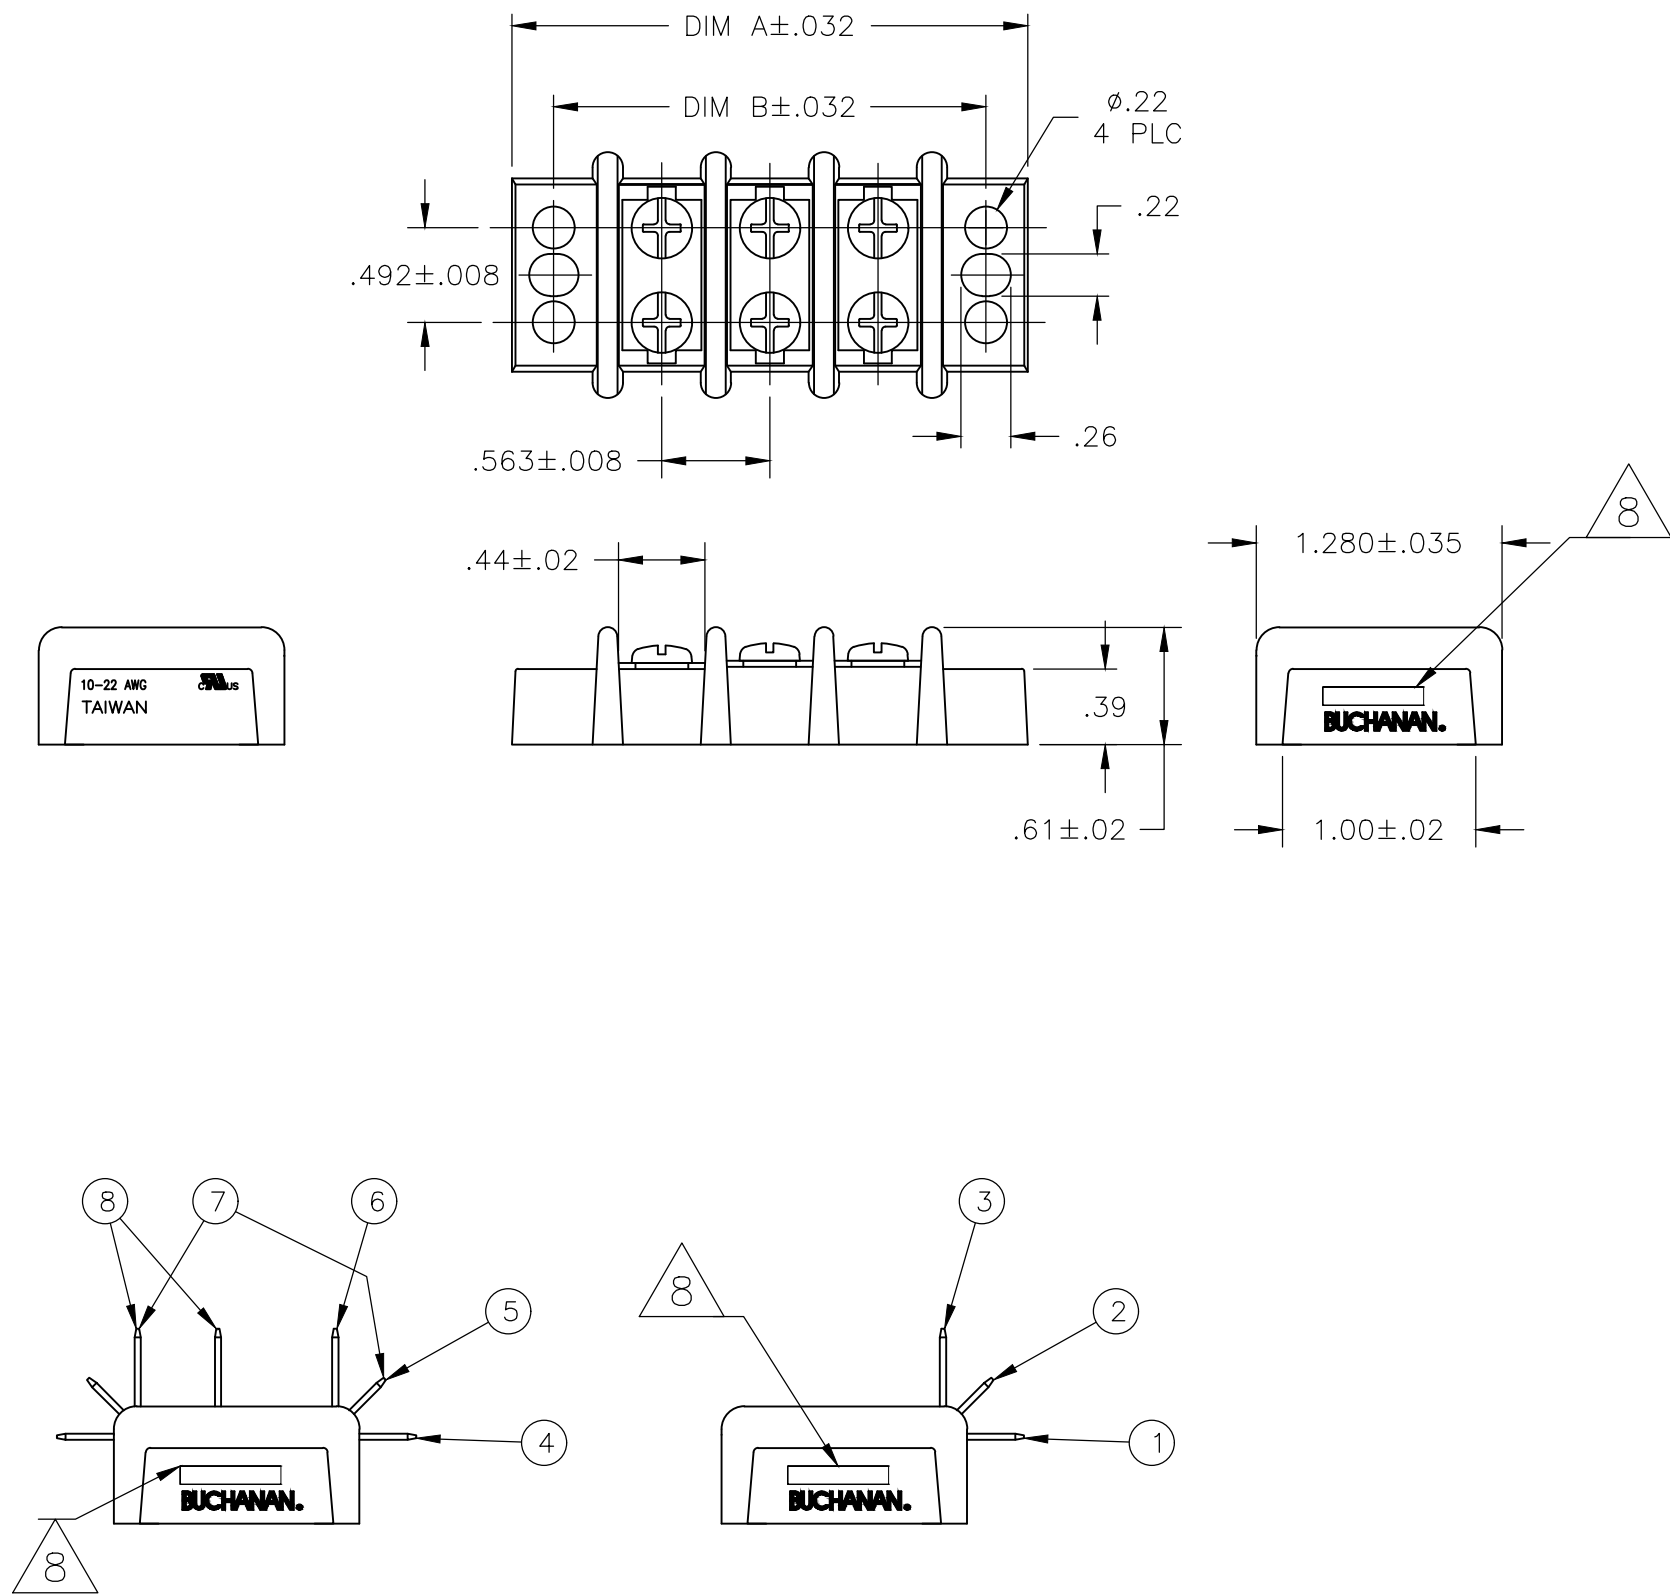

	—	—	—	—	—	—	2	—	2	—	1.693	2.130		5–1546310–1								
	—	—	—	—	—	—	—	—	—	—	10.701	11.138	18	1–1546310–8								
	—	—	—	—	—	—	—	—	—	—	10.138	10.575	17	1–1546310–7								
	—	—	—	—	—	—	—	—	—	—	9.575	10.012	16	1–1546310–6								
	—	—	—	—	—	—	—	—	—	—	9.012	9.449	15	1–1546310–5								
	—	—	—	—	—	—	—	14	14	14	8.449	8.886	14	4–1546310–9								
	—	—	—	—	—	—	—	—	—	—	8.449	8.886	14	1–1546310–4								
NOTES		OTB JUMPER		.250 QC TAB 90° DOUBLE SIDE		.250 QC TAB 90°/45° DOUBLE SIDE		.250 QC TAB 90° DOUBLE SIDE		.250 QC TAB 45° DOUBLE SIDE		.250 QC TAB STRAIGHT DOUBLE SIDE		.250 QC TAB 90° SINGLE SIDE		.250 QC TAB 45° SINGLE SIDE		.250 QC TAB STRAIGHT SINGLE SIDE	DIM B	DIM A	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES, UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
-

DWN
S SCHLEGEL
CHK
S YODER
APVD
S YODER
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
-
CUSTOMER DRAWING

16FEB2007
2/16/07
2/16/07
-
-
-

TE Connectivity Ltd.


NAME
14.3 (.563) DBL ROW BARRIER STRIP
W/O WASHER
-

SIZE
A2
CAGE CODE
00779
DRAWING NO
C-1546310
RESTRICTED TO
-


SCALE
NTS
SHEET
2 OF 4
REV
T5

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D

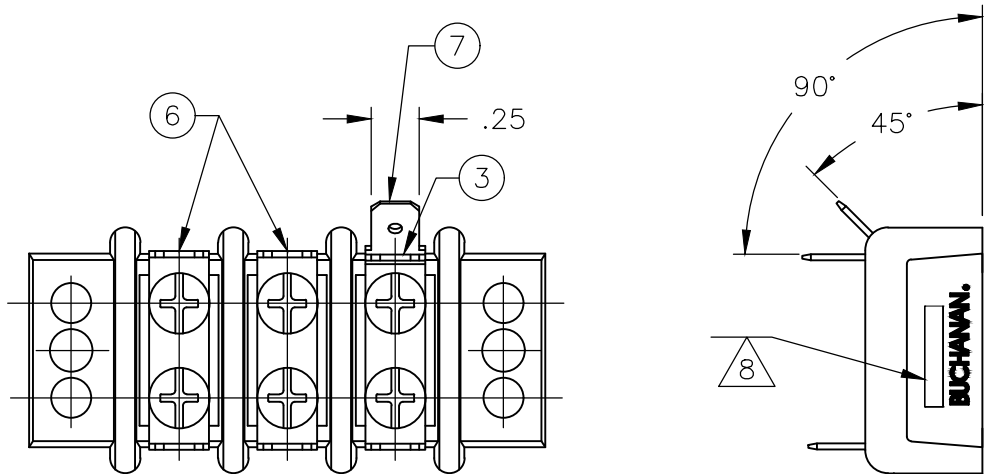


2-1546310-0

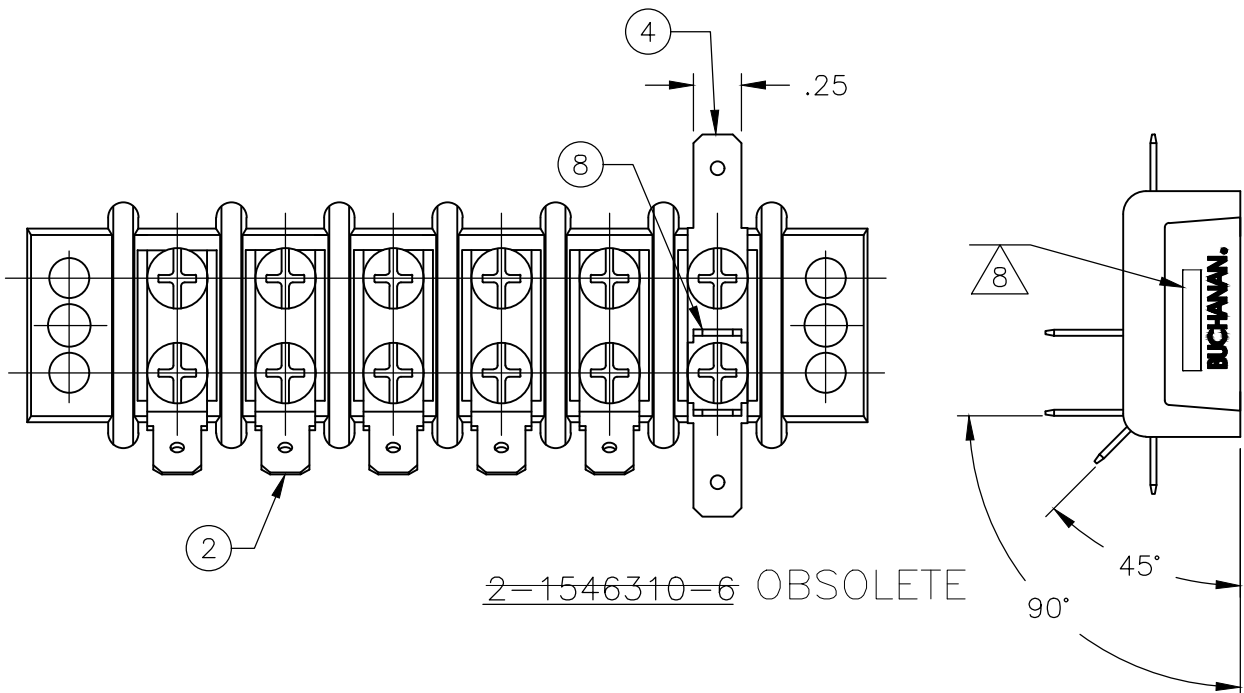


2-1546310-6 OBSOLETE


C

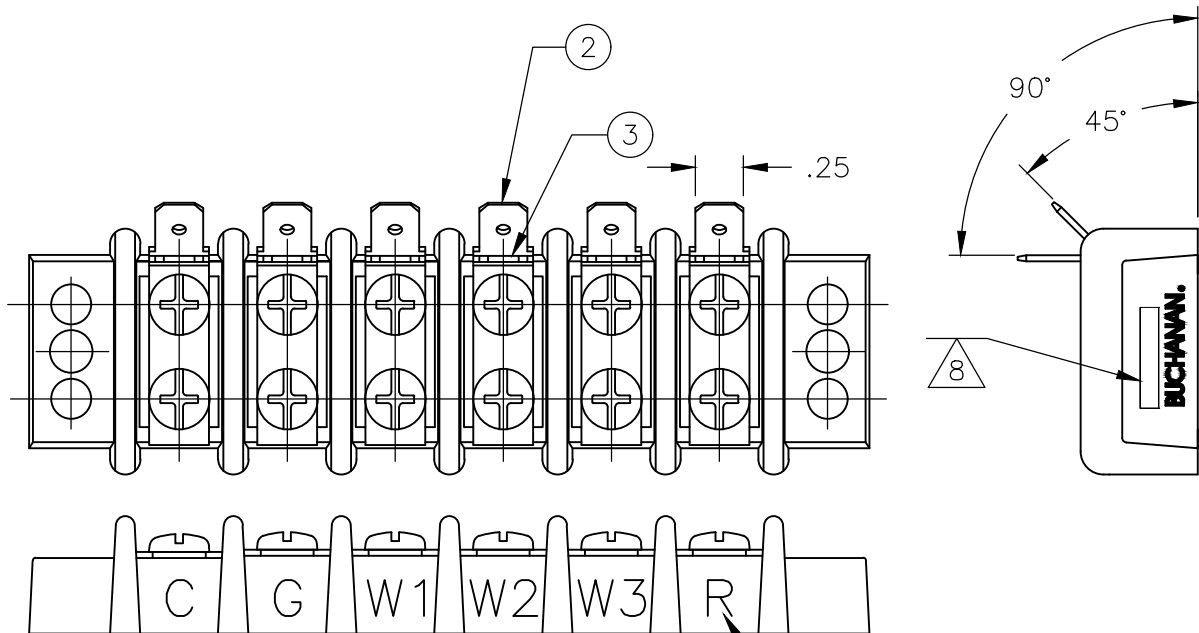

OBSOLETE 2-1546310-1

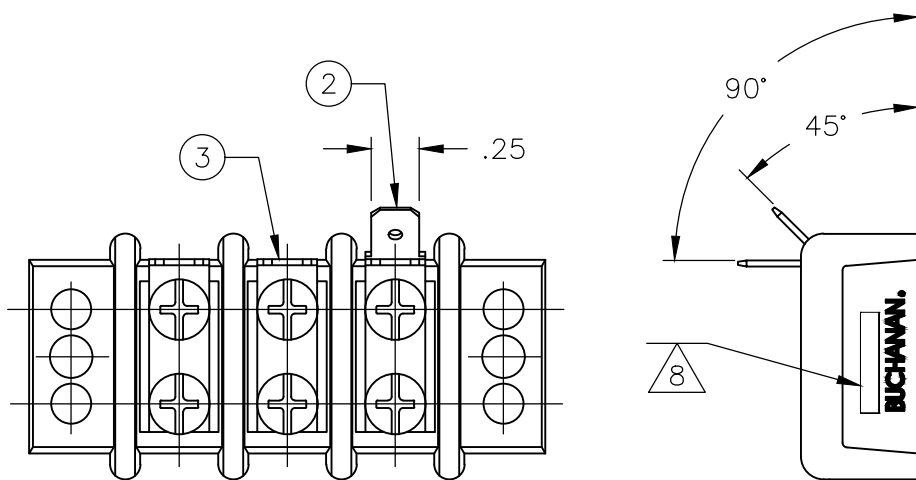


2-1546310-4 OBSOLETE

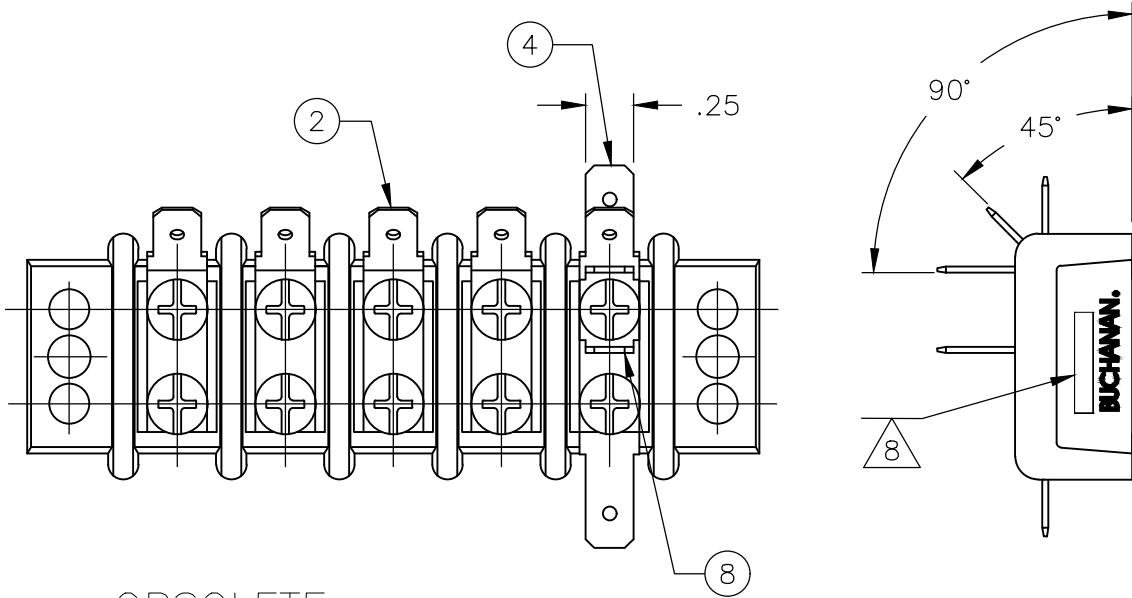

OBSOLETE 2-1546310-7

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 16FEB2007	 TE Connectivity Ltd.		
DIMENSIONS: INCHES		CHK S YODER 2/16/07			
		APVD S YODER 2/16/07	NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
		PRODUCT SPEC			
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE A2	CAGE CODE 00779	DRAWING NO C-1546310
MATERIAL		WEIGHT	SCALE NTS	SHEET 3 OF 4	REV T5
FINISH		CUSTOMER DRAWING	RESTRICTED TO		

D

C

1546310

B

A

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

D



4-1546310-7 OBSOLETE

C

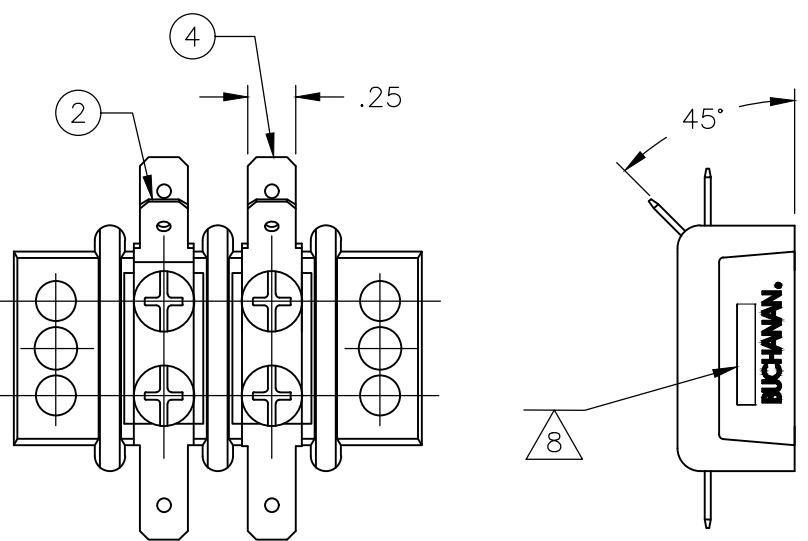

5-1546310-1

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16FEB2007	TE Connectivity Ltd.		
		CHK	2/16/07			
		APVD	2/16/07			
		PRODUCT SPEC				
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC	± -	14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
		1 PLC	± -			
		2 PLC	± -			
		3 PLC	± -			
		4 PLC	± -			
		ANGLES	± -			
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO
				A2	00779	C-1546310
				CUSTOMER DRAWING		RESTRICTED TO
				SCALE	SHEET	REV
				NTS	4 OF 4	T5

D

C

1546310

B

A



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.