


DESCRIPTION

The 1N4765 thru 1N4774A series of Zero-TC Reference Diodes provides a selection of 9.1 V nominal voltages and temperature coefficients to as low as 0.0005%/°C for minimal voltage change with temperature when operated at 7.5 mA. Options for screening similar to JAN, JANTX, JANTXV, and JANS also exist by using MQ, MX, MV or MSP respectively for part number prefixes and high reliability screening. Microsemi also offers numerous other Zener Reference Diode products for a variety of other voltages from 6.2 V to 200 V

APPEARANCE

**DO-7
(DO-204AA)**



IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- JEDEC registered 1N935 thru 1N940 series
- Standard reference voltage of 9.1V +/- 5%
- Internal metallurgical bonds
- JANS Equivalent available via SCD
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers. For example, designate "MX1N4769A" for a JANTX screen
- Radiation Hardened devices available by changing "1N" prefix to "RH", e.g. RH4769A, RH 4774A, etc. Also consult factory for "RH" data sheet brochure for other radiation hardened reference diode products.

APPLICATIONS / BENEFITS

- Provides minimal voltage changes over a broad temperature range for instrumentation and other circuit designs requiring a voltage reference
- Temperature coefficient selections available from 0.01%/°C to 0.0005%/°C
- Tight voltage tolerances available by adding tolerance 1%, 2%, 3%, etc. after part number for further identification, e.g. 1N4773A-2%, 1N4774A-1%, 1N4769-3%, 1N4769A-1%, etc.
- Flexible axial-leaded mounting terminals
- Nonsensitive to ESD per MIL-STD-750 Method 1020

MAXIMUM RATINGS

- Operating & Storage Temperature: -65°C to +175°C
- DC Power Dissipation: 250 mW @ T_L = 25°C
NOTE: For optimum voltage-temperature stability, the test current I_{ZT} = 0.5 or 1.0 mA as shown in Electrical Characteristics (less than 10 mW in dissipated power)
- Solder temperatures: 260 °C for 10 s (maximum)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed glass case with DO-7 (DO-204AA) package
- TERMINALS: Tin-lead plated and solderable per MIL-STD-750, Method 2026
- MARKING: Part number and cathode band
- POLARITY: Reference diode to be operated with the banded end positive with respect to the opposite end
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number)
- WEIGHT: 0.2 grams.
- See package dimensions on last page


*** ELECTRICAL CHARACTERISTICS @ 25°C**

JEDEC TYPE NUMBER	ZENER VOLTAGE (Note 3)	ZENER TEST CURRENT	MAXIMUM DYNAMIC IMPEDANCE	MAXIMUM REVERSE CURRENT I_R @ 6 V	MAXIMUM VOLTAGE TEMPERATURE STABILITY (Note 2 & 3)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COMPENSATIONS α_{VZ}
	V_Z @ I_{ZT}	I_{ZT}	Z_{ZT}	I_R	ΔV_{ZT}		
	VOLTS	mA	OHMS	μA	mV	°C	%/°C
1N4765	9.1	0.5	350	10	68	0 to +75	0.01
1N4765A	9.1	0.5	350	10	141	-55 to +100	0.01
1N4766	9.1	0.5	350	10	34	0 to +75	0.005
1N4766A	9.1	0.5	350	10	70	-55 to +100	0.005
1N4767	9.1	0.5	350	10	14	0 to +75	0.002
1N4767A	9.1	0.5	350	10	28	-55 to +100	0.002
1N4768	9.1	0.5	350	10	7	0 to +75	0.001
1N4768A	9.1	0.5	350	10	14	-55 to +100	0.001
1N4769	9.1	0.5	350	10	3	0 to +75	0.0005
1N4769A	9.1	0.5	350	10	7	-55 to +100	0.0005
1N4770	9.1	1.0	200	10	68	0 to +75	0.01
1N4770A	9.1	1.0	200	10	141	-55 to +100	0.01
1N4771	9.1	1.0	200	10	34	0 to +75	0.005
1N4771A	9.1	1.0	200	10	70	-55 to +100	0.005
1N4772	9.1	1.0	200	10	14	0 to +75	0.002
1N4772A	9.1	1.0	200	10	28	-55 to +100	0.002
1N4773	9.1	1.0	200	10	7	0 to +75	0.001
1N4773A	9.1	1.0	200	10	14	-55 to +100	0.001
1N4774	9.1	1.0	200	10	3	0 to +75	0.005
1N4774A	9.1	1.0	200	10	7	-55 to +100	0.005

* JEDEC Registered Data.

NOTES:

1. Measured by superimposing I_Z ac rms on I_Z dc @ +25°C where I_Z ac rms = 10% I_Z dc.
2. Maximum allowable change between any two discrete temperatures over the specified temperature range.
3. Voltage measurements to be performed 15 seconds after application of dc current.
4. Designate Radiation Hardened devices with "RH" prefix instead of "1N", i.e., RH4774A.
5. Consult factory for TX, TXV or JANS equivalent SCDs.

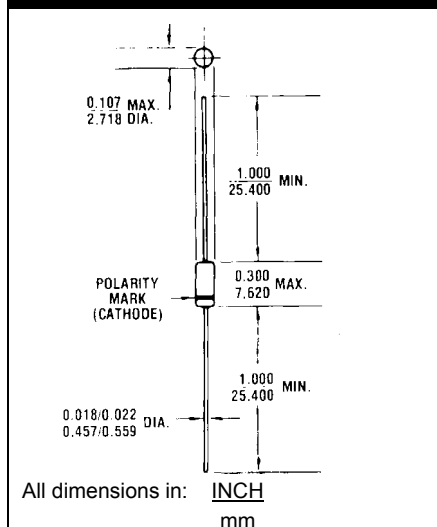PACKAGE DIMENSIONS


Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[1N4766A](#) [CDLL4765A/TR](#) [CDLL4771/TR](#) [CDLL4768A/TR](#) [CDLL4766A/TR](#) [CDLL4765/TR](#) [CDLL4774A/TR](#)
[CDLL4772A/TR](#) [CDLL4774/TR](#) [CDLL4769/TR](#) [CDLL4771A/TR](#) [CDLL4773/TR](#) [CDLL4770/TR](#) [CDLL4769A/TR](#)
[CDLL4768/TR](#) [CDLL4767A/TR](#) [CDLL4767/TR](#) [CDLL4773A/TR](#) [CDLL4772/TR](#) [CDLL4770A/TR](#) [CDLL4766/TR](#)
[1N4766/TR](#) [1N4772/TR](#) [1N4774/TR](#) [1N4773A/TR](#) [1N4765/TR](#) [1N4767A/TR](#) [1N4769A/TR](#) [1N4766A/TR](#)
[1N4767/TR](#) [1N4768/TR](#) [1N4768A/TR](#) [1N4770/TR](#) [1N4765A/TR](#) [1N4769/TR](#) [1N4772A/TR](#) [1N4771/TR](#) [1N4773/TR](#)
[1N4771A/TR](#) [1N4770A/TR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.