Anti-Sulfurated Chip Resistor Array

Type: **EXBU2 : 0402 Array**
EXBU3 : 0603 Array

■ Features

- High resistance to sulfurization achieved by adopting an Ag-Pb-based inner electrode
- High density
  2 resistors in 1.0 mm × 1.0 mm size (EXBU24)
  4 resistors in 2.0 mm × 1.0 mm size (EXBU28)
  8 resistors in 3.8 mm × 1.6 mm size (EXBU2H)
  2 resistors in 1.6 mm × 1.6 mm size (EXBU34)
  4 resistors in 3.2 mm × 1.6 mm size (EXBU38)
- Improvement of placement efficiency
  Placement efficiency of Chip Resistor Array is two, four or eight times of the flat type chip resistor
- Reference Standard···IEC 60115-9, JIS C 5201-9, EIAJ RC-2129
- RoHS compliant

■ Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions

Please see Data Files

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	X	B	U	2	8	4	7	2	J	X

Product Code
Thick Film Chip Resistor Networks

Size, Construction (inch size)

U2	0402 Array
U3	0603 Array

Anti-Sulfuarted Convex Terminal

No. of Terminal

4	4 Terminal
8	8 Terminal
H	16 Terminal

Resistance Value
The first two digits are significant figures of resistance value and the third one denotes the number of zeros following. Jumper is expressed by R00
Example : 222 → 2.2 kΩ

Resistance Tolerance

J	±5 %
0	Jumper

Packaging Methods

Code	Packaging	Type
X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	EXBU24, U28
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	EXBU2H, U34, U38

■ Construction

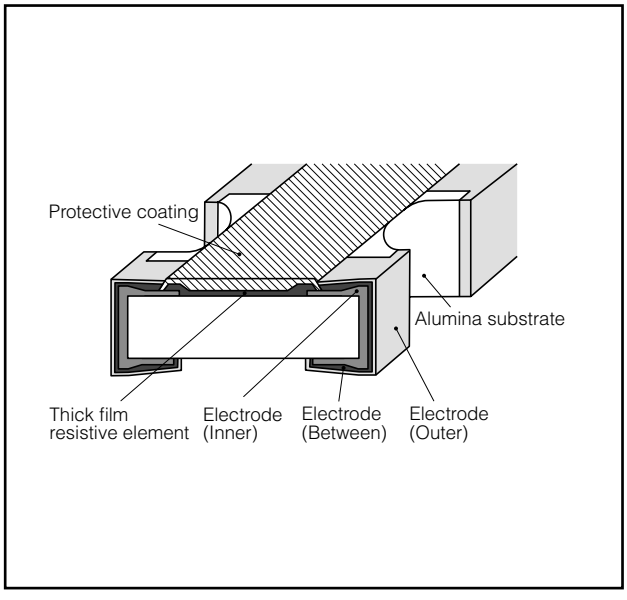

■ Schematics

● Isolated type

EXBU24, U34
2 resistors



EXBU28, U38
4 resistors



EXBU2H
8 resistors



Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

NEW

■ Dimensions in mm (not to scale)

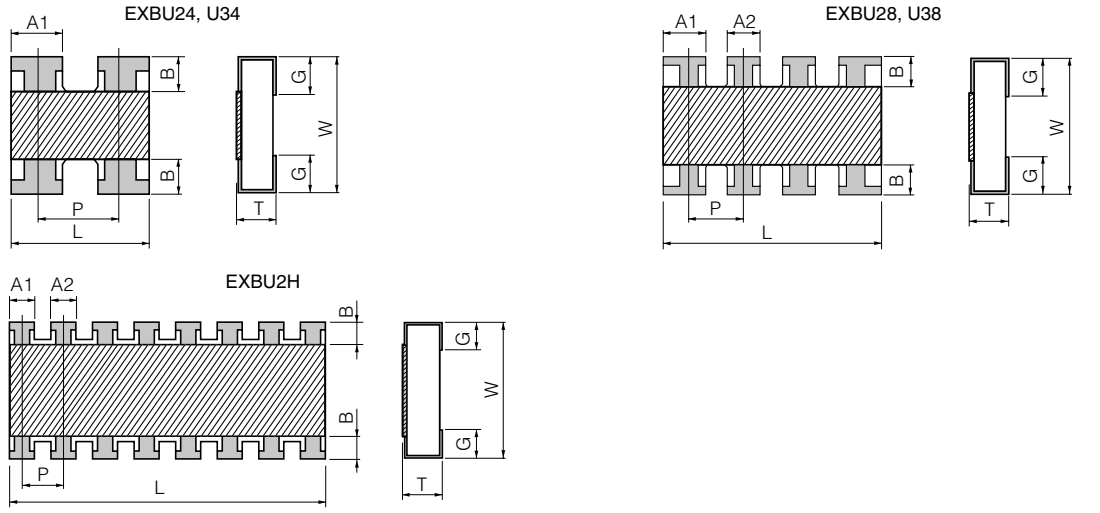

Type (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXBU24 (0402×2)	$1.00^{\pm0.10}$	$1.00^{\pm0.10}$	$0.35^{\pm0.10}$	$0.40^{\pm0.10}$	—	$0.18^{\pm0.10}$	(0.65)	$0.25^{\pm0.10}$	1.2
EXBU28 (0402×4)	$2.00^{\pm0.10}$	$1.00^{\pm0.10}$	$0.35^{\pm0.10}$	$0.45^{\pm0.10}$	$0.35^{\pm0.10}$	$0.20^{\pm0.10}$	(0.50)	$0.25^{\pm0.10}$	2.0
EXBU2H (0402×8)	$3.80^{\pm0.10}$	$1.60^{\pm0.10}$	$0.45^{\pm0.10}$	$0.35^{\pm0.10}$	$0.35^{\pm0.10}$	$0.30^{\pm0.10}$	(0.50)	$0.30^{\pm0.10}$	9.0
EXBU34 (0603×2)	$1.60^{\pm0.20}$	$1.60^{\pm0.15}$	$0.50^{\pm0.10}$	$0.65^{\pm0.15}$	—	$0.30^{\pm0.20}$	(0.80)	$0.30^{\pm0.20}$	3.5
EXBU38 (0603×4)	$3.20^{\pm0.20}$	$1.60^{\pm0.15}$	$0.50^{\pm0.10}$	$0.65^{\pm0.15}$	$0.45^{\pm0.15}$	$0.30^{\pm0.20}$	(0.80)	$0.35^{\pm0.20}$	7.0

( ) Reference

■ Ratings

Item		Specifications
Resistance Range		10 Ω to 1 MΩ E24 series
Resistance Tolerance		J: ±5 %
Number of Terminals	U24, U34	4 terminal
	U28, U38	8 terminal
	U2H	16 element
Number of Resistors	U24, U34	2 element
	U28, U38	4 element
	U2H	8 element
Power Rating at 70 °C	U24, U28, U34, U38	0.063 W/element
	U2H	0.063 W/element (0.25 W/package)

Item			Specifications
Limiting Element Voltage(1)		U2H	25 V
		U24, U28, U34, U38	50 V
Max. Overload Voltage (2)		U2H	50 V
		U24, U28, U34, U38	100 V
T.C.R.			±200×10^{-6}/°C
Category Temperature Range			–55 °C to 125 °C
Jumper Array	Rated Current	U24, U28, U2H, U34, U38	1 A
	Max. Overload Current	U24, U28, U2H, U34, U38	2 A

(1) Rated Continuous Working Voltage (RCWV) shall be determined from RCWV=$\sqrt{\text{Power Rating} \times \text{Resistance Value}}$, or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from SOTV=2.5 × Power Rating or max. Overload Voltage listed above whichever less.

Power Derating Curve

For resistors operated in ambient temperature above 70 °C, power rating shall be derated in accordance with the figure on the right.

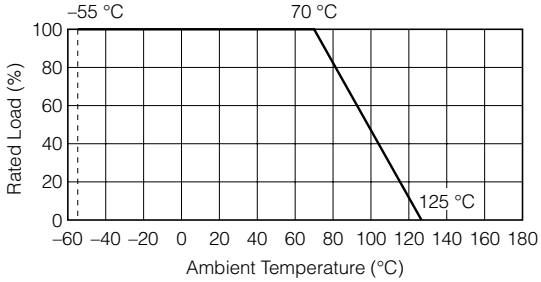

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

EXB-U245R1JX EXB-U241R8JX EXB-U242R4JX EXB-U242R0JX EXB-U241R2JX EXB-U241R6JX EXB-U241R5JX EXB-U243R6JX EXB-U244R3JX EXB-U246R8JX EXB-U248R2JX EXB-U244R7JX EXB-U245R6JX EXB-U242R7JX EXB-U243R9JX EXB-U246R2JX EXB-U241R1JX EXB-U249R1JX EXB-U247R5JX EXB-U243R0JX EXB-U242R2JX EXB-U243R3JX EXB-U241R0JX EXB-U241R3JX EXB-U281R2JX EXB-U281R3JX EXB-U281R1JX EXB-U281R6JX EXB-U281R0JX EXB-U281R5JX EXB-U282R7JX EXB-U282R4JX EXB-U281R8JX EXB-U289R1JX EXB-U288R2JX EXB-U286R8JX EXB-U285R1JX EXB-U286R2JX EXB-U287R5JX EXB-U283R0JX EXB-U284R7JX EXB-U285R6JX EXB-U284R3JX EXB-U283R9JX EXB-U283R6JX EXB-U283R3JX EXB-U282R2JX EXB-U282R0JX

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.