

ATC 100 E Series Porcelain High RF Power Multilayer Capacitors

- Case E Size (.380" x .380")
- High Q
- Low ESR/ESL
- High RF Power
- Extended WVDC up to 7200 VDC
- Capacitance Range 1 pF to 5100 pF
- Ultra-Stable Performance
- High RF Current/Voltage
- High Reliability
- Available with Encapsulation Option*

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 E Series RF Capacitors. This high Q multilayer capacitor is ultra-stable under high RF current and voltage applications. High density porcelain construction provides a rugged, hermetic package.

ATC offers an encapsulation option for applications requiring extended protection against arc-over and corona.

Typical functional applications: Bypass, Coupling, Tuning, Impedance Matching and DC Blocking.

Typical circuit applications: HF/RF Power Amplifiers, Transmitters, Antenna Tuning, Plasma Chambers and Medical (MRI coils).

*For leaded styles only

ENVIRONMENTAL TESTS

ATC 100 E Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C.

Voltage applied.

200% of WVDC for capacitors rated at 500 volts DC or less.

120% of WVDC for capacitors rated at 1250 volts DC or less.

100% of WVDC for capacitors rated above 1250 volts DC.



ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 10,000 (1 pF to 1000 pF) @ 1 MHz.

Greater than 10,000 (1100 pF to 5100 pF) @ 1 KHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

+90 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

1 pF to 5100 pF:

10⁵ Megohms min. @ +25°C at 500 VDC.

10⁴ Megohms min. @ +125°C at 500 VDC.

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds.

150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds.

120% of WVDC for capacitors rated above 1250 volts DC for 5 seconds.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 10 lbs. min., 25 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

ATC # 001-809 Rev. M, 9/14

ATC 100 E Capacitance Values

| CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | |
|-----------|-----------|-----------|------------|------|-----------|-----------|------------------|------------|------|-----------|-----------|------------------|------------|------|-----------|-----------|------------------|------------|------|
| | | | STD. | EXT. | | | | STD. | EXT. | | | | STD. | EXT. | | | | STD. | EXT. |
| 1R0 | 1.0 | B, C D | 3600 | 7200 | 5R6 | 5.6 | B, C D | 3600 | 7200 | 470 | 47 | F, G, J, K, M | 3600 | 7200 | 391 | 390 | F, G, J, K, M | 3600 | N/A |
| 1R1 | 1.1 | | | | 6R2 | 6.2 | | | | 510 | 51 | | | | 431 | 430 | | | |
| 1R2 | 1.2 | | | | 6R8 | 6.8 | | | | 560 | 56 | | | | 471 | 470 | | | |
| 1R3 | 1.3 | | | | 7R5 | 7.5 | | | | 620 | 62 | | | | 511 | 510 | | | |
| 1R4 | 1.4 | | | | 8R2 | 8.2 | | | | 680 | 68 | | | | 561 | 560 | | | |
| 1R5 | 1.5 | | | | 9R1 | 9.1 | | | | 750 | 75 | | | | 621 | 620 | | | |
| 1R6 | 1.6 | | | | 100 | 10 | | | | 820 | 82 | | | | 681 | 680 | | | |
| 1R7 | 1.7 | | | | 110 | 11 | | | | 910 | 91 | | | | 751 | 750 | | | |
| 1R8 | 1.8 | | | | 120 | 12 | | | | 101 | 100 | | | | 821 | 820 | | | |
| 1R9 | 1.9 | | | | 130 | 13 | | | | 111 | 110 | | | | 911 | 910 | | | |
| 2R0 | 2.0 | B, C D | 3600 | 7200 | 150 | 15 | F, G, J, K, M | 3600 | 7200 | 121 | 120 | F, G, J, K, M | 3600 | 5000 | 102 | 1000 | G, J, K, M | 1000 | N/A |
| 2R1 | 2.1 | | | | 160 | 16 | | | | 131 | 130 | | | | 112 | 1100 | | | |
| 2R2 | 2.2 | | | | 180 | 18 | | | | 151 | 150 | | | | 122 | 1200 | | | |
| 2R4 | 2.4 | | | | 200 | 20 | | | | 161 | 160 | | | | 152 | 1500 | | | |
| 2R7 | 2.7 | | | | 220 | 22 | | | | 181 | 180 | | | | 182 | 1800 | | | |
| 3R0 | 3.0 | | | | 240 | 24 | | | | 201 | 200 | | | | 222 | 2200 | | | |
| 3R3 | 3.3 | | | | 270 | 27 | | | | 221 | 220 | | | | 272 | 2700 | | | |
| 3R6 | 3.6 | | | | 300 | 30 | | | | 241 | 240 | | | | 302 | 3000 | | | |
| 3R9 | 3.9 | | | | 330 | 33 | | | | 271 | 270 | | | | 332 | 3300 | | | |
| 4R3 | 4.3 | | | | 360 | 36 | | | | 301 | 300 | | | | 392 | 3900 | | | |
| 4R7 | 4.7 | 390 | 39 | 331 | 330 | 472 | 4700 | | | | | | | | | | | | |
| 5R1 | 5.1 | 430 | 43 | 361 | 360 | 512 | 5100 | | | | | | | | | | | | |


VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, MATCHING, AND CAPACITOR ASSEMBLIES ARE AVAILABLE. • ATC'S CUSTOM POWER CAPACITOR ASSEMBLY CATALOG, ATC # 001-900 LISTS ASSEMBLY OPTIONS. • EXTENDED WORKING VOLTAGES ARE AVAILABLE FOR COMMERCIAL ORDERS ONLY. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

CAPACITANCE TOLERANCE

| Code | B | C | D | F | G | J | K | M |
|------|---------|----------|---------|-----|-----|-----|------|------|
| Tol. | ±0.1 pF | ±0.25 pF | ±0.5 pF | ±1% | ±2% | ±5% | ±10% | ±20% |

ATC PART NUMBER CODE

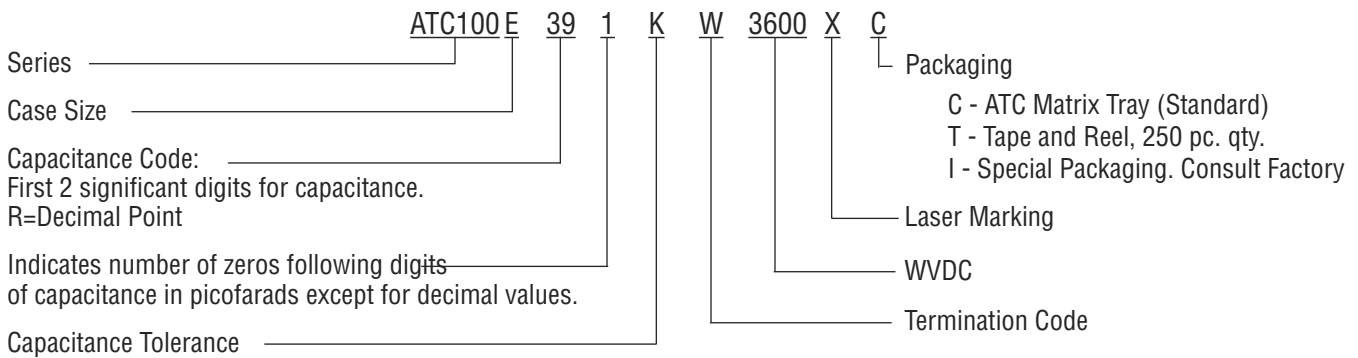

The above part number refers to a 100 E Series (case size E) 390 pF capacitor,

K tolerance (±10%), 3600 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and Waffle-packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 E Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | CASE SIZE & TYPECASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS INCHES (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | |
|------------------------|----------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------|---------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIALS |
| 100E | W |  E Solder Plate |  | .380 +.015 -.010 (9.65 +0.38 -0.25) | .380 ± 0.010 (9.65 ± 0.25) | .170 (4.32) max. | .040 (1.02) max. | Tin/Lead, Solder Plated over Nickel Barrier Termination |
| 100E | P |  E Pellet |  | .380 +.040 -.010 (9.65 +1.02 -0.25) | | | | Heavy Tin/Lead Coated, over Nickel Barrier Termination |
| 100E | T |  E Solderable Nickel Barrier |  | .380 +.015 -.010 (9.65 +0.38 -0.25) | | | | RoHS Compliant Tin Plated over Nickel Barrier Termination |
| 100E | CA |  E Gold Chip |  | .380 +.015 -.010 (9.65 +0.38 -0.25) | | | | RoHS Compliant Gold Plated over Nickel Barrier Termination |
| 100E | MS |  E Microstrip |  | .380 +.035 -.010 (9.65 +0.89 -0.25) | .380 ± 0.010 (9.65 ± 0.25) | .170 (4.32) max. | N/A | High Purity Silver Leads L _L = .750 (19.05) min. W _L = .350 ± 0.10 (8.89 ± 0.25) T _L = .010 ± .005 (0.25 ± 0.13) Leads are Attached with High Temperature Solder. |
| 100E | AR |  E Axial Ribbon |  | | | | | High Purity Silver Leads L _L = .750 (19.05) min. W _L = .350 ± 0.10 (8.89 ± 0.25) T _L = .010 ± .005 (0.25 ± 0.13) Leads are Attached with High Temperature Solder. |
| 100E | AW |  E Axial Wire |  | | | | | Silver-plated Copper Leads Dia. = .032 ± .002 (.813 ± .051) L _L = 2.25 (57.2) min. |
| 100E | RW |  E Radial Wire |  | | | | | Silver-plated Copper Leads Dia. = .032 ± .002 (.813 ± .051) L _L = 1.0 (25.4) min. |

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 E Capacitors: Non-Magnetic Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS INCHES (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | |
|------------------------|----------------|---------------------------------|------------------------------------------|-------------------------------------------------|-----------|---------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIALS |
| 100E | WN | E Non-Mag Solder Plate | | .380 +.015 -.010 (9.65 +0.38 -0.25) | | | .040 (1.02) max. | Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination |
| 100E | PN | E Non-Mag Pellet | | .380 +.040 -.010 (9.65 +1.02 -0.25) | | | | Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination |
| 100E | TN | E Non-Mag Solderable Barrier | | .380 +.015 -.010 (9.65 +0.38 -0.25) | | | | RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination |
| 100E | MN | E Non-Mag Microstrip | | .380 +.015 -.010 (9.65 +0.38 -0.25) | | .170 (4.32) max. | N/A | High Purity Silver Leads $L_L = .750$ (19.05) min. $W_L = .350 \pm .010$ (8.89 ± 0.25) $T_L = .010 \pm .005$ (0.25 ± 0.13) Leads are Attached with High Temperature Solder. |
| 100E | AN | Non-Mag Axial Ribbon | | | | | | .380 +.035 -.010 (9.65 +0.89 -0.25) |
| 100E | BN | E Non-Mag Axial Wire | | | | | | Silver-plated Copper Leads Dia. = .032 ± .002 (.813 ± .051) $L_L = 2.25$ (57.2) min. |
| 100E | RN | E Non-Mag Radial Wire | | | | | | Silver-plated Copper Leads Dia. = .032 ± .002 (.813 ± .051) $L_L = 1.0$ (25.4) min |

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case E

| | Pad Size | A Min. | B Min. | C Min. | D Min. |
|------------------|--------------|--------|--------|--------|--------|
| Vertical Mount | Normal | .185 | .050 | .325 | .425 |
| | High Density | .165 | .030 | .325 | .385 |
| Horizontal Mount | Normal | .405 | .050 | .325 | .425 |
| | High Density | .385 | .030 | .325 | .385 |

Dimensions are in inches.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 E Performance Data


**ESR VS. CAPACITANCE
ATC SERIES 100, CASE E**

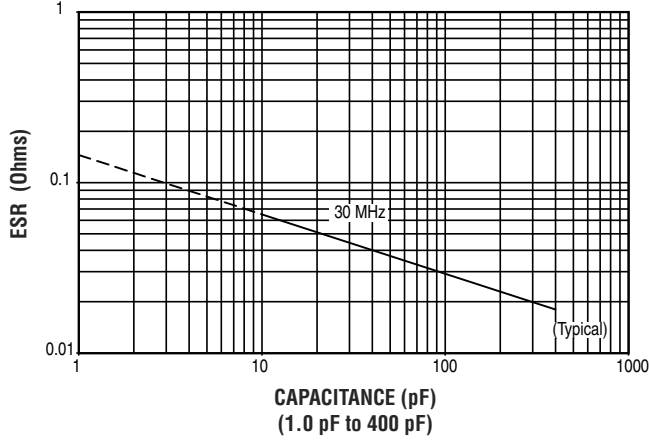

**Q VS. CAPACITANCE
ATC SERIES 100, CASE E**



**ESR VS. CAPACITANCE
ATC SERIES 100, CASE E**

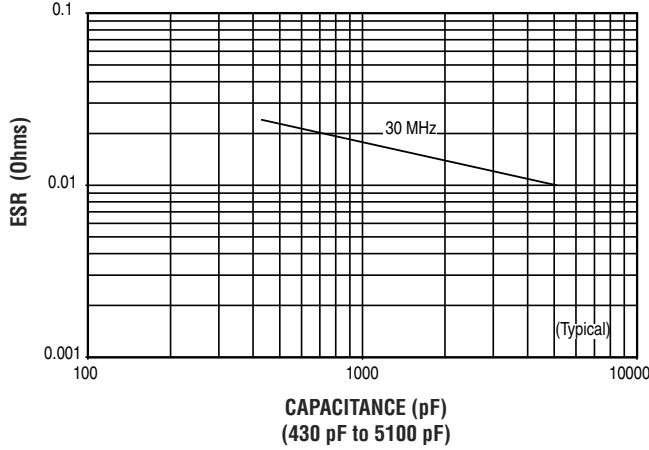

**Q VS. CAPACITANCE
ATC SERIES 100, CASE E**



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 E Performance Data

**SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE E**



**CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE E**



**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE E**



**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE E**



**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE E, EXTENDED VOLTAGE**



Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-809 Rev. M, 9/14



AMERICAN
ATC North America
sales@atceramics.com

TECHNICAL
ATC Europe
saleseur@atceramics.com

CERAMICS
ATC Asia
sales@atceramics-asia.com



THE ENGINEERS' CHOICE™

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[American Technical Ceramics \(ATC\):](#)

[100E391JMS3600X](#) [100E240GMN3600XC](#) [100E512JRW500X](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.