

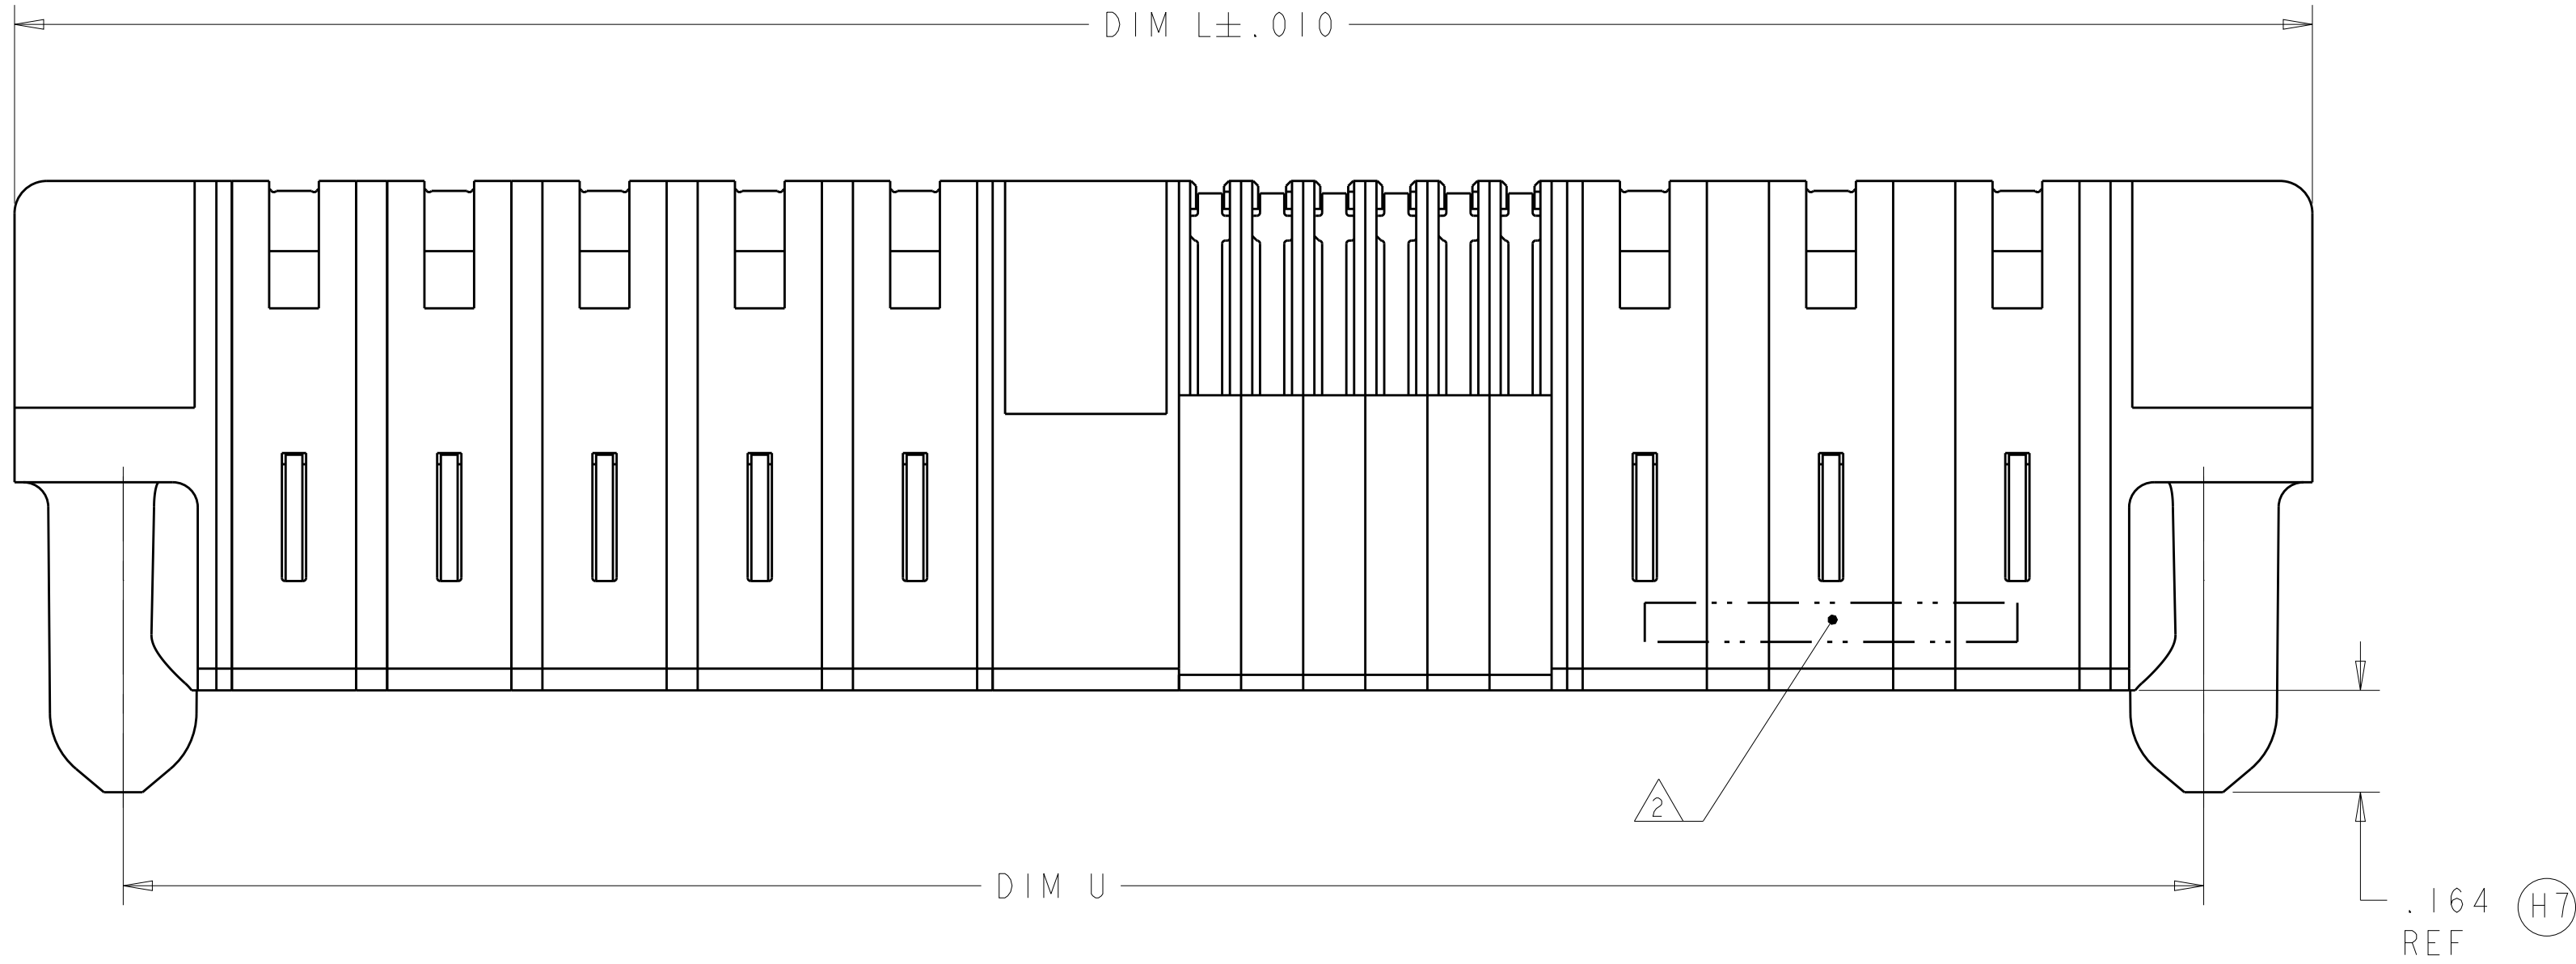
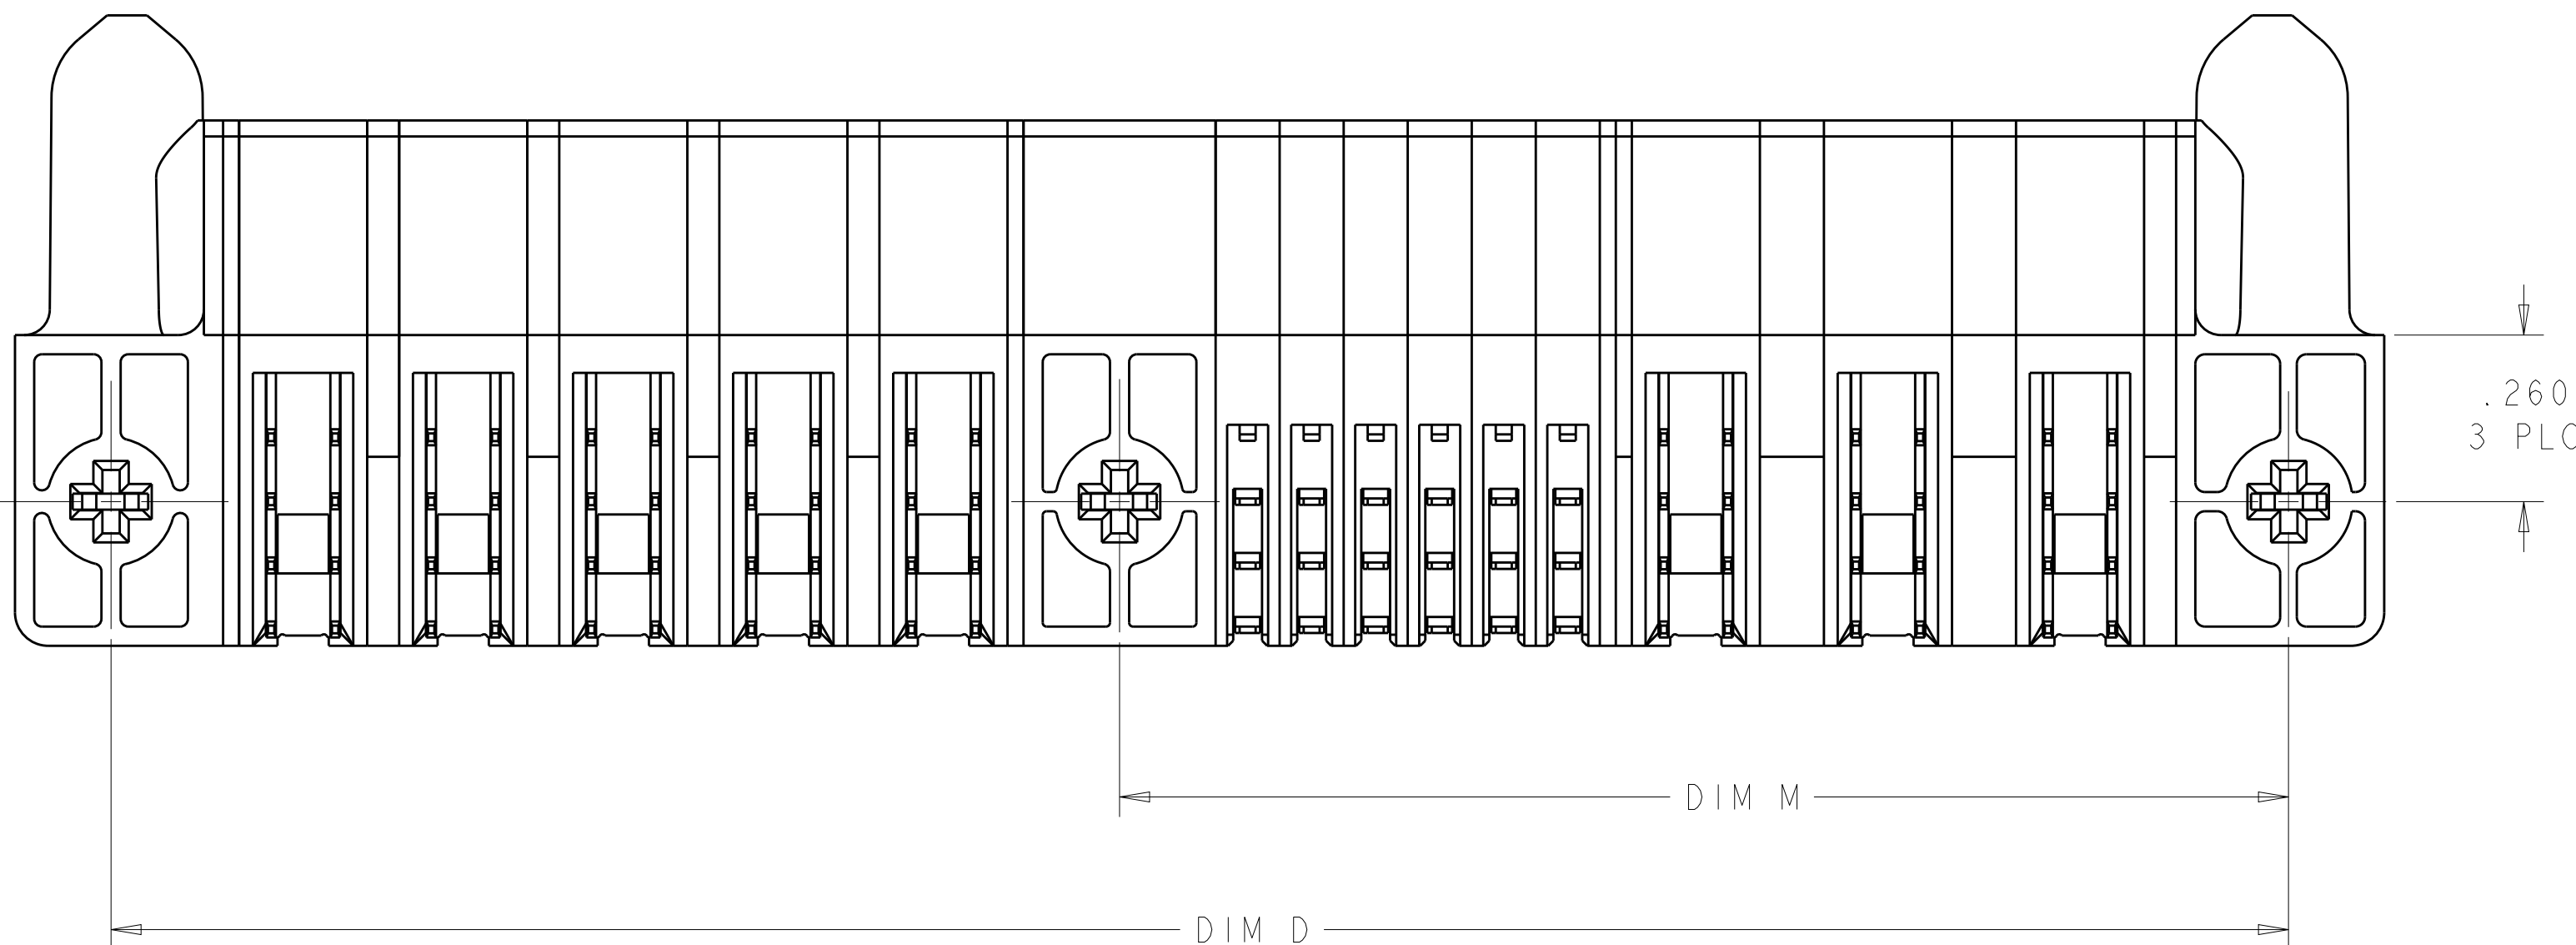


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00		J1	REV PER ECR-12-016975	25SEP2012	CZ	SZ
			J3	ADDED NEW DASH NUMBER 4-0	01FEB2013	CZ	SZ
			J5	ADDED NEW DASH NUMBER 4-1	25FEB2014	CZ	SZ

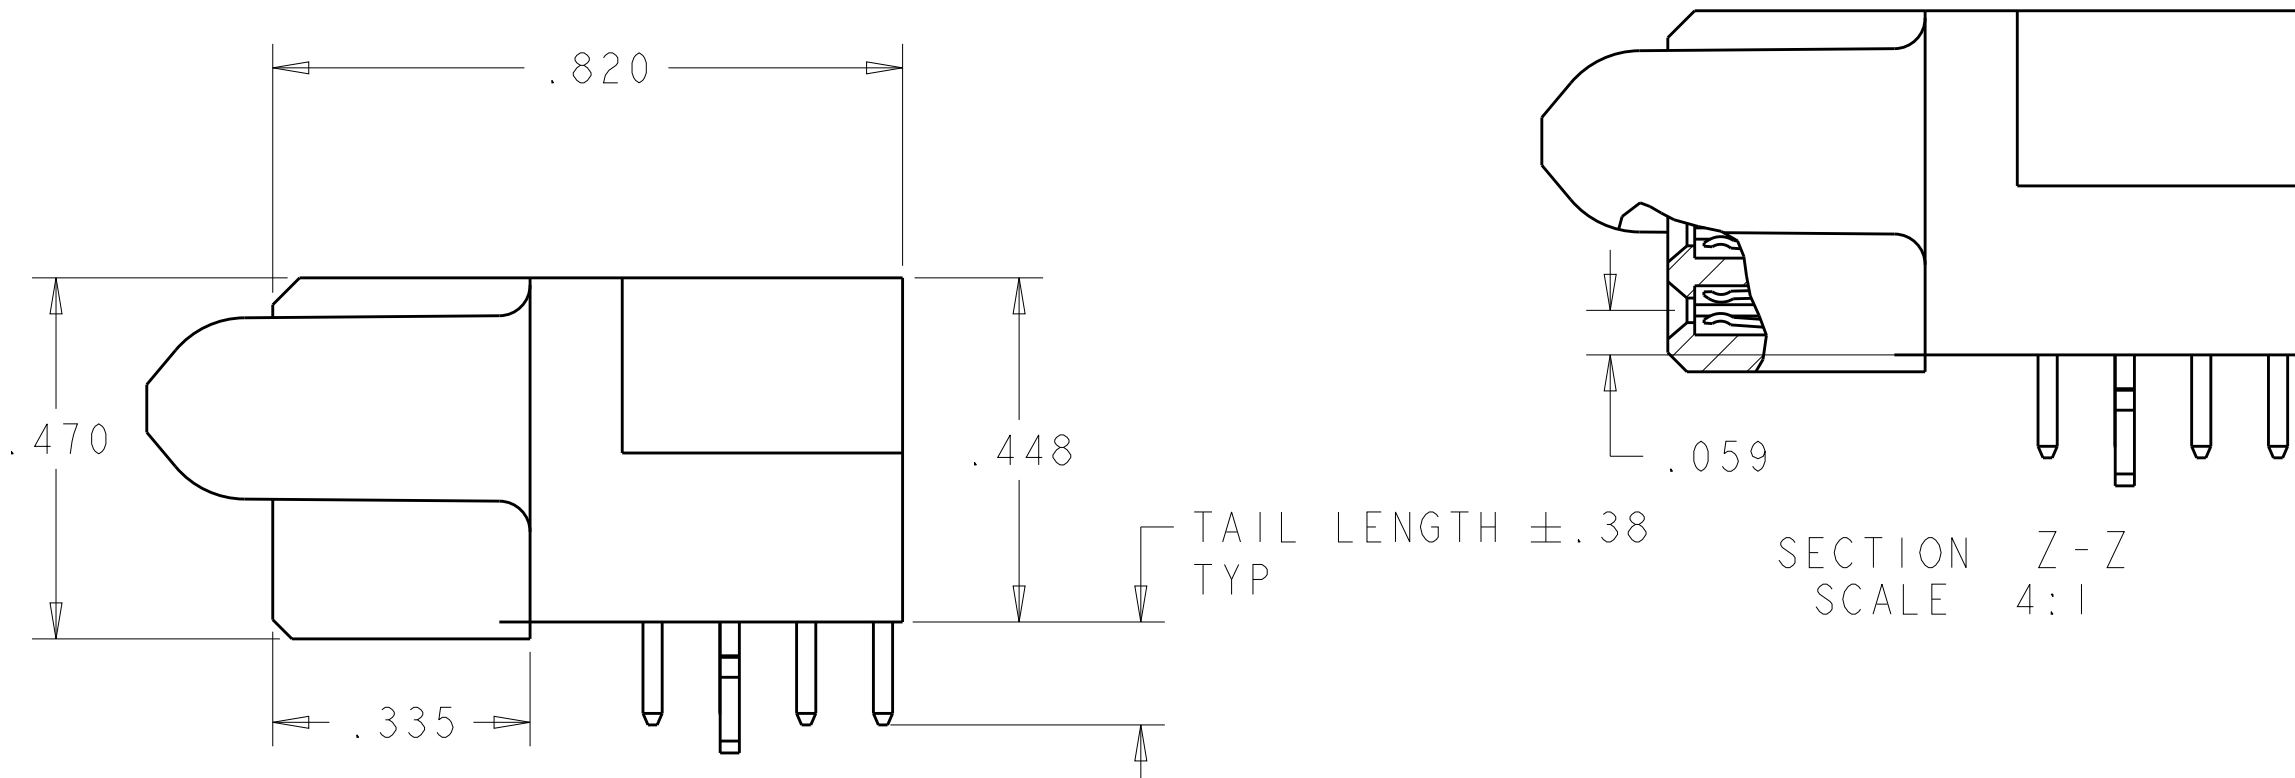

- 1 OPTIONAL CENTER MODULE, WITH .150 THRU HOLE OR HOLD DOWN FEATURE.
- 2 "AMP", PART NUMBER AND DATE CODE TO BE MARKED
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIAMETER HOLE

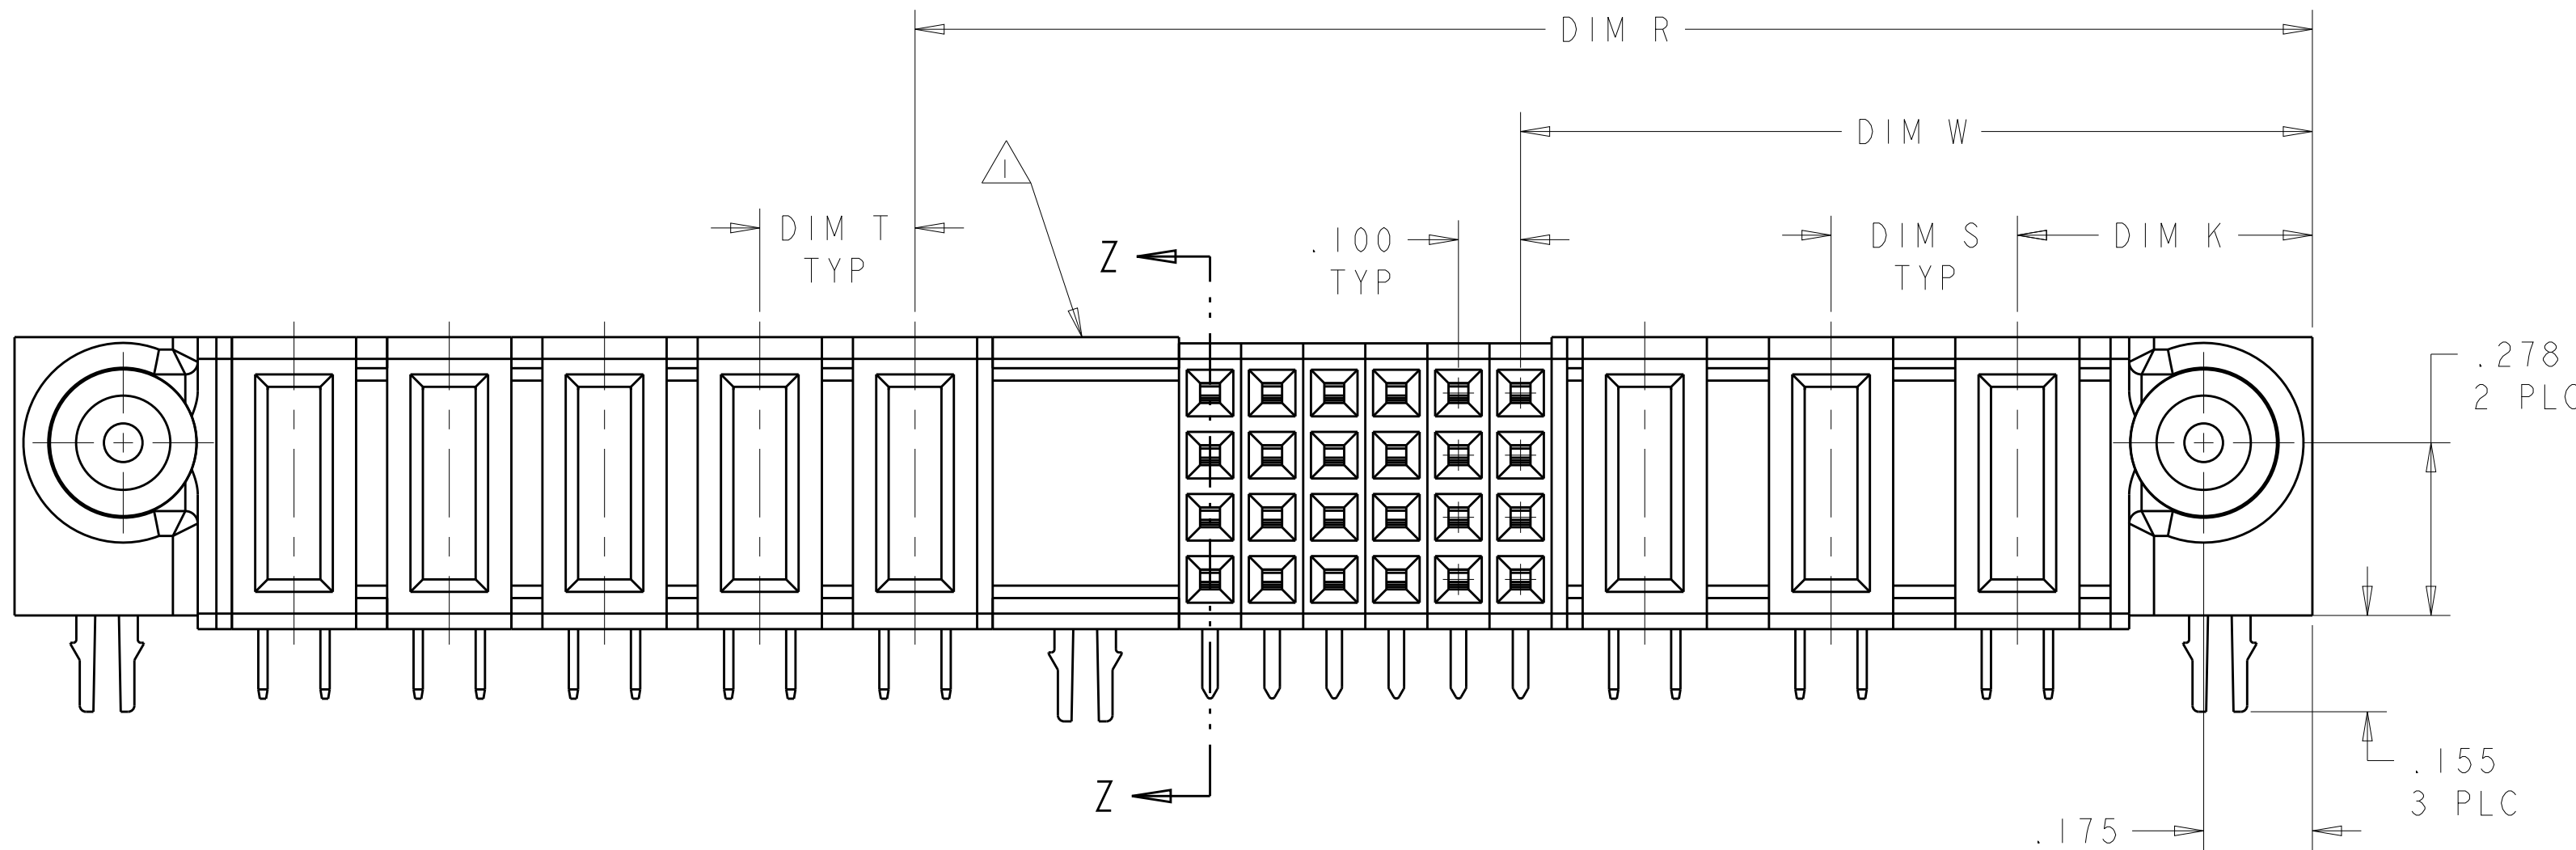


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 21FEB05	TE Connectivity	
		CHK M.PERCHERKE 21FEB05		
DIMENSIONS: INCHES		APVD M.PERCHERKE	NAME	
		PRODUCT SPEC	RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		108-1973		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	
		114-13038	A100779C=6450170	
MATERIAL		WEIGHT	RESTRICTED TO	
3		4	CUSTOMER DRAWING	
		SCALE 4:1	SHEET 1 OF 13	
			REV J5	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

J4	2.650	.200	.250	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	4-6450170-1
	3.100	.250	.250	2.250	1.875	3.150	-	3.450	.450	6P + 12S + 4P	4-6450170-0
	1.900	.250	.300	1.550	1.275	1.950	-	2.250	.475	3ACP + 8S + 2P	3-6450170-9
	1.800	-	-	1.700	.625	1.850	-	2.150	.450	1P + 40S + 1P	3-6450170-8
	1.600	-	-	1.500	.625	1.650	-	1.950	.450	1P + 32S + 1P	3-6450170-7
	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450170-6
	1.550	.250	.250	1.200	.900	1.600	-	1.900	.450	2P + 8S + 2P	3-6450170-5
	2.350	.250	.250	1.250	.875	2.400	-	2.700	.450	2P + 12S + 5P	3-6450170-4
	2.325	.250	.300	1.975	1.600	2.375	-	2.675	.450	4ACP + 12S + 2P	3-6450170-3
	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450170-1
	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	3-6450170-0
	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	2-6450170-9
	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	2-6450170-8
	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	2-6450170-7
	1.950	.250	.250	1.600	1.125	2.000	-	2.300	.450	3P + 16S + 2P	2-6450170-6
	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	2-6450170-0
	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6450170-9
	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	1-6450170-8
	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	1-6450170-4
	2.600	.200	.200	1.925	1.175	2.650	-	2.950	.425	4P + 28S + 4P	1-6450170-1
	1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	1-6450170-0
	2.500	.250	.250	2.150	.875	2.550	-	2.850	.450	2P + 48S + 2P	6450170-9
	3.300	.250	.300	1.950	1.275	3.350	-	3.650	.475	3ACP +24S + 6P	6450170-8
	1.400	.250	.250	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	6450170-6
	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450170-5
	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450170-4
	3.650	.250	.300	2.550	1.275	3.700	-	4.000	.475	3ACP + 48S + 5P	6450170-3
	3.050	.250	.300	1.950	1.275	3.100	-	3.400	.475	3ACP +24S + 5P	6450170-2
	2.550	.250	.300	2.200	1.525	2.600	-	2.900	.475	3ACP+1P+24S+2P	6450170-1
	DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.0020
#2°
-

DWN
R.GRZYBOWSKI

CHK
M.PERCHEKKE

APVD
M.PERCHEKKE

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

CUSTOMER DRAWING

21FEB05

21FEB05

-

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450170

RESTRICTED TO
-

SCALE
4:1









SHEET
2

OF
13

REV
J5

4805 (3/11)

LOC	DIST	REVISONS			
		P	LTR	DESCRIPTION	DATE
ES	00	-	-	SEE SHEET 1	-

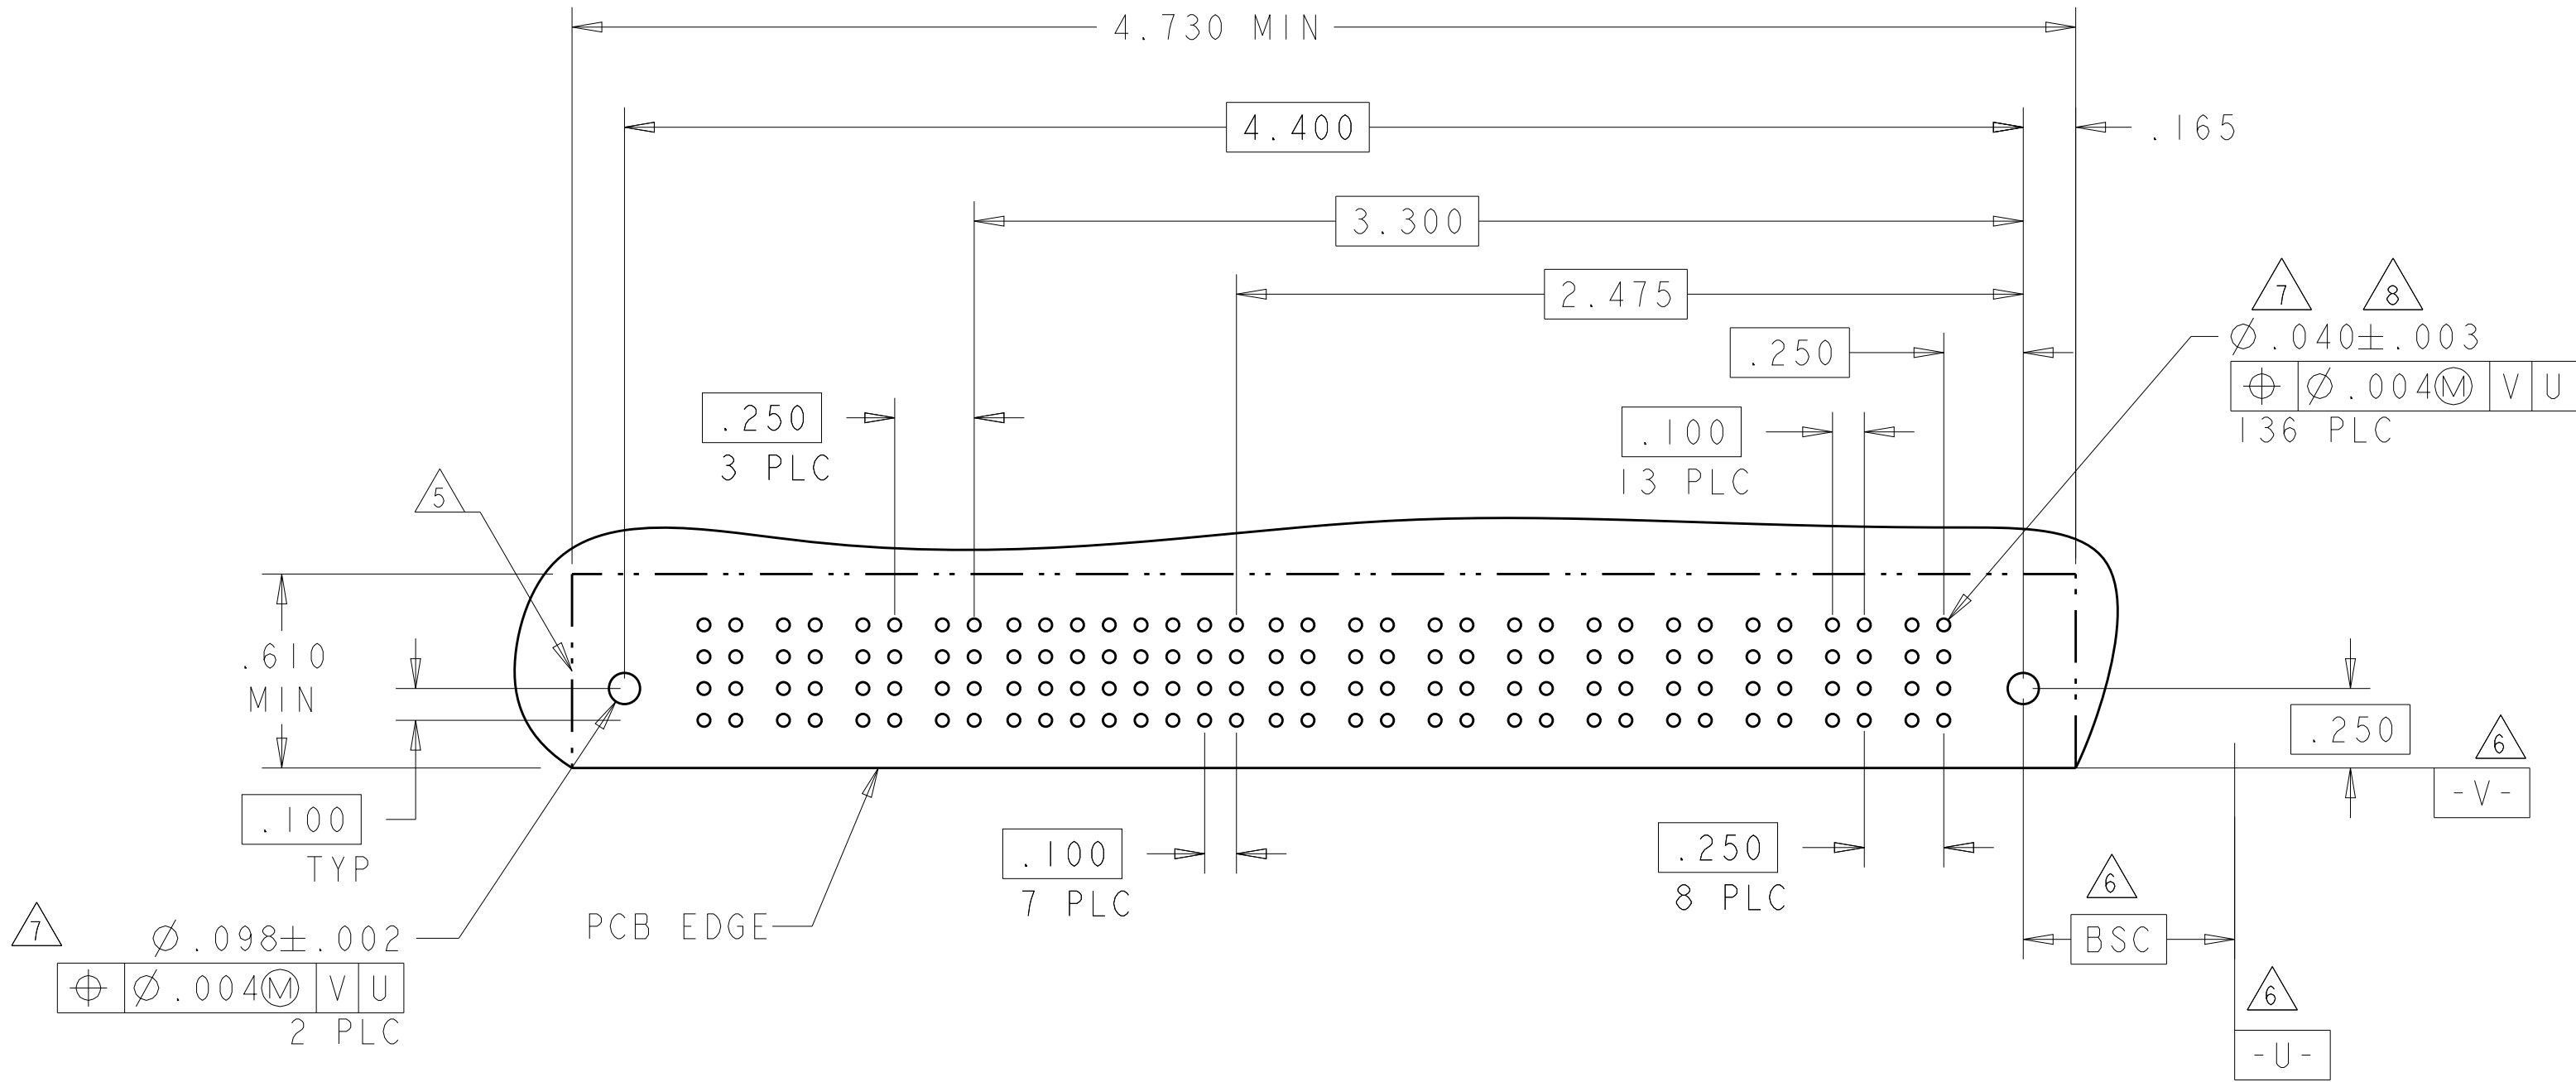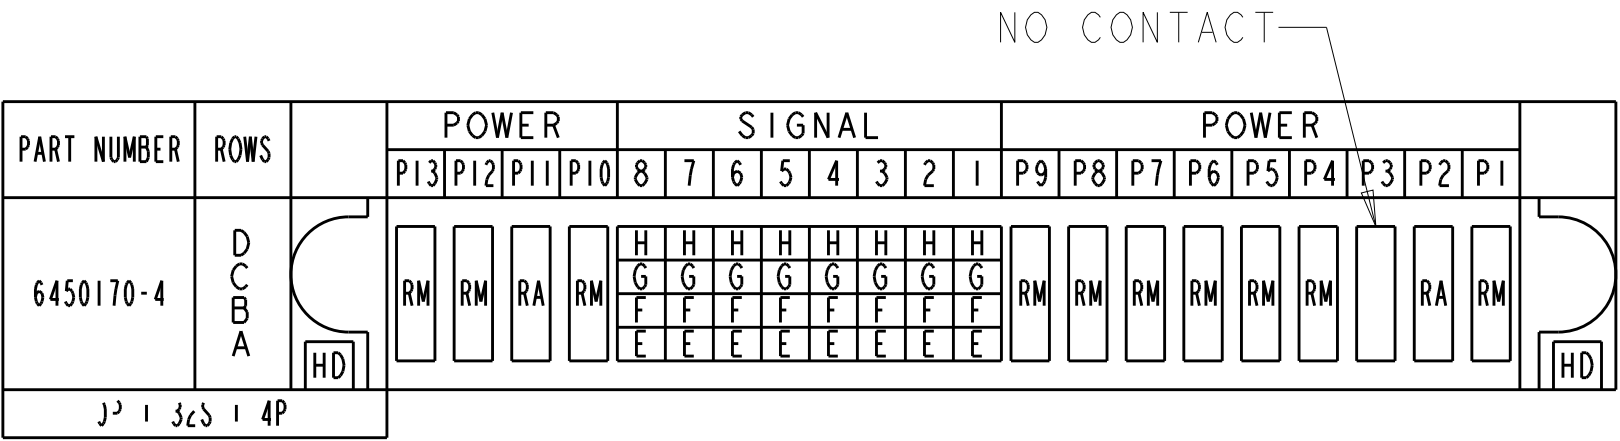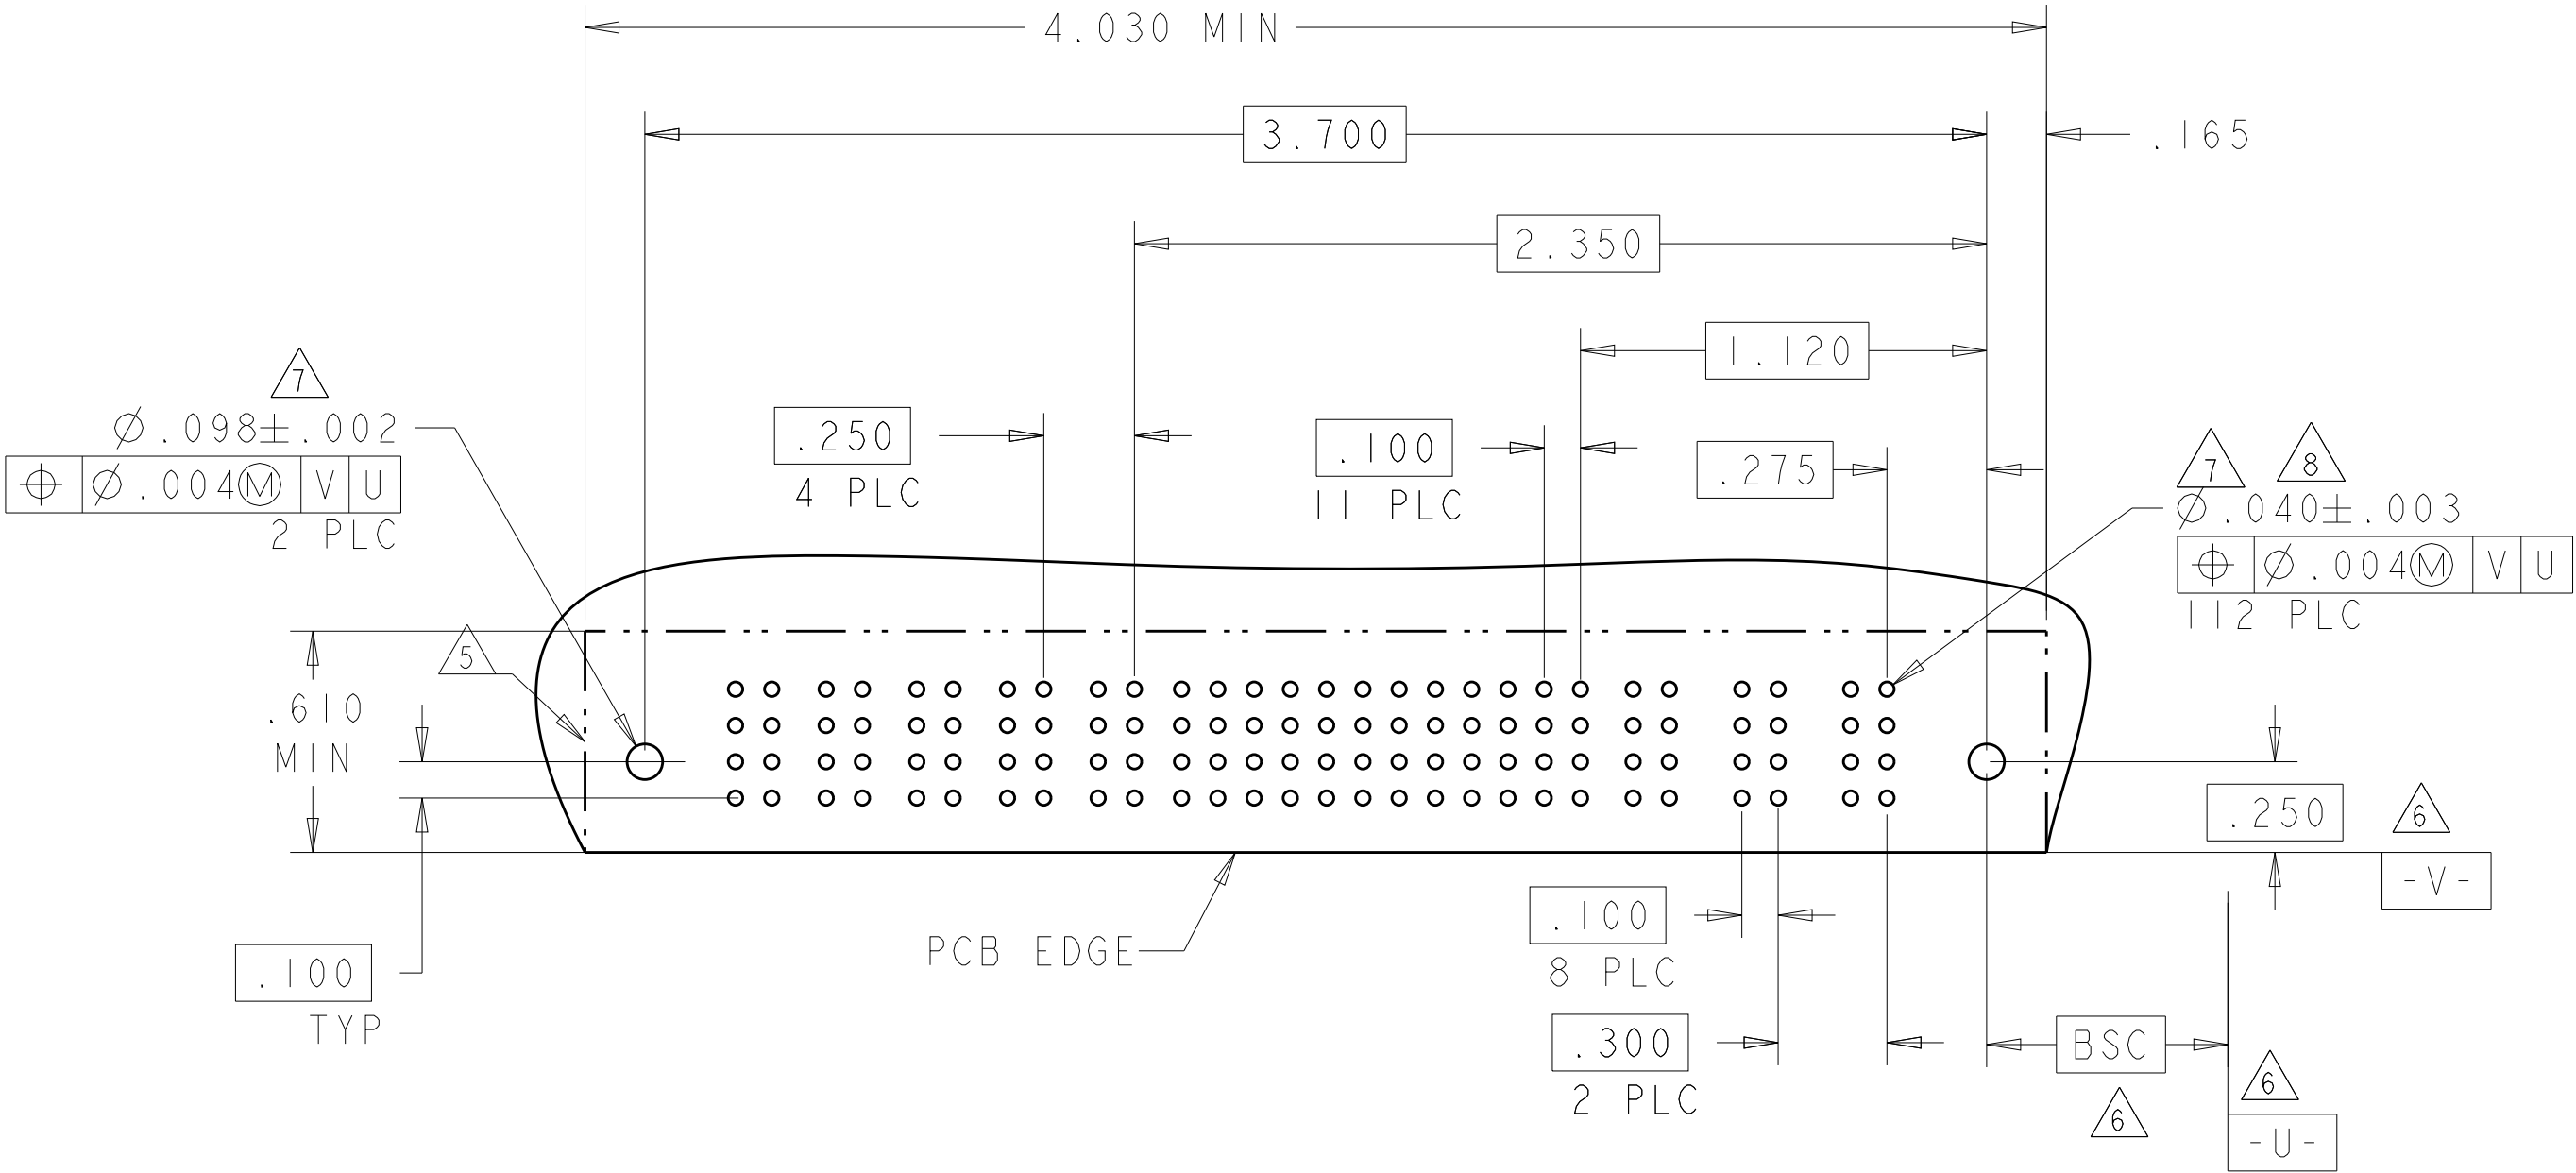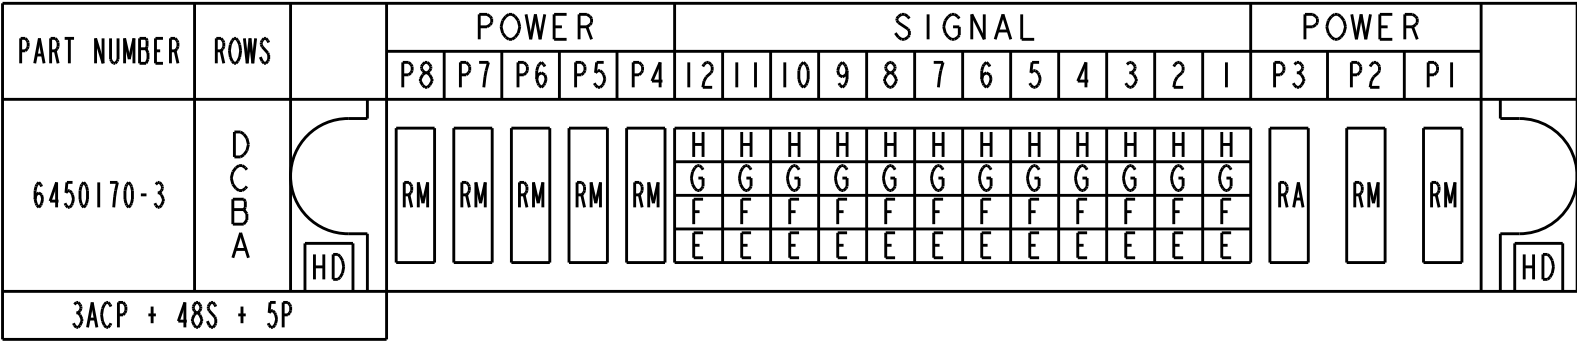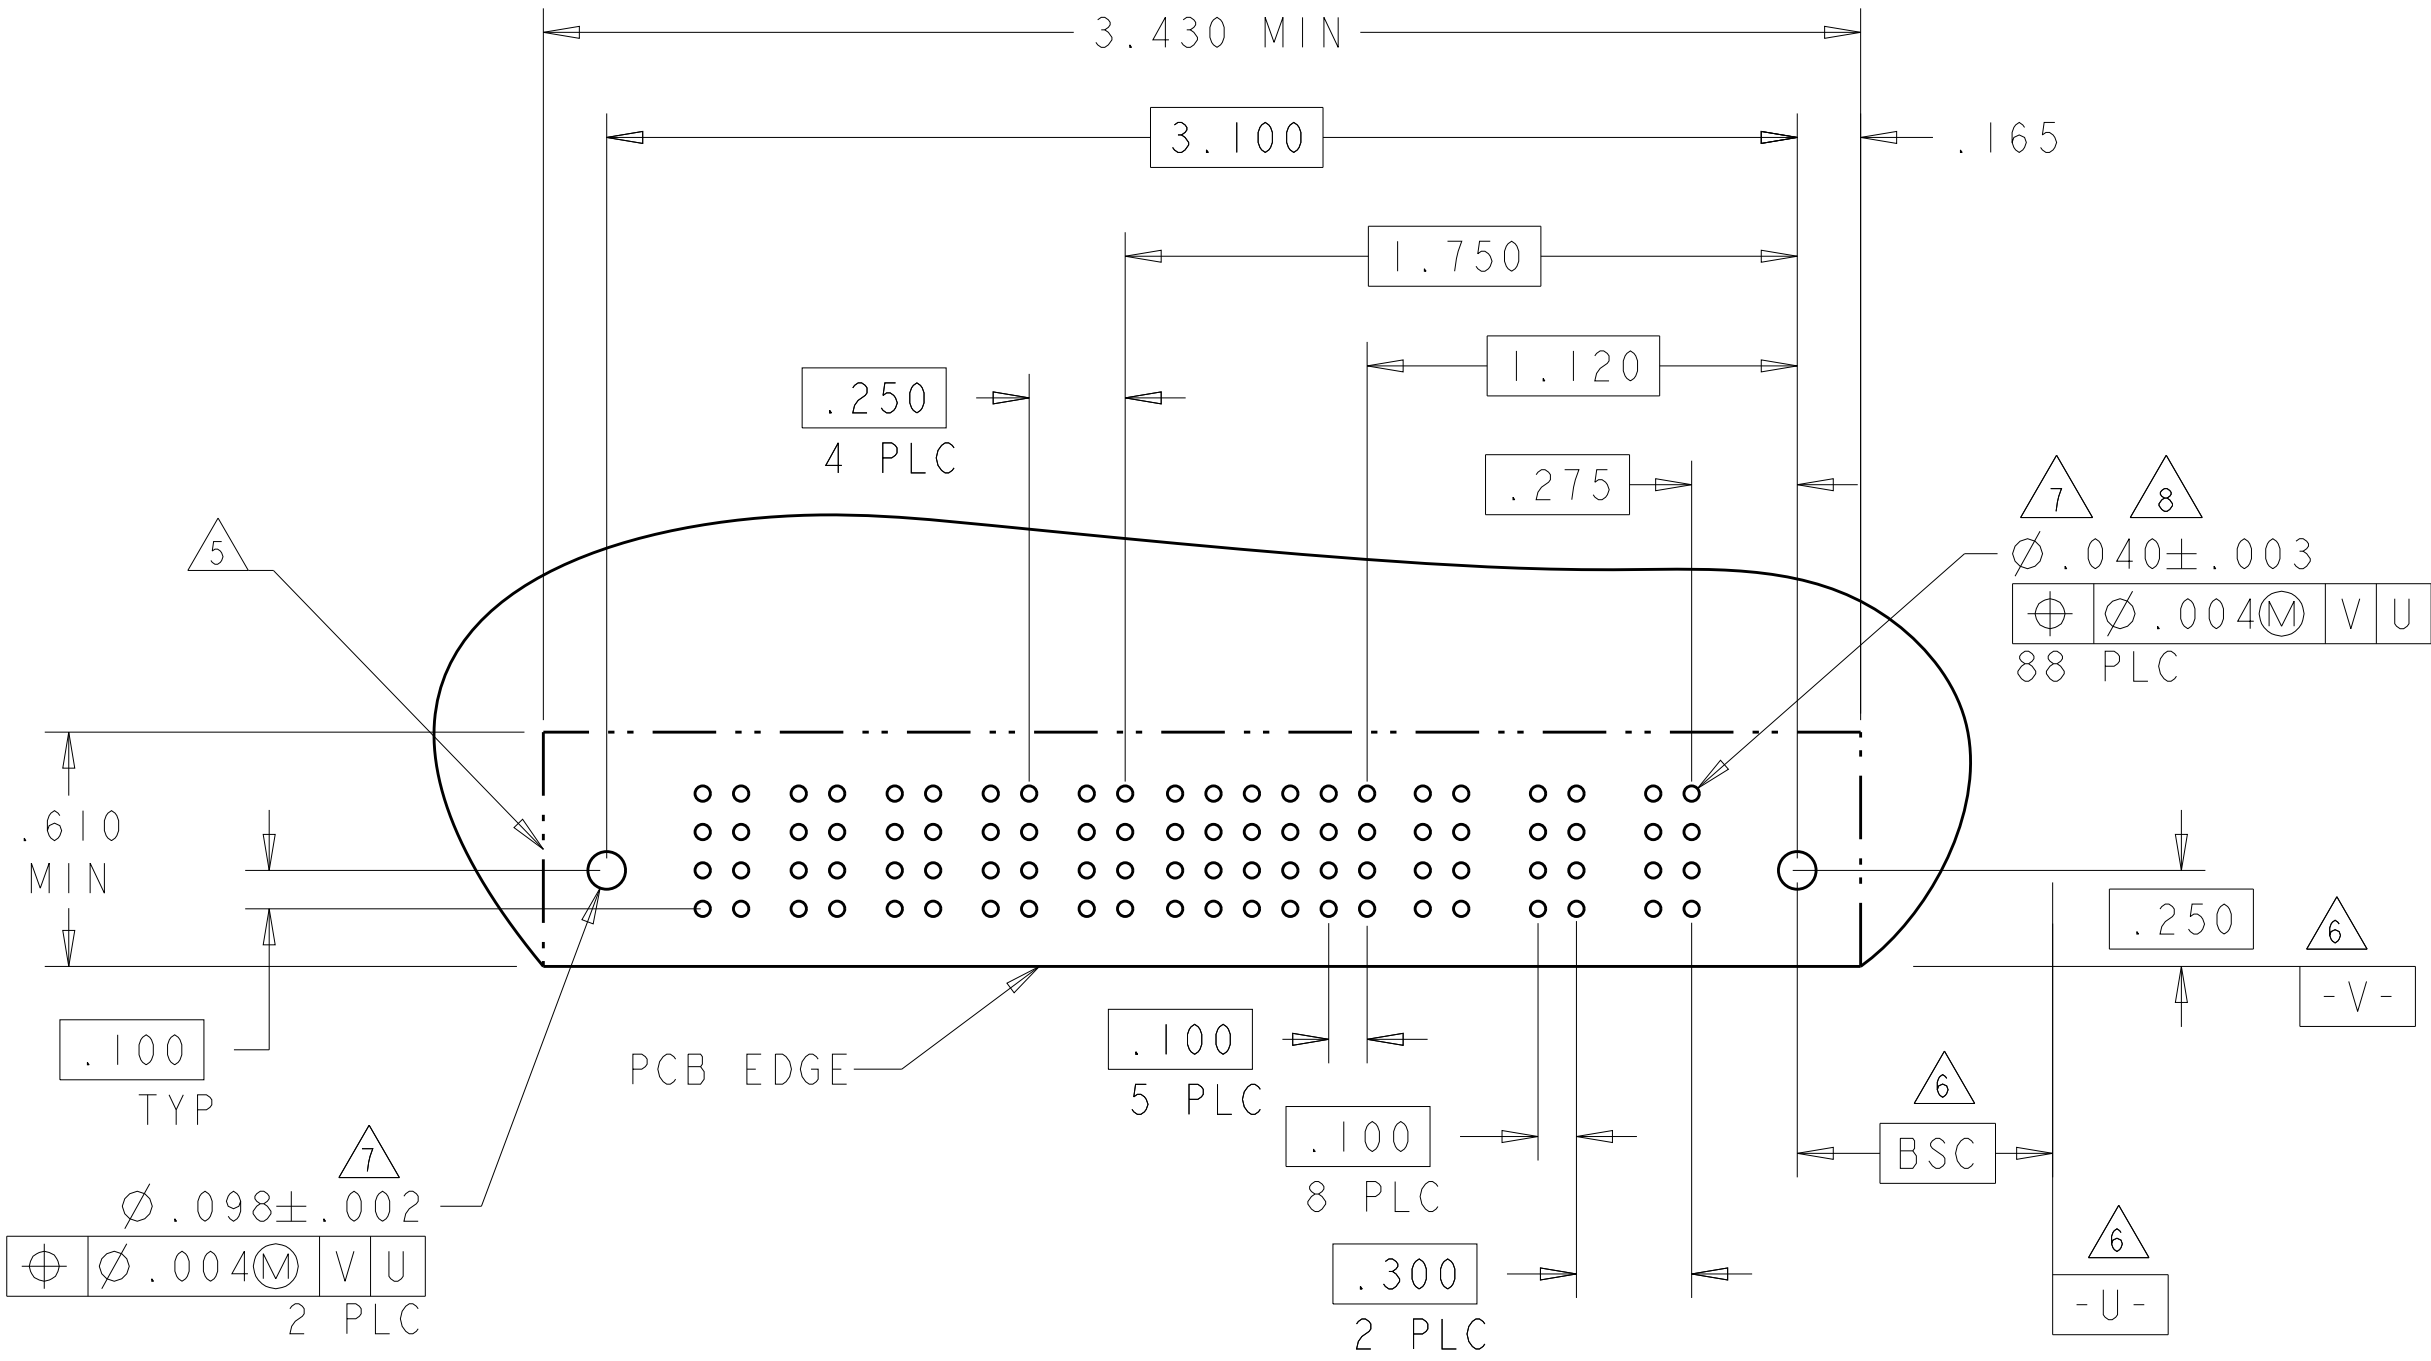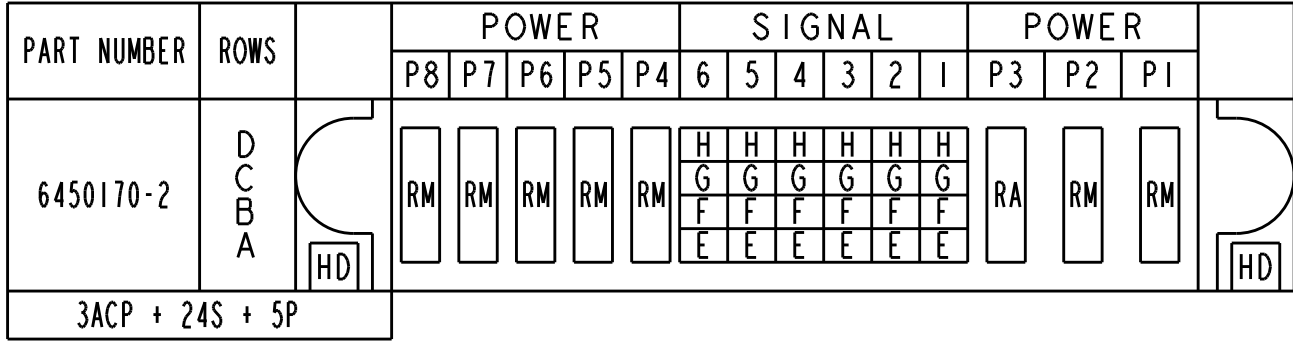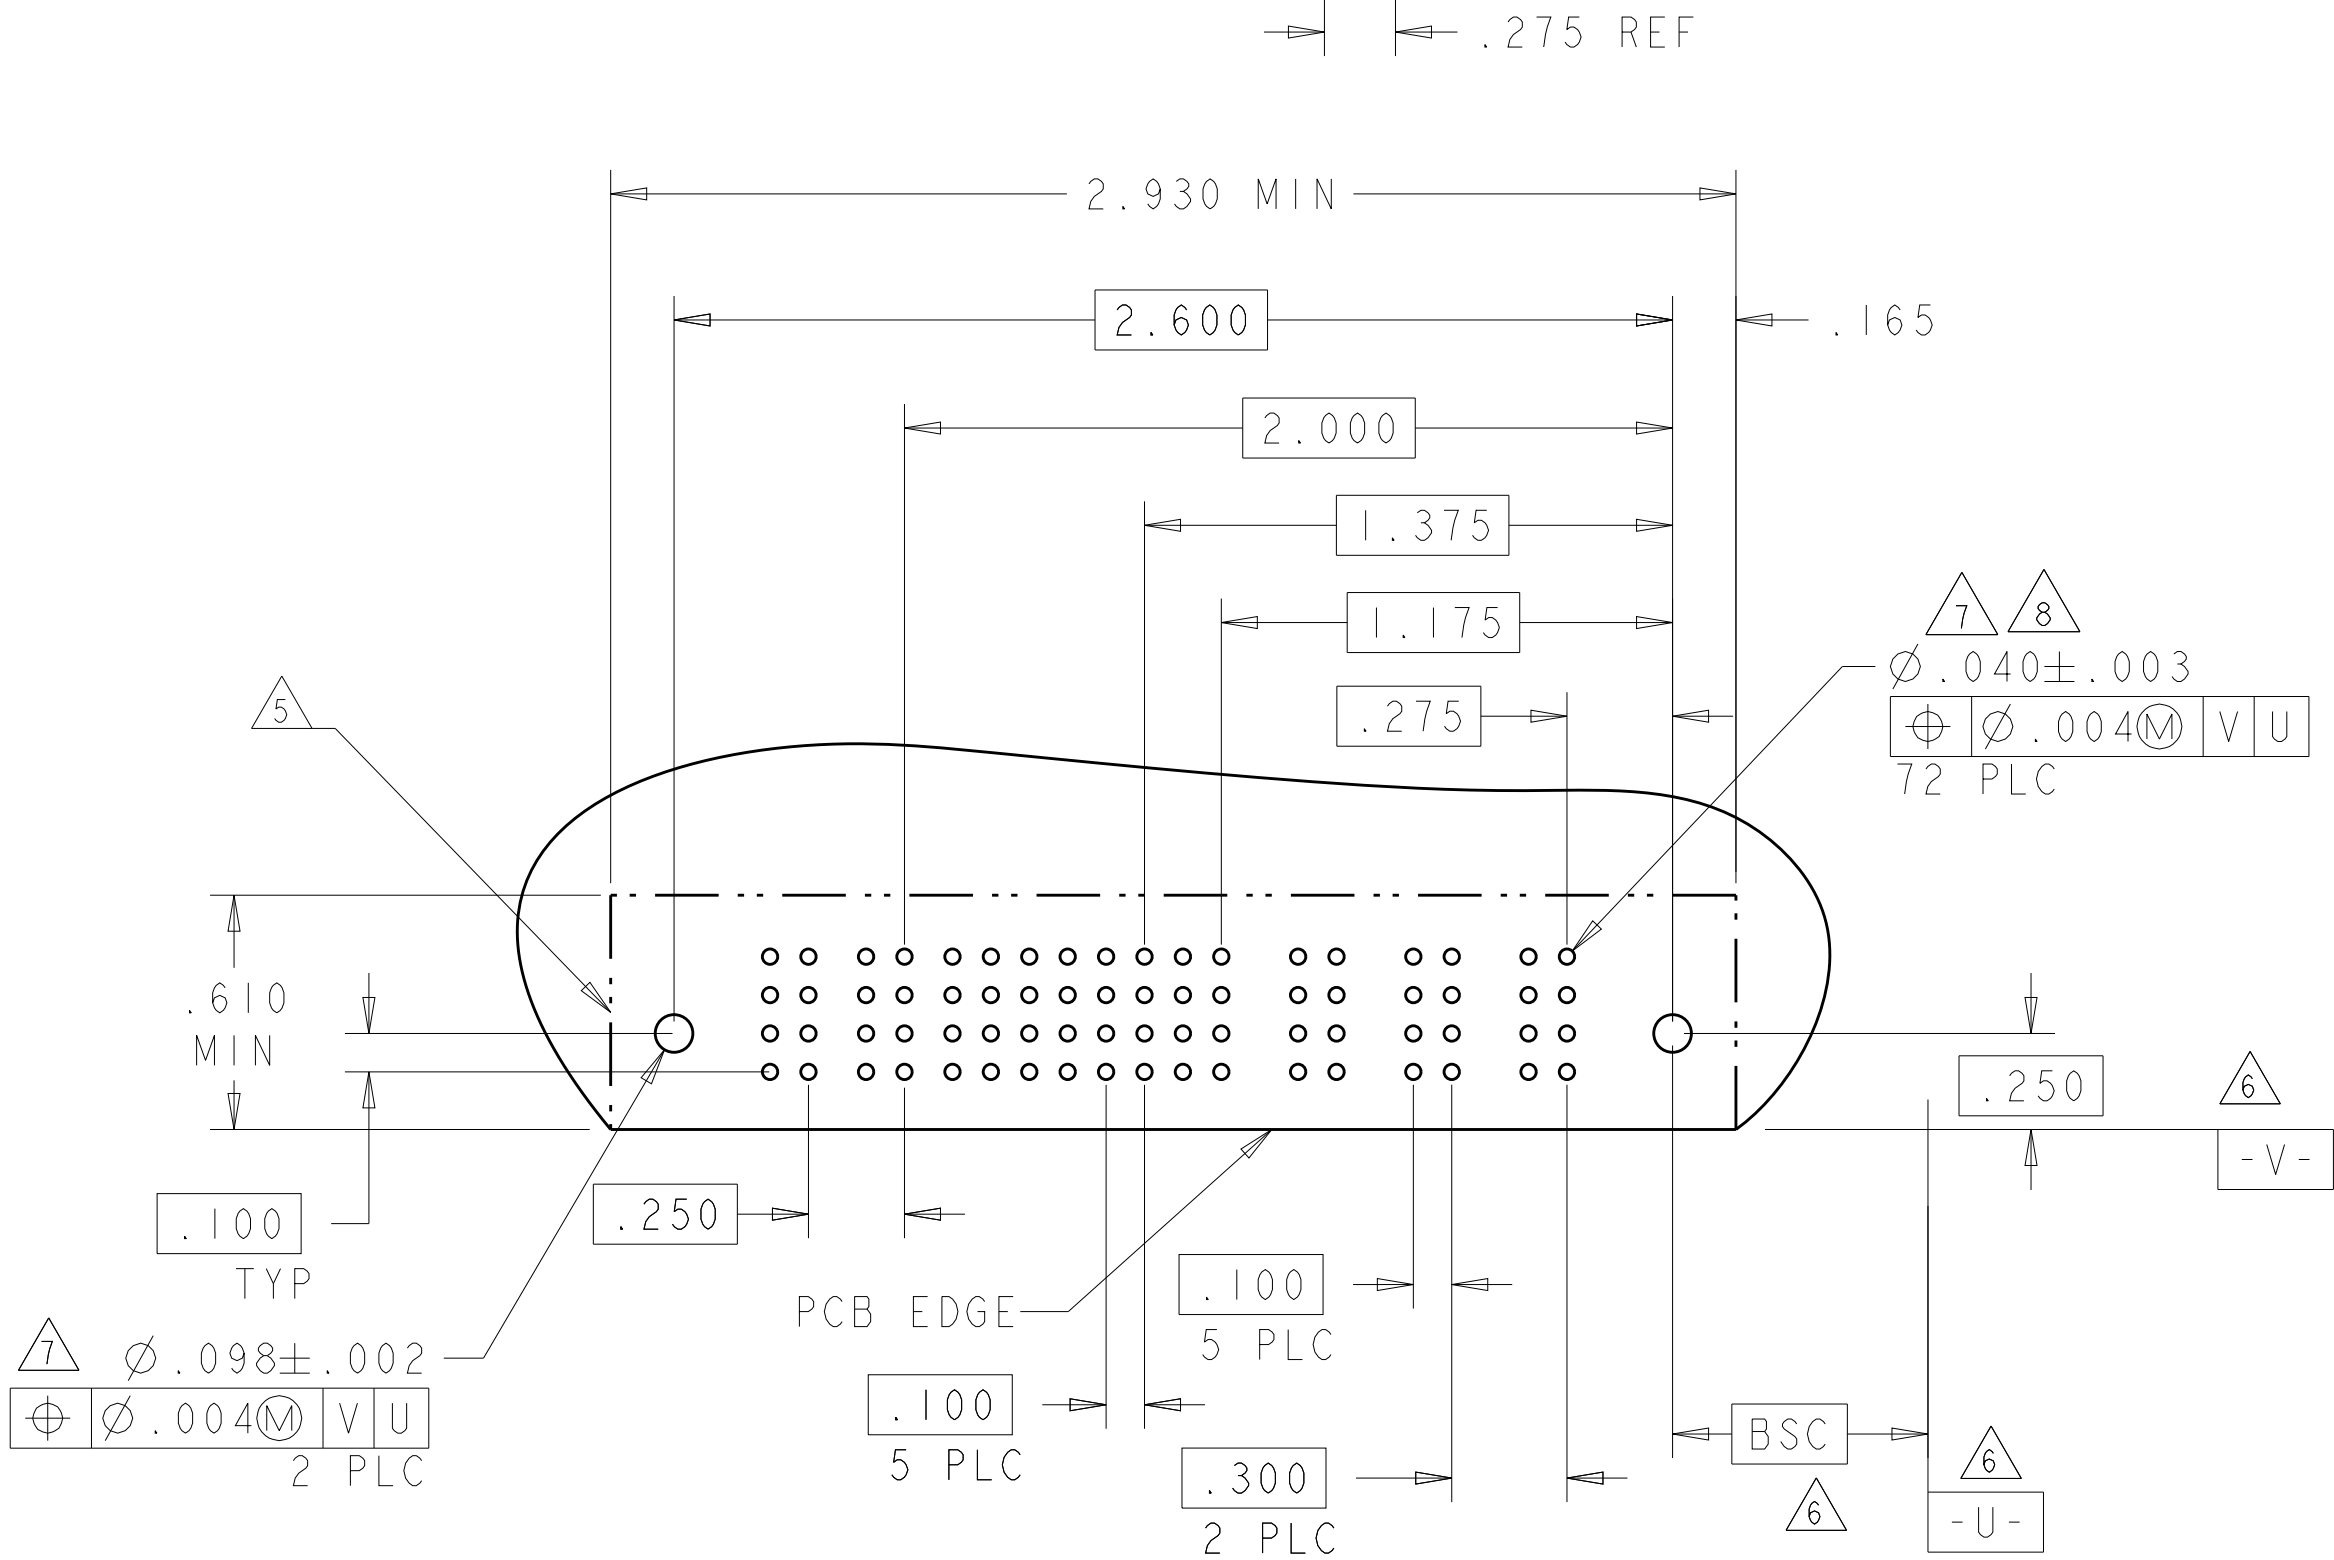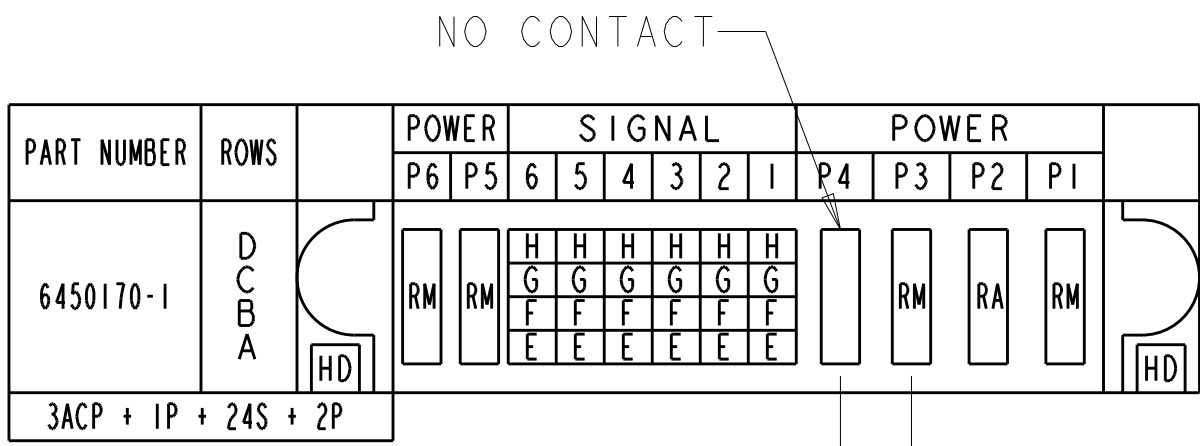

RM	.135	STD	F	.135	B
RA	.135	MFB	E	.135	A
CODE	TAIL LENGTH	TYPE	CODE	TAIL LENGTH	ROW
POWER CONTACT			SIGNAL CONTACT		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES

MATERIAL

:

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.01

4 PLC ±.002

ANGLES ±.002

FINISH

:

OWN: R. GRZYBOWSKI

CHK: M. PERCHERKE

APVD: M. PERCHERKE

PRODUCT SPEC: 108-1973

APPLICATION SPEC: 114-13038

WEIGHT:

CUSTOMER DRAWING

21FEB05

21FEB05

-

NAME: RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 6450170

RESTRICTED TO: -

SCALE: 1:1



SHEET: 3

OF: 13

REV: J5


TE Connectivity

PART NUMBER	ROWS		POWER						SIGNAL						POWER			
			P9	P8	P7	P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
6450170-8	D C B A																	
3ACP + 24S + 6P																		

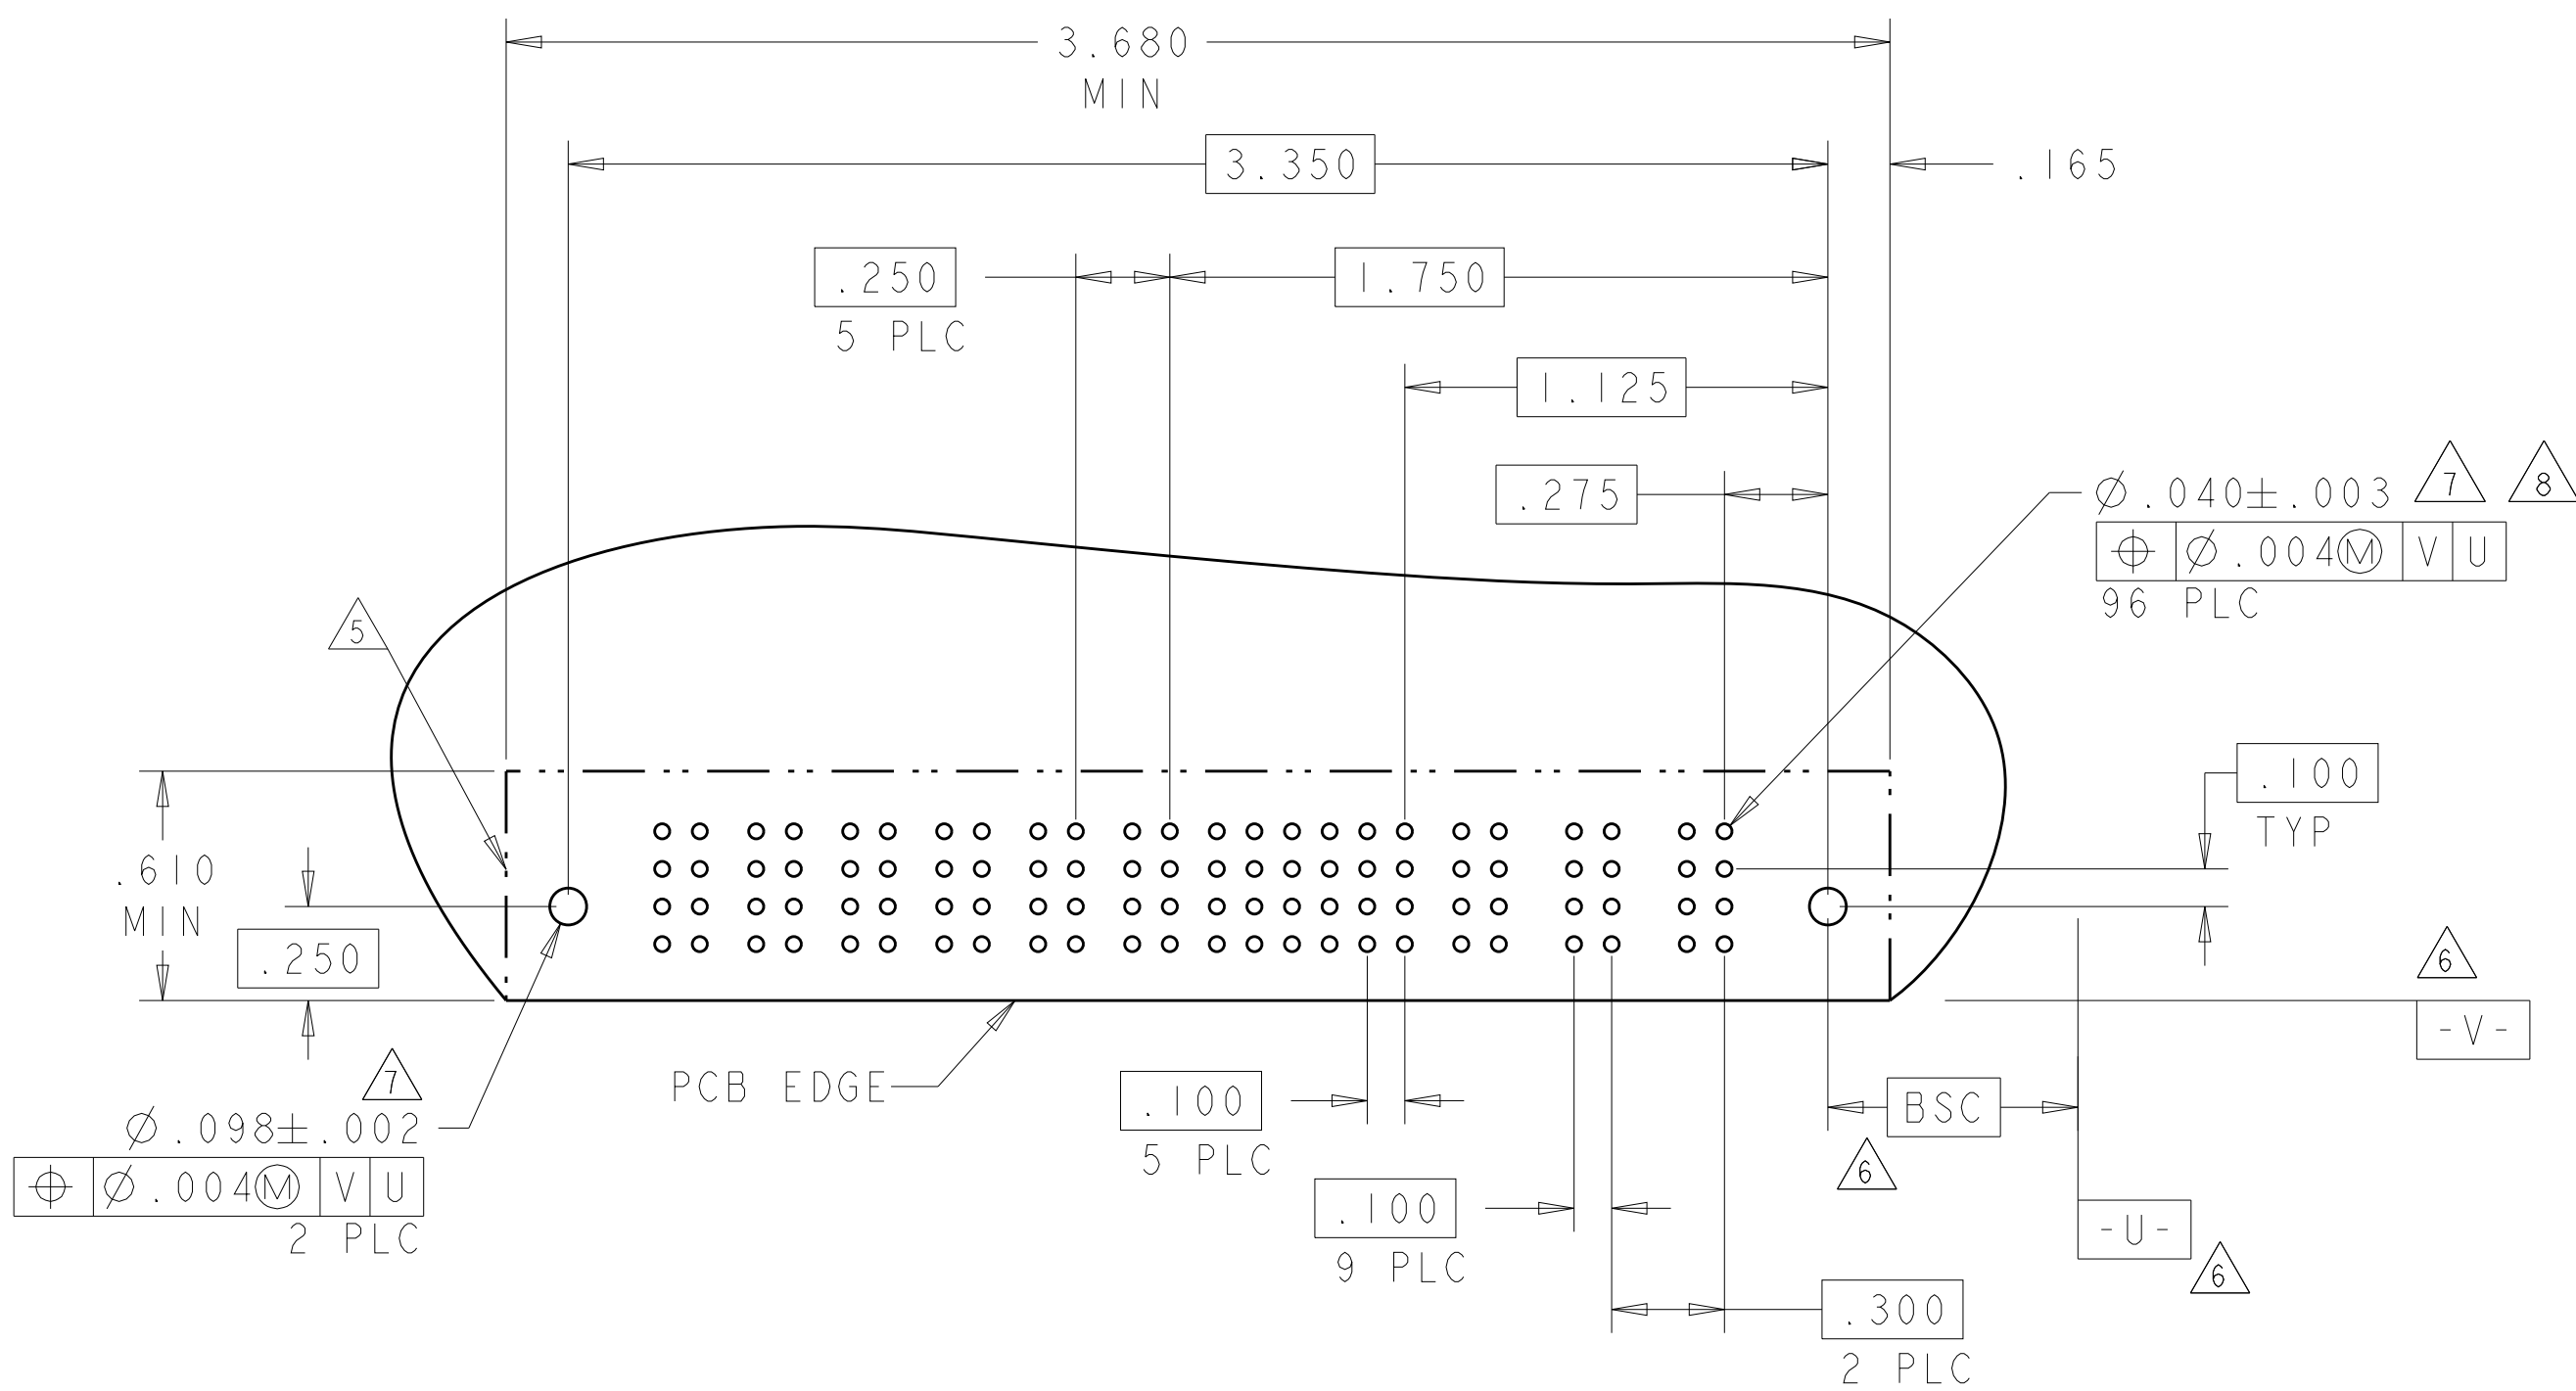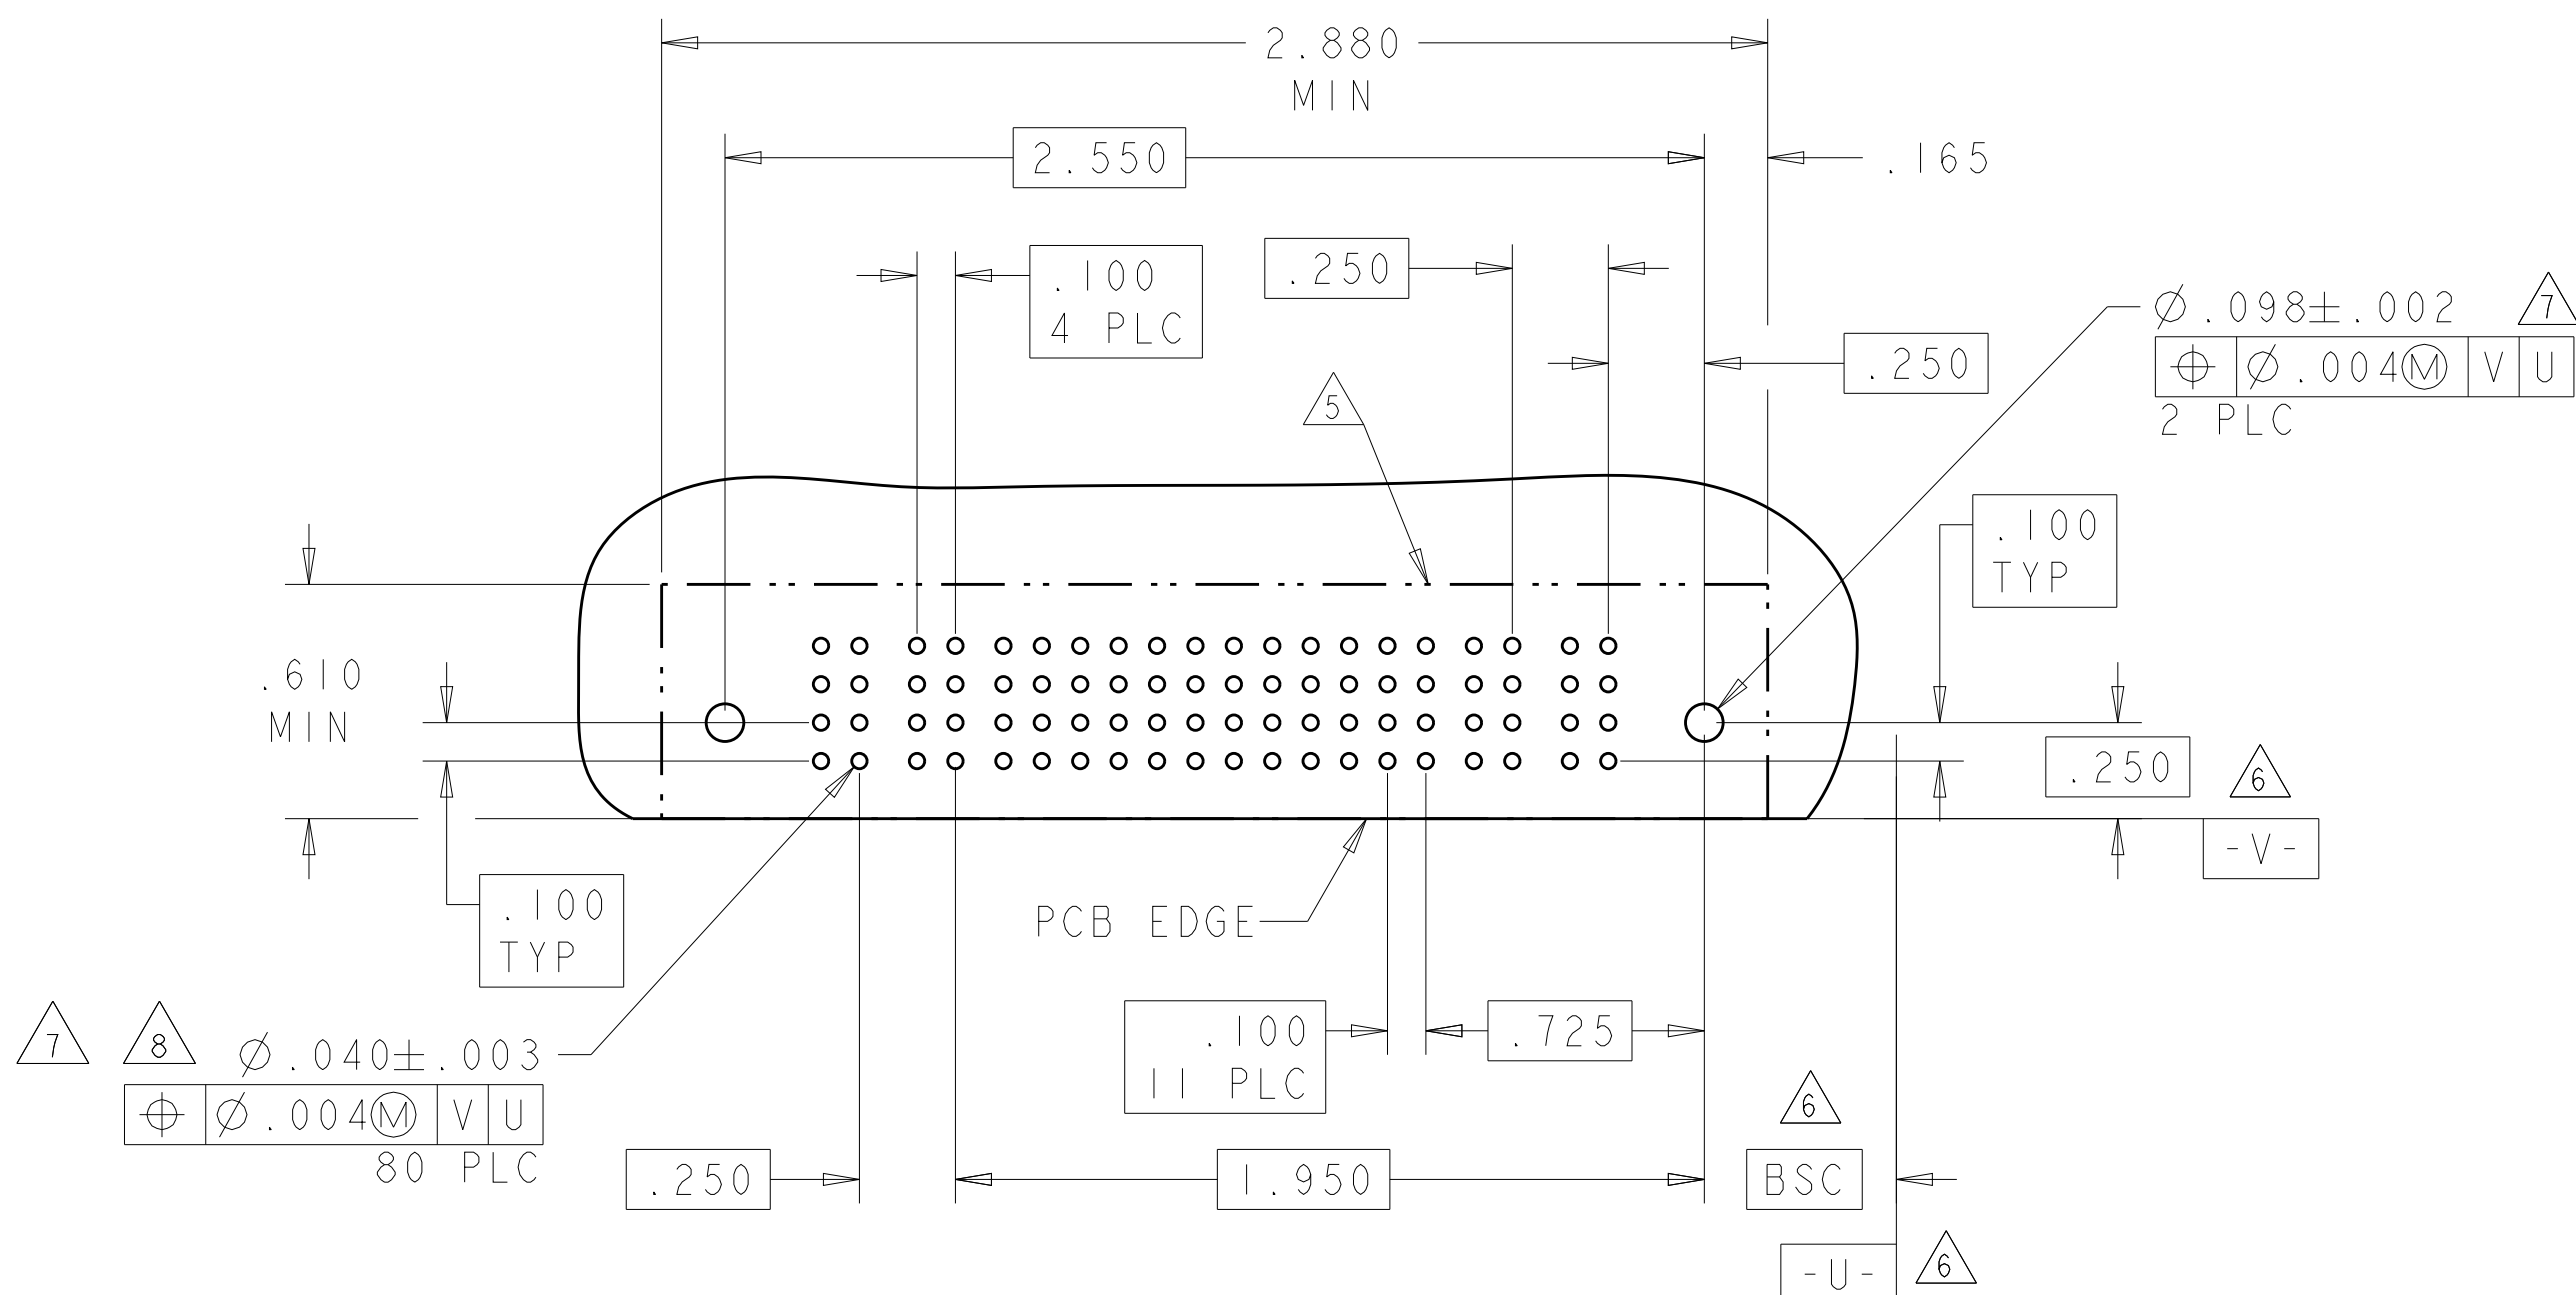
[illegible]4805 (3/11)

LOC	DIST	REVISONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER		SIGNAL					POWER			
			P2		6	5	4	3	2	1	P1		
1-6450170-0	D C B A			HD	RM	H	H	H	H	H	RA		HD
						G	G	G	G	G			
						F	F	F	F	F			
						E	E	E	E	E			
IP + 24S + IP													

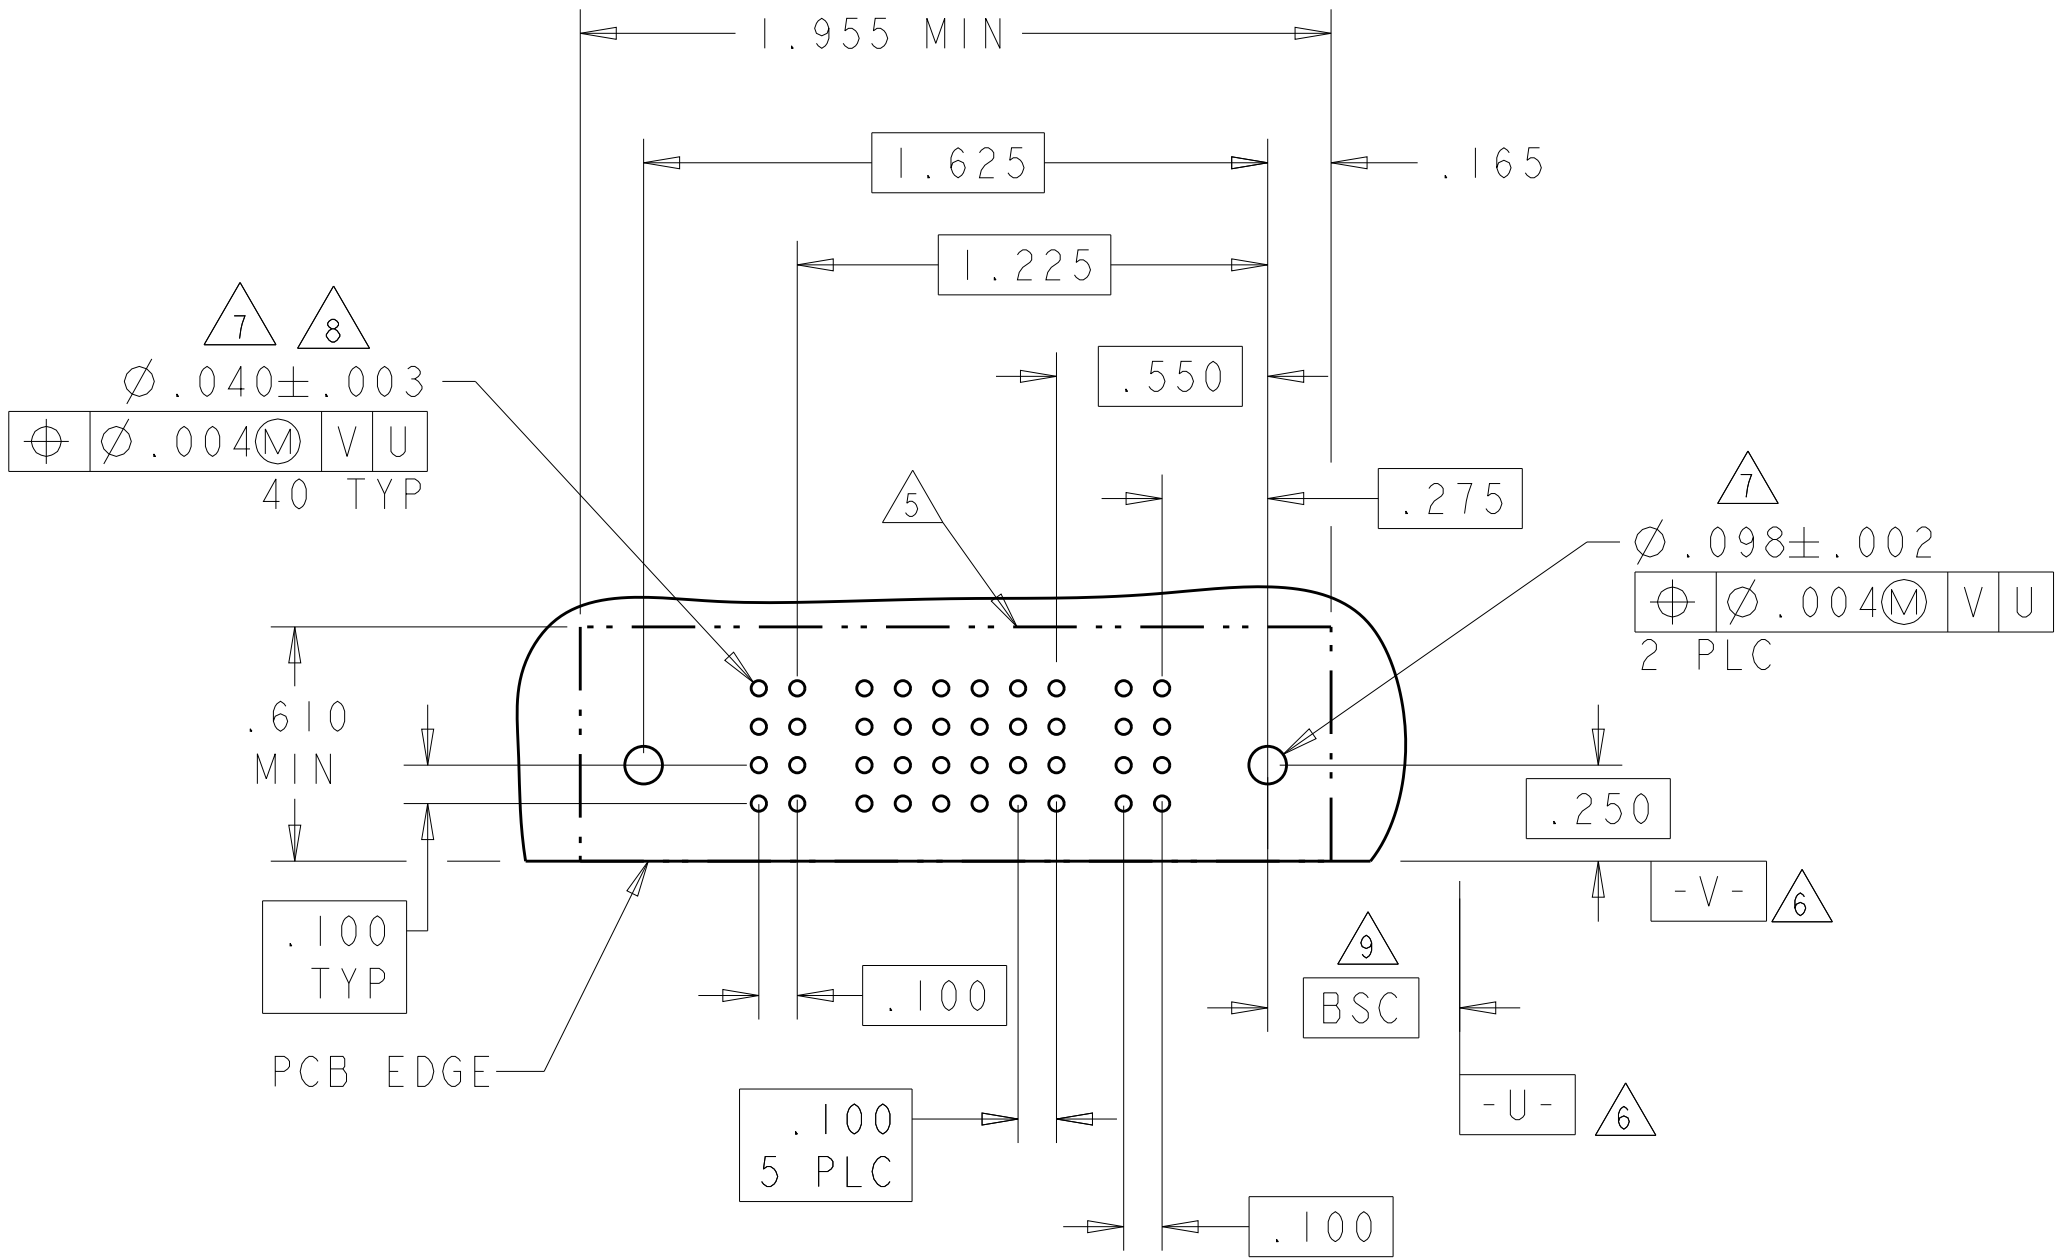


PART NUMBER	ROWS	POWER				SIGNAL								POWER				
		P8	P7	P6	P5	7	6	5	4	3	2	1	P4	P3	P2	P1		
1-6450170-1	D C B A		RM	RM	RM	RM	H	H	H	H	H	H	H	RM	RM	RM	RM	
							G	G	G	G	G	G	G					G
							F	F	F	F	F	F	F					F
							E	E	E	E	E	E	E					E
4P + 28S + 4P																		

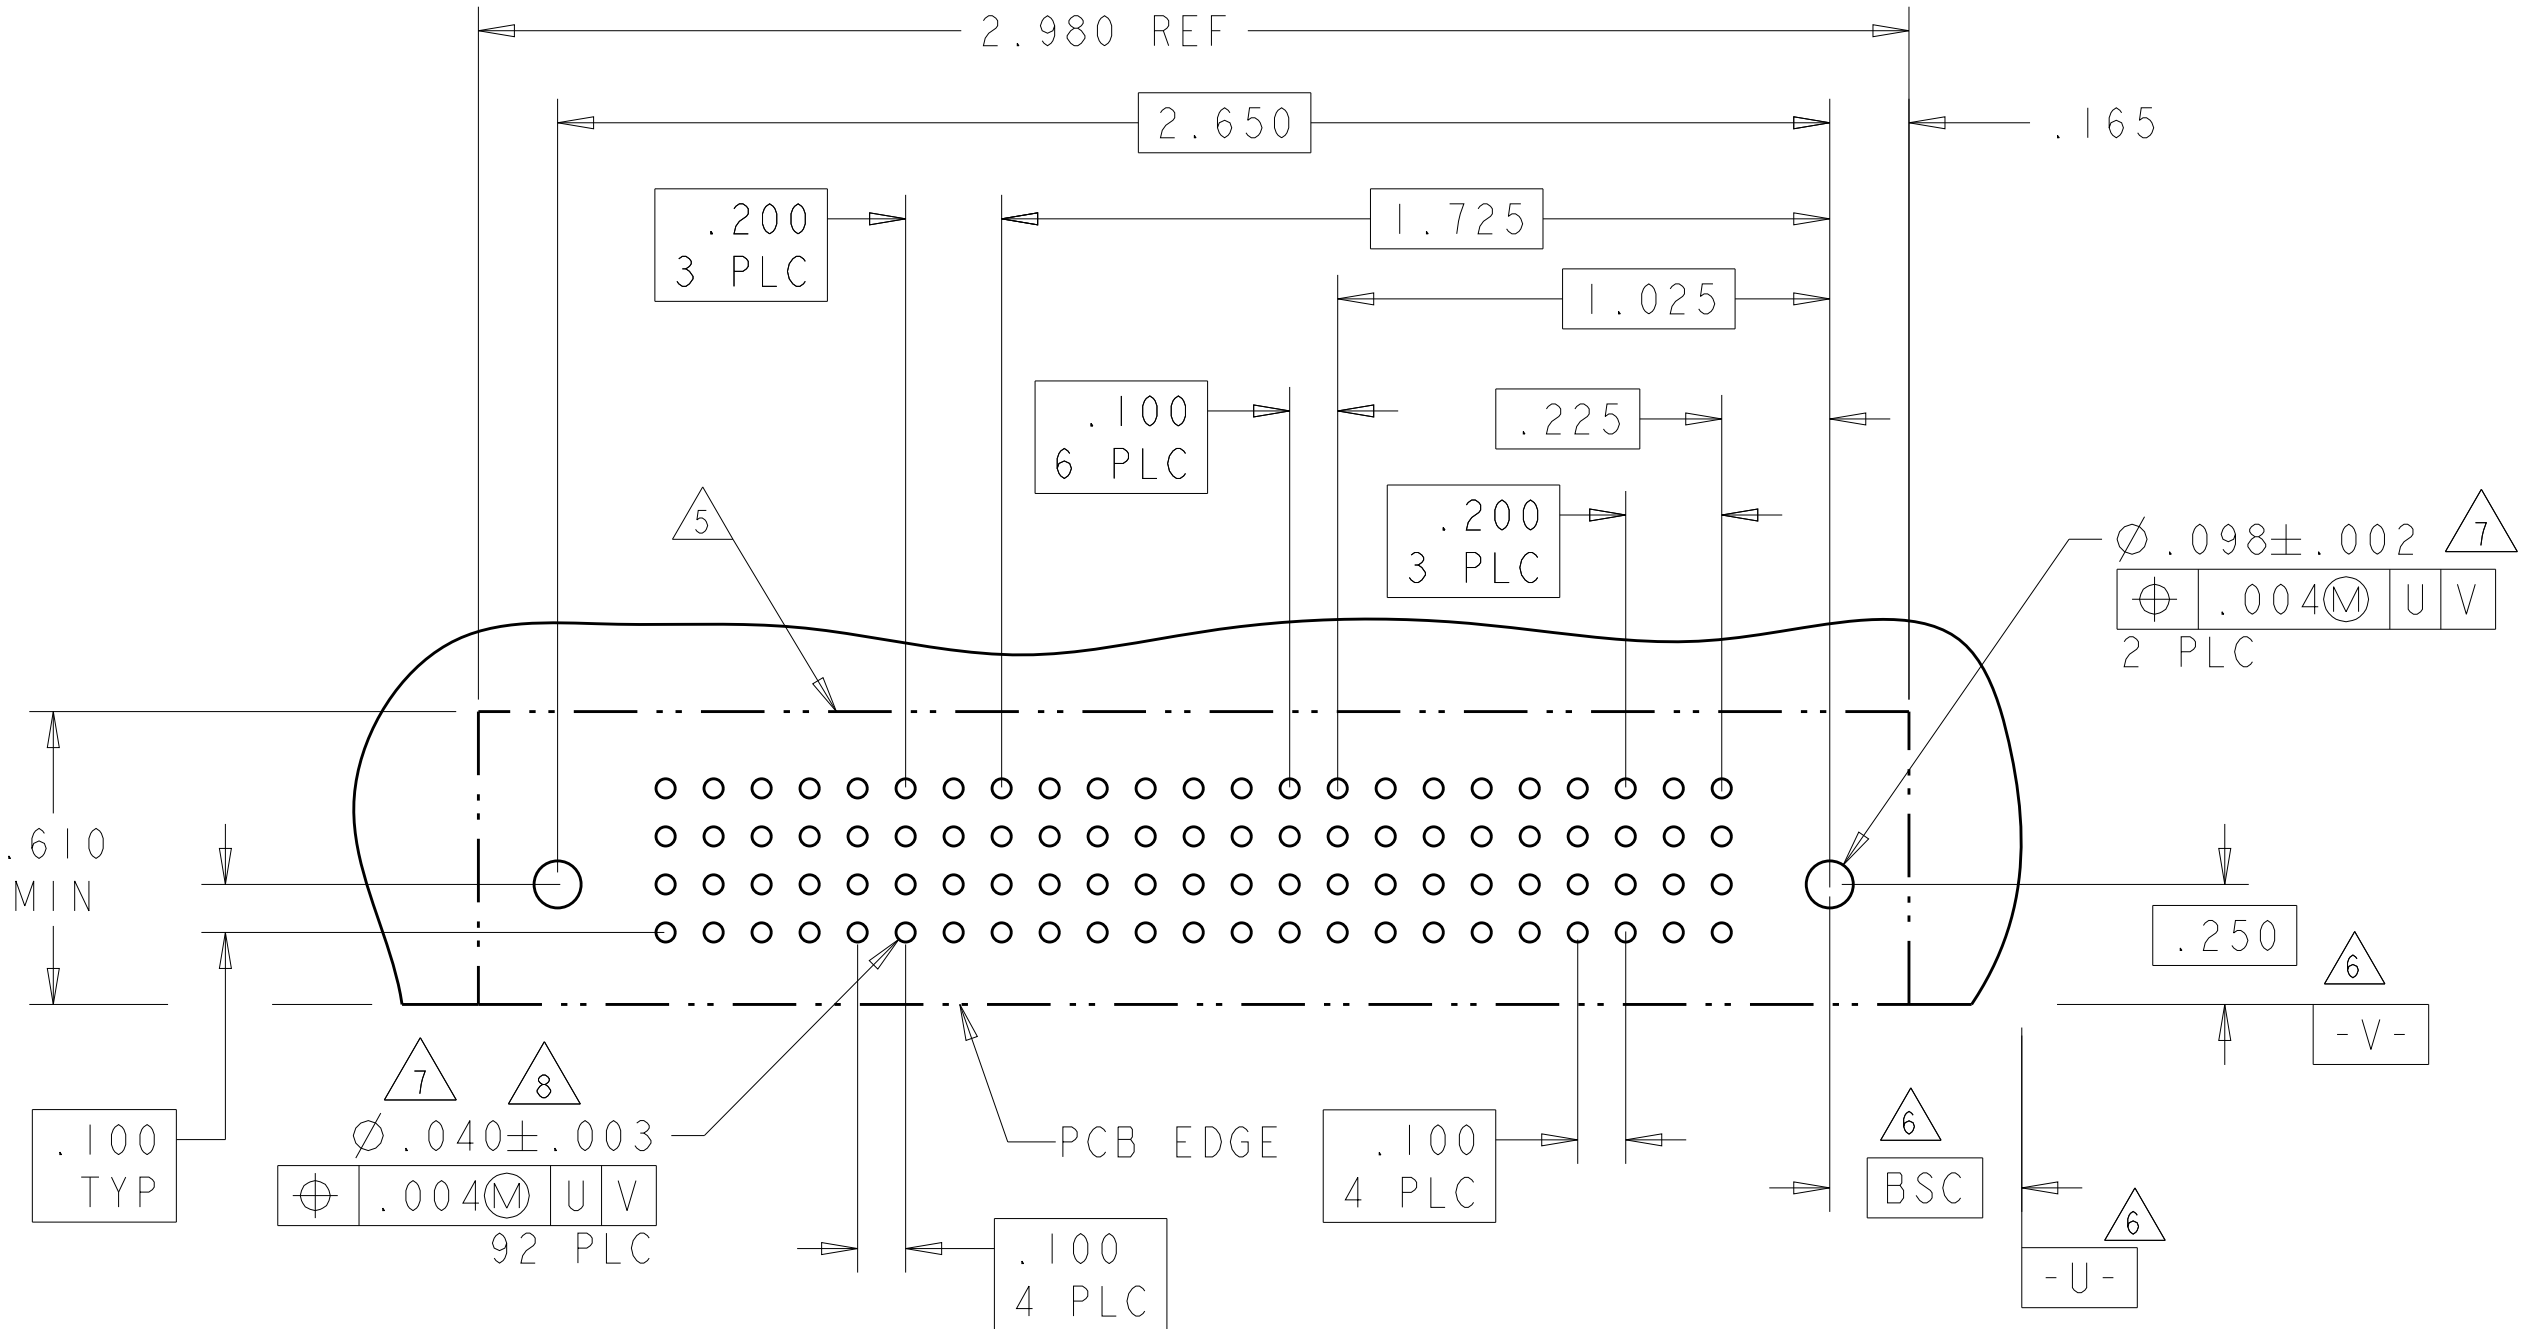

PART NUMBER	ROWS	POWER		SIGNAL				POWER						
		P5	P4	4	3	2	1	P3	P2	P1				
2-6450170-6	D	C	B	A	RM	RM	H	H	H	H	RA	RA	RA	HD
	G						G	G	G					
	F						F	F	F					
	E						E	E	E					
3P + 16S + 2P														

NO CONTACTS LOADED

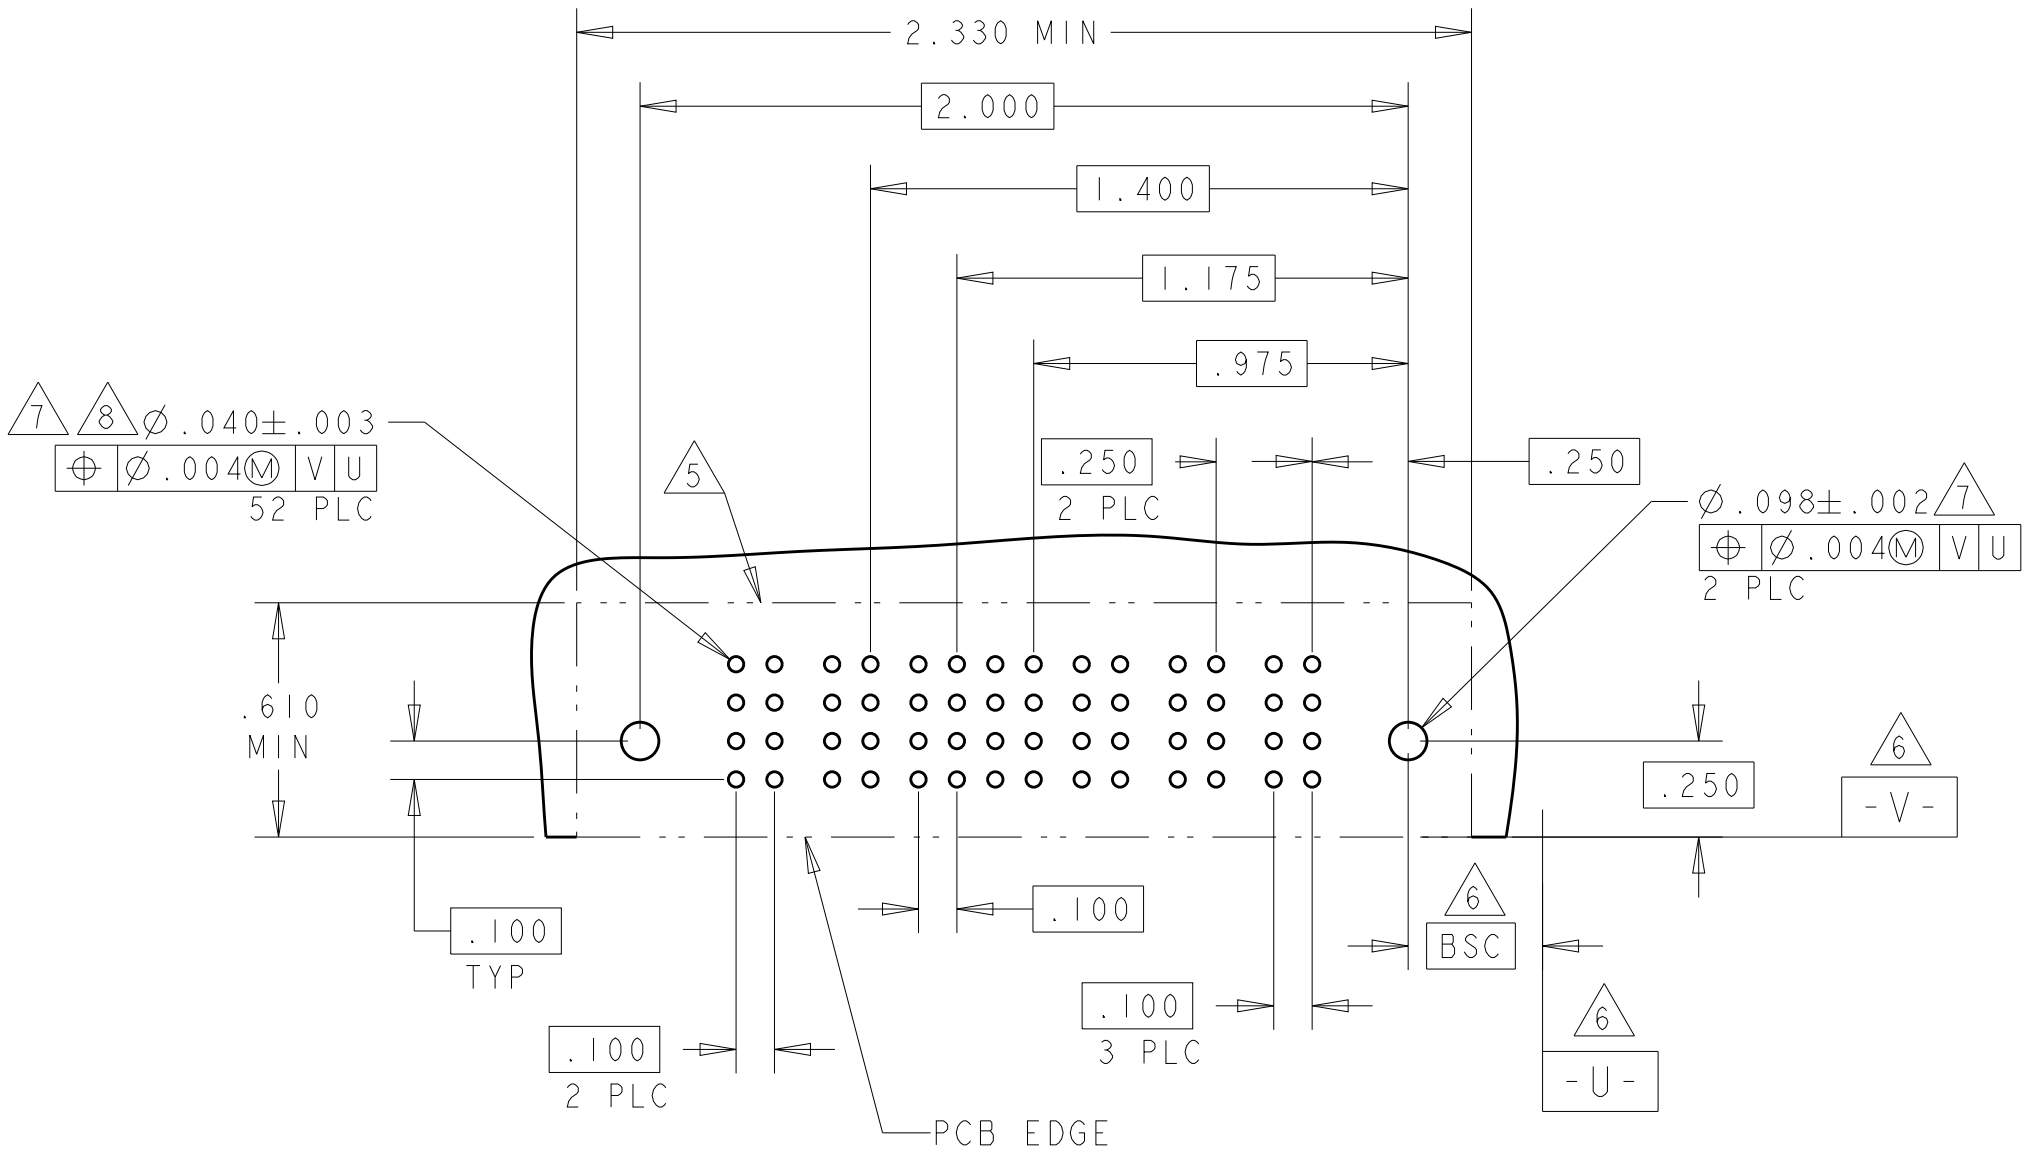


PART NUMBER	ROWS	POWER			SIGNAL						POWER		
		P6	P5	P4	6	5	4	3	2	1	P3	P2	P1
2-6450170-7	D C B A		RM	RM	RA	H	G	H	G	H	G	RM	RM
						H	G	H	G	H	G		
						F	F	F	F	F	F		
						F	F	F	F	F	F		
3P + 24S + 3P													

NO CONTACTS LOADED

PART NUMBER	ROWS	POWER			SIGNAL						POWER		
		P6	P5	P4	6	5	4	3	2	1	P3	P2	P1
2-6450170-9	D C B A	RM	RM	RA	H	H	H	H					
					G	G	G	G					
					F	F	F	F					
					E	E	E	E					
3P + 24S + 3P													

NO CONTACTS LOADED

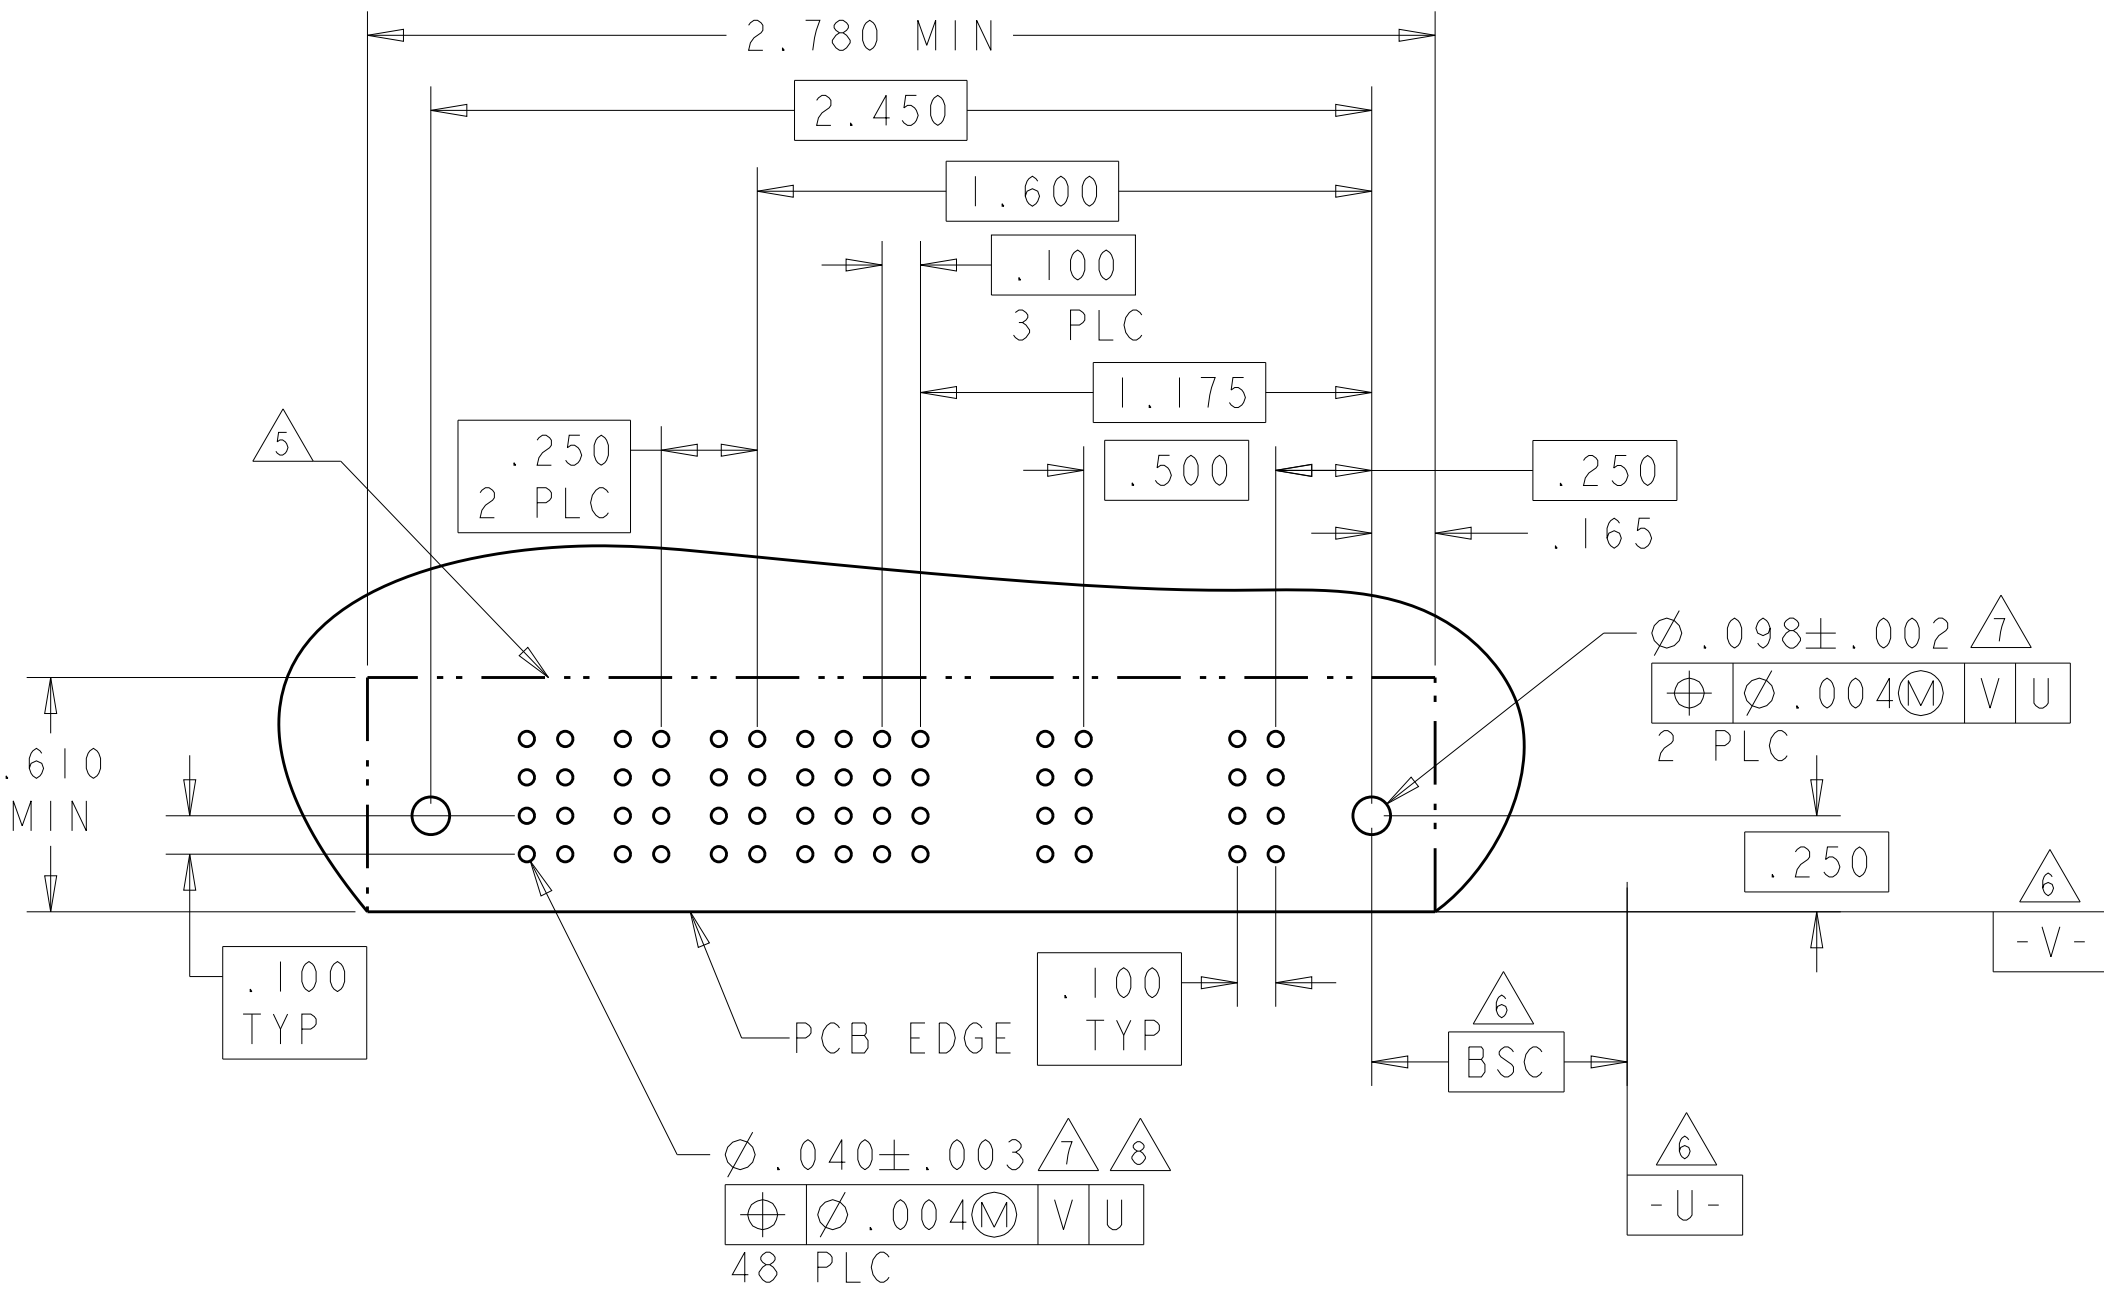


2-6450170-7 & 2-6450170-9 PCB LAYOUT



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	21FEB05	TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE	21FEB05		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°		PRODUCT SPEC	
MATERIAL		FINISH		APPLICATION SPEC	
				114-13038	
				WEIGHT	
				A100779	
				CUSTOMER DRAWING	
				SCALE 4:1 SHEET 5 OF 13 REV J5	

LOC		DIST		REVISONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

PART NUMBER	ROWS		POWER				SIGNAL				POWER		
			P6	P5	P4	P3	4	3	2	1	P2	P1	
1-6450170-9	D		RA	RA	RM	RM	H	H	H	H	RM	RA	
	C						G	G	G	G			
	B						F	F	F	F			
	A						E	E	E	E			
2P + 16S + 4P													

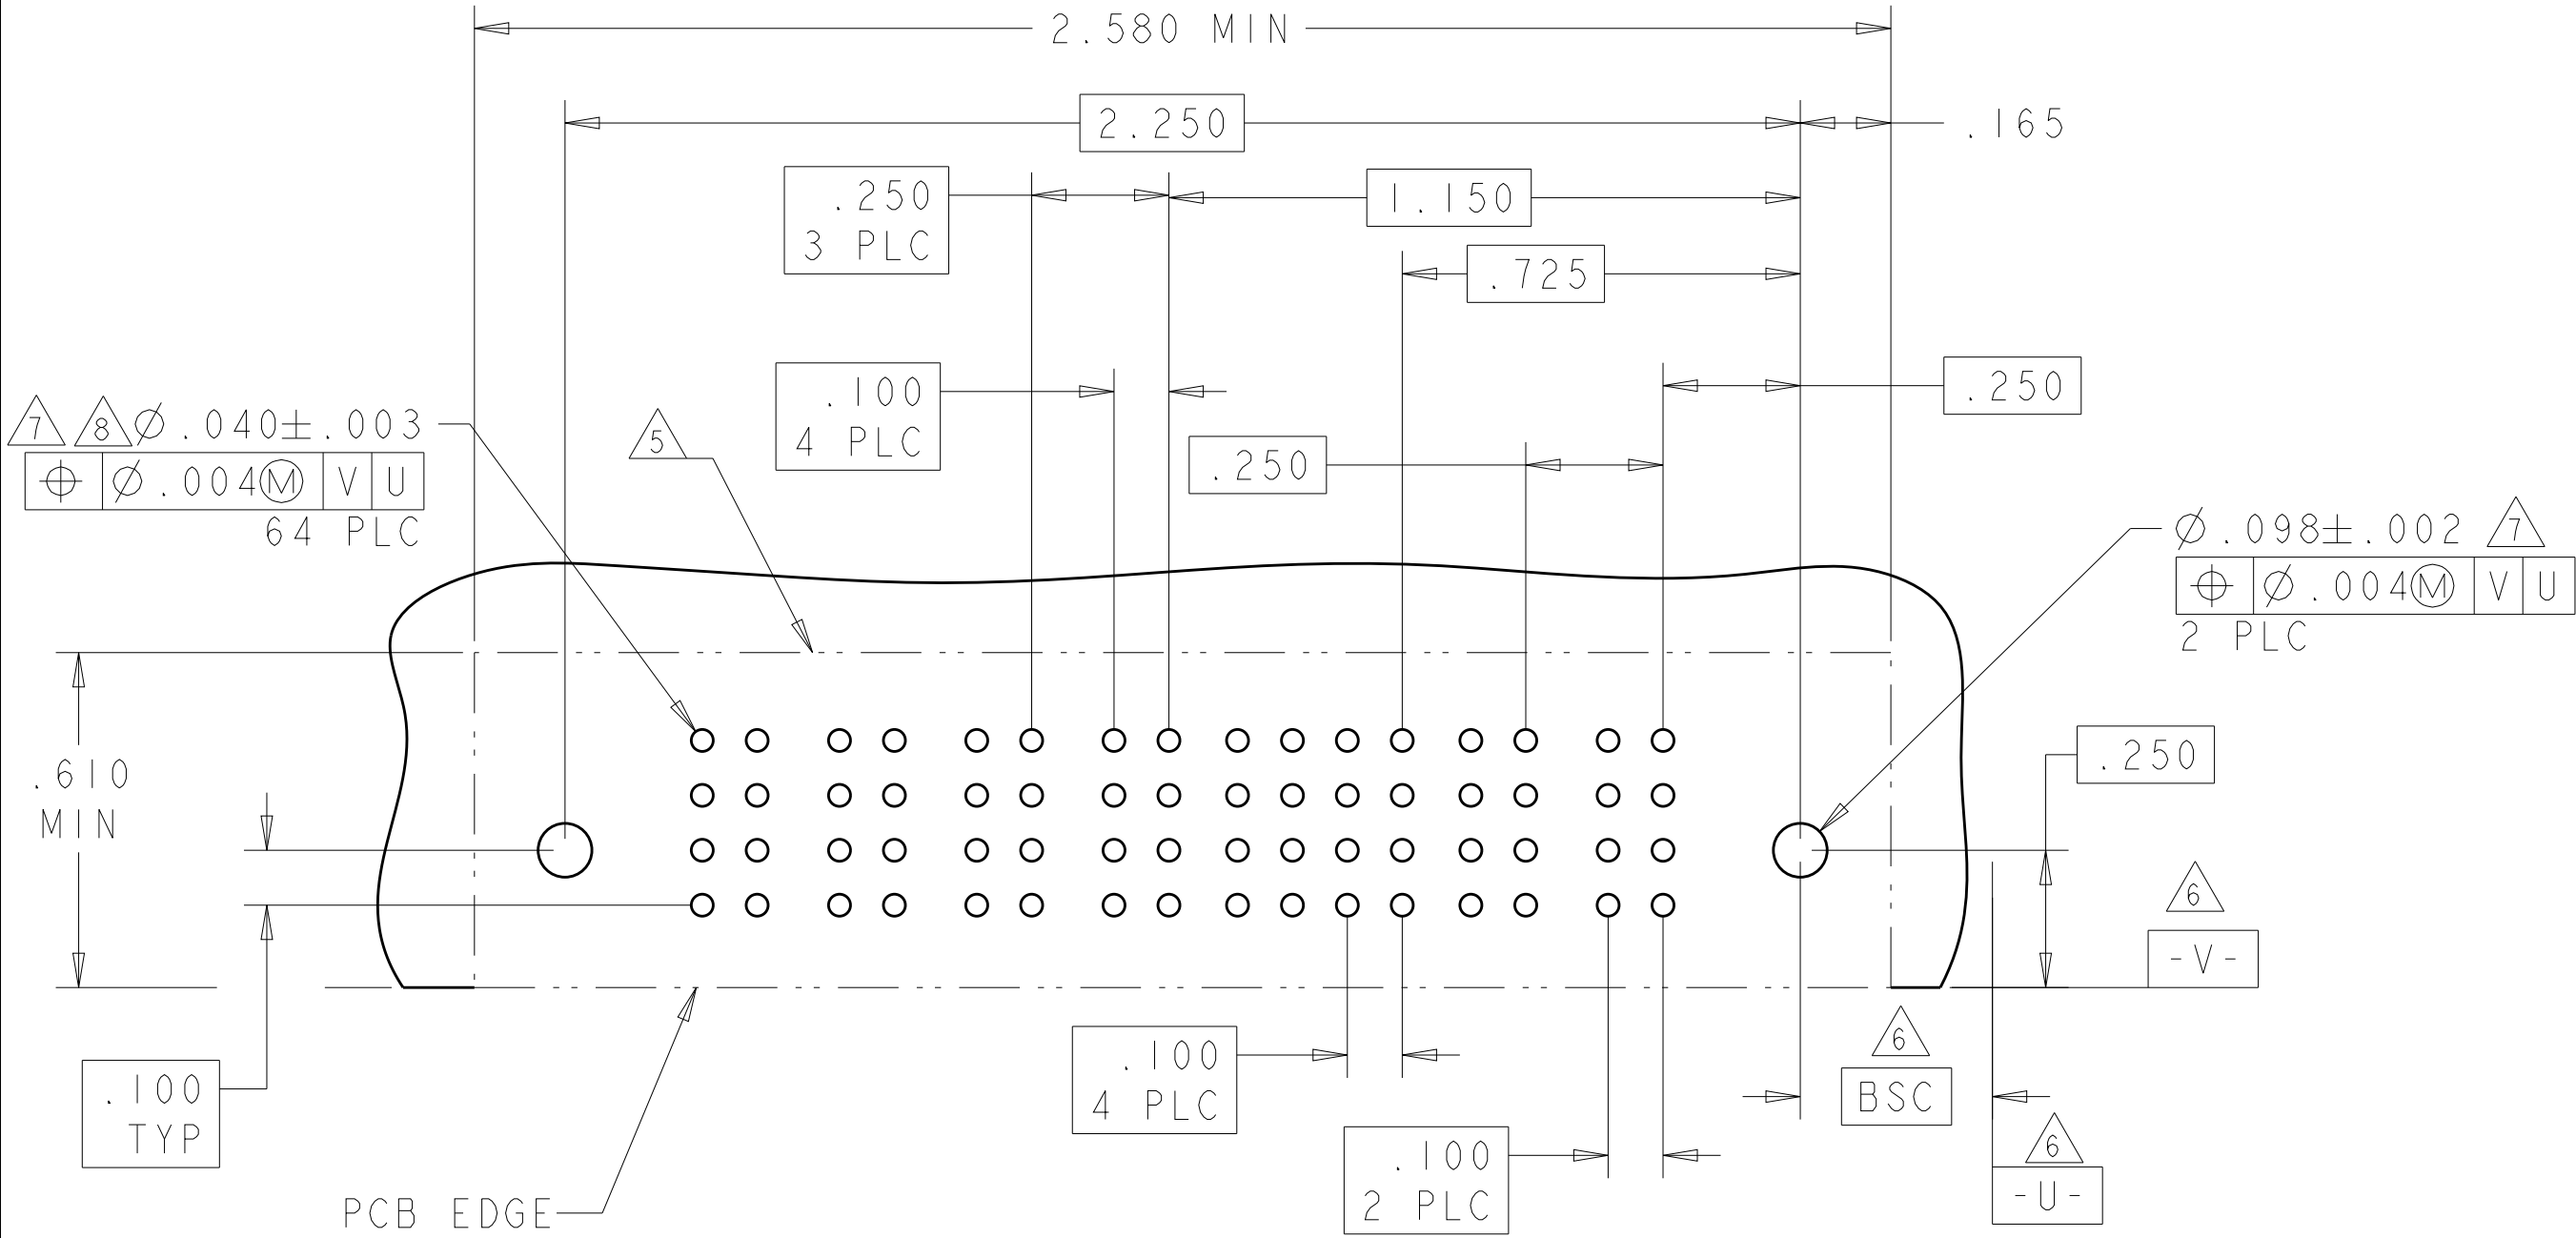

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
1-6450170-4	D		RA	RA	RA	RA	H	H	H	H	H	H	RA	RA	RA	RA	
	C						G	G	G	G	G	G					
	B						F	F	F	F	F	F					
	A						E	E	E	E	E	E					
4P + 24S + 4P																	

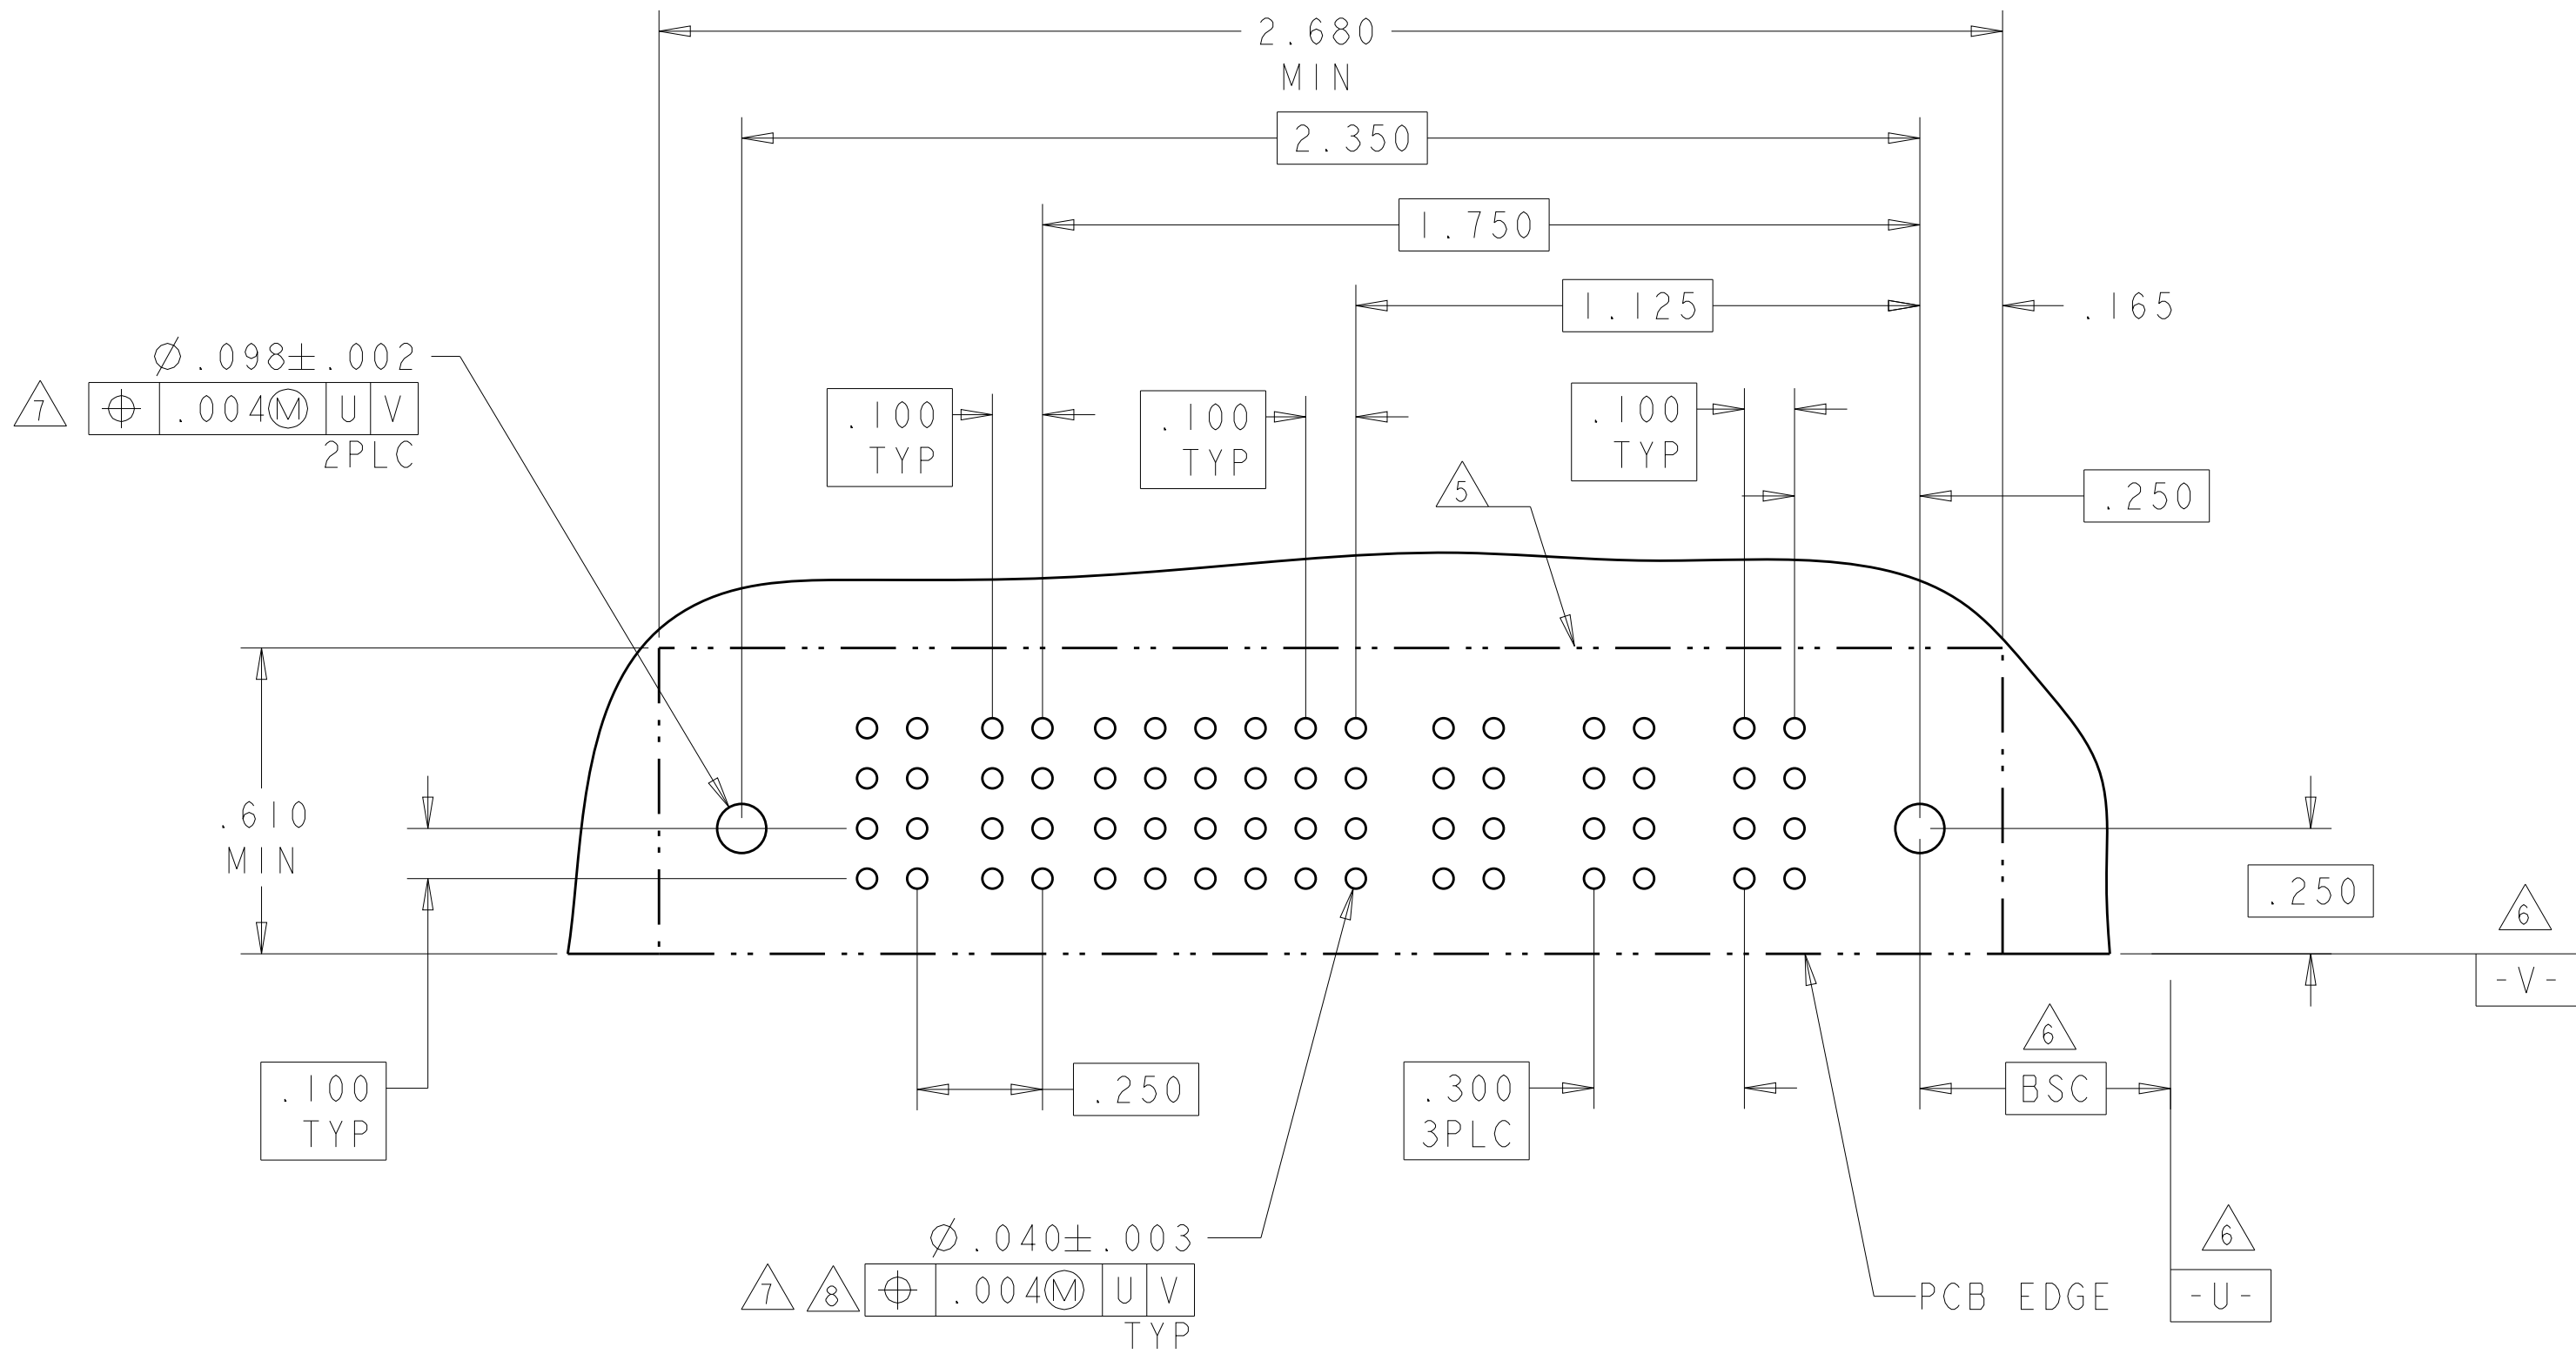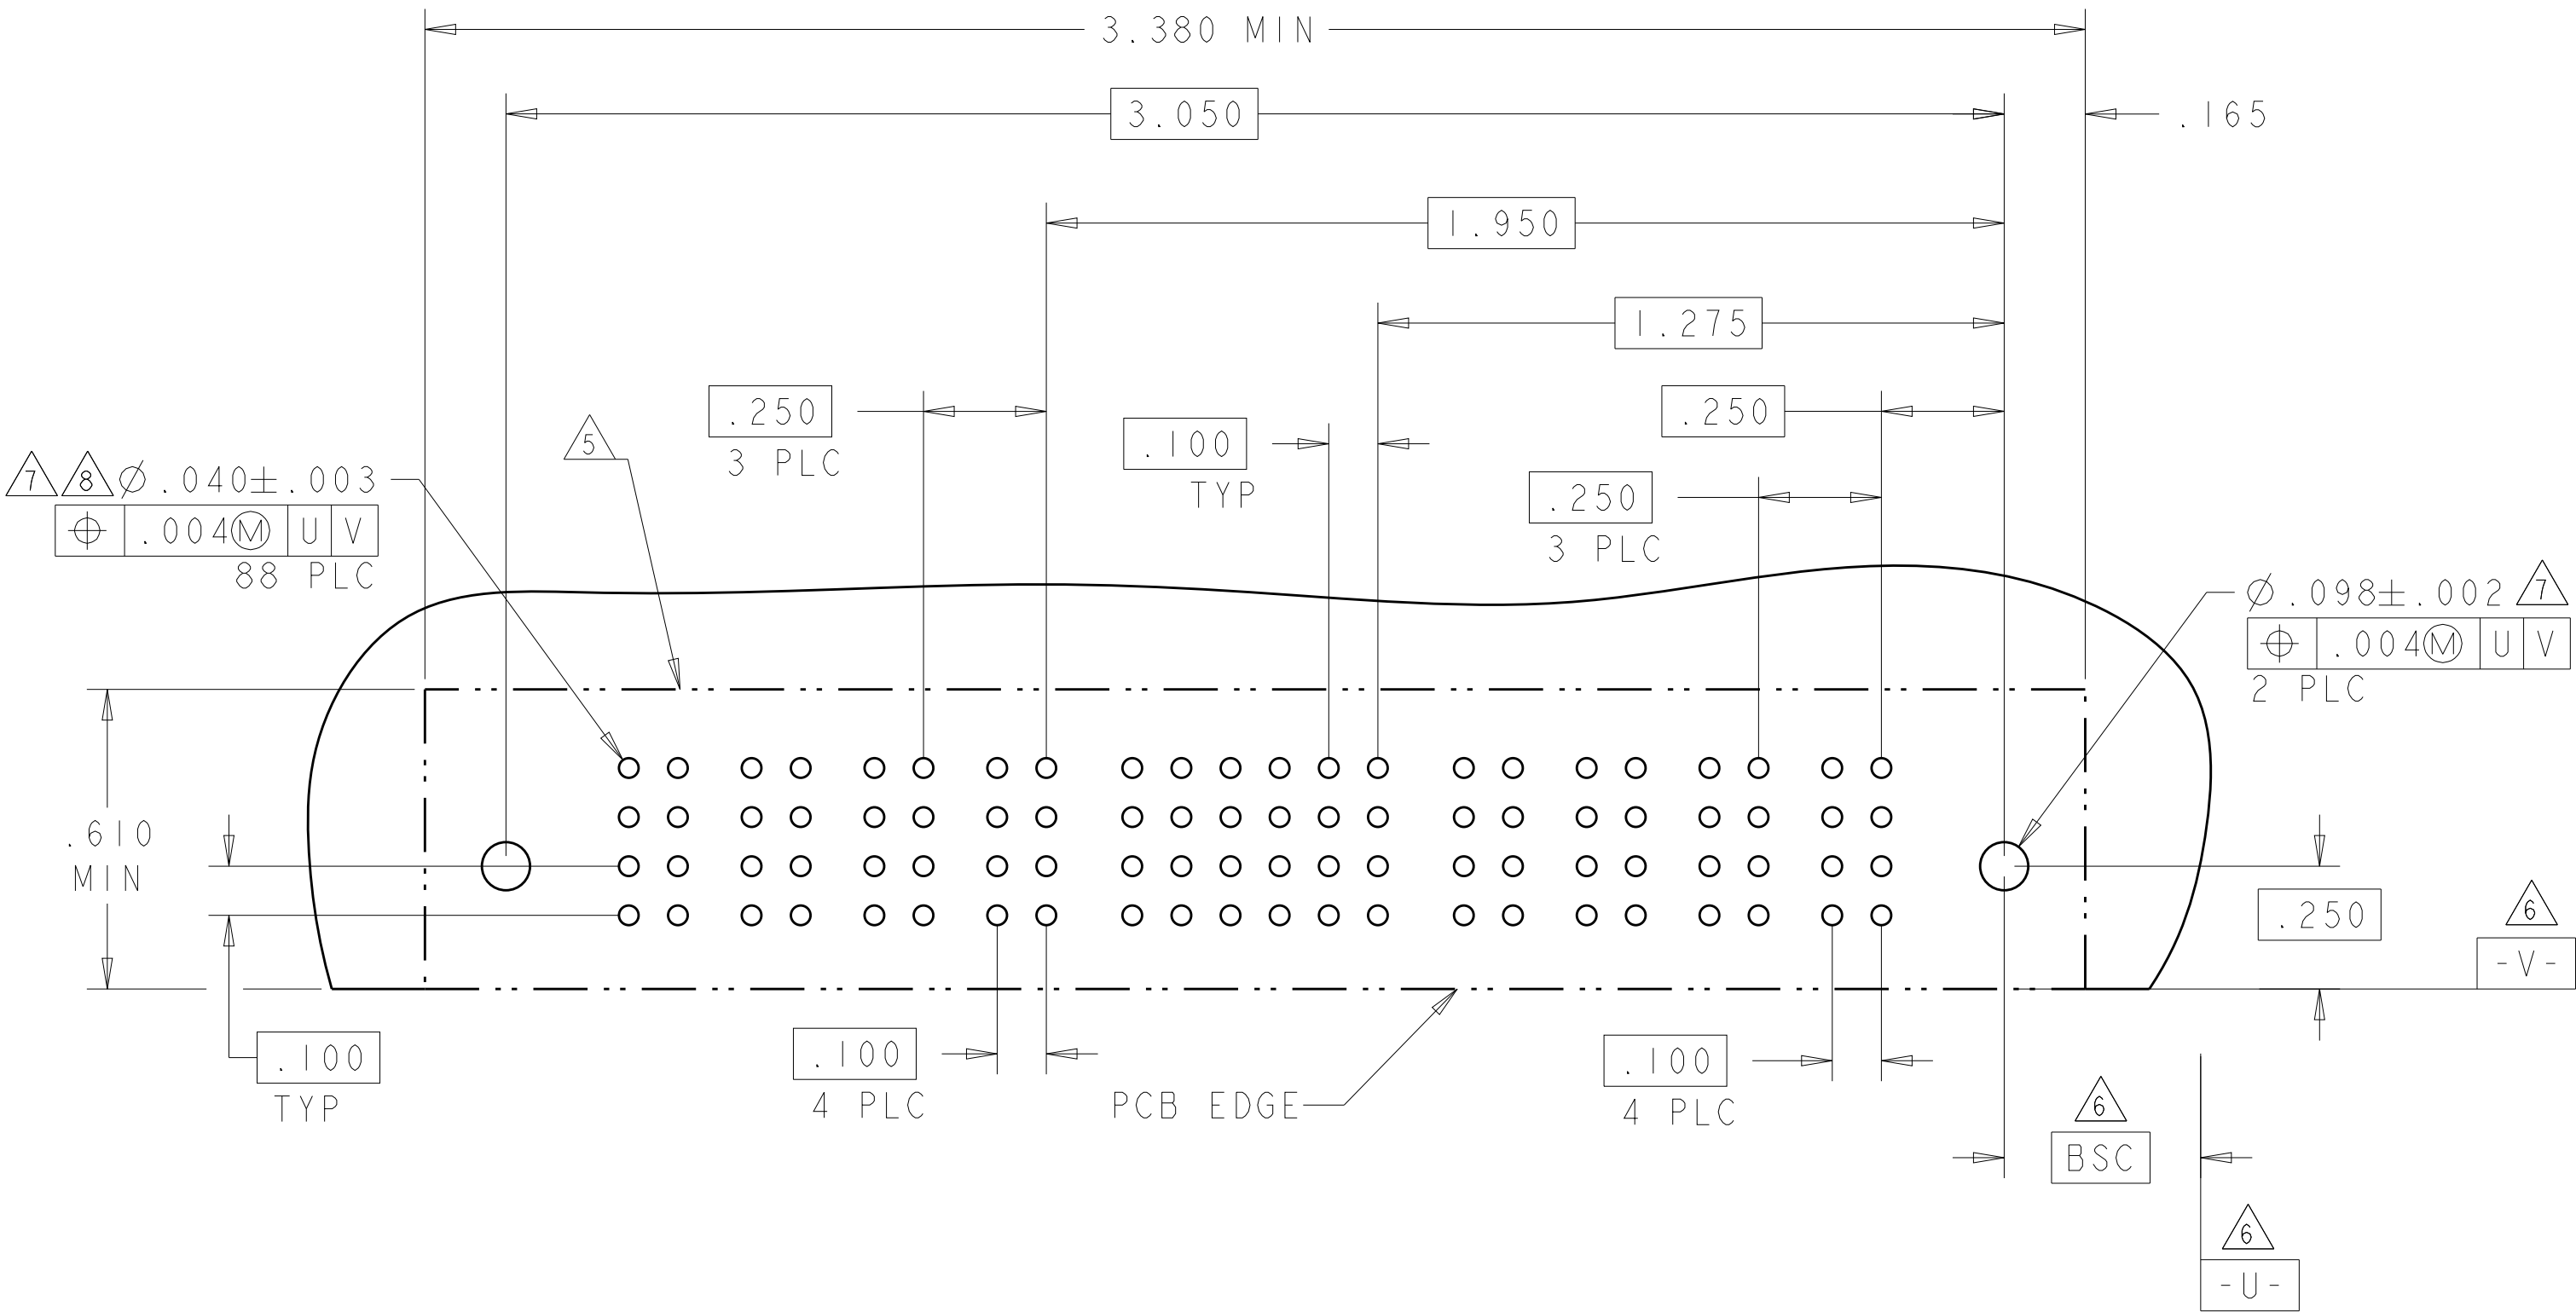

PART NUMBER	ROWS		POWER		SIGNAL						AC POWER			
			P5	P4	6	5	4	3	2	1	P3	P2	P1	
2-6450170-8	D		RA	RA	H	H	H	H	H	H	RA	RM	RM	
	G				G	G	G	G	G					
	F				F	F	F	F	F					
	E				E	E	E	E	E					
3ACP + 24S + 2P														

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 21FEB05
CHK M.PERCHEKKE 21FEB05
APVD M.PERCHEKKE

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°
FINISH

MATERIAL

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

CUSTOMER DRAWING

NAME

RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450170

RESTRICTED TO

SCALE

4:1

SHEET

6

OF


13

REV


J5

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P2	4	3	2	1	P1	
2-6450170-0	D C B A		RM	H	H	H	H	RM	
				G	G	G	G		
				F	F	F	F		
IP + 16S + IP		HD		E	E	E	E		HD

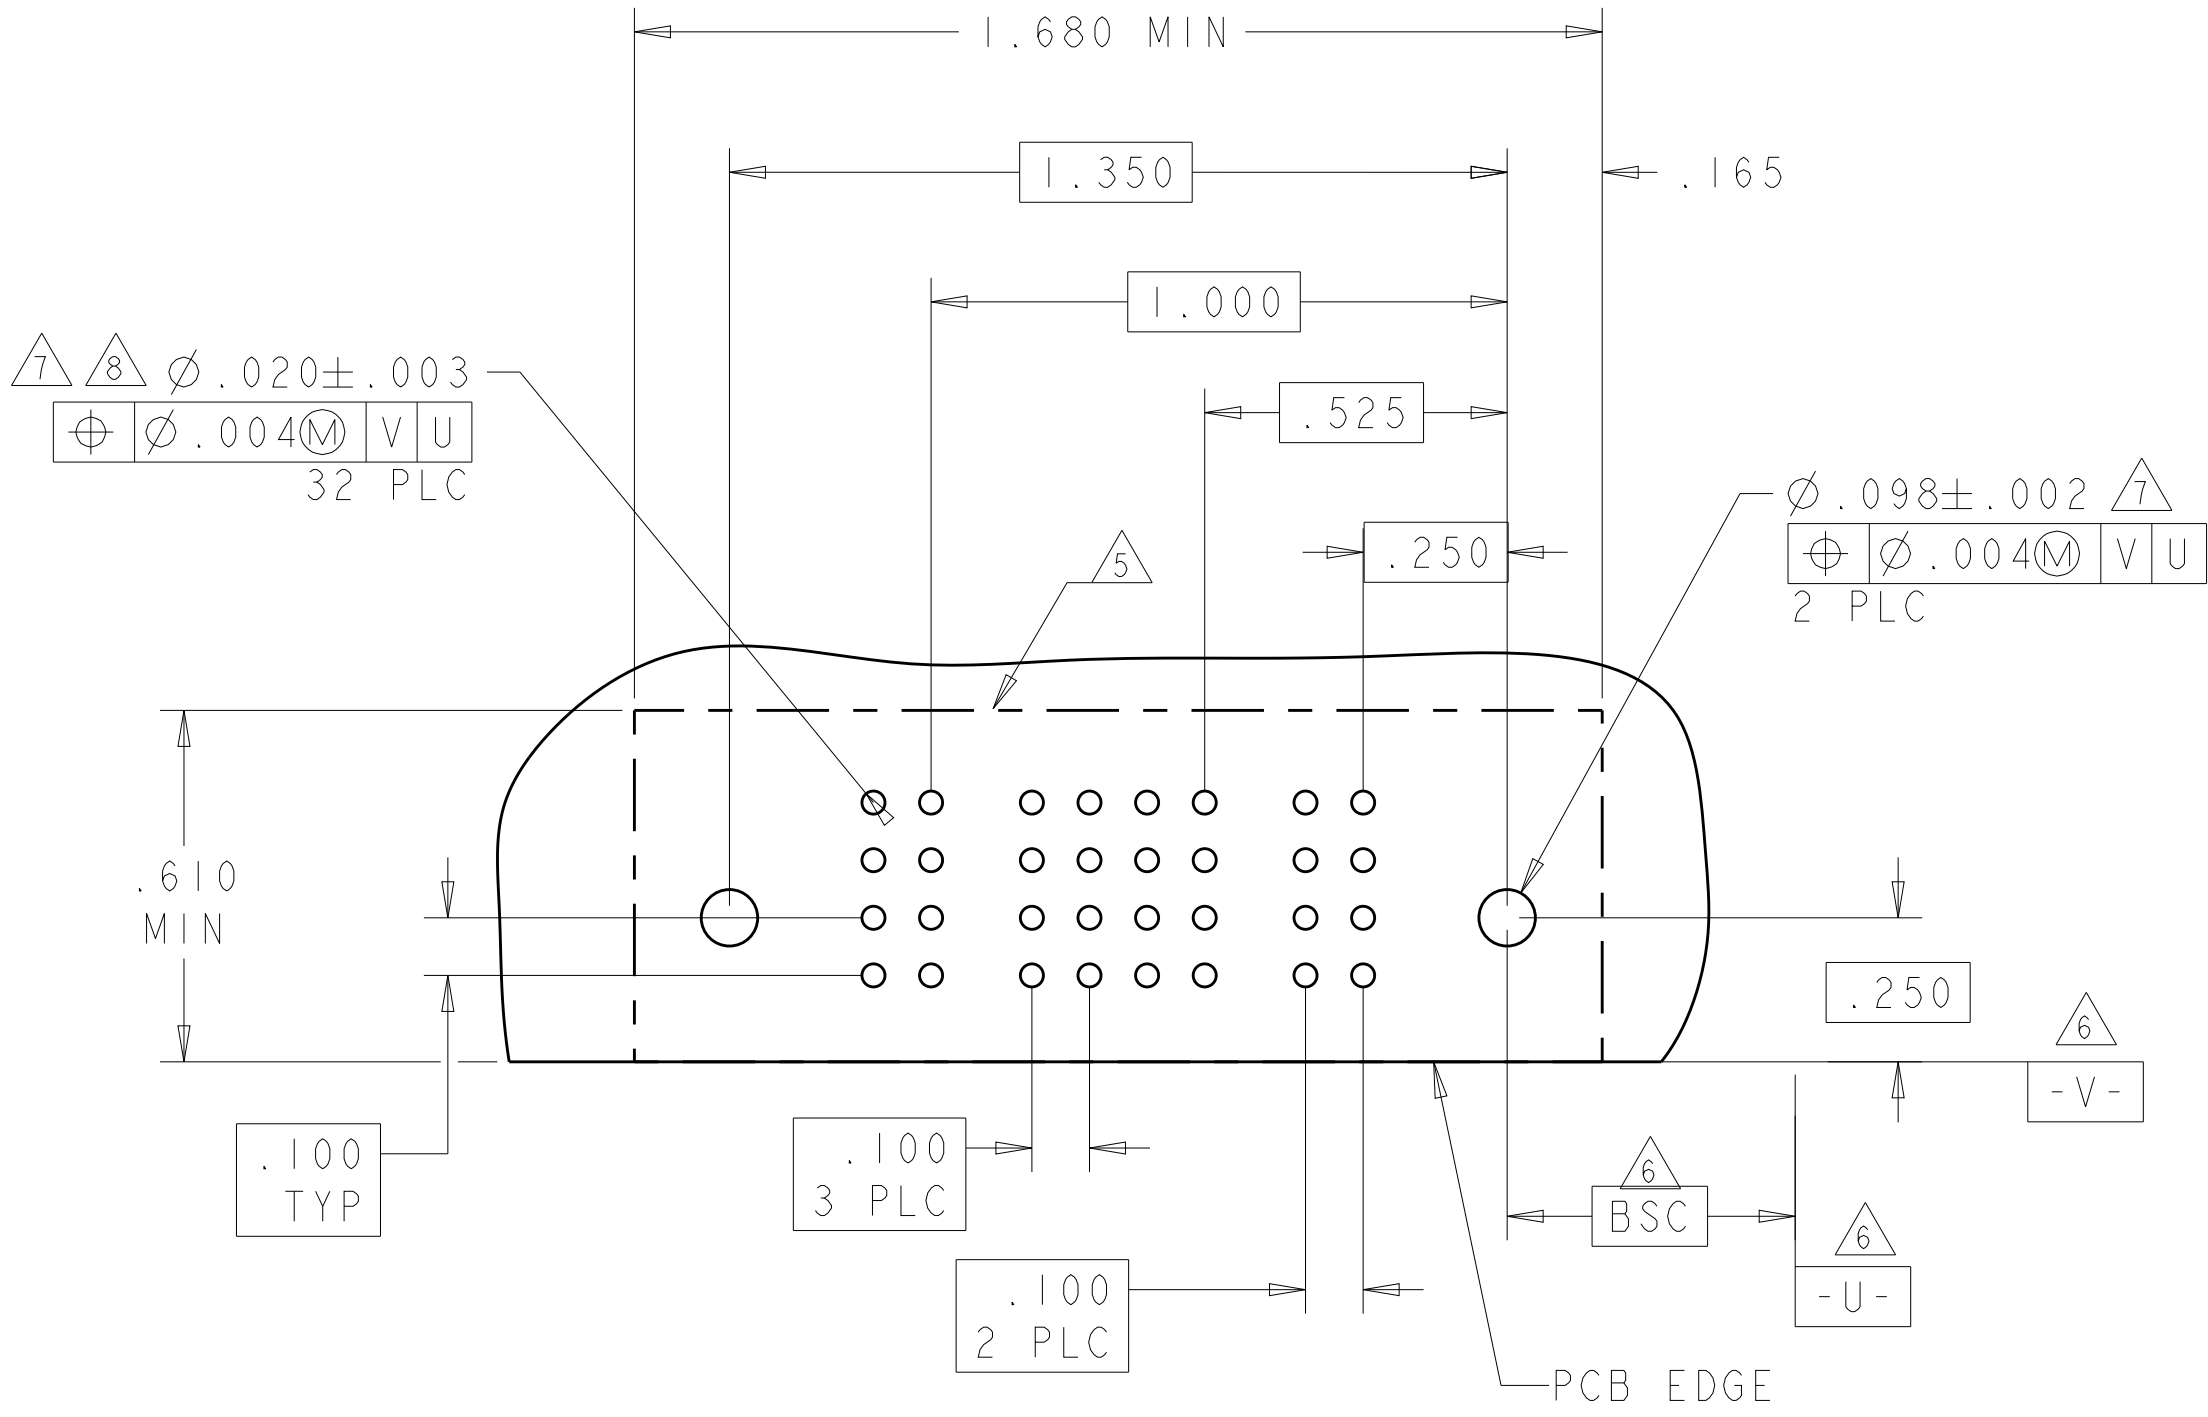

PART NUMBER	ROWS		POWER		SIGNAL							AC POWER			
			P5	P4	6	5	4	3	2	1	P3	P2	P1		
3-6450170-0	D C B A		RM	RM	H	H	H	H	H	H	RA	RM	RM		
					G	G	G	G	G	G					
					F	F	F	F	F	F					
					E	E	E	E	E	E					
3ACP + 24S + 2P		HD												HD	

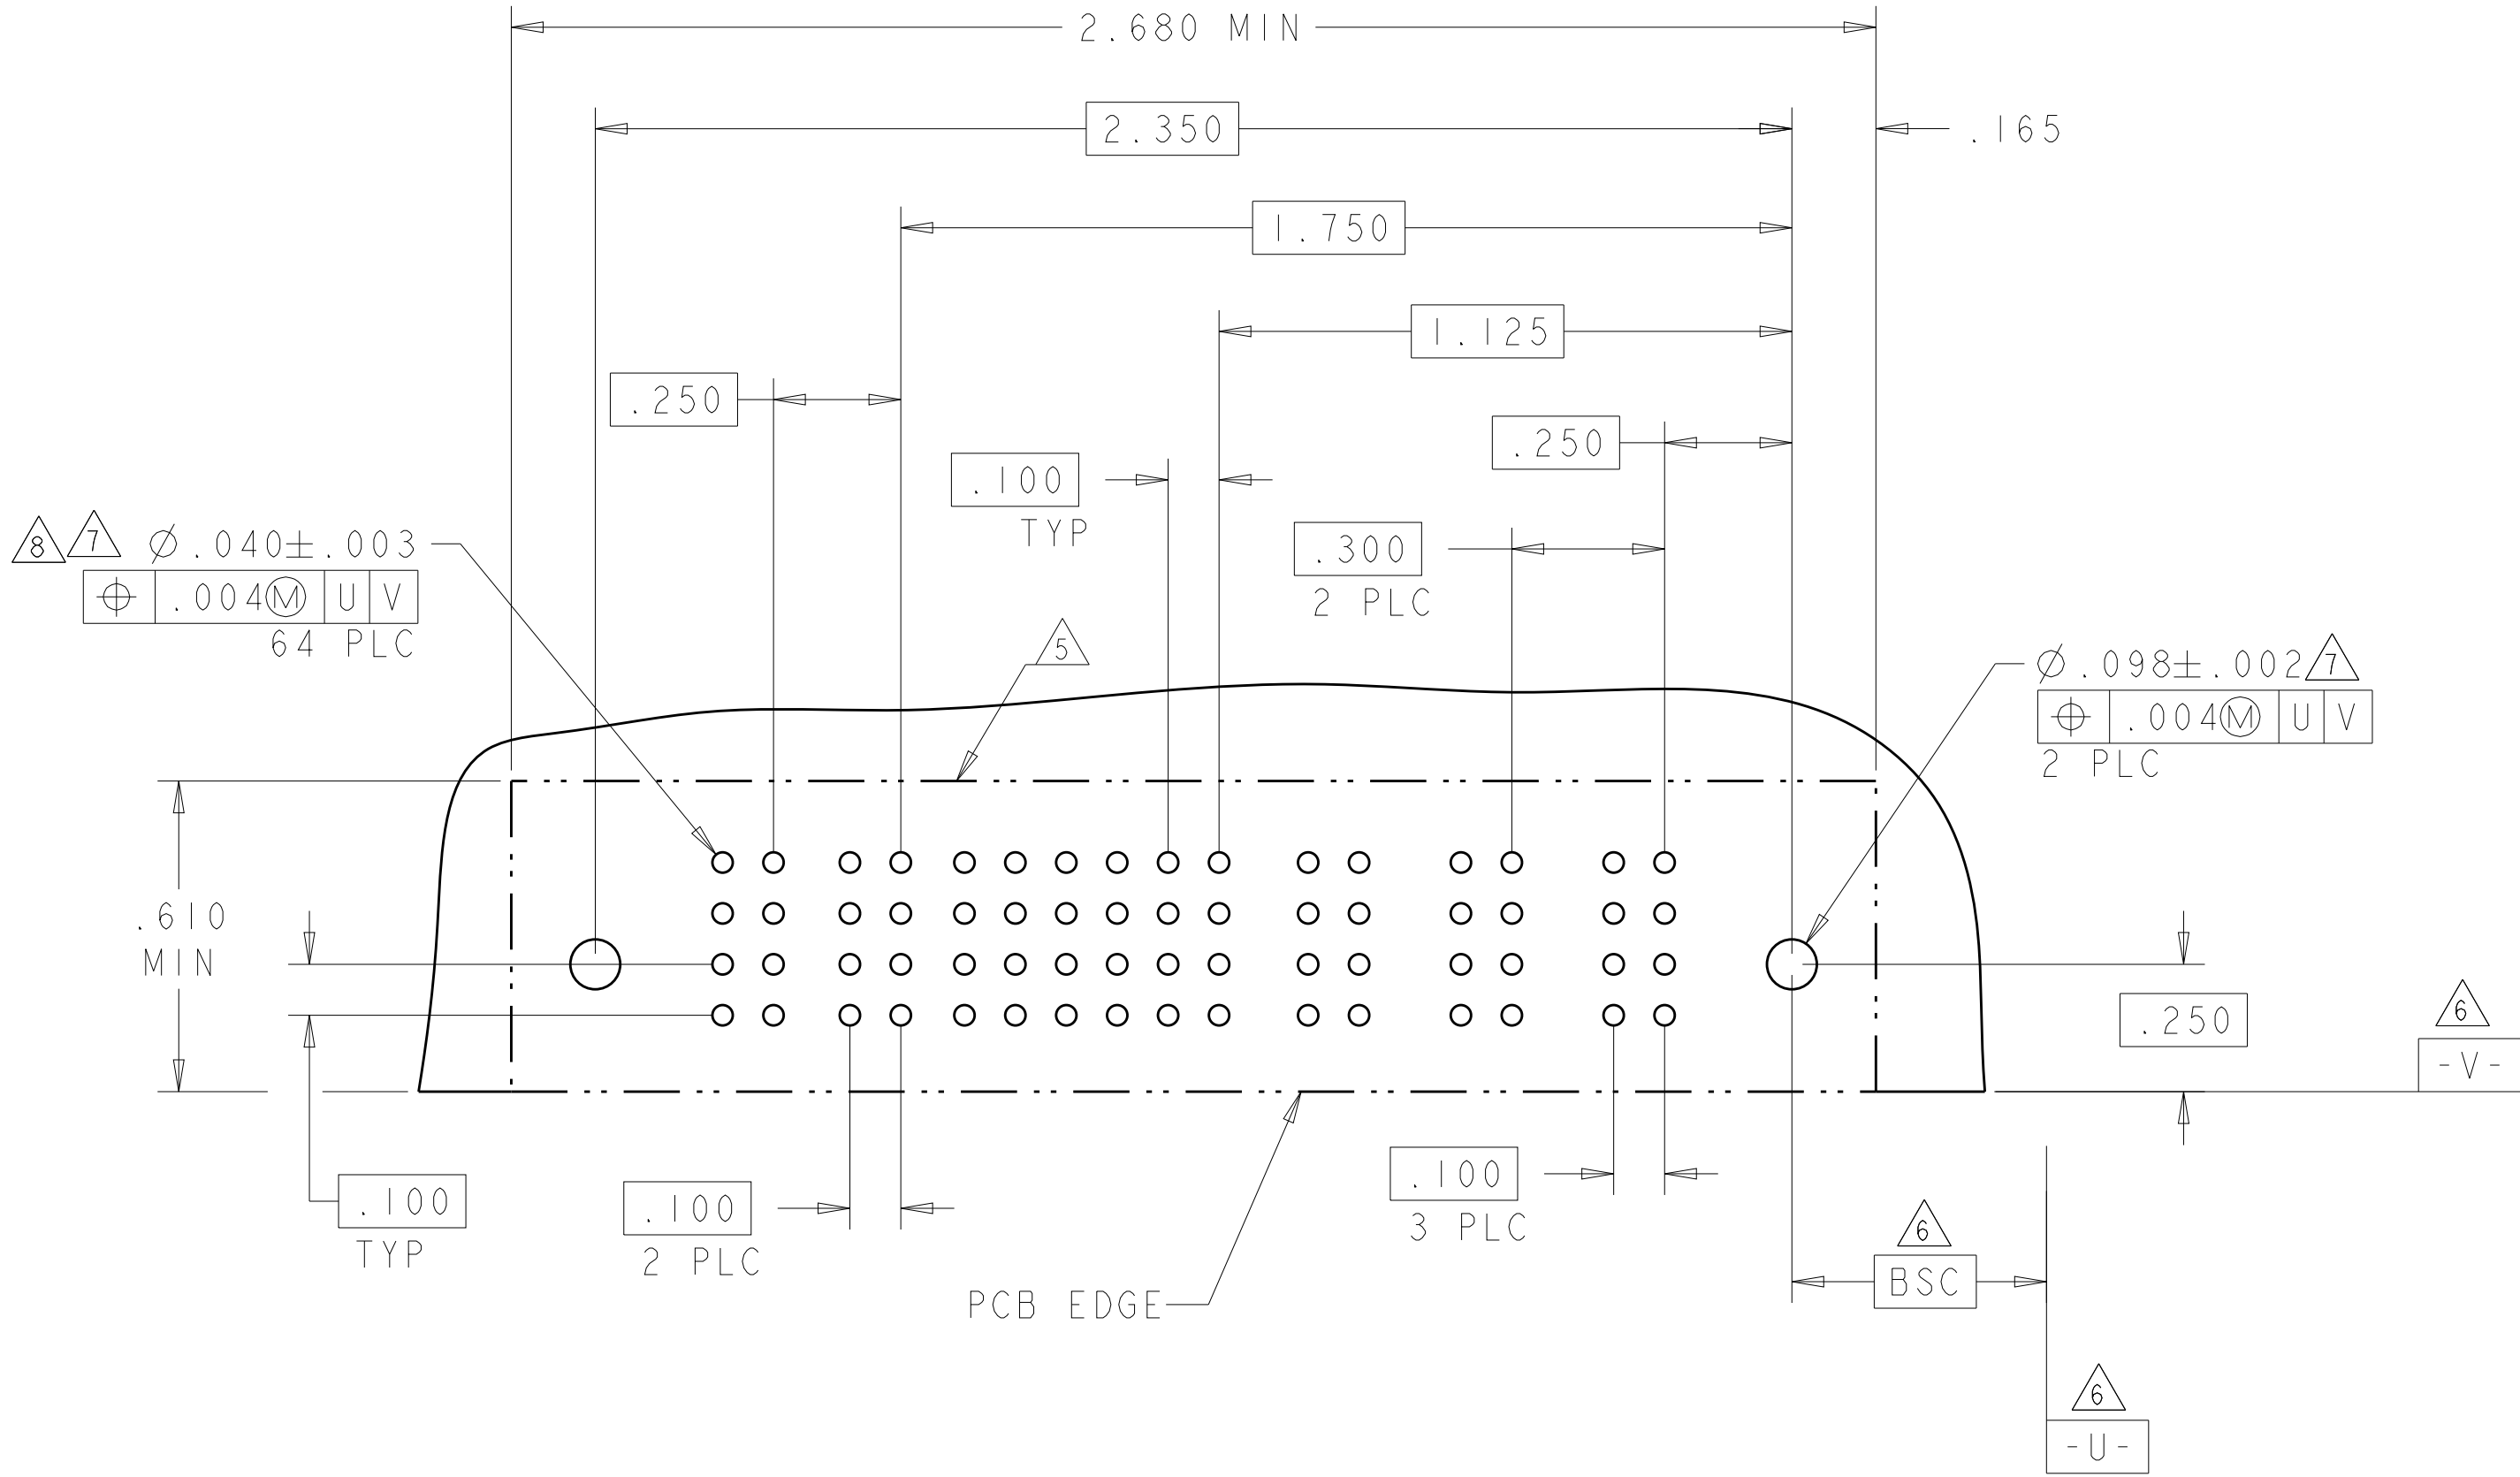

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R.GRZYBOWSKI 21FEB05
CHK: M.PERCHEKKE 21FEB05
APVD: M.PERCHEKKE

NAME: RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL: -

FINISH: -

WEIGHT: -

CUSTOMER DRAWING

PRODUCT SPEC: 108-1973

APPLICATION SPEC: 114-13038

SIZE: A100779

CAGE CODE: C=6450170

SCALE: 4:1

SHEET: 7 OF 13

REV: J5



TE Connectivity


























RESTRICTED TO: -


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
3-6450170-1	D		RM	RA	H	H	H	H	RA	RM	
	C				G	G	G	G			
	B				E	E	E	E			
	A	HD			F	F	F	F			HD
2P + 16S + 2P											

PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
1-6450170-8	D		RM	RM	RA	H	H	H	H	H	H	RM	RM	RM	RM	
	C					G	G	G	G	G	G					
	B					F	F	F	F	F	F					
	A	HD				E	E	E	E	E	E					HD
4P + 24S + 3ACP																

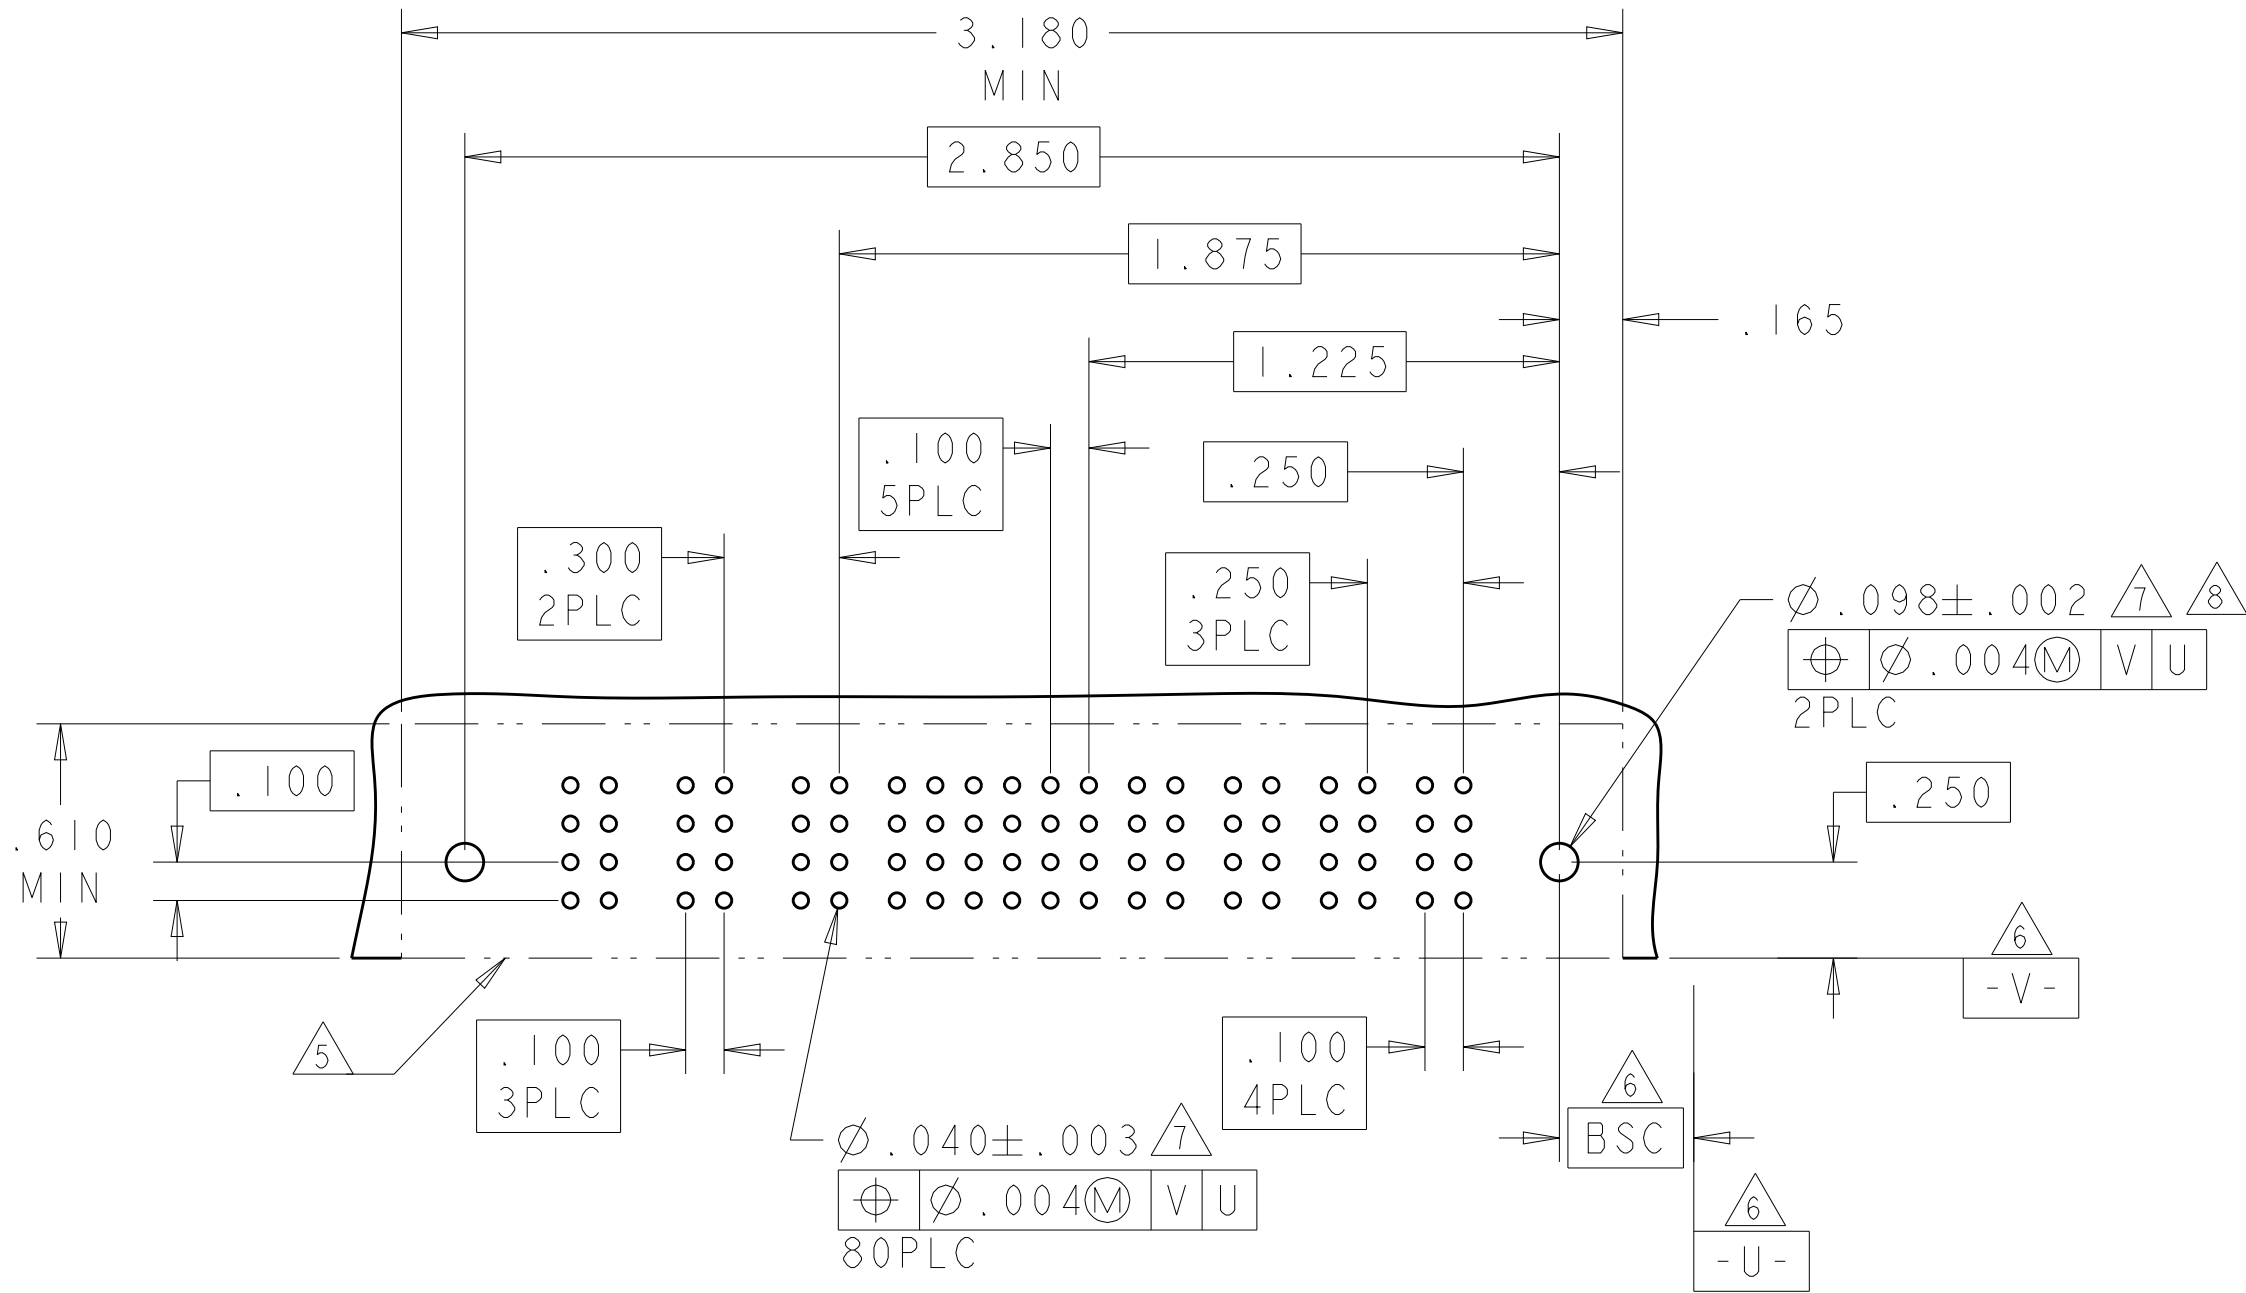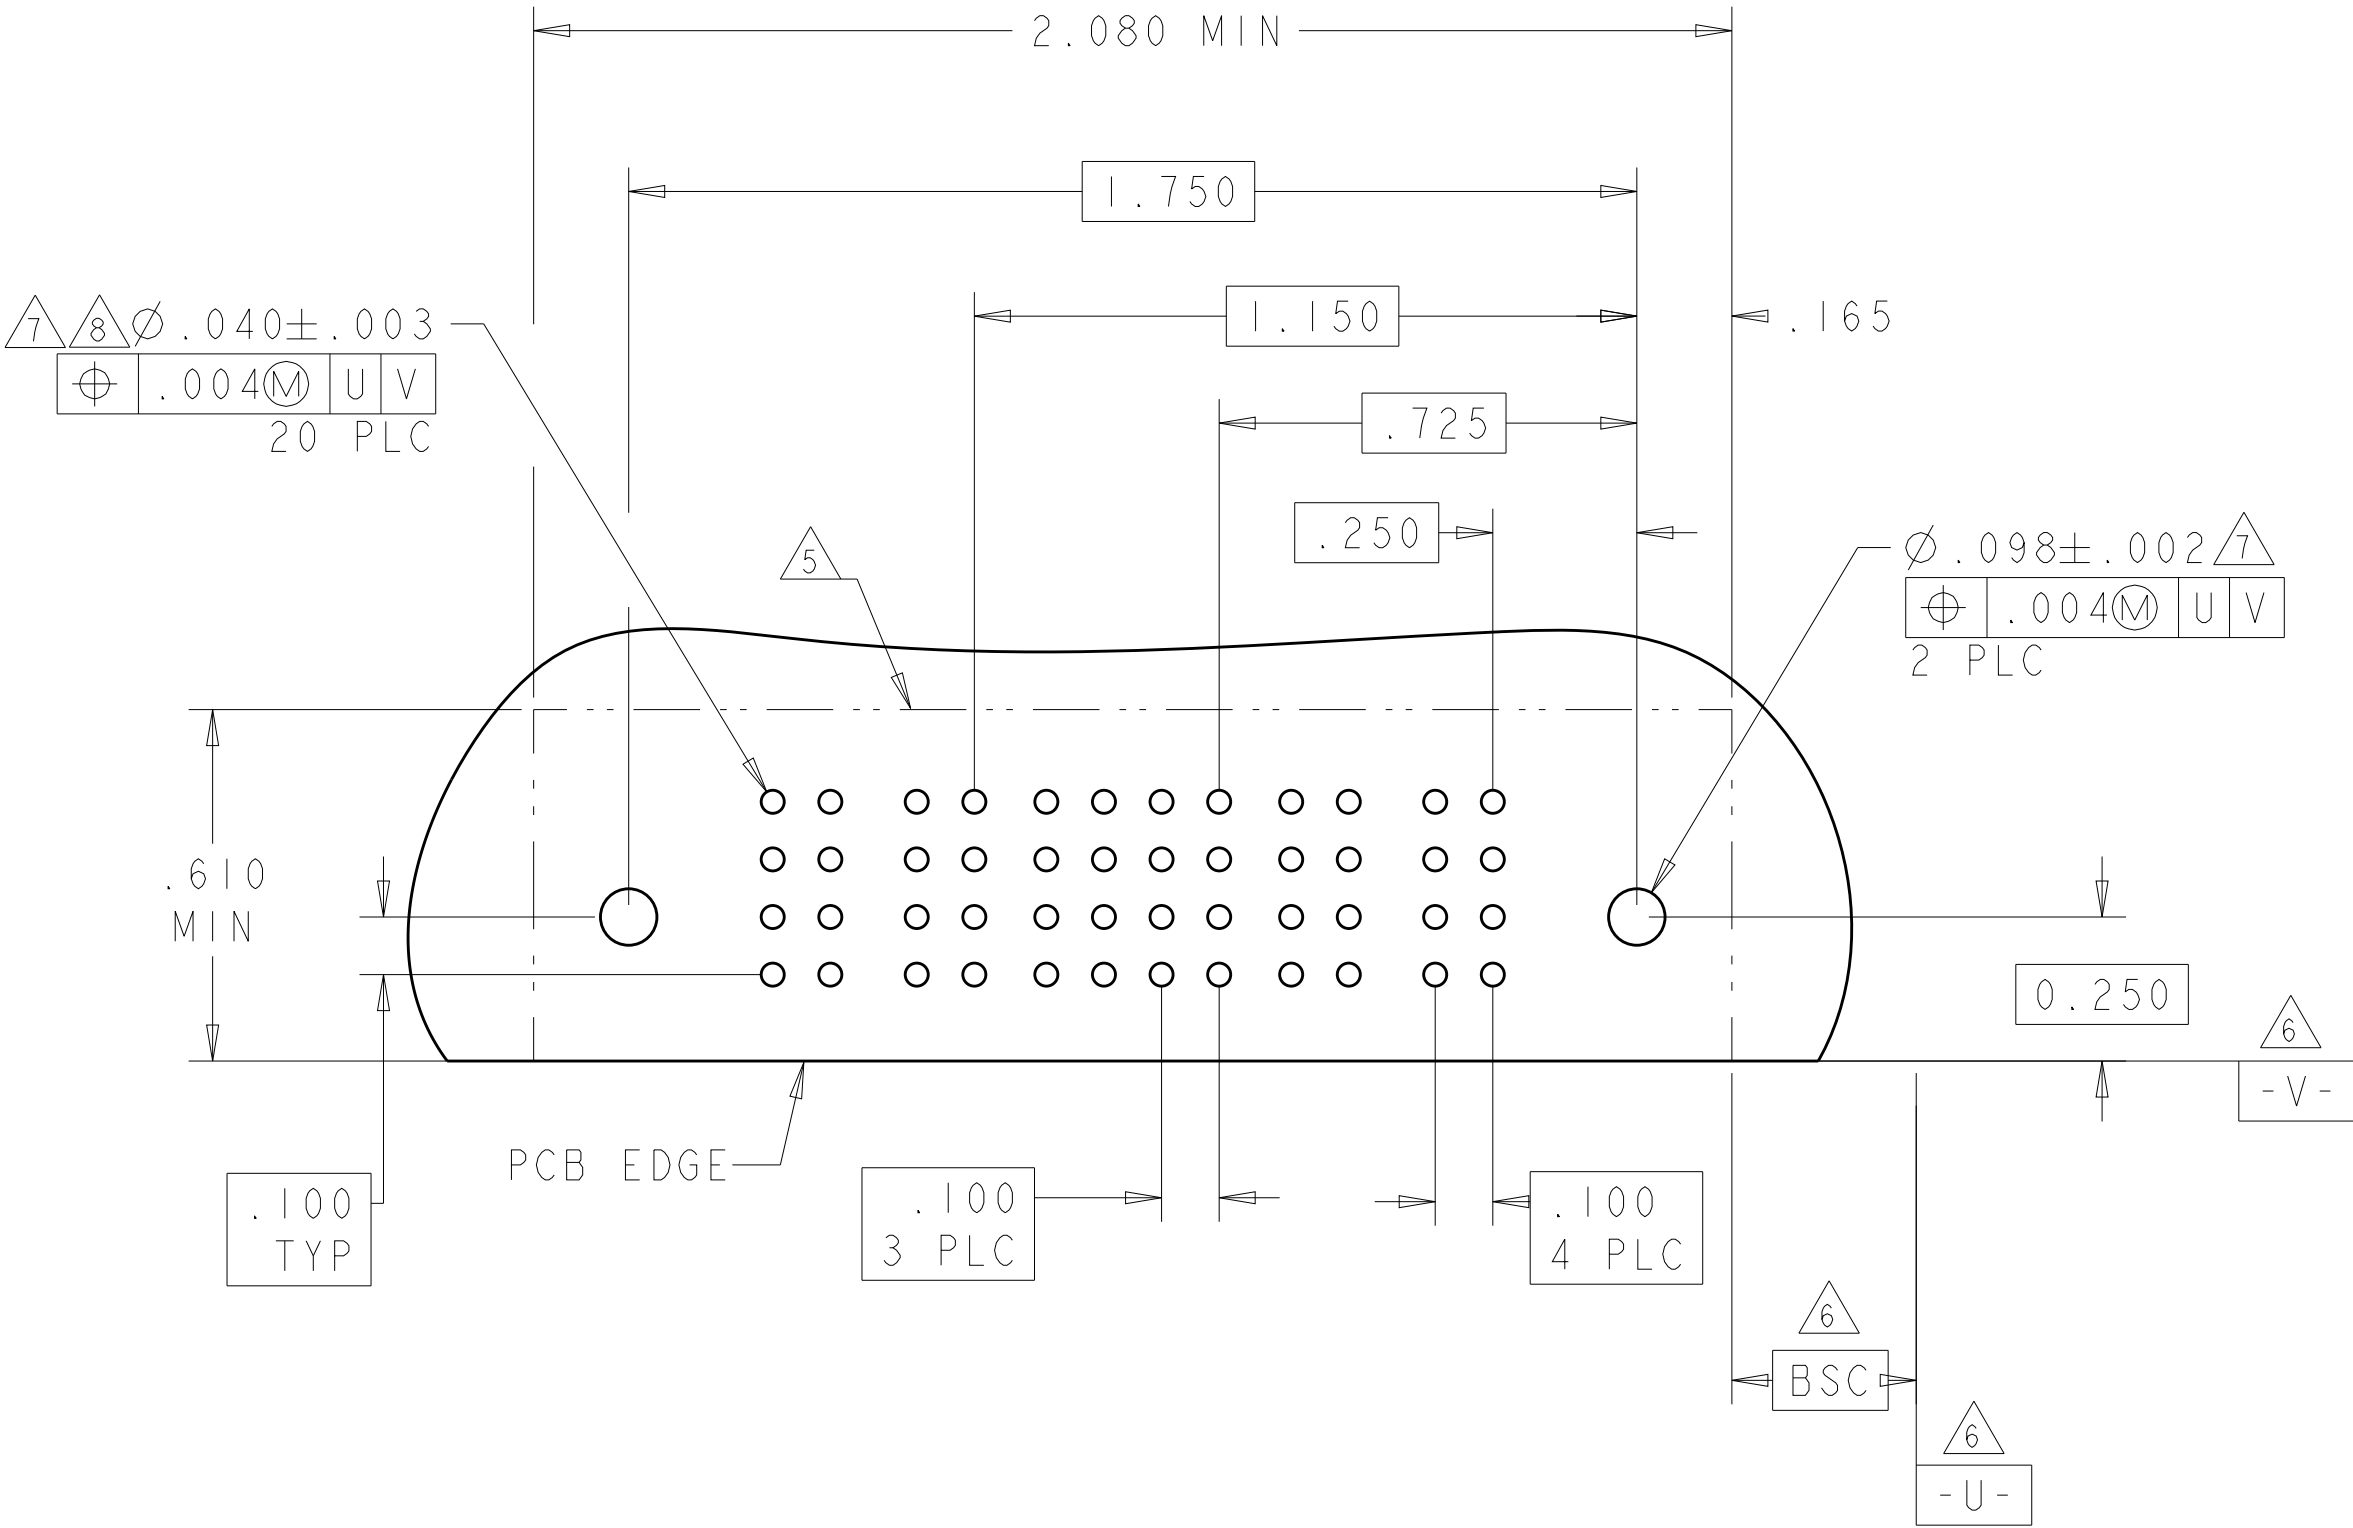

PART NUMBER	ROWS		POWER		SIGNAL			POWER				
			P6	P5	3	2	1	P4	P3	P2	P1	
3-6450170-3	D C B A	      	      	      	      	      	      					
4ACP + 12S + 2P												


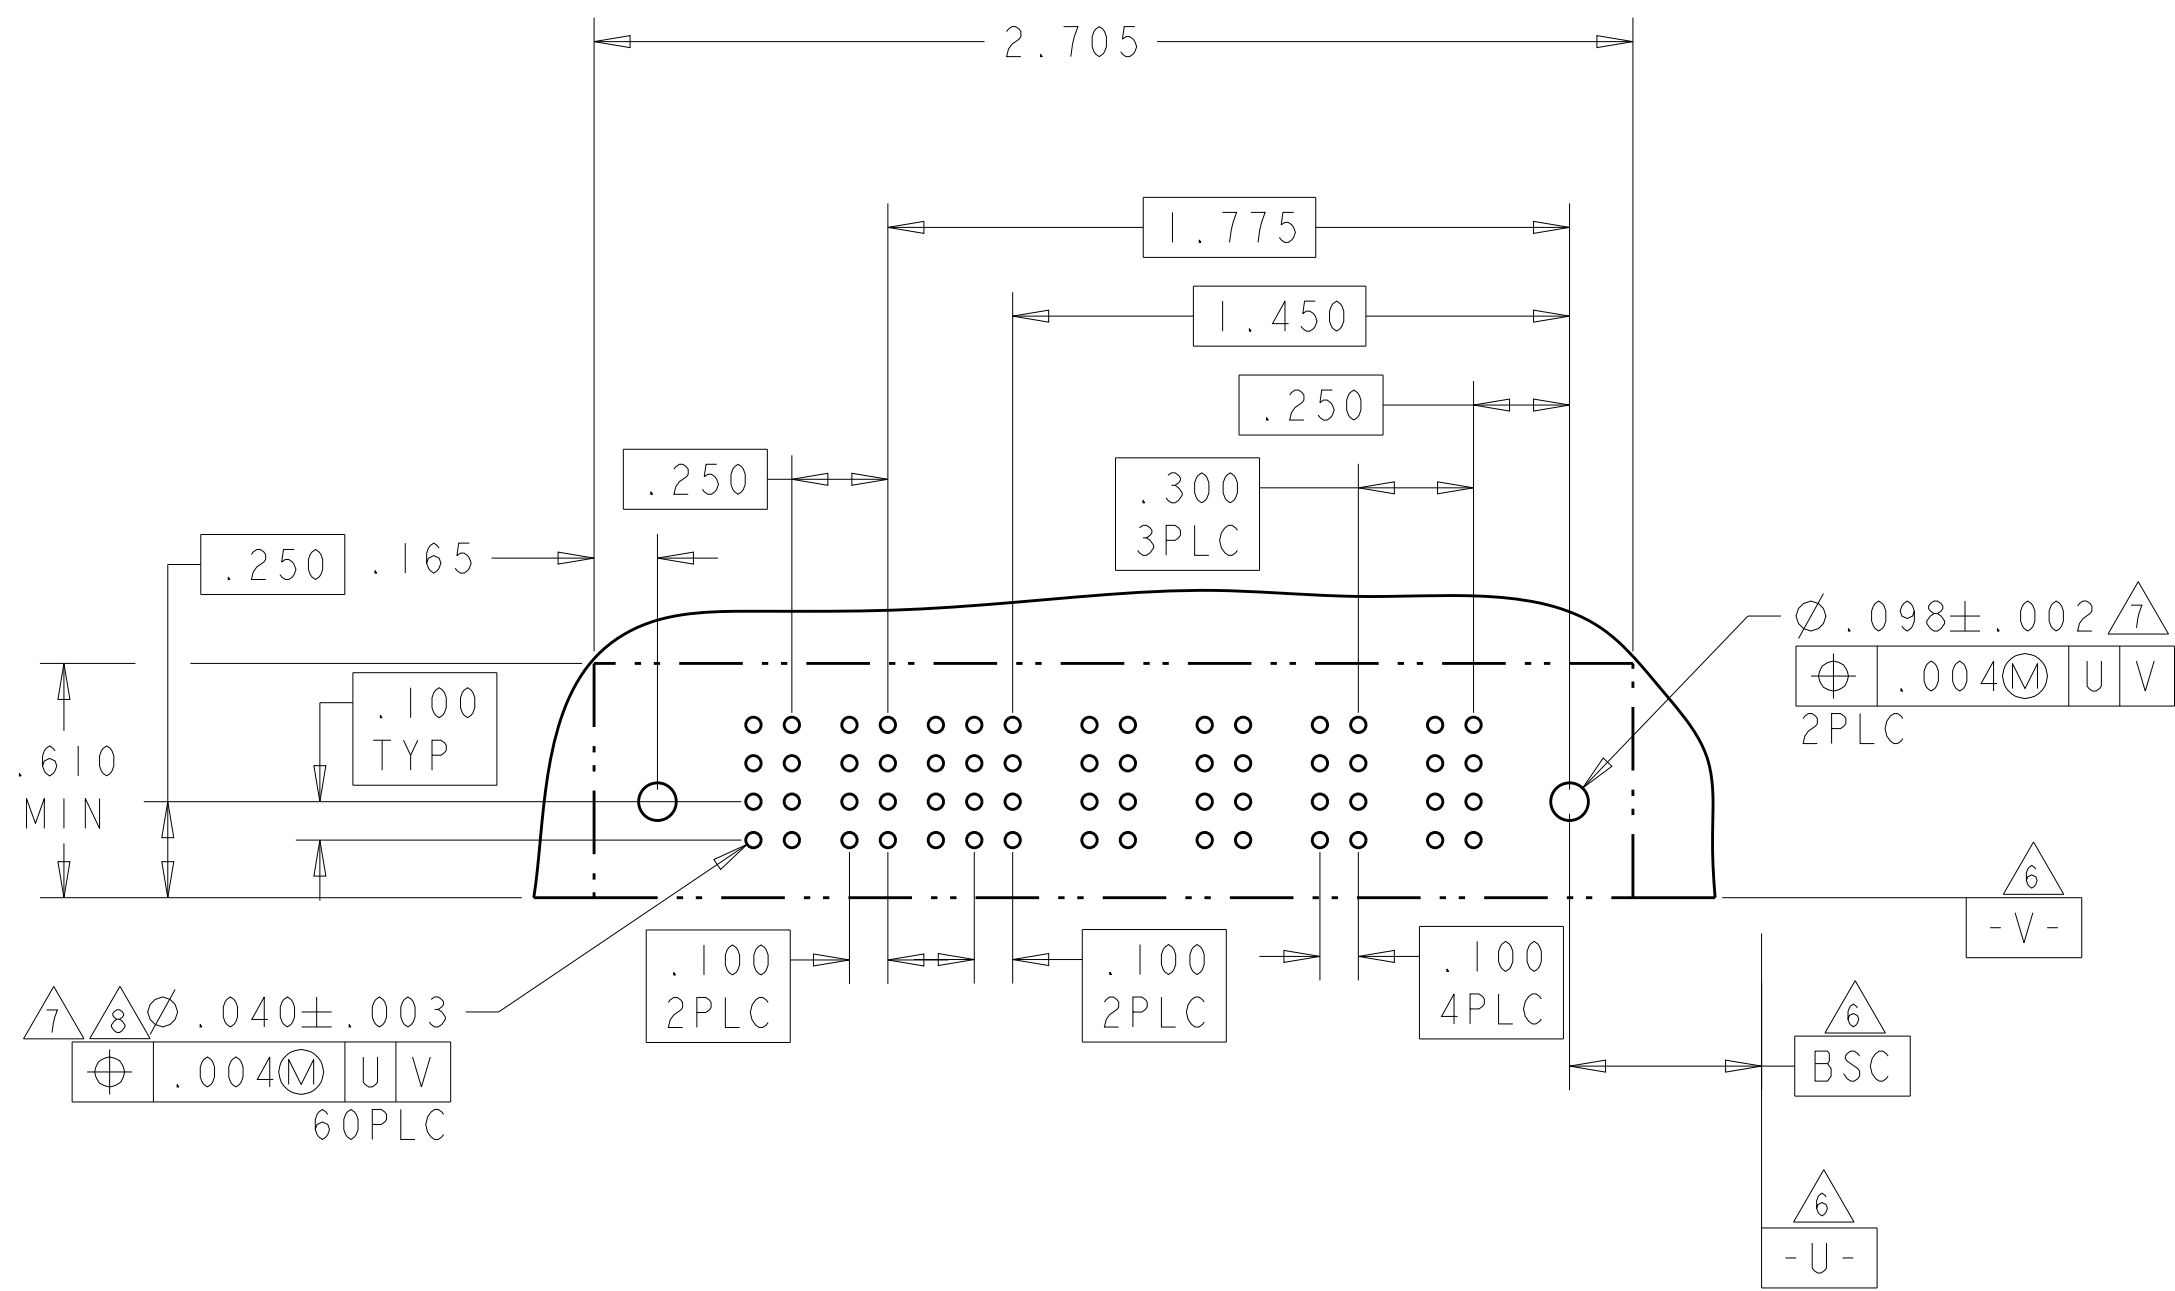


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 21FEB05 CHN M. PERCHERKE 21FEB05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ±.01 1 P/LC ±.01 2 P/LC ±.005 3 P/LC ±.005 4 P/LC ±.0020 ANGLES ±2°		NAME RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE CASE CODE DRAWING NO RESTRICTED TO A 00779 C-6450170 -	
MATERIAL -		FINISH -		WEIGHT -	
CUSTOMER DRAWING				SCALE 4:1 SHEET 9 OF 13 REV J5	

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER					SIGNAL			POWER		
			P7	P6	P5	P4	P3	3	2	1	P2	P1	
3-6450170-4	D		RM	RM	RM	RM	RM	H	H	H	RM	RM	
	C							G	G	G			
	B							F	F	F			
	A							E	E	E			
2P + 12S + 5P		HD											HD

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P 4	P 3	2	1	P 2	P 1	
3-6450170-5	D		RA	RA	H	H	RM	RM	
	C				G	G			
	B				F	F			
	A				E	E			
2P + 8S + 2P									HD

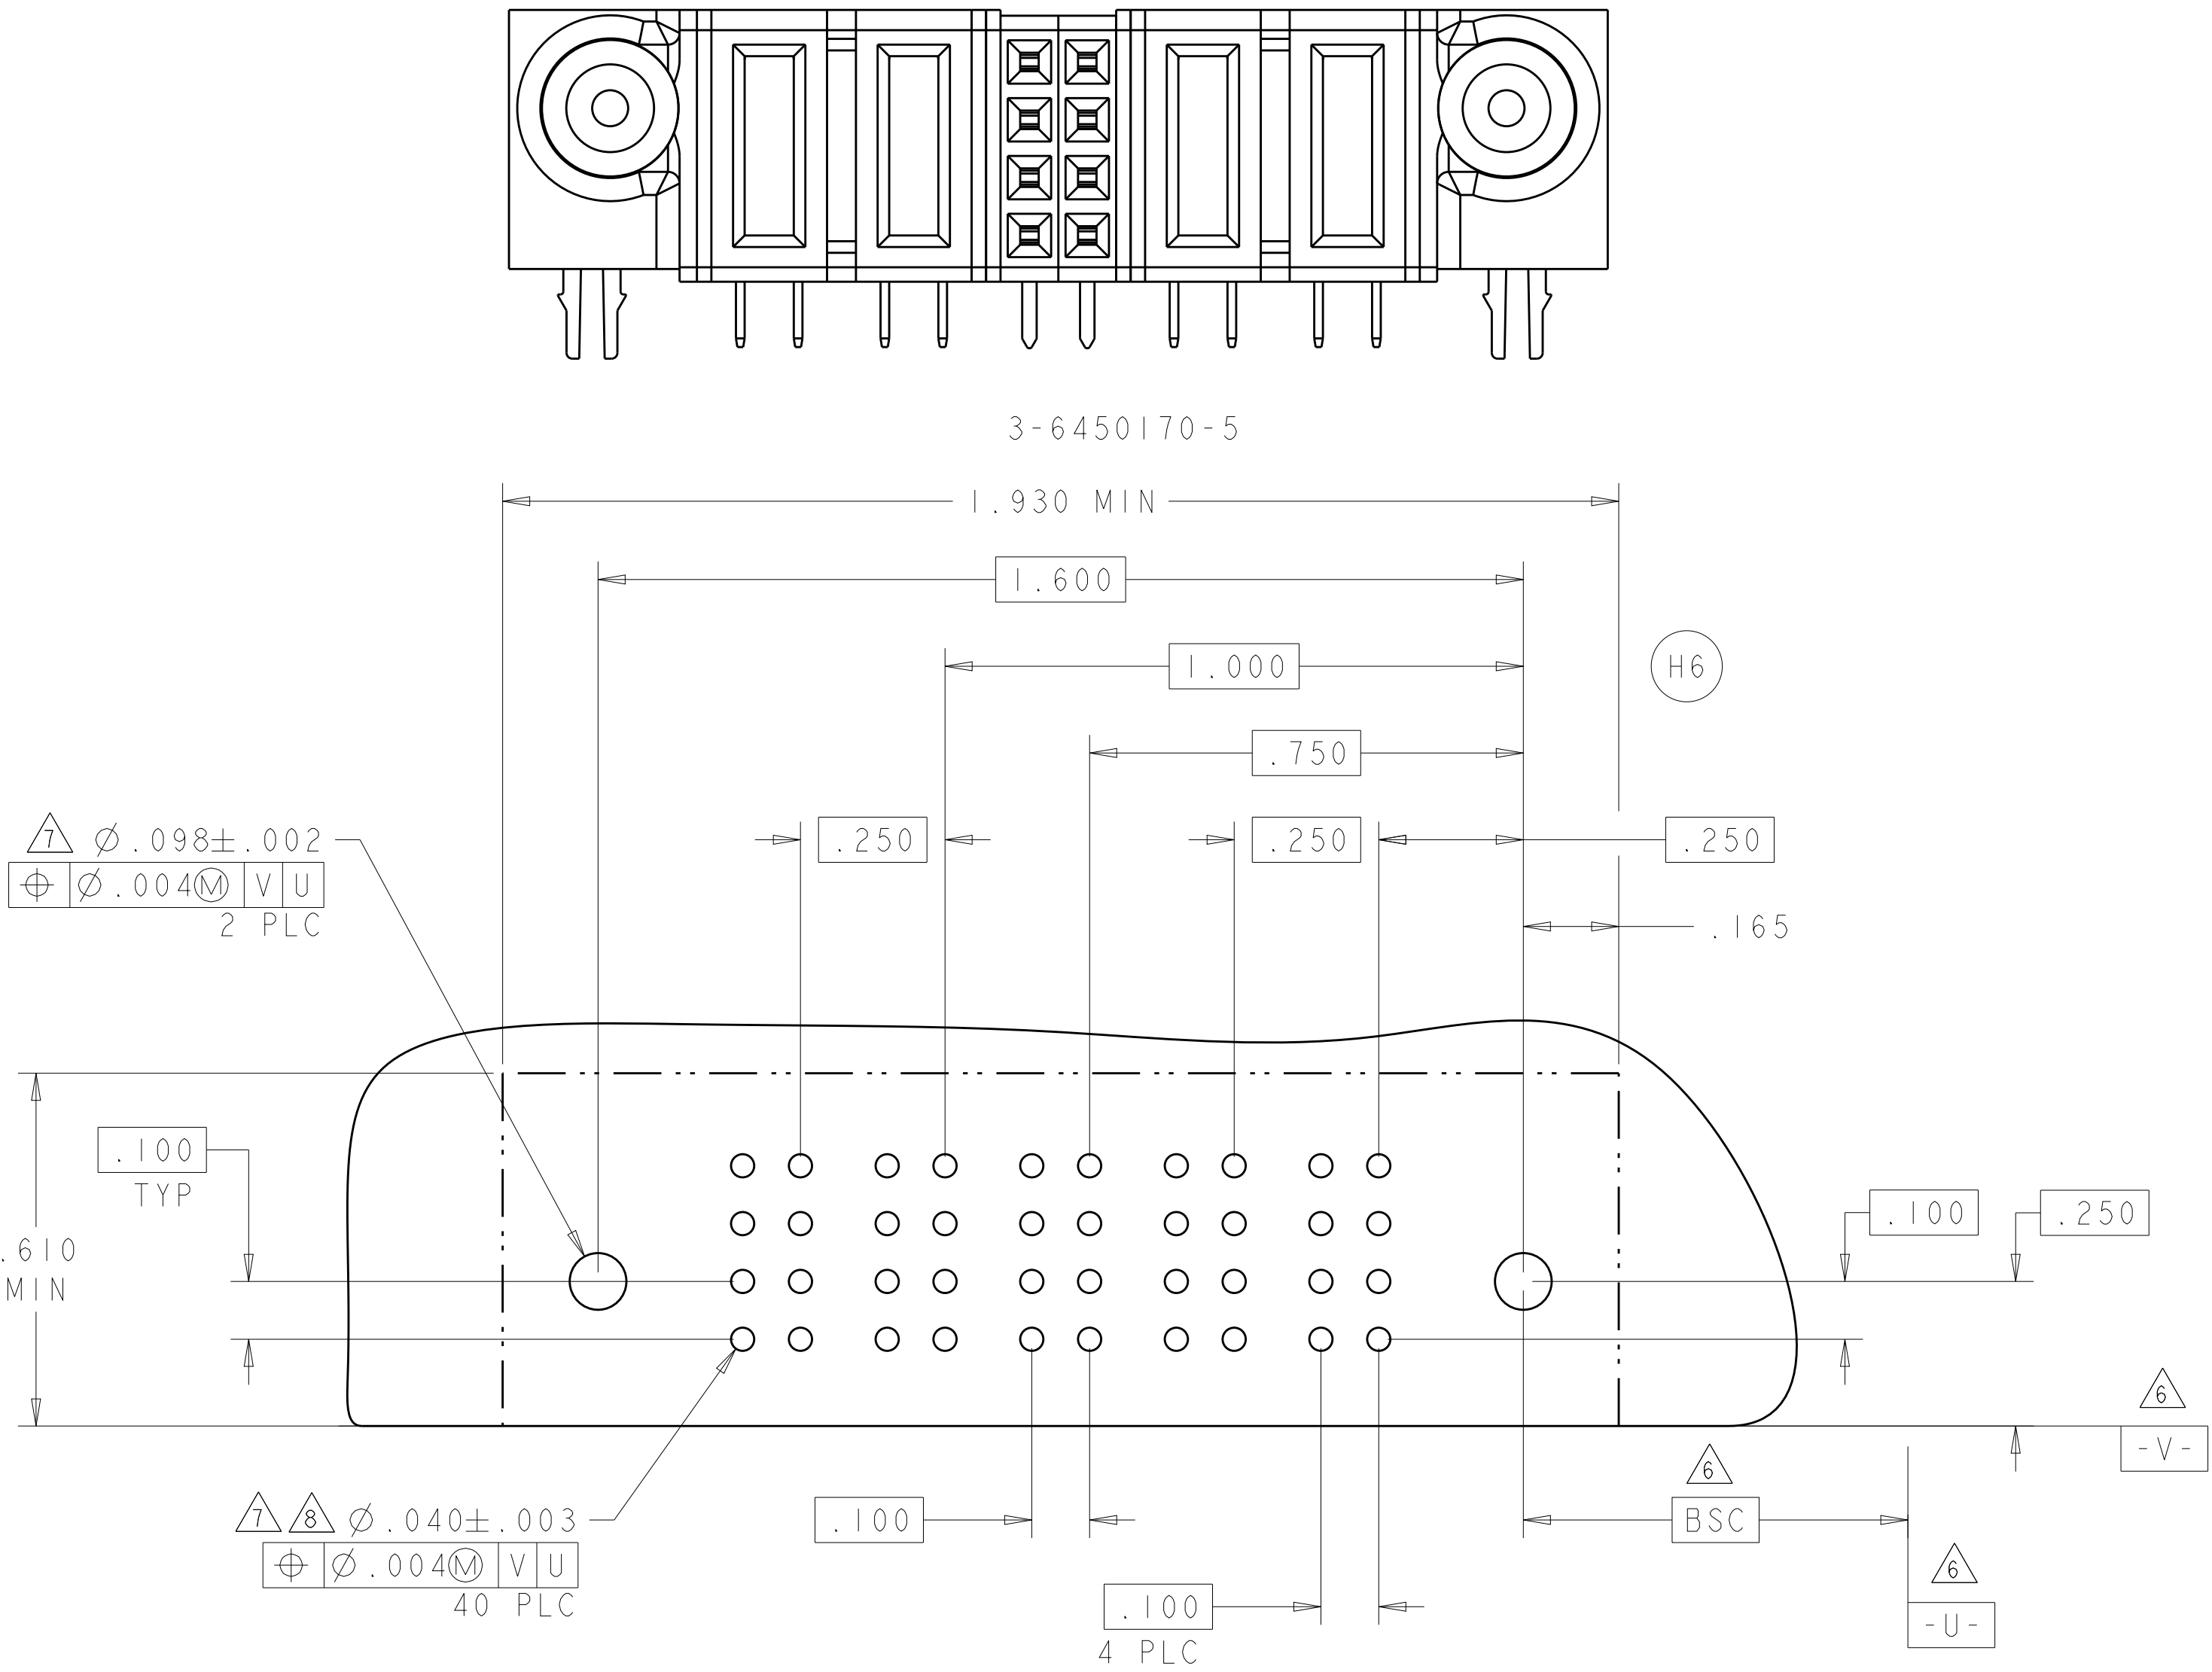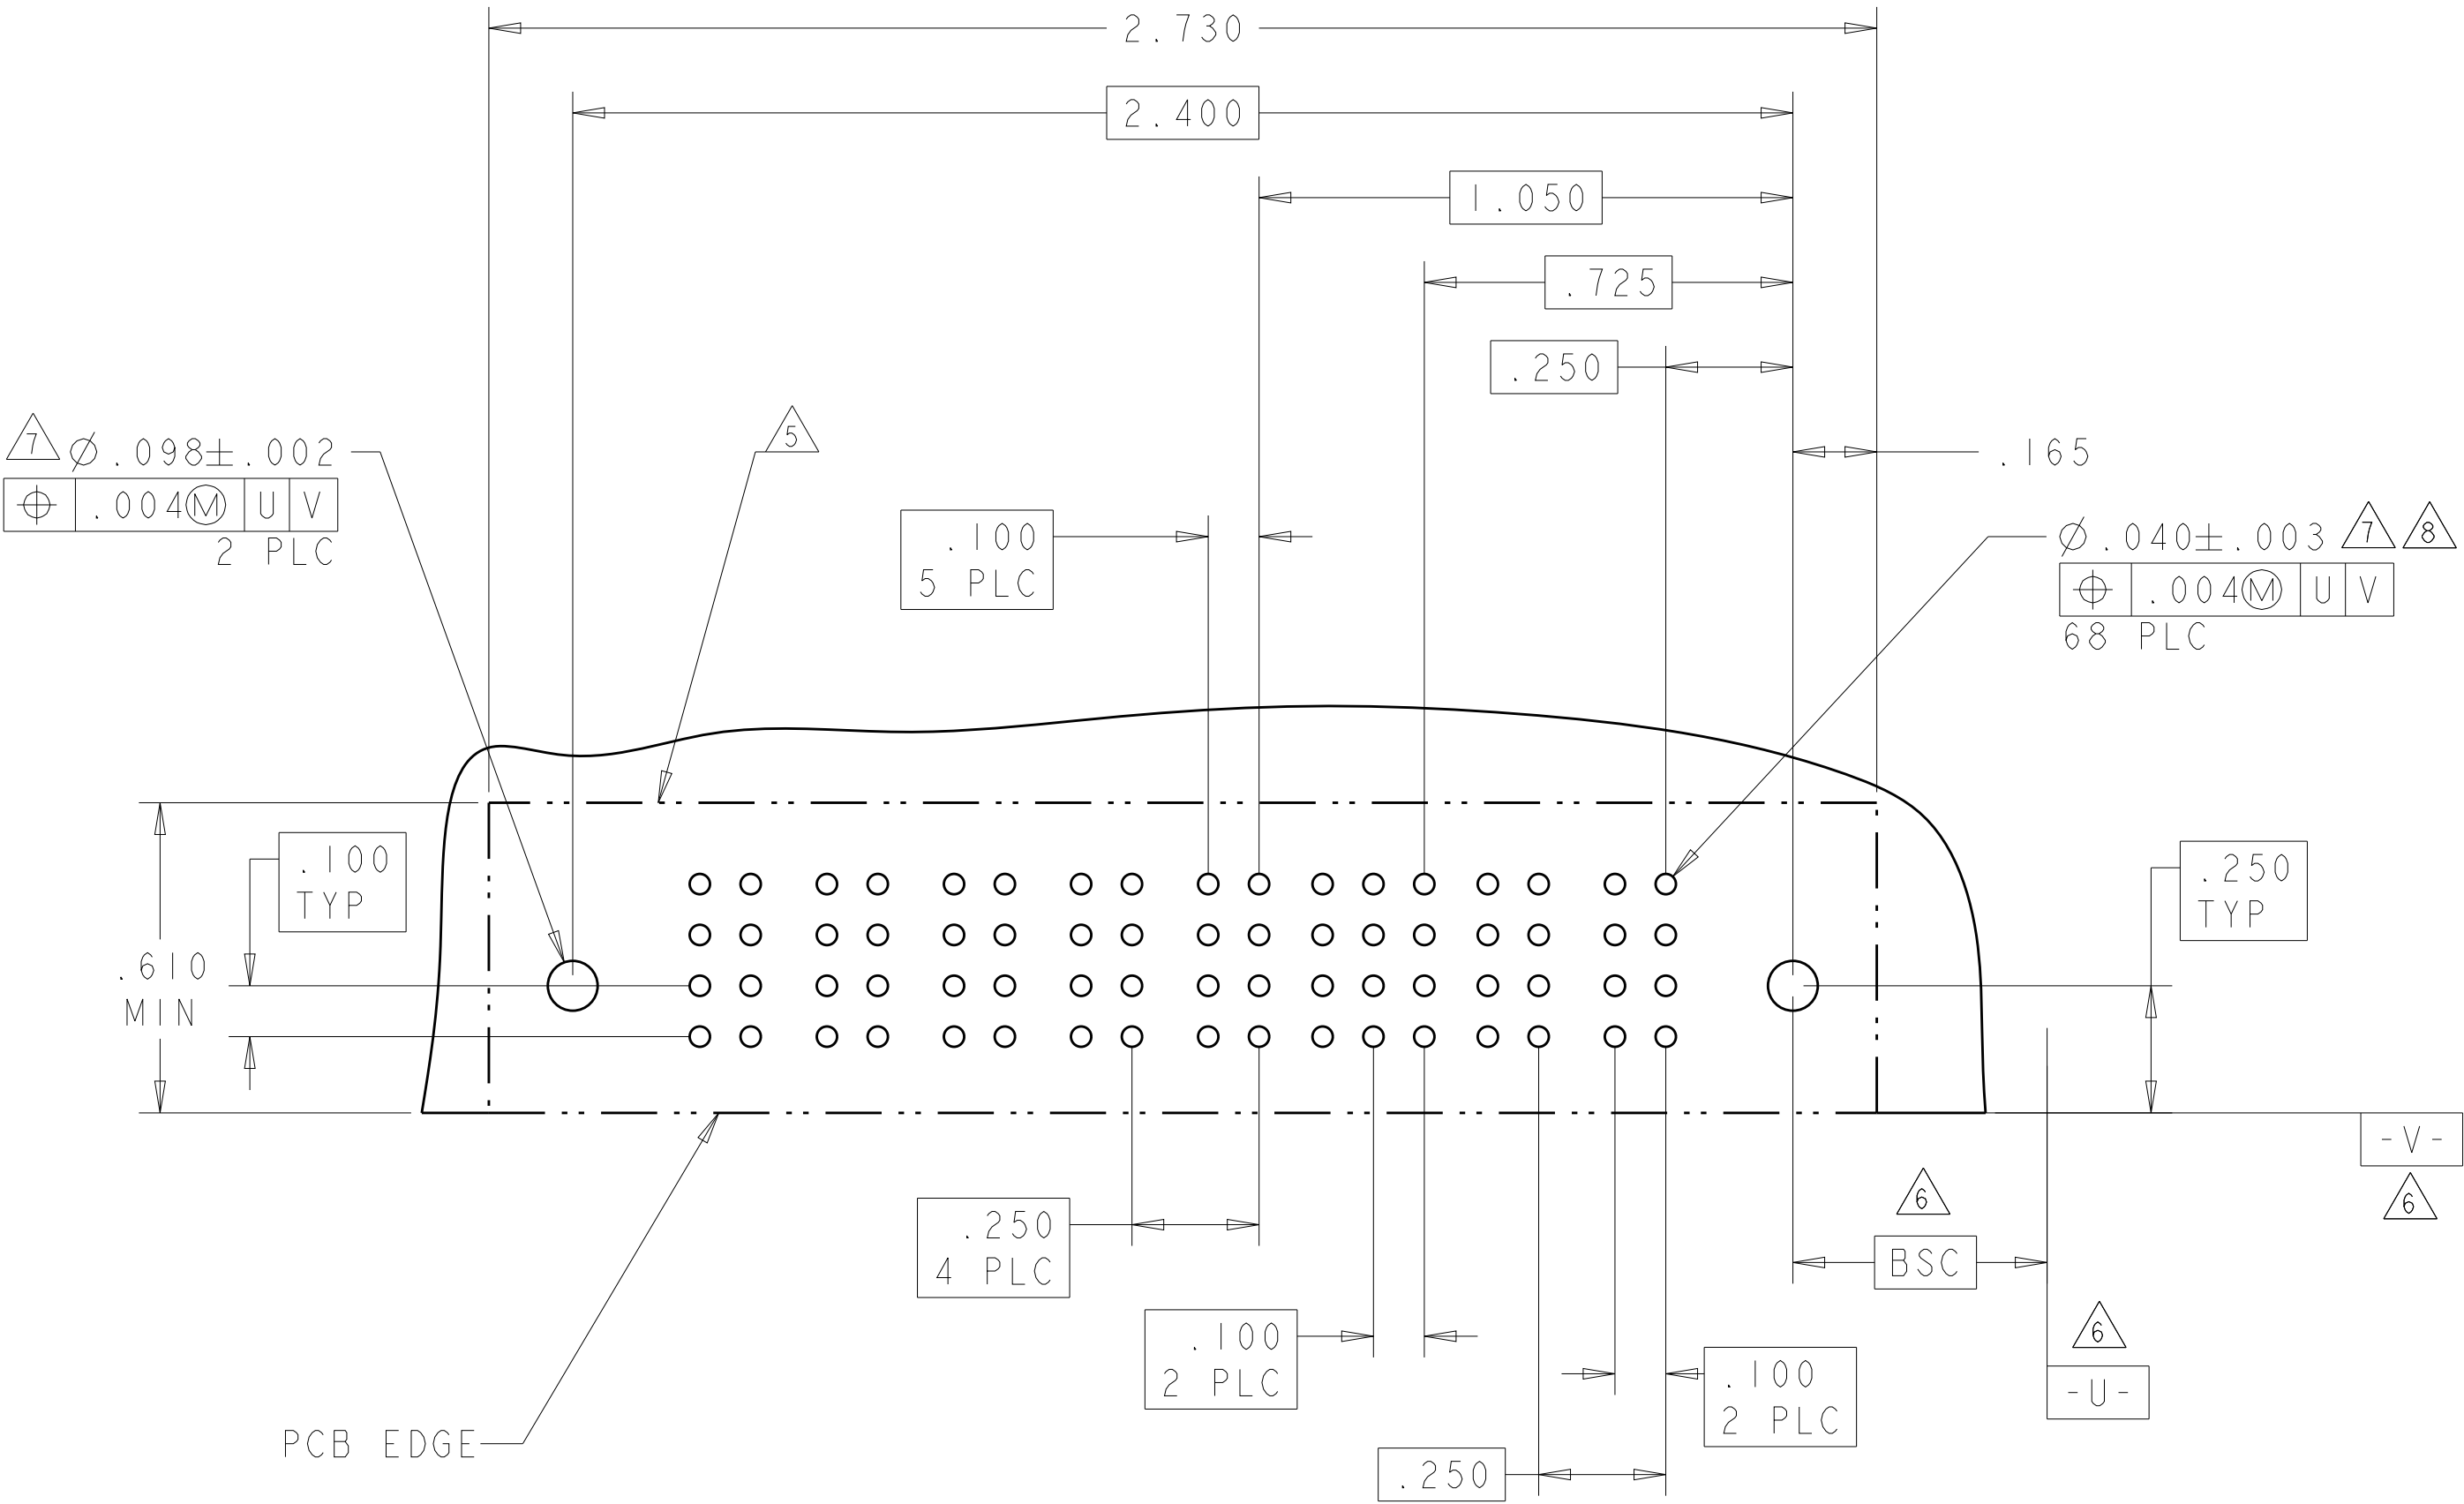

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.010

1 PLC ±.005

2 PLC ±.005

3 PLC ±.005

4 PLC ±.0020

ANGLES ±.2°

FINISH

MATERIAL

DWN R. GRZYBOWSKI 21FEB05

CHK M. PERCHERKE 21FEB05

APVD M. PERCHERKE

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

CUSTOMER DRAWING

NAME

RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779


C=6450170

SCALE 4:1


SHEET 10 OF 13

REV J5

PART NUMBER	ROWS		POWER	SIGNAL								POWER		
			P2	8	7	6	5	4	3	2	1	P1		
3-6450170-7	D C B A			H	H	H	H	H	H	H	H			
				G	G	G	G	G	G	G	G			
				F	F	F	F	F	F	F	F			
				E	E	E	E	E	E	E	E			
IP + 32S + IP														

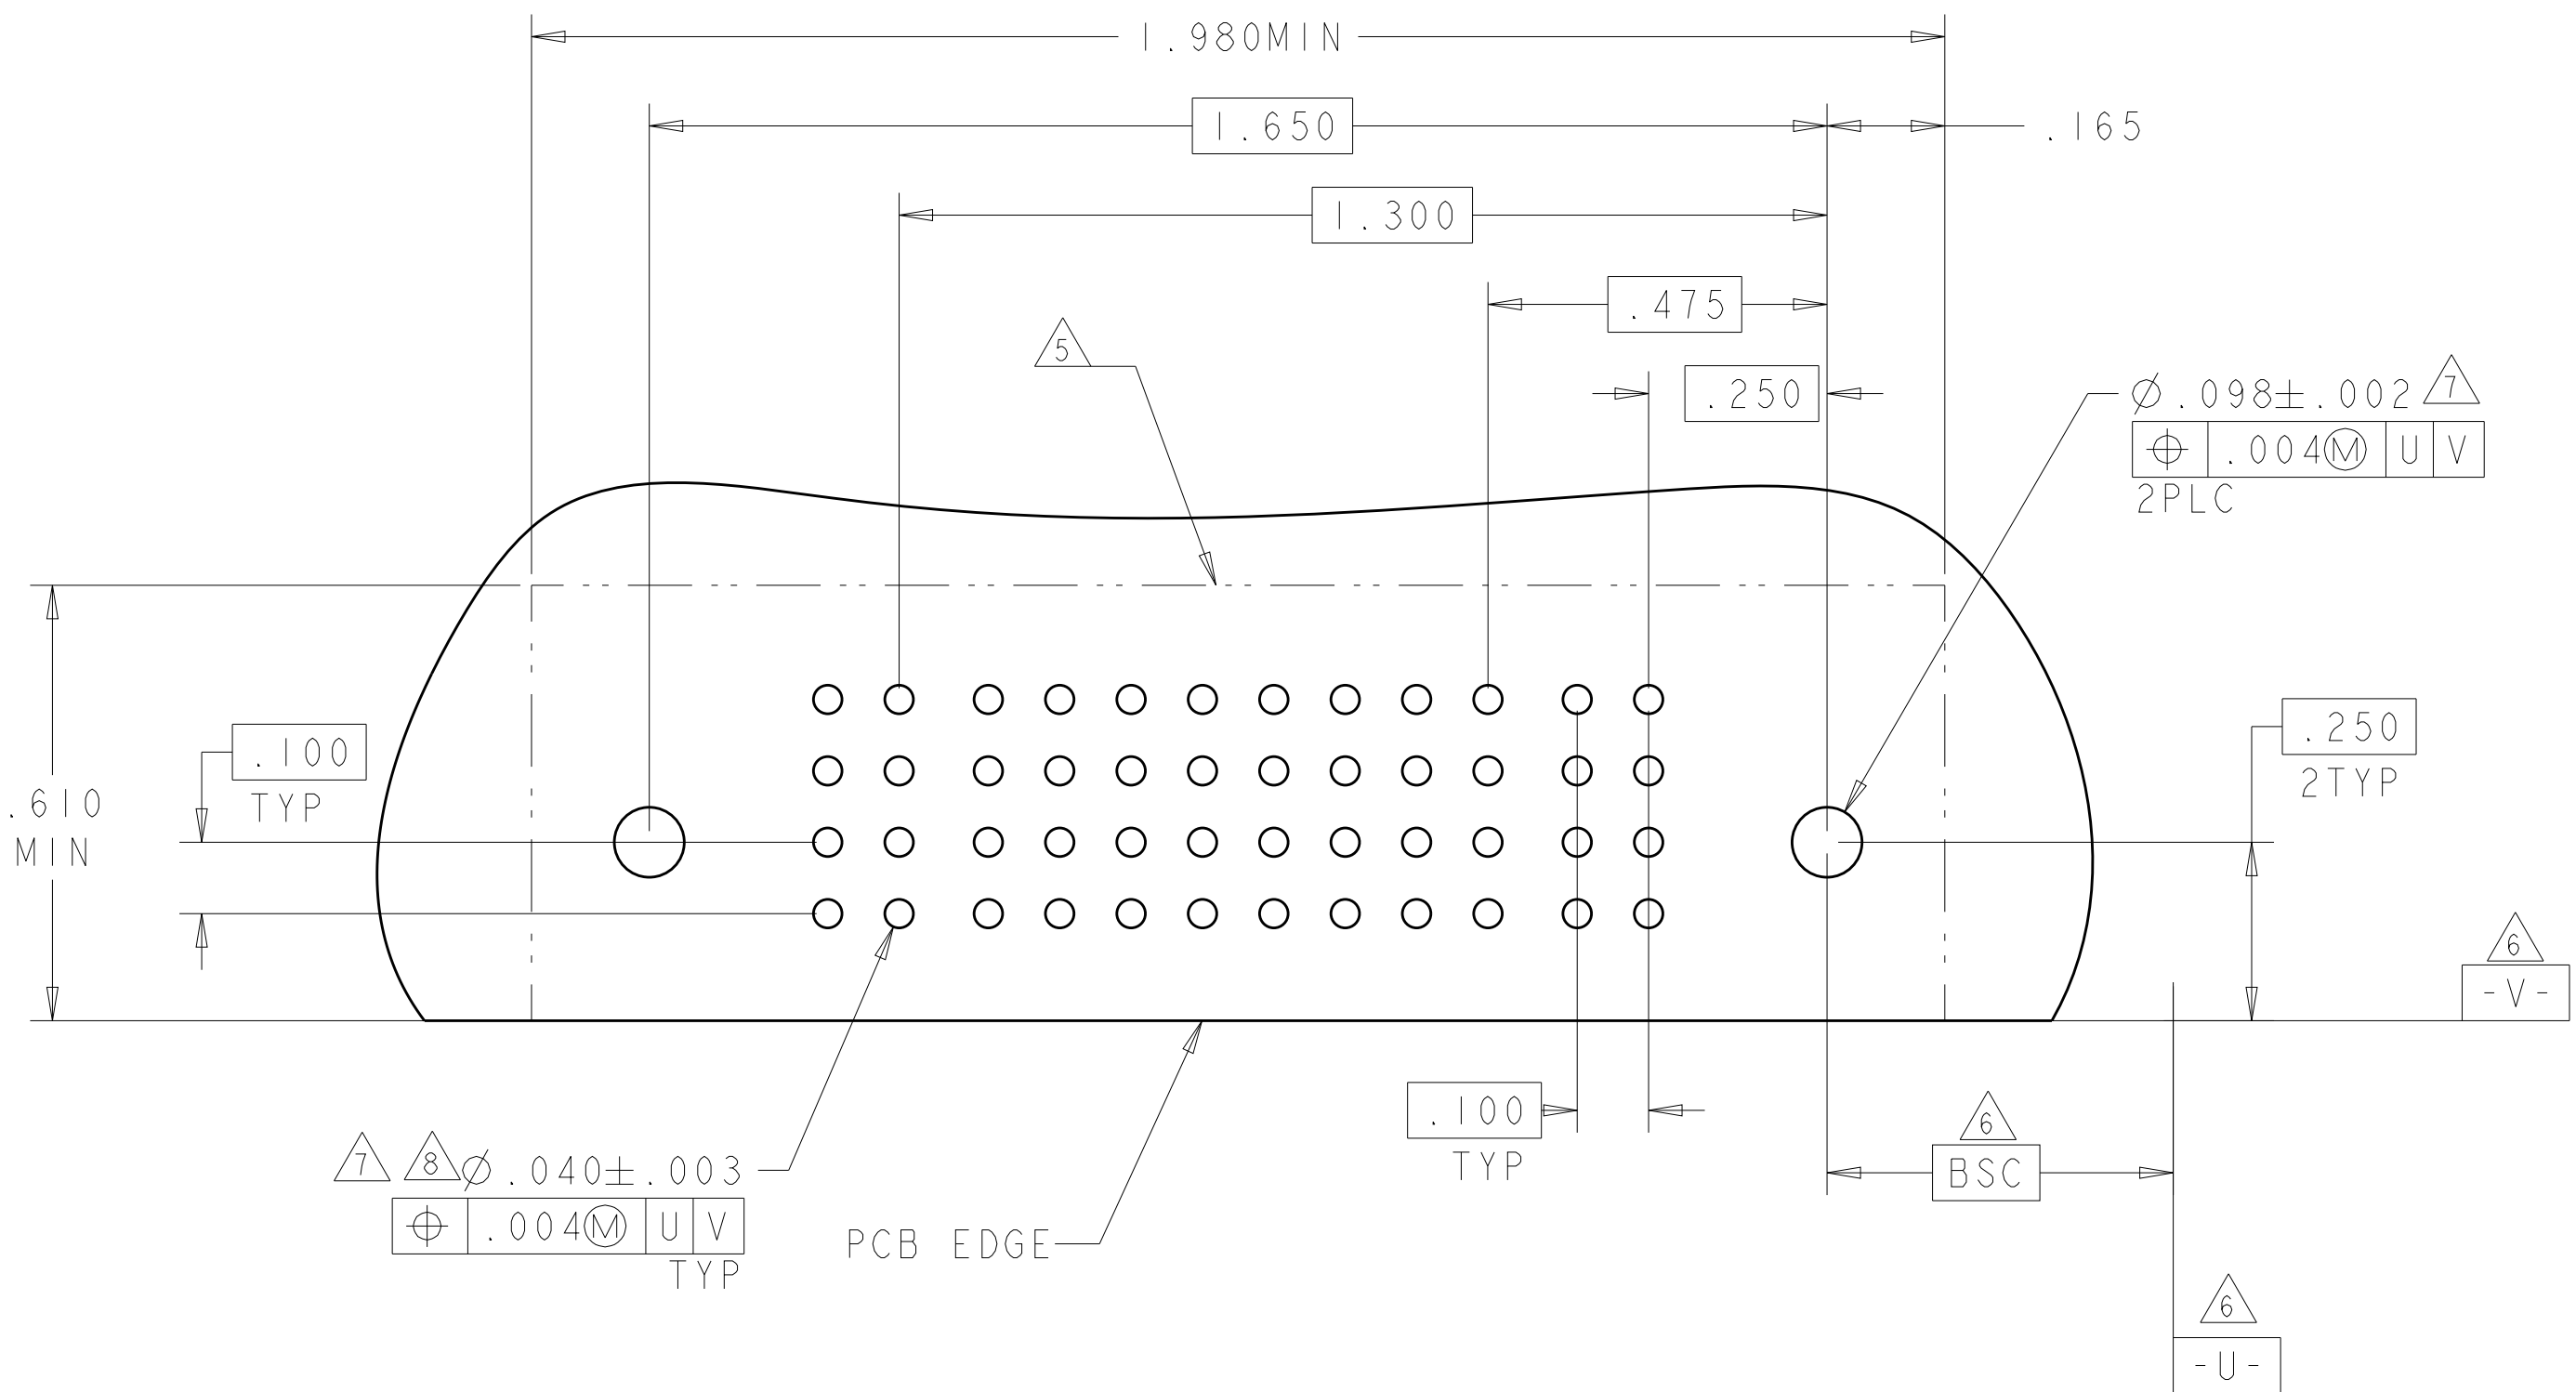4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P5	P4	2	1	P3	P2	P1	
3-6450170-9	D C B A				H	H				
					G	G				
					F	F				
					E	E				
3ACP + 8S + 2P										

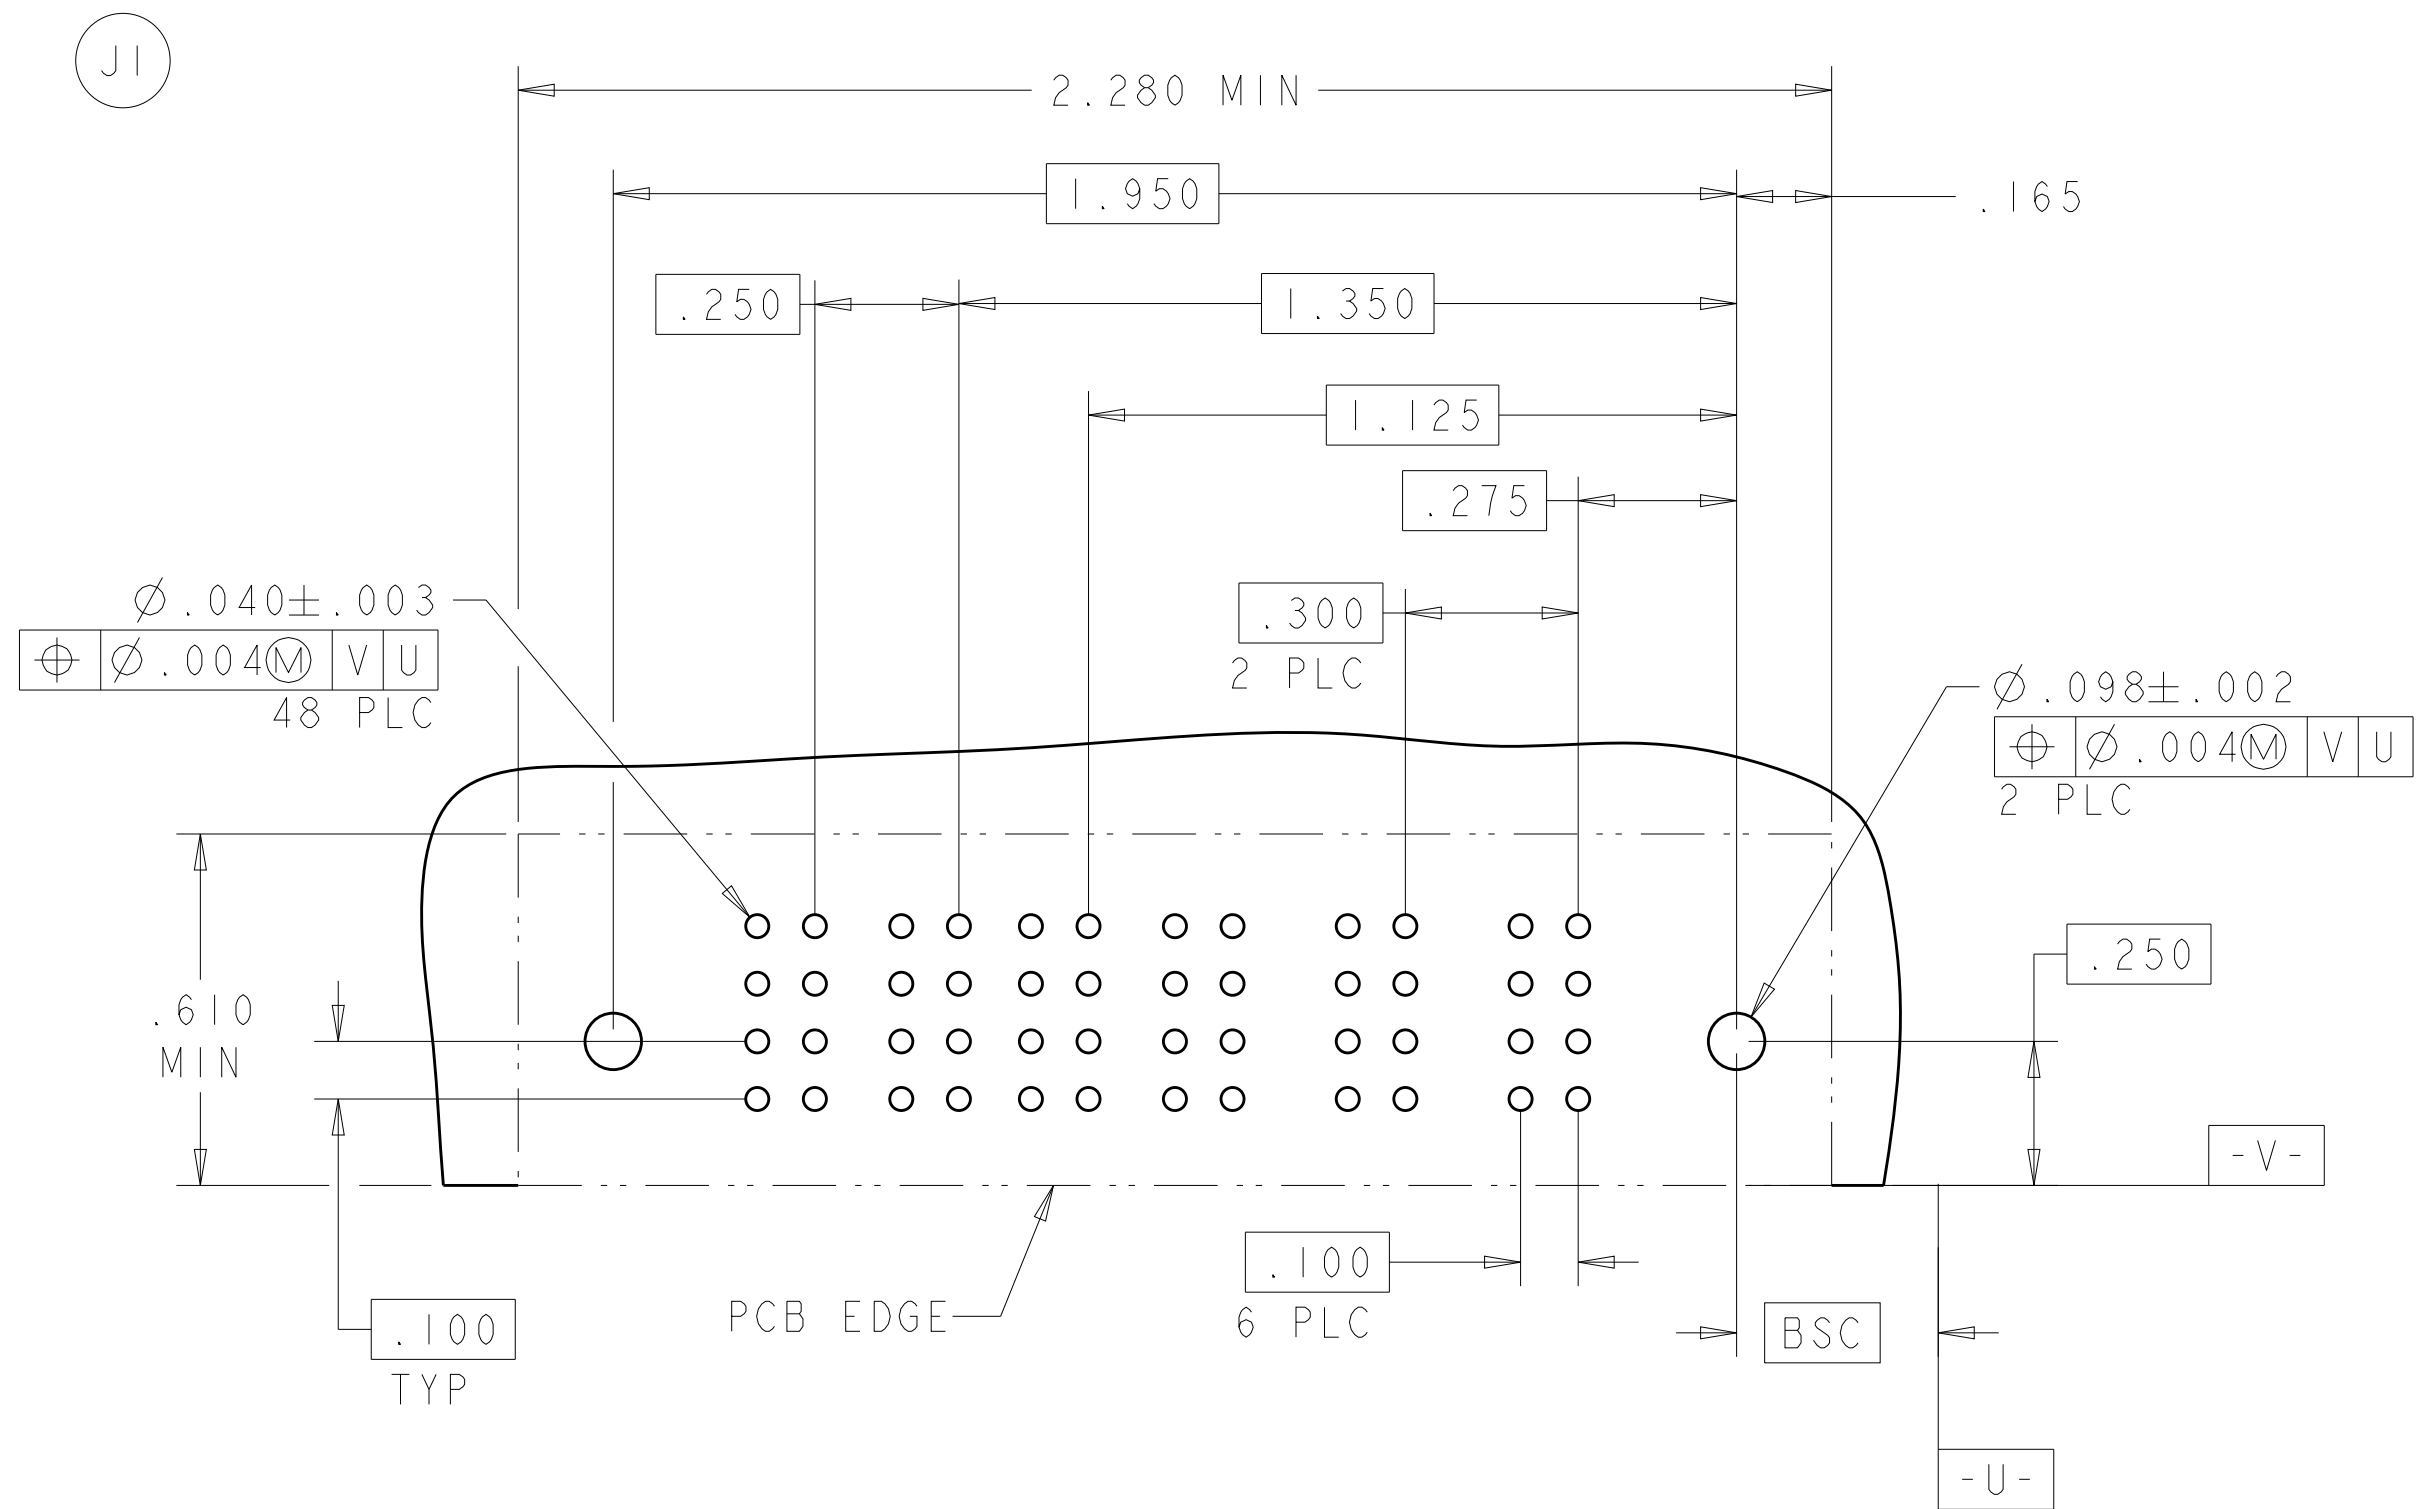

TE RECOMMENDED PCB LAYOUT



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL			POWER						
			P10	P9	P8	P7	3	2	1	P6	P5	P4	P3	P2	P1	
4-6450170-0	D						H	H	H							
	C		RM	RM	RM	RM	G	G	G	RM	RM	RM	RM	RA	RA	
	B						F	F	F							
	A	HD					E	E	E							HD
6P + 12S + 4P																

PART NUMBER	ROWS		POWER						SIGNAL						POWER		
			P8	P7	P6	P5	P4	P3	6	5	4	3	2	1	P2	P1	
4-6450170-1	D		RM		RM		RA		H	H	H	H	H		RM	RM	
	C								G	G	G	G					
	B								F	F	F	F	F				
	A								E	E	E	E	E				
2P + 24S + 6P																	

NO CONTACTS LOADED

NO CONTACTS LOADED

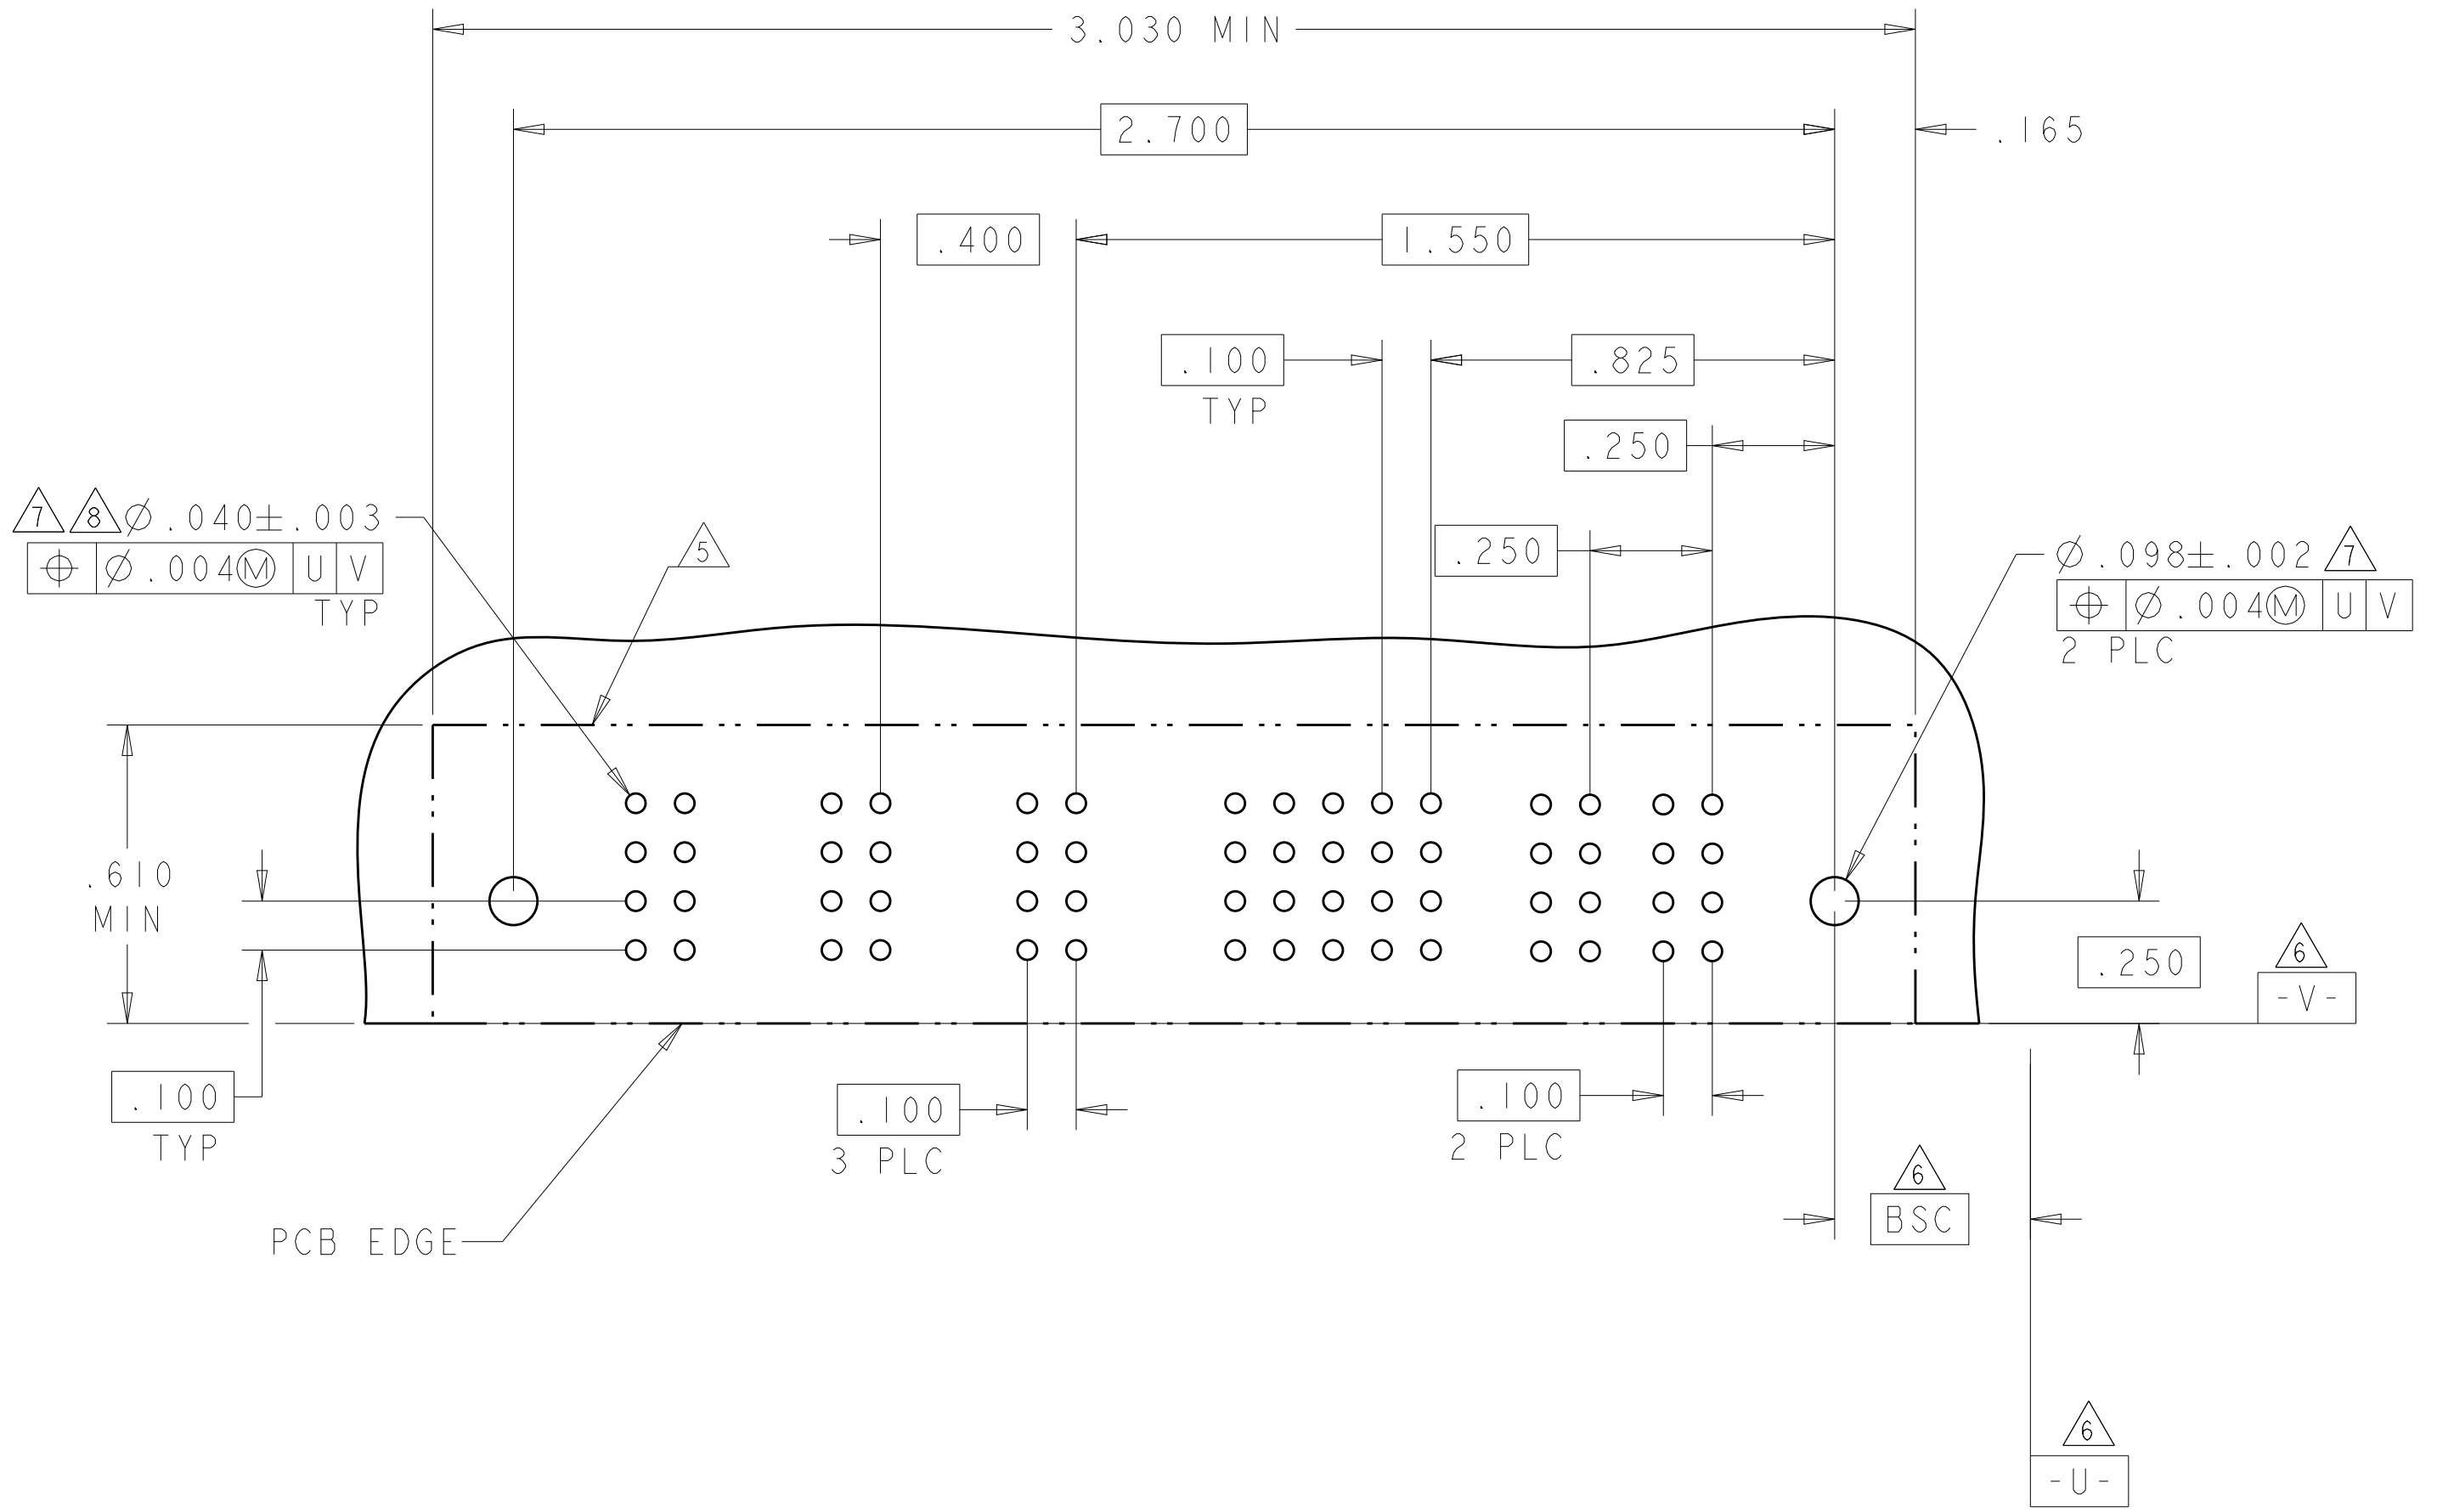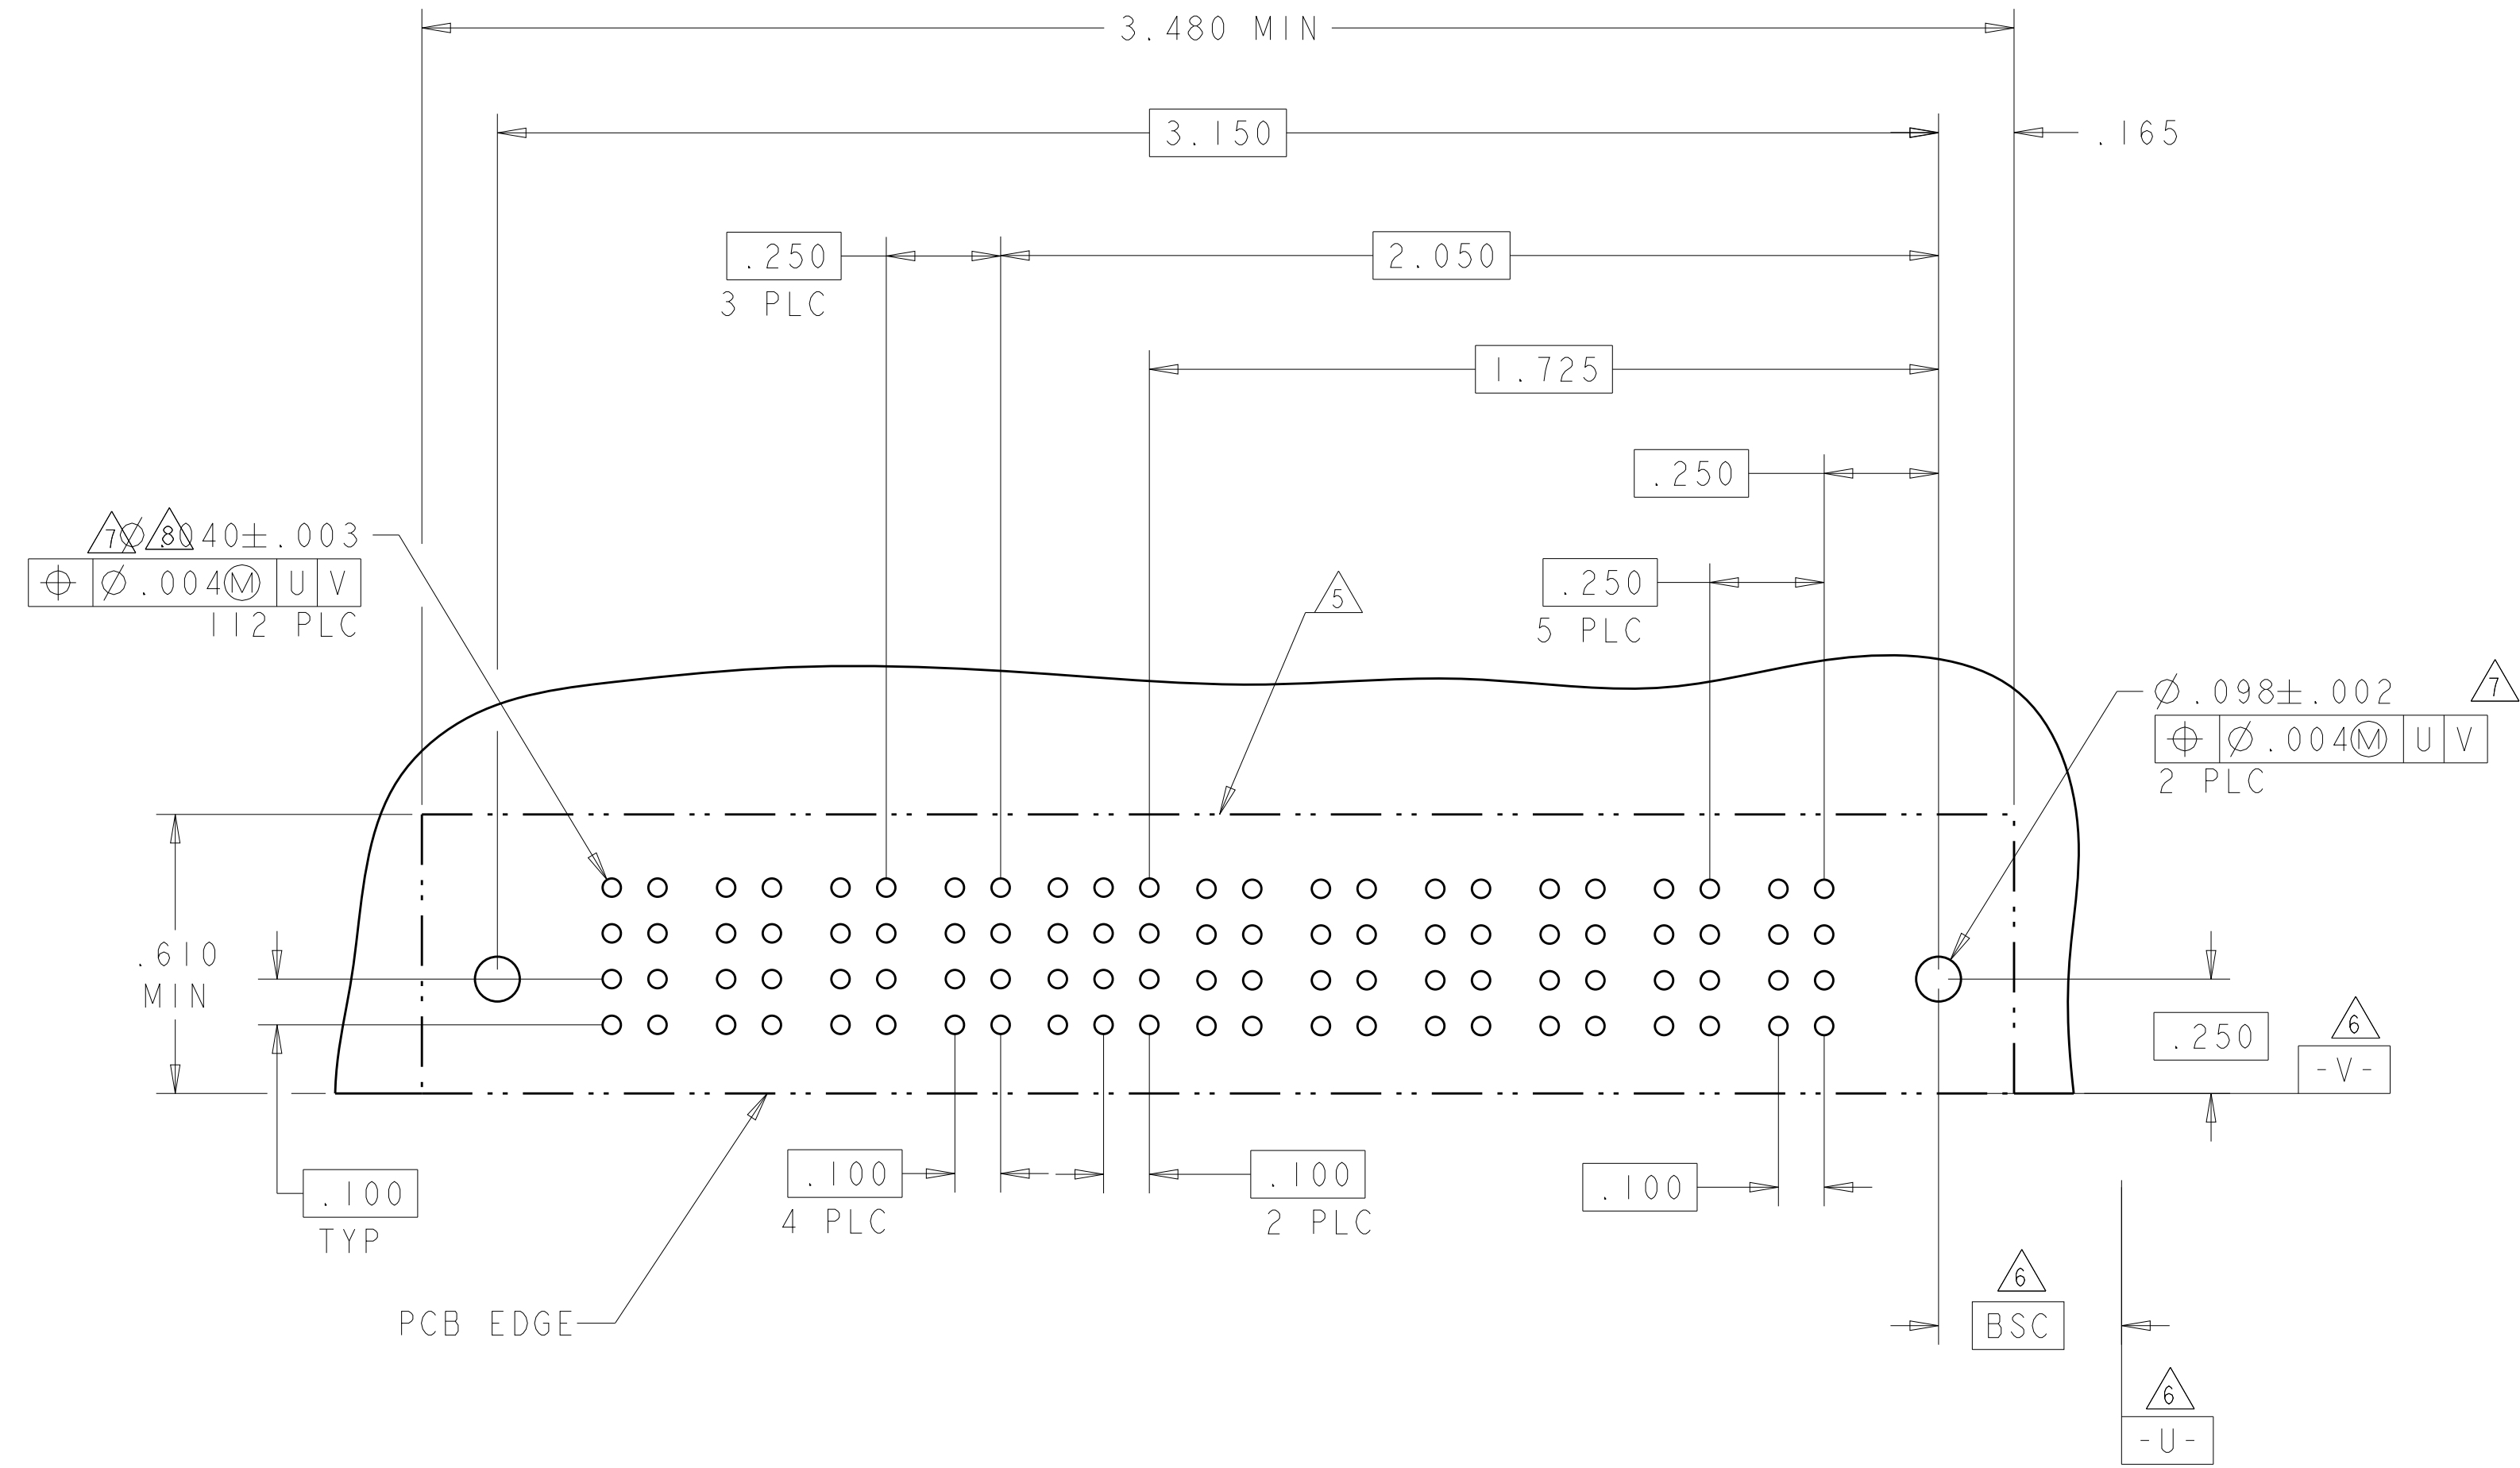

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

21FEB05
21FEB05
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT -
CUSTOMER DRAWING

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A100779

CAGE CODE
C=6450170

DRAWING NO
21FEB05

RESTRICTED TO
-

SCALE
4:1

SHEET
13

OF
13

REV
J5



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.