



3M™ FOUR-WALL HEADER, 2500 SERIES

.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE

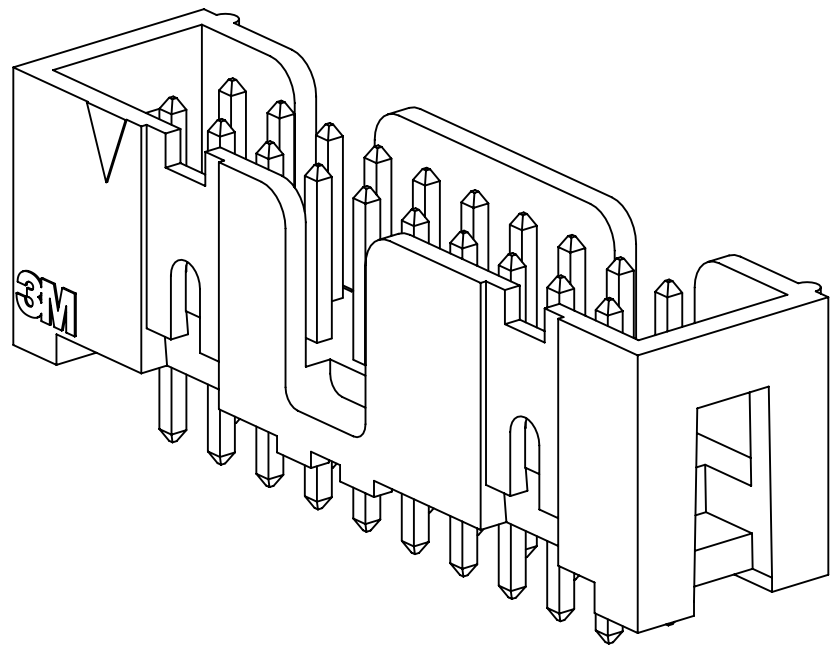


25XX-60XX

STRAIGHT VERSION

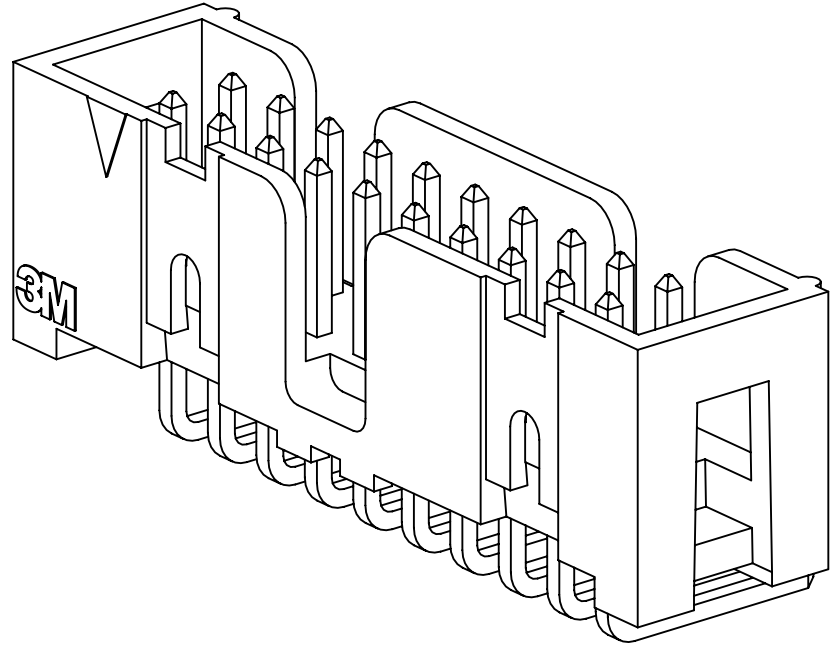

25XX-50XX

RIGHT ANGLE VERSION

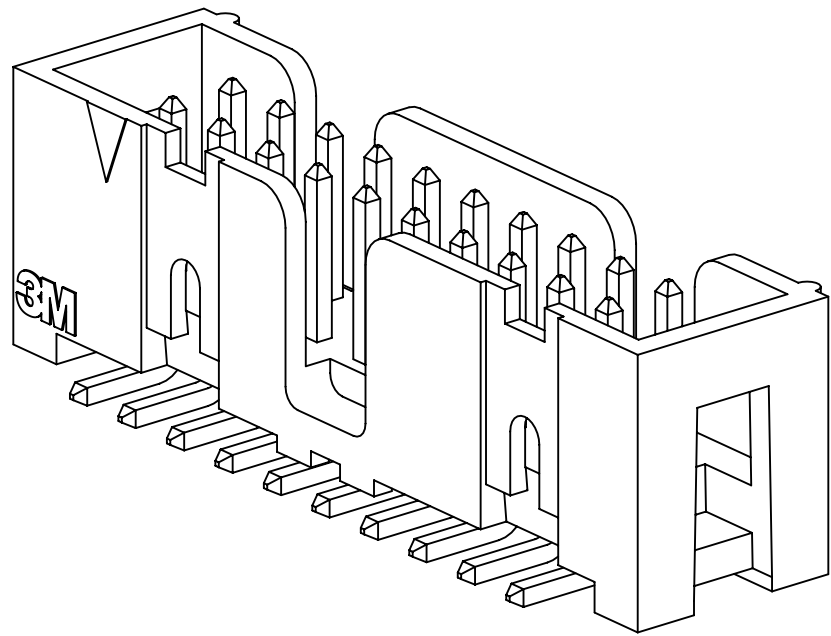

25XX-6V0C

SURFACE MOUNT VERSION

- * LOW PROFILE, SPACE SAVING DESIGN.
- * CENTER SLOT POLARIZATION PREVENTS MIS-INSERTIONS AND REDUCES INSERTION TIME.
- * DUAL SLOT POLARIZATION MEANS BROADER COMPATIBILITY WITH COMPETITIVE POLARIZATION DESIGNS (NOT AVAILABLE ON 6, 8 OR 10 POSITIONS).
- * OPTIONAL RETAINER CLIP FOR LOCKING SOCKETS IN PLACE AND INCREASING CONNECTION RELIABILITY IN VIBRATION-PRONE ENVIRONMENTS.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * THROUGH HOLE VERSION SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.
- * EXPOSED SOLDER TAILS (ON RIGHT ANGLE VERSION) PROVIDE EASE OF CLEANING AND REDUCED REPAIR COST.
- * STRAIGHT SURFACE MOUNT VERSION AVAILABLE.

2 PHYSICAL :

INSULATOR :
MATERIAL : GLASS FILLED POLYESTER (PCT)
FLAMMABILITY : UL94V-0
COLOR : BLACK
CONTACT :
MATERIAL : COPPER ALLOY
PLATING :
UNDER PLATING : 100µ" (2.54µm) NICKEL-OVERALL
WIPING AREA : AVG. GOLD (SEE ORDERING INFORMATION)
SOLDER TAILS : 200µ" (5.08µm) TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
MARKINGS : 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

2 ELECTRICAL :

CURRENT RATING : 5.00A, 1 CONTACT POWERED
3.00A, 6 CONTACTS POWERED
1.75A, ALL CONTACTS POWERED
RATING CONDITIONS : EIA-364-070 METHOD 2, 30°C MAXIMUM TEMPERATURE RISE, 20% DERATED. REFERENCE APPROPRIATE 3M PRODUCT SPECIFICATION FOR DETAILED CURRENT DERATING CURVES.
INSULATION RESISTANCE : >1 X 10⁹Ω AT 500 V_{DC}
WITHSTANDING VOLTAGE : 1,000V_{RMS} AT SEA LEVEL

2 ENVIRONMENTAL :

TEMPERATURE RATING : -55°C TO 105°C
PROCESS RATING : 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL : 1 (PER J-STD-020C)

- NOTES
1. REGULATORY INFORMATION: ROHS COMPLIANT. SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF WWW.3MCONNECTORS.COM FOR COMPLIANCE INFORMATION.
 2. IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENT.
 3. NOTCHES A & C WILL ACCOMODATE 3M POLARIZING KEY: N3518.
 4. CONTACT TAILS .0245 (.622) WIRE WITH .0075 (.191) CORNER WIRE AND .028 (.072) DIAGONAL.
 5. SOLDER STANDOFFS FACILITATE .01 (.3) CLEARANCE ABOVE BOARD FOR REFLOW SOLDERING.

3M ELECTRONIC MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3mconnectors.com>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

UL®
UL FILE NO: E68080

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		
REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
CHKD	CASTIGLIONE	AUG 11, 2014	DATE	DATE
CHKD	DATE	APPR	R. SCHERER	DATE
CHKD	DATE	APPR	R. SCHERER	DATE
DIVISION		DIVISION CODE		
Interconnect Solutions		EMSD		
DO NOT SCALE DRAWING	SCALE 4 1	TOLERANCES EXCEPT AS NOTED		
THIRD ANGLE PROJECTION		INCHES		
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS		
MAX SURFACE ROUGHNESS		ANGLES		
DET SURFACES		MARKED ONLY		
MODEL		2500 SERIES		
CAGE NUMBER		DRAWING NO.		
D 78-5100-0770-7		REV. N		
DET		YES		
LISTS		NO		
SHT		1 OF 5		

3M™ FOUR-WALL HEADER, 2500 SERIES
.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE




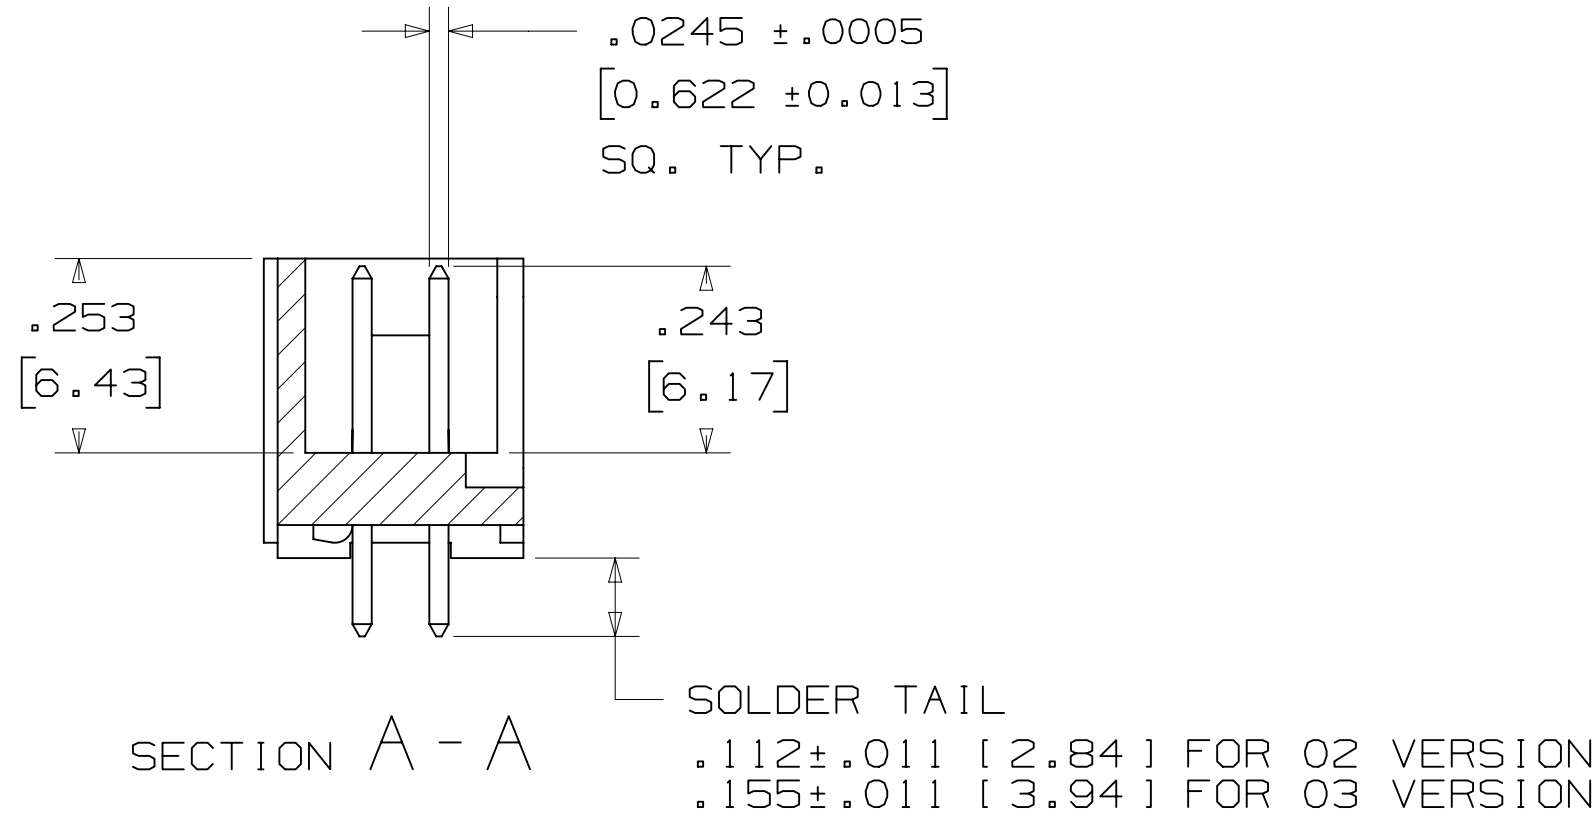


TABLE 1				
PIN QTY.	DIM. "A"	DIM. "B"	POLARIZING NOTCHES	PIN QTY.
06	.588 [14.94]	.508 [12.90]	B	06
08	.688 [17.48]	.608 [15.44]	B	08
10	.788 [20.02]	.708 [17.98]	BC	10
14	.988 [25.10]	.908 [23.06]	BCDE	14
16	1.088 [27.64]	1.008 [25.60]	ABCDE	16
20	1.288 [32.72]	1.208 [30.68]	ABCDE	20
24	1.488 [37.80]	1.408 [35.76]	ABCDE	24
26	1.588 [40.34]	1.508 [38.30]	ABCDE	26
30	1.788 [45.42]	1.708 [43.38]	ABCDE	30
34	1.988 [50.50]	1.908 [48.46]	ABCDE	34
36	2.088 [53.04]	2.008 [51.00]	ABCDE	36
40	2.288 [58.12]	2.208 [56.08]	ABCDE	40
50	2.788 [70.82]	2.708 [68.78]	ABCDE	50
60	3.288 [83.52]	3.208 [81.48]	ABCDE	60
64	3.488 [88.60]	3.408 [86.56]	ABCDE	64

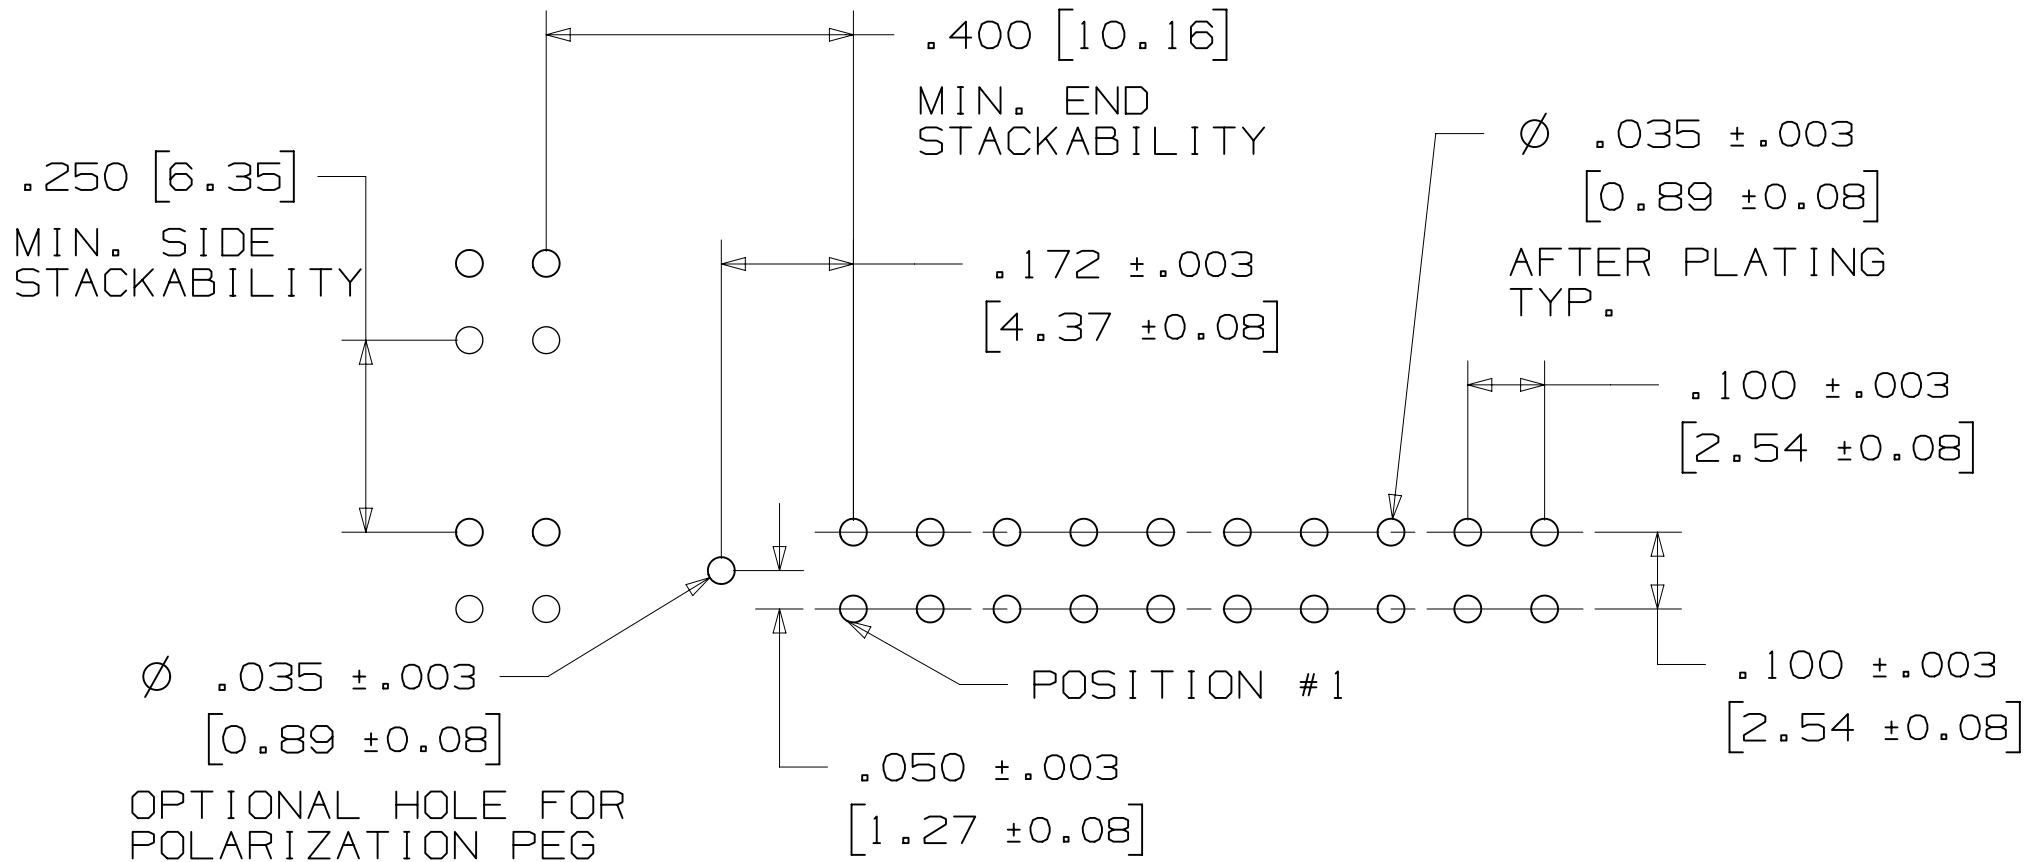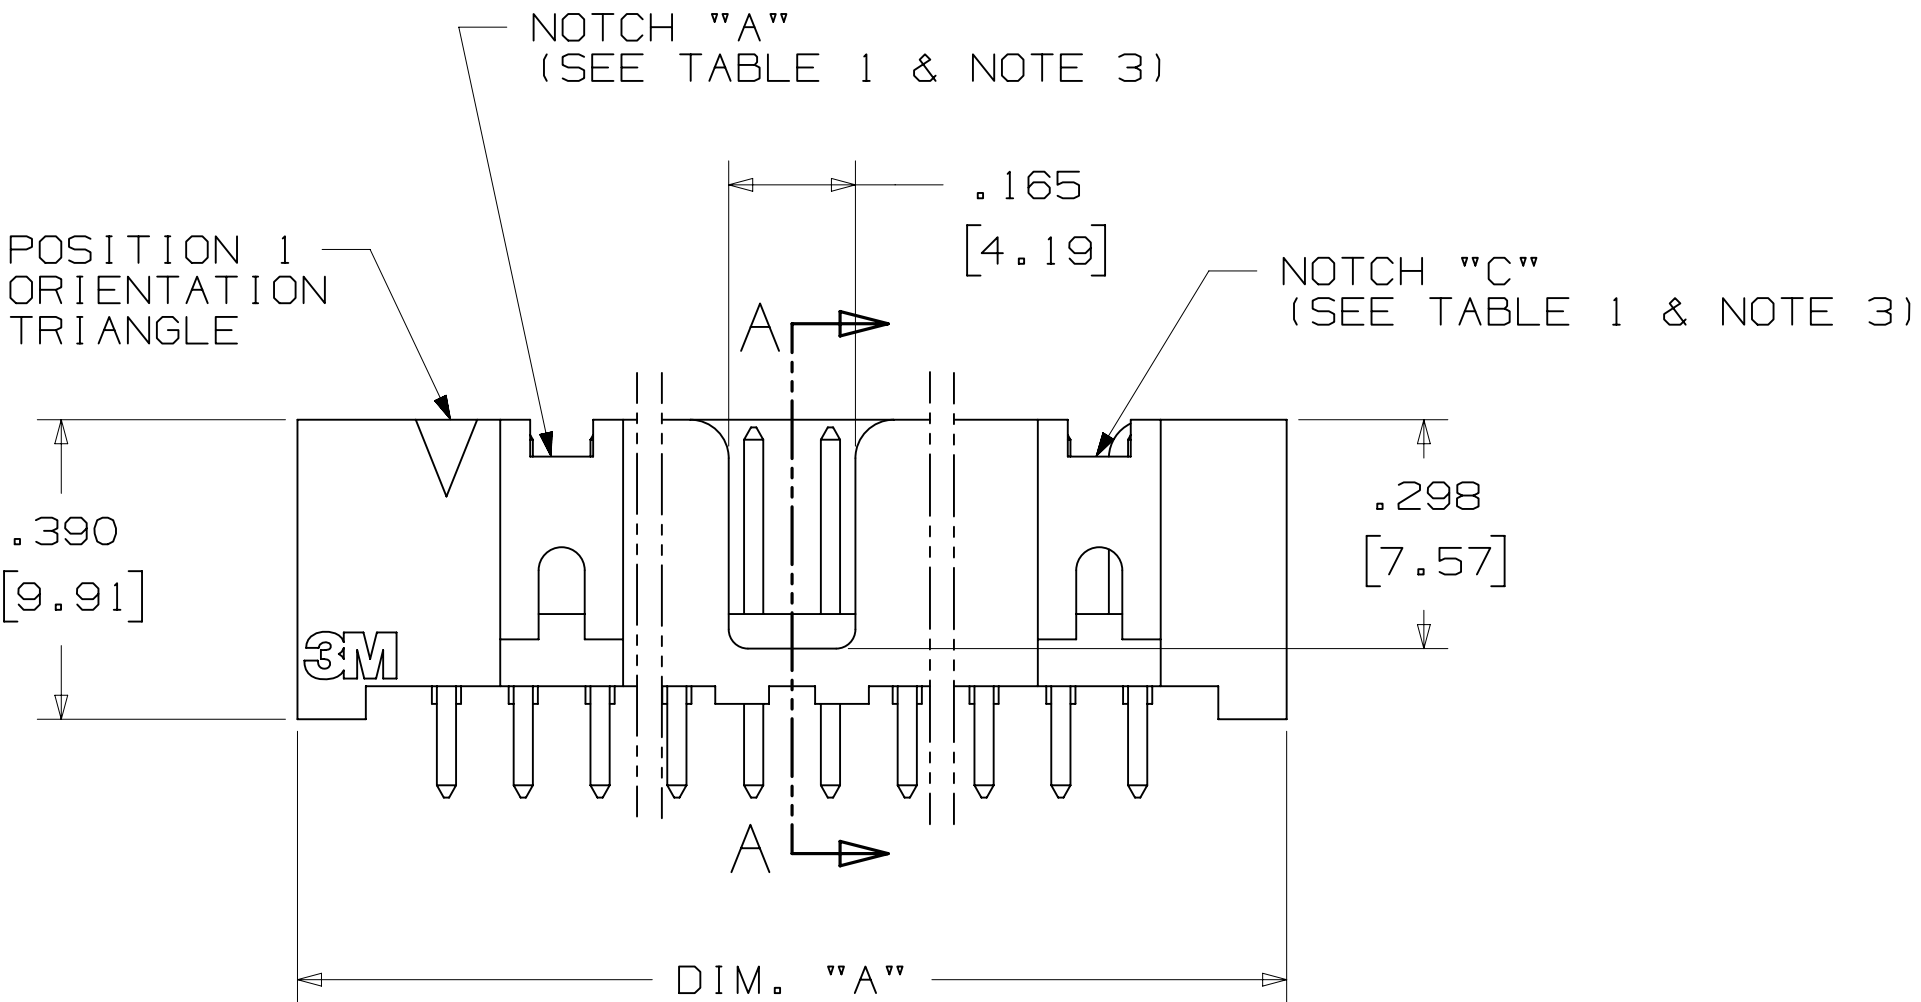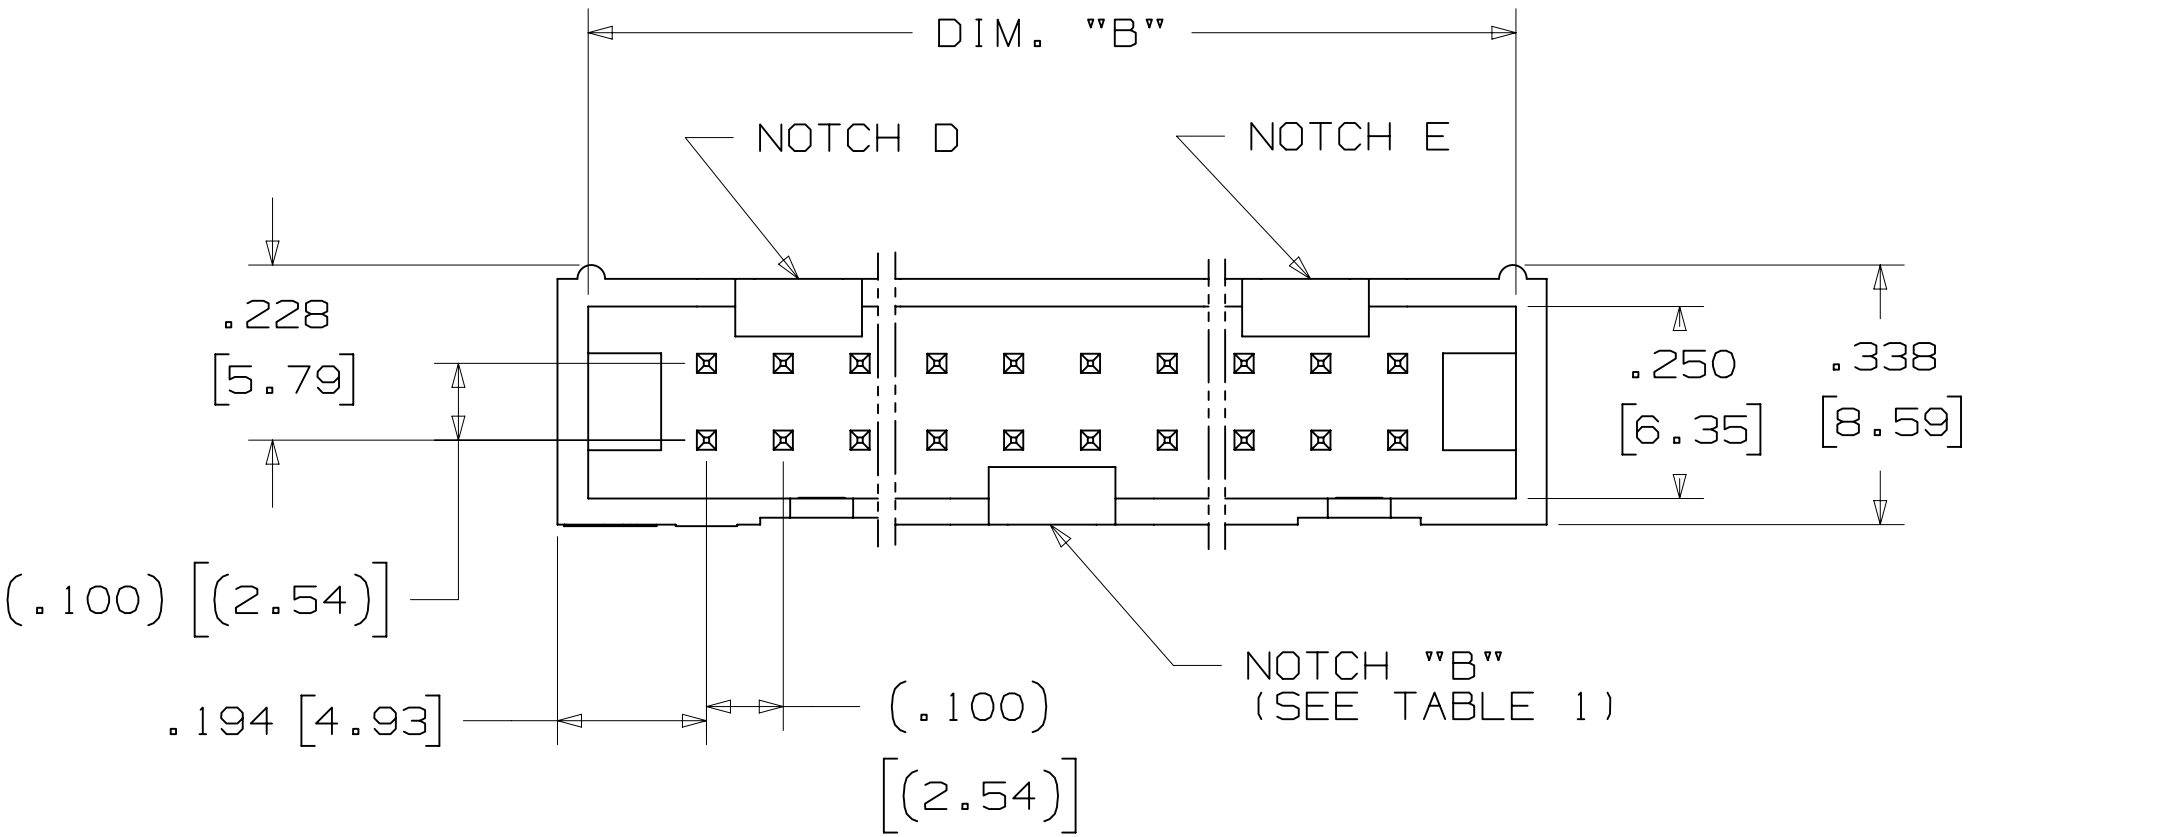

ORDERING INFORMATION
STRAIGHT VERSION

X25XX-60XX-XX


N= HIGH TEMP BLACK (PCT)
(RB, UB OR UG PLATING REQ'D)
BLANK= (UB OR UG PLATING)
PIN QUANTITY:
(SEE TABLE 1)
SOLDER TAIL:
02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18]
THICK BOARD

PLATING:
RB = 30μ" [0.76μm] AVG. GOLD
200μ" [5.08μm] MATTE TIN (RIA, E1 & C1 APPLY)
UG = 15μ" [0.38μm] AVG. GOLD
200μ" [5.08μm] 60:40 TIN-LEAD SOLDER TAILS
(RIA E3 & C2 APPLY)
UB = 30μ" [0.76μm] AVG. GOLD
200μ" [5.08μm] 60:40 TIN LEAD SOLDER TAILS
(RIA E3 & C2 APPLY)

RECOMMENDED HOLE PATTERN
SHOWN FROM COMPONENT SIDE

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
Header CODES		CHKD	CASTIGLIONE	AUG 11, 2014	MFG DATE	
DIVISION	Interconnect Solutions	DIVISION CODE	EMSD	APPR	R. SCHERER	DATE
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED				
THIRD ANGLE PROJECTION		INCHES .00 ±.01 .000 ±.005 .0000 ±				
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS 0 ± .0 ±.3 .00 ±.13 .000 ±				
MAX SURFACE ROUGHNESS		DET SURFACES				
MARKED ONLY		ANGLES				
TITLE		CAGE NUMBER		DRAWING NO.		REV.
HEADER, 4-WALL, LO-PRO, .100 X .100, SMT, STRAIGHT & RA		D78-5100-0770-7		2500 SERIES		N
MODEL		LISTS		YES		NO
SHT 2 OF 5						

3M™ FOUR-WALL HEADER, 2500 SERIES
.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE

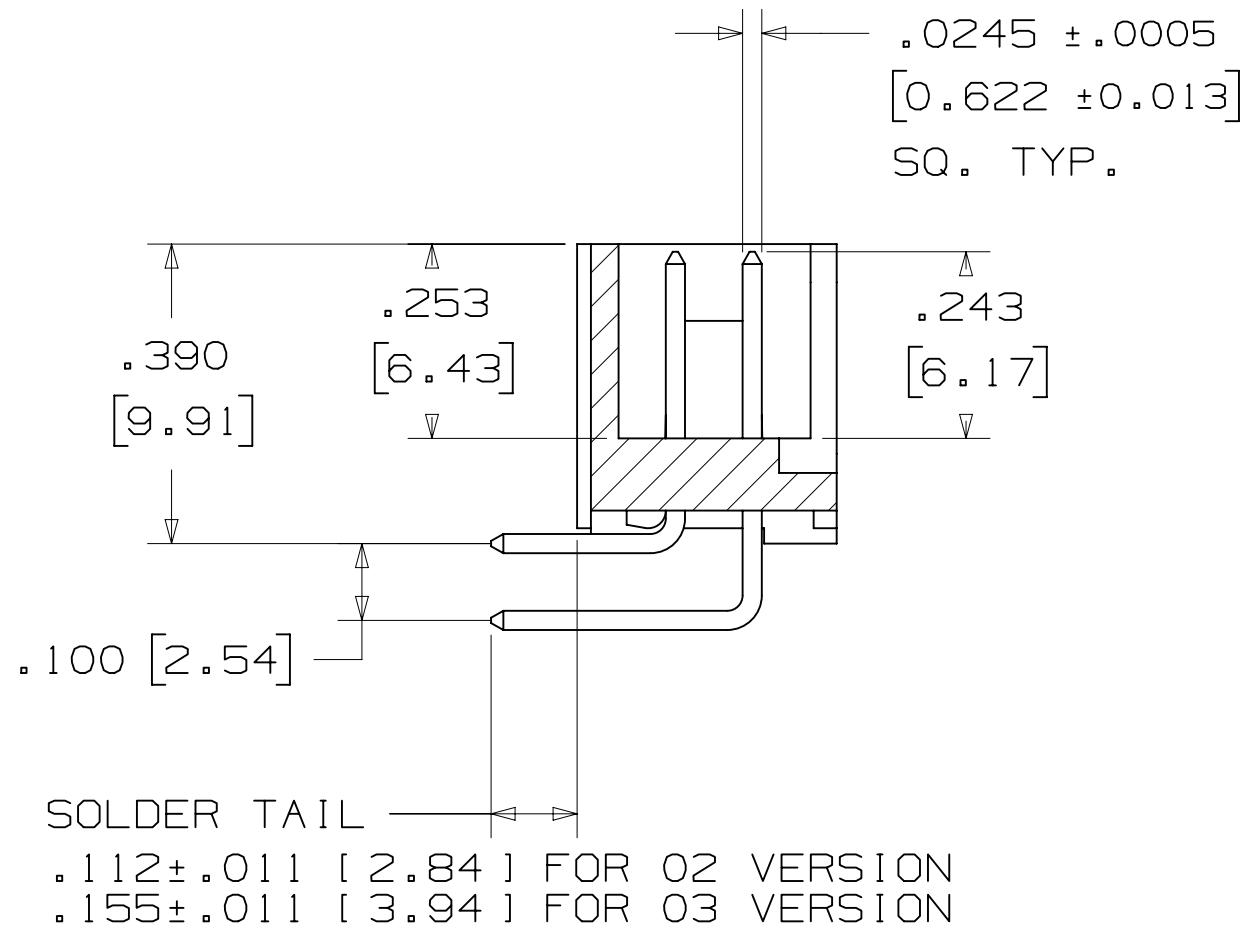

SECTION B - B

TABLE 1				
PIN QTY.	DIM. "A"	DIM. "B"	POLARIZING NOTCHES	PIN QTY.
06	.588 [14.94]	.508 [12.90]	B	06
08	.688 [17.48]	.608 [15.44]	B	08
10	.788 [20.02]	.708 [17.98]	BC	10
14	.988 [25.10]	.908 [23.06]	BCDE	14
16	1.088 [27.64]	1.008 [25.60]	ABCDE	16
20	1.288 [32.72]	1.208 [30.68]	ABCDE	20
24	1.488 [37.80]	1.408 [35.76]	ABCDE	24
26	1.588 [40.34]	1.508 [38.30]	ABCDE	26
30	1.788 [45.42]	1.708 [43.38]	ABCDE	30
34	1.988 [50.50]	1.908 [48.46]	ABCDE	34
36	2.088 [53.04]	2.008 [51.00]	ABCDE	36
40	2.288 [58.12]	2.208 [56.08]	ABCDE	40
50	2.788 [70.82]	2.708 [68.78]	ABCDE	50
60	3.288 [83.52]	3.208 [81.48]	ABCDE	60
64	3.488 [88.60]	3.408 [86.56]	ABCDE	64

ORDERING INFORMATION
RIGHT ANGLE VERSION


X25XX-50XX-XX

N= HIGH TEMP BLACK (PCT)
(RB, UB OR UG PLATING REQ'D)
BLANK= (UB OR UG PLATING)

PIN QUANTITY:
(SEE TABLE 1)

SOLDER TAIL:
02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18] THICK BOARD

PLATING:
RB = 30μ" [0.76μm] AVG. GOLD
200μ" [5.08μm] MATTE TIN (RIA, E1 & C1 APPLY)
UG = 15μ" [0.38μm] AVG. GOLD
200μ" [5.08μm] 60:40 TIN-LEAD SOLDER TAILS
(RIA E3 & C2 APPLY)
UB = 30μ" [0.76μm] AVG. GOLD
200μ" [5.08μm] 60:40 TIN LEAD SOLDER TAILS
(RIA E3 & C2 APPLY)

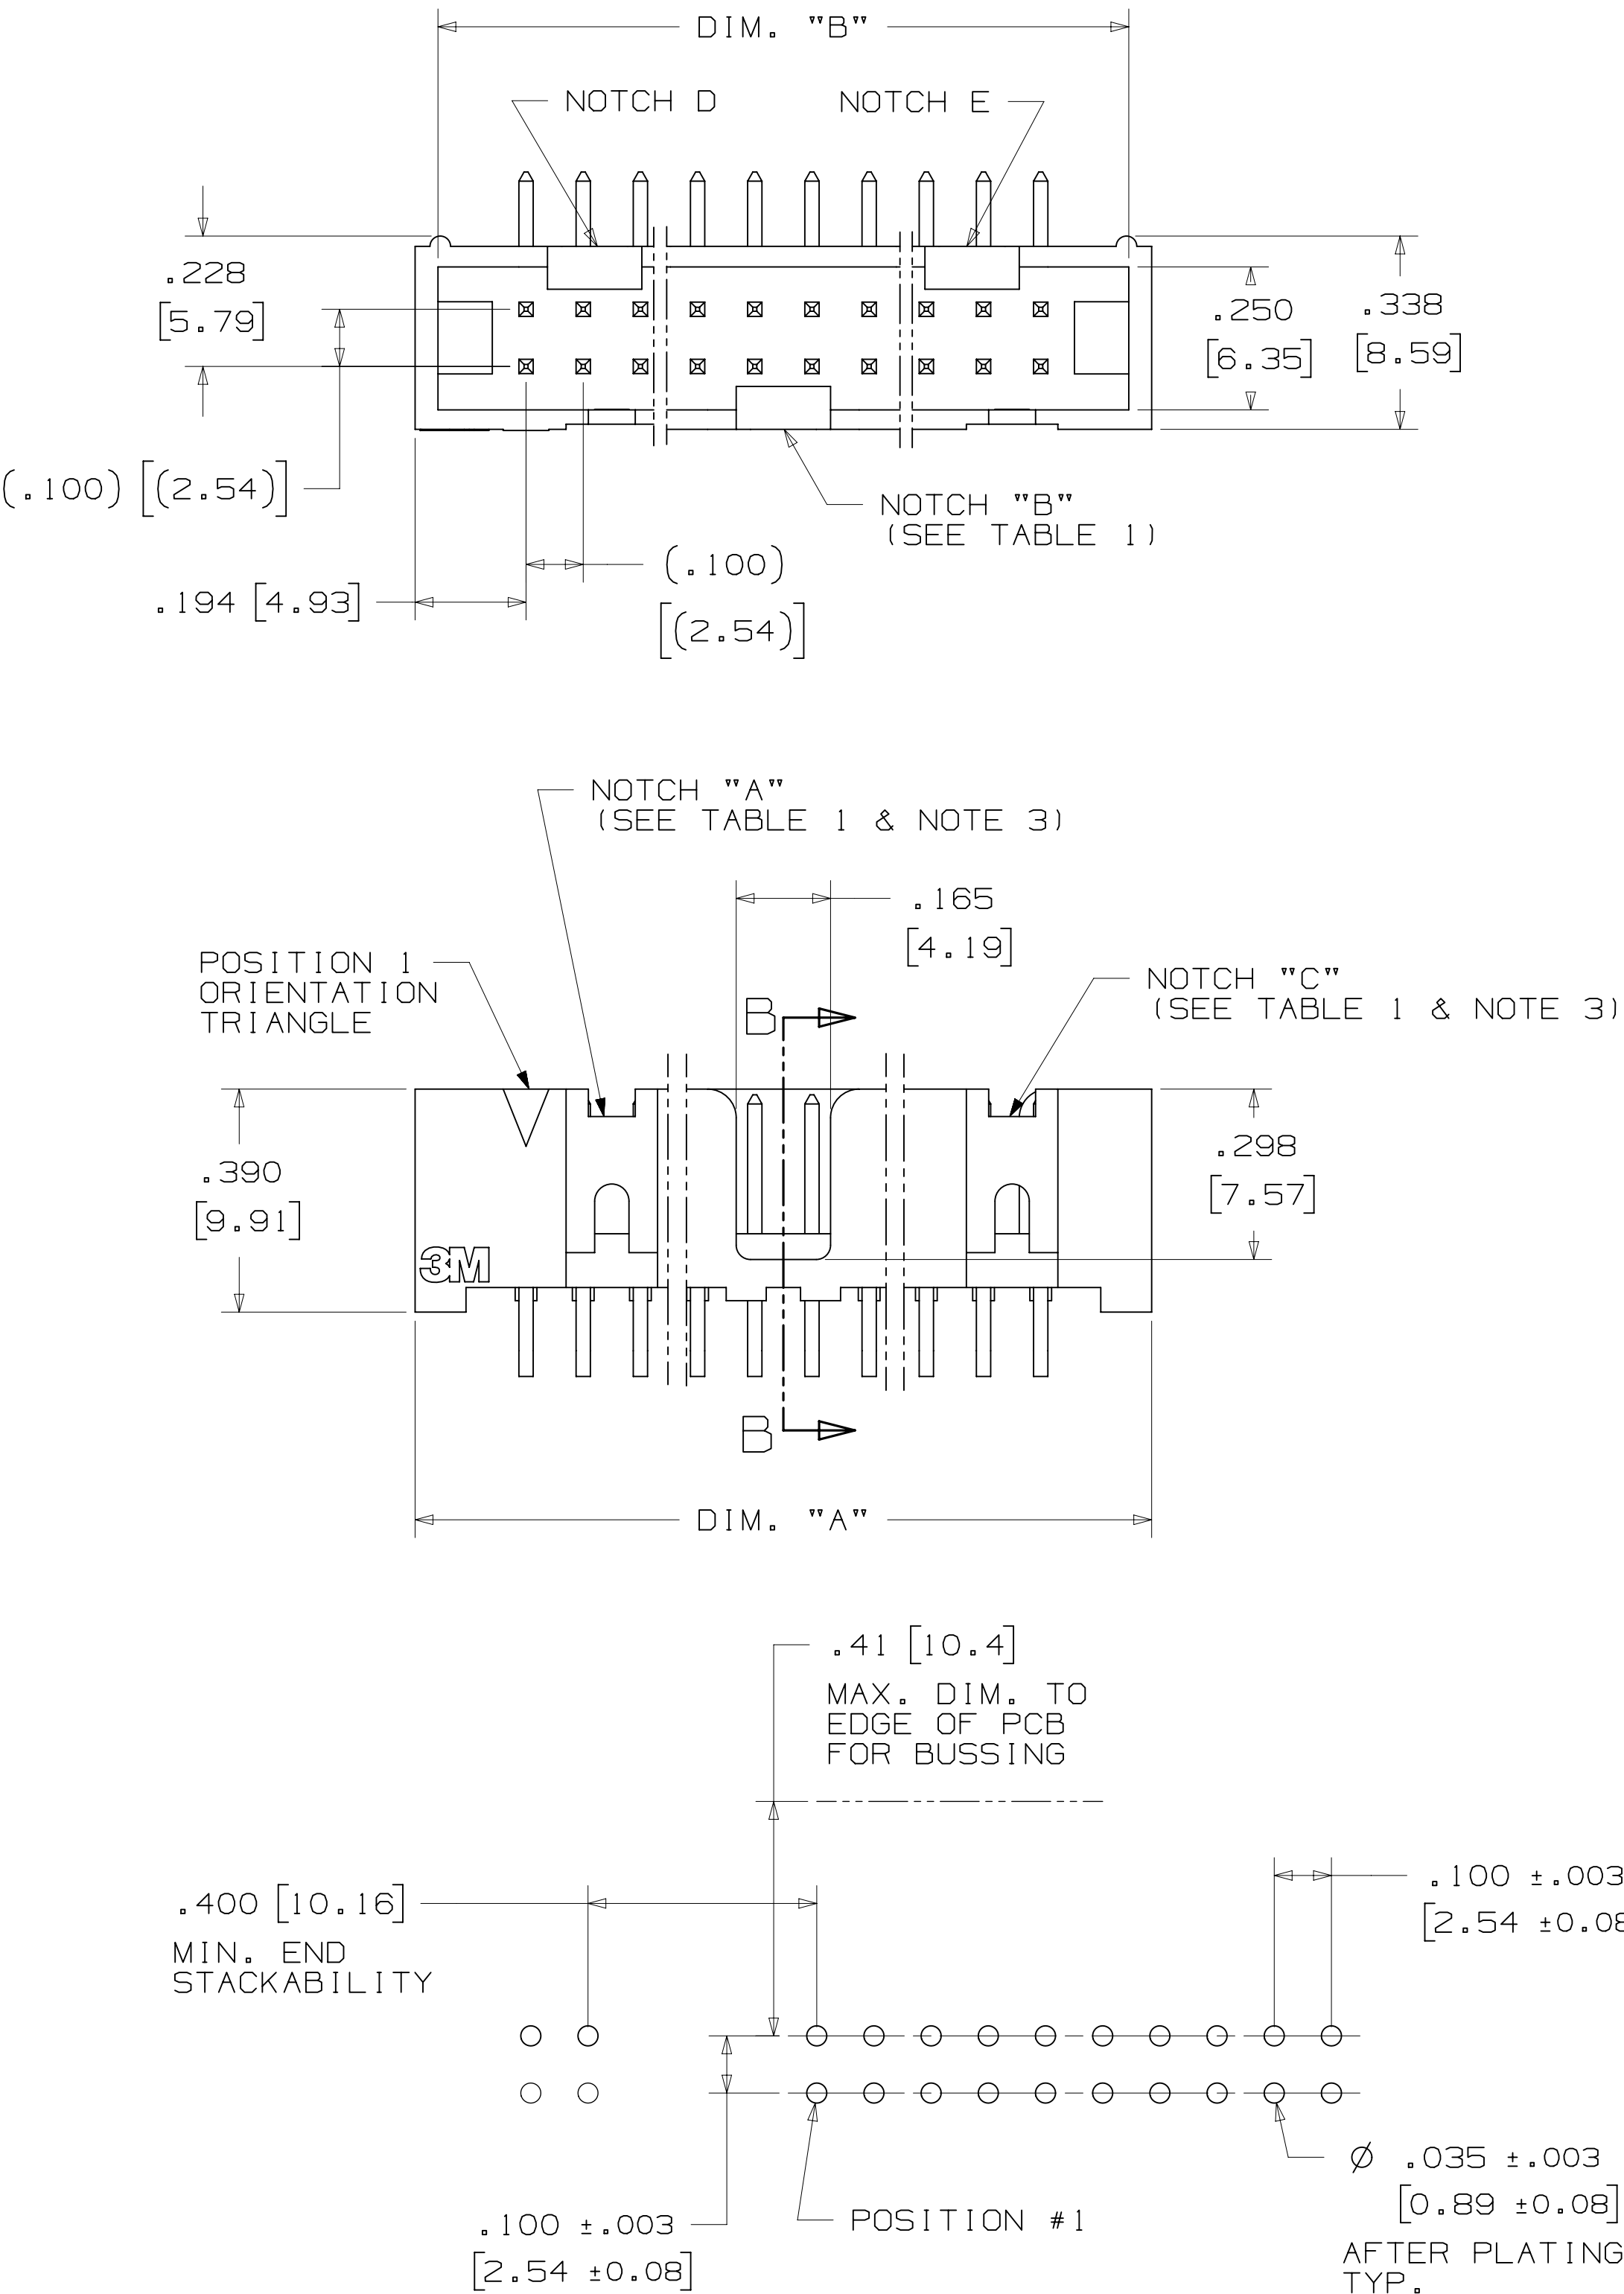


RECOMMENDED HOLE PATTERN
SHOWN FROM COMPONENT SIDE

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
XXXX	XXXX	CASTIGLIONE	AUG 11, 2014	MFG	DATE	DATE
DIVISION	DIVISION CODE	CHKD	DATE	APPR	DATE	DATE
Interconnect Solutions	EMSD			R. SCHERER	SEP 05, 2014	
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED				
THIRD ANGLE PROJECTION		INCHES .00 ±.01 .000 ±.005 .0000 ±				
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS 0 ± .0 ±.3 .00 ±.13 .000 ±				
MAX SURFACE ROUGHNESS		INCHES				
MARKED ONLY		ANGLES				
TITLE		© 3M COPYRIGHT 2016				
HEADER, 4-WALL, LO-PRO, .100 X .100, SMT, STRAIGHT & RA		3M Center St. Paul, MN 55144 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.				
CAGE NUMBER	SIZE	DRAWING NO.	REV.			
D	78-5100-0770-7	N				
MODEL	2500 SERIES	DET	LISTS	YES	NO	SHT 3 OF 5

3M™ FOUR-WALL HEADER, 2500 SERIES

.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE

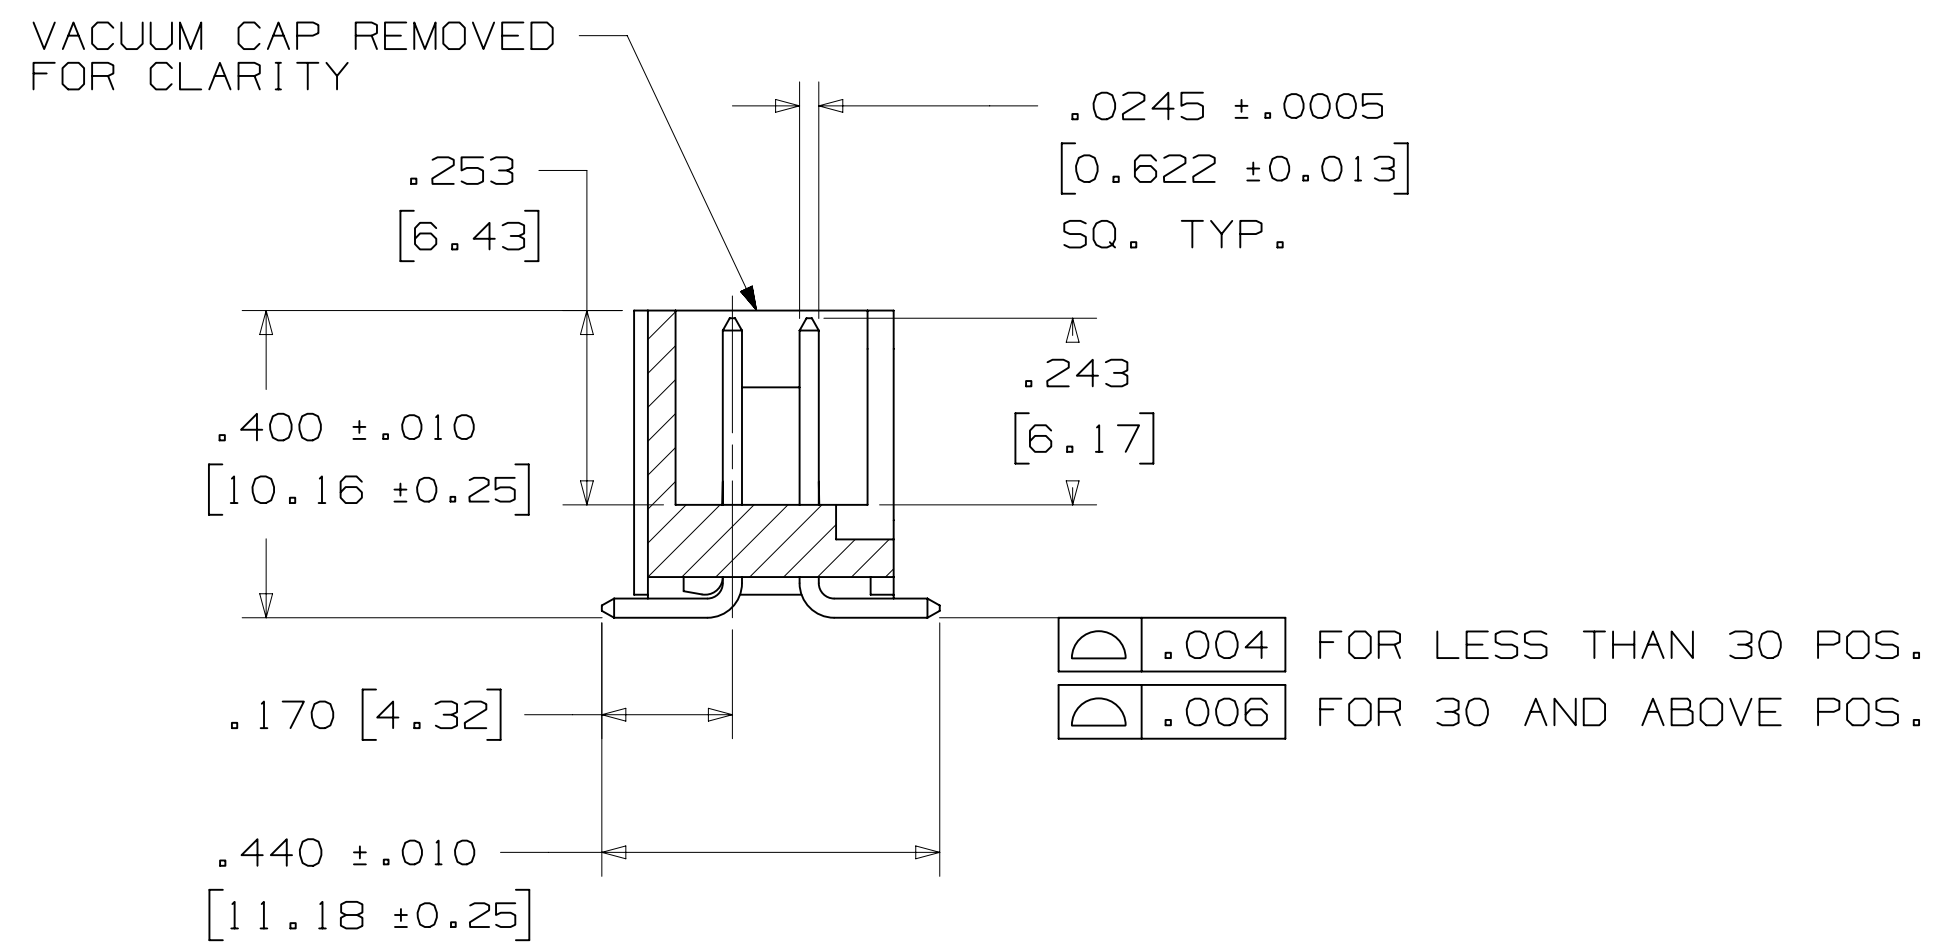

SECTION C - C

PIN QTY.	DIM. "A"	DIM. "B"	POLARIZING NOTCHES	TAPE AND REEL PKG CODE	PIN QTY.
06	.588 [14.94]	.508 [12.90]	B	WD (44 MM)	06
08	.688 [17.48]	.608 [15.44]	B	WD (44 MM)	08
10	.788 [20.02]	.708 [17.98]	BC	WD (44 MM)	10
14	.988 [25.10]	.908 [23.06]	BCDE	WD (44 MM)	14
16	1.088 [27.64]	1.008 [25.60]	ABCDE	WD (44 MM)	16
20	1.288 [32.72]	1.208 [30.68]	ABCDE	WE (56 MM)	20
24	1.488 [37.80]	1.408 [35.76]	ABCDE	WE (56 MM)	24
26	1.588 [40.34]	1.508 [38.30]	ABCDE	WE (56 MM)	26
30	1.788 [45.42]	1.708 [43.38]	ABCDE	WF (72 MM)	30
34	1.988 [50.50]	1.908 [48.46]	ABCDE	WF (72 MM)	34
36	2.088 [53.04]	2.008 [51.00]	ABCDE	WG (88 MM)	36
40	2.288 [58.12]	2.208 [56.08]	ABCDE	WG (88 MM)	40
50	2.788 [70.82]	2.708 [68.78]	ABCDE	WG (88 MM)	50
60	3.288 [83.52]	3.208 [81.48]	ABCDE	WH (120 MM)	60
64	3.488 [88.60]	3.408 [86.56]	ABCDE	WH (120 MM)	64

ORDERING INFORMATION



SURFACE MOUNT VERSION

N = HIGH TEMP BLACK (PCT)-
(RB PLATING REQ'D)

PIN QUANTITY:
(SEE TABLE 1)

- PACKAGING OPTIONS:
WX = TAPE & REEL PACKAGING (SEE TABLE 1)

PLATING:
RB = 30 μ " [0.76 μ m] AVG. GOLD
200 μ " [5.08 μ m] MATTE TIN (RIA, E1 & C1 APPLY)

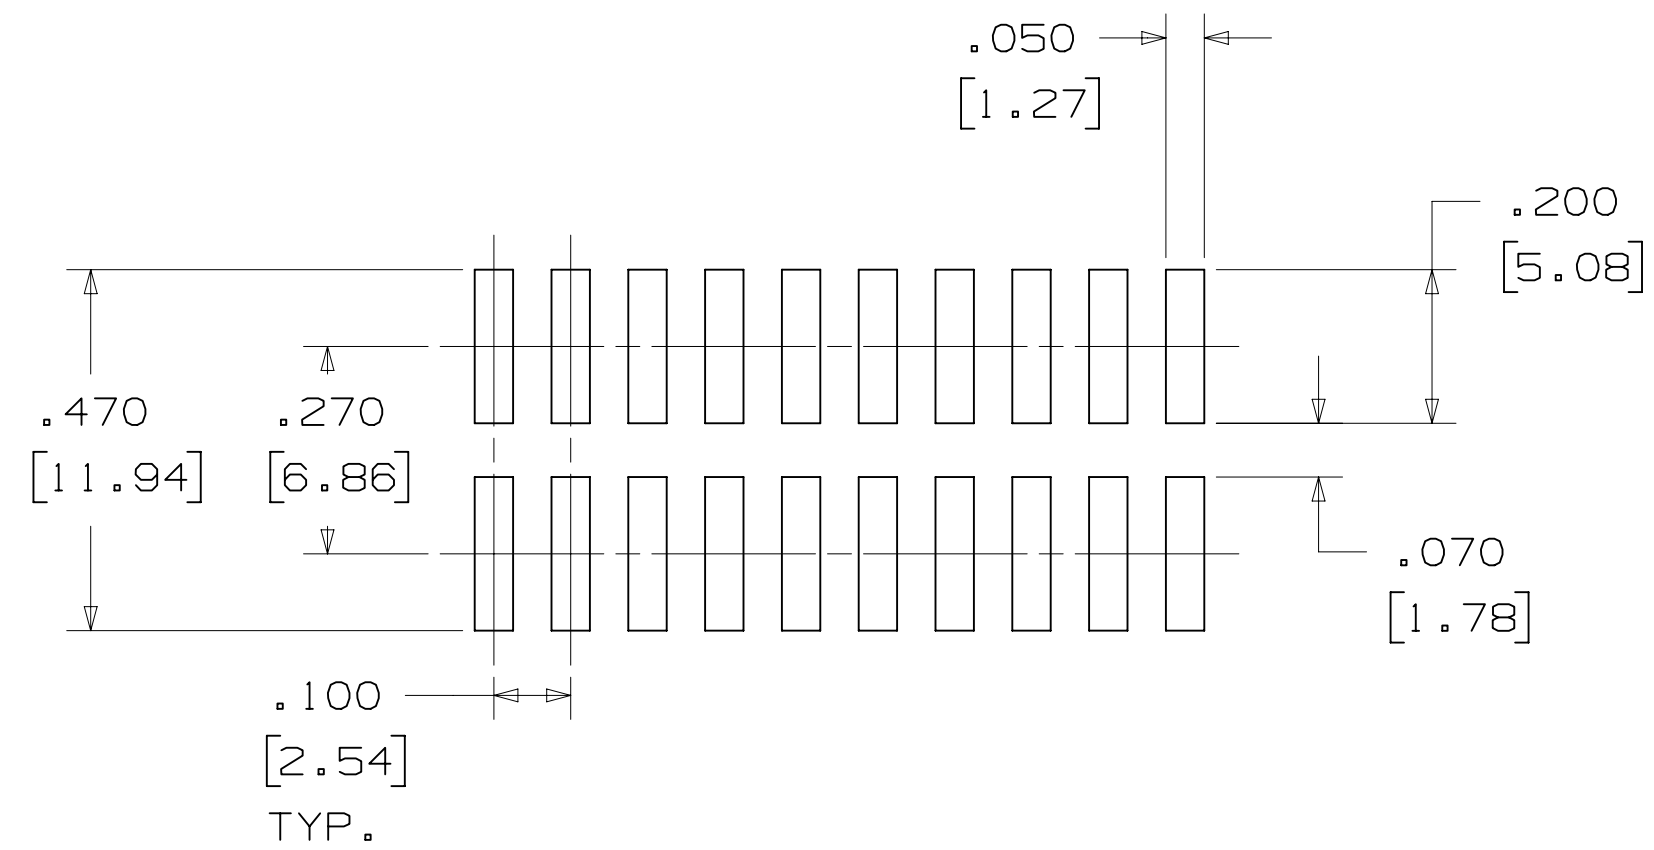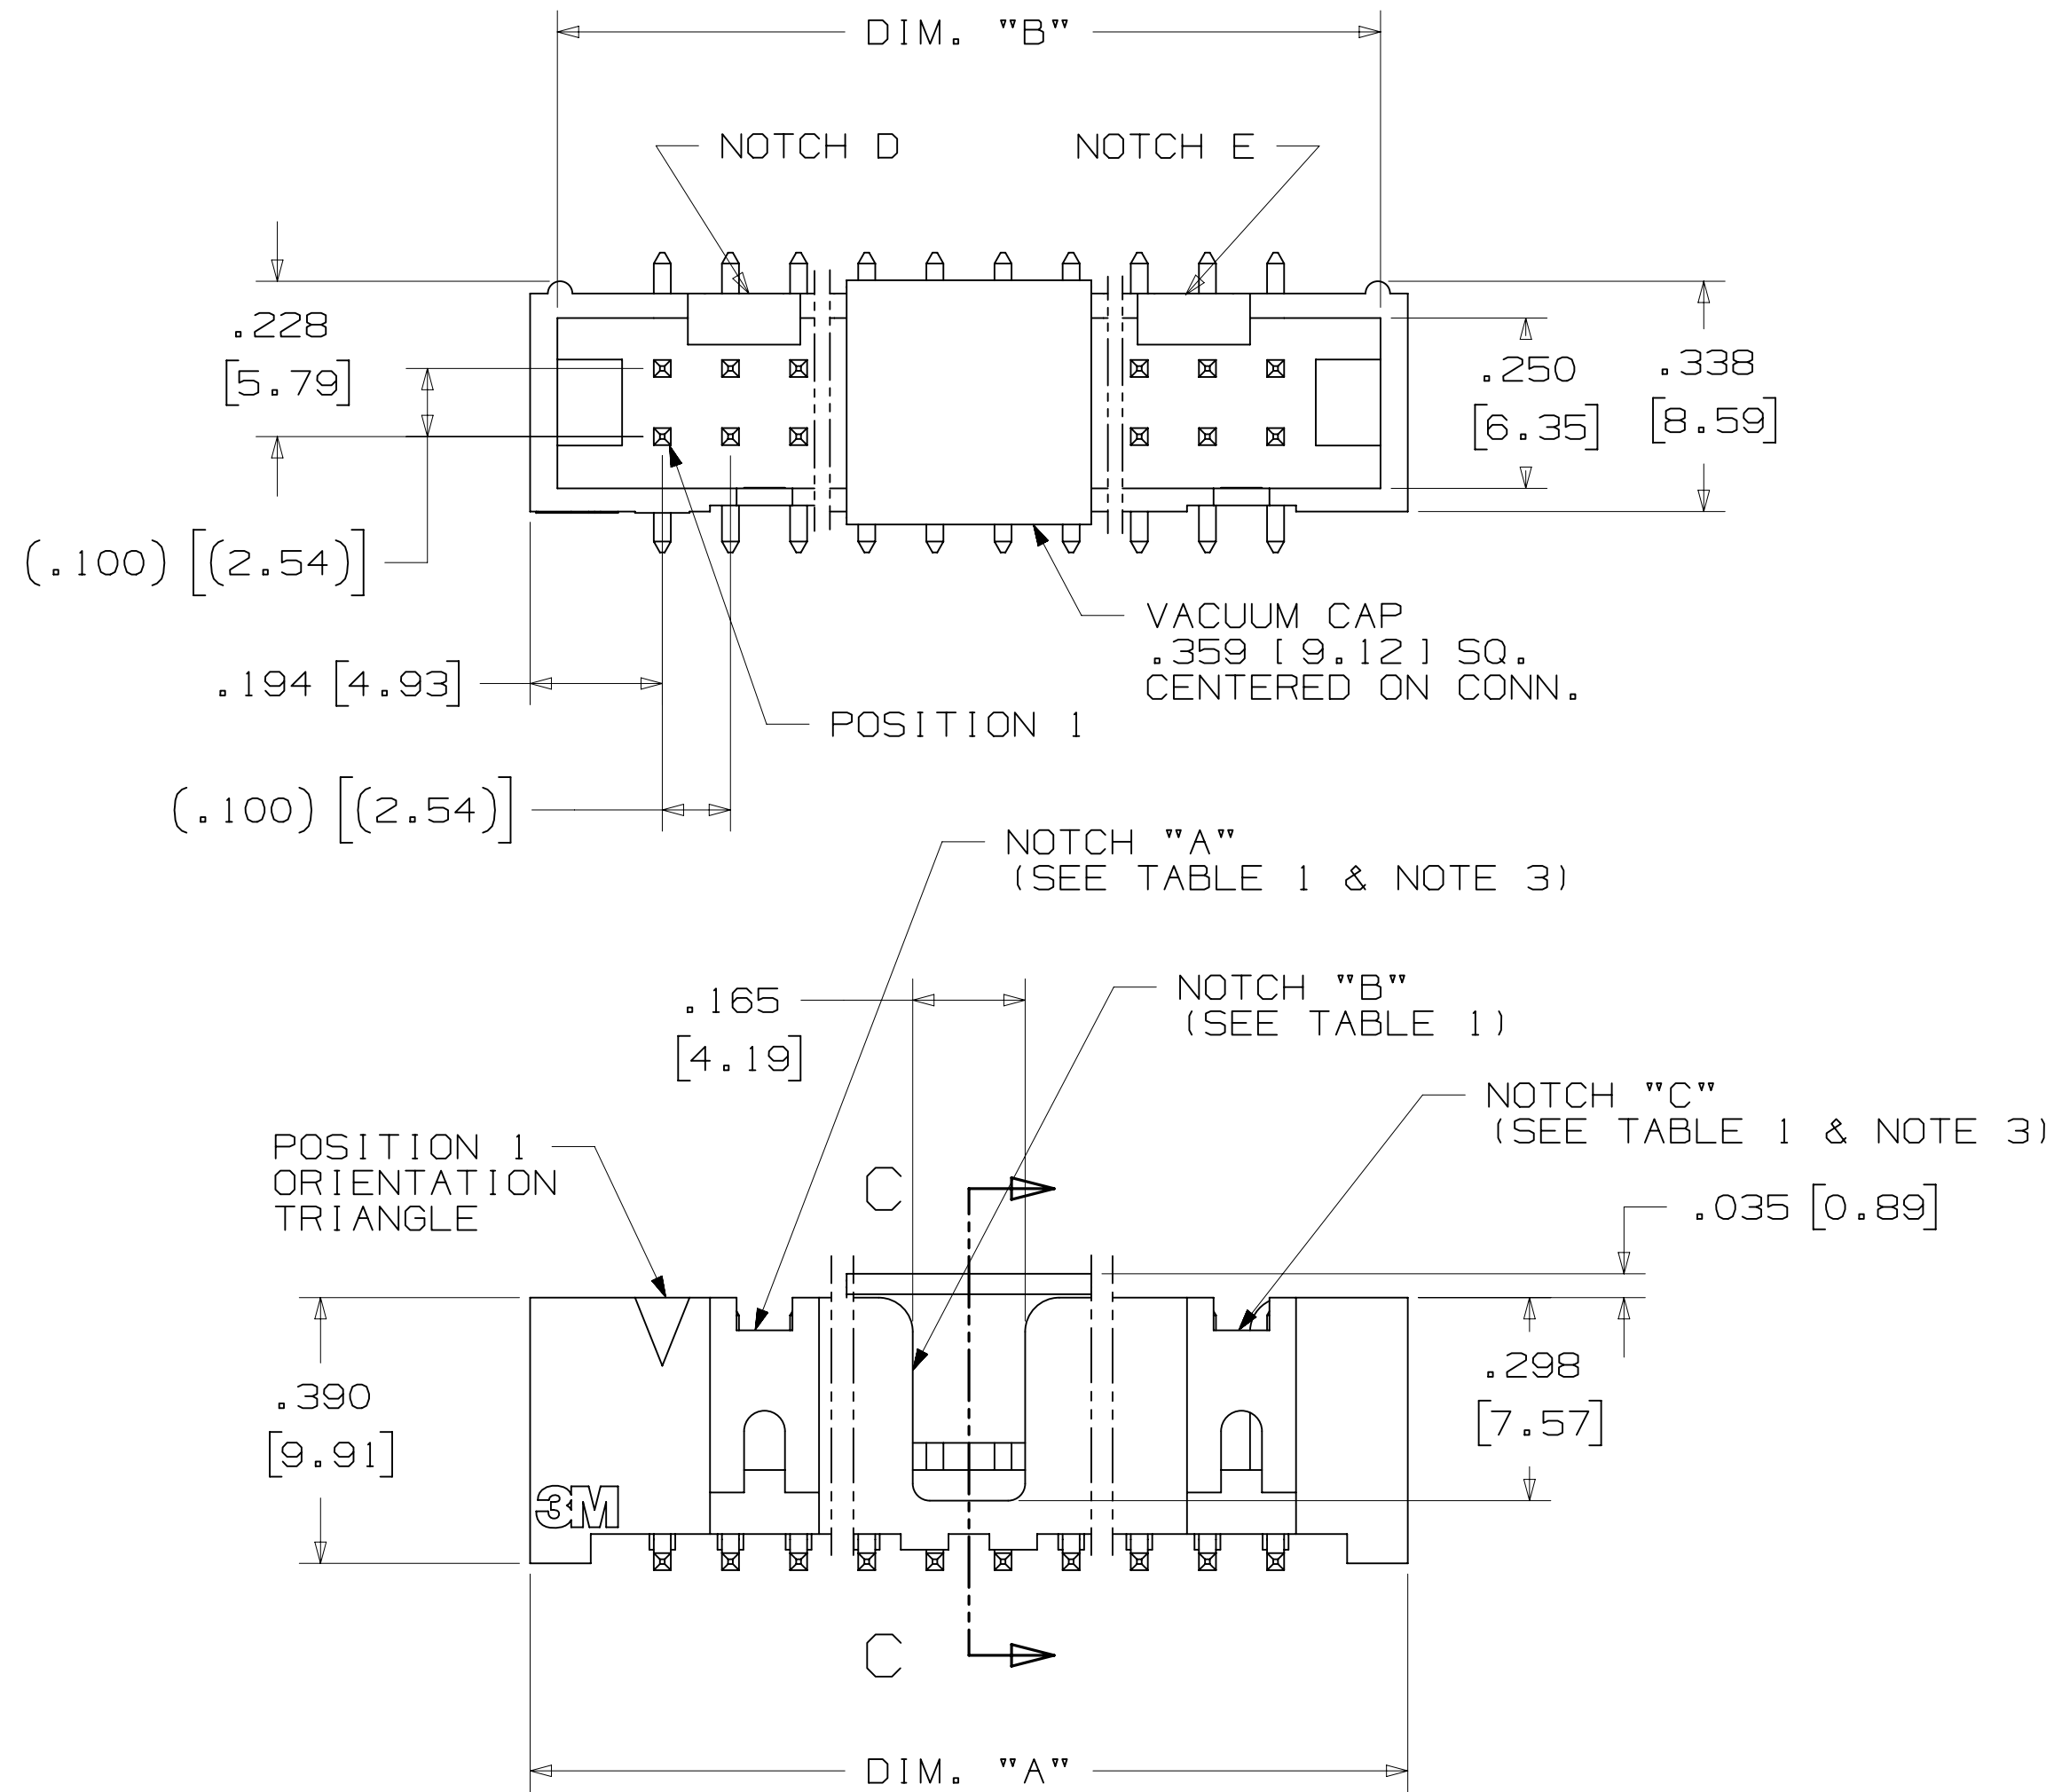

RECOMMENDED PAD LAYOUT

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRPT	CHKD
ADDEND CODES				DRPT	CAST 1 GL 1 ONE		AUG 11, 2014	DATE	
				CHKD			DATE		
				APPRV. R. SCHERER				DATE SEP 05, 2014	
DIVISION		DIVISION CODE		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2016 This document and the information it contains are 3M property and may not be reproduced or further distributed without written permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
Interconnect Solutions		EMSD		3M					
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED					
		THIRD ANGLE PROJECTION		INCHES .00 ± .0000 ± .01 ± .005 ± .0000 ±					
		INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS 0 ± .00 ± .13 ± .00 ± .000 ±					
MAX SURFACE ROUGHNESS ✓		MAX SURFACES		CAGE NUMBER D		DRAWING NO. 78-5100-0770-7		REV. N	
✓		□ MARKED ONLY		MODEL 2500 SERIES		DET. LISTS		YES ☐ NO ☒ SHT 4 OF 5	

3M™ FOUR-WALL HEADER, 2500 SERIES
.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE


PART CUSTOMIZATION

THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.

3M HAS SEVERAL CAPABILITIES THAT CAN PROVIDE A PART TAILORED TO YOUR SPECIFIC NEEDS. ASK YOUR 3M SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR MORE DETAILS.

- * SELECTIVE PIN REMOVAL (FOR BOARD ASSEMBLY POLARIZATION).
- * DIFFERENT PIN LENGTHS.


POLARIZING KEY

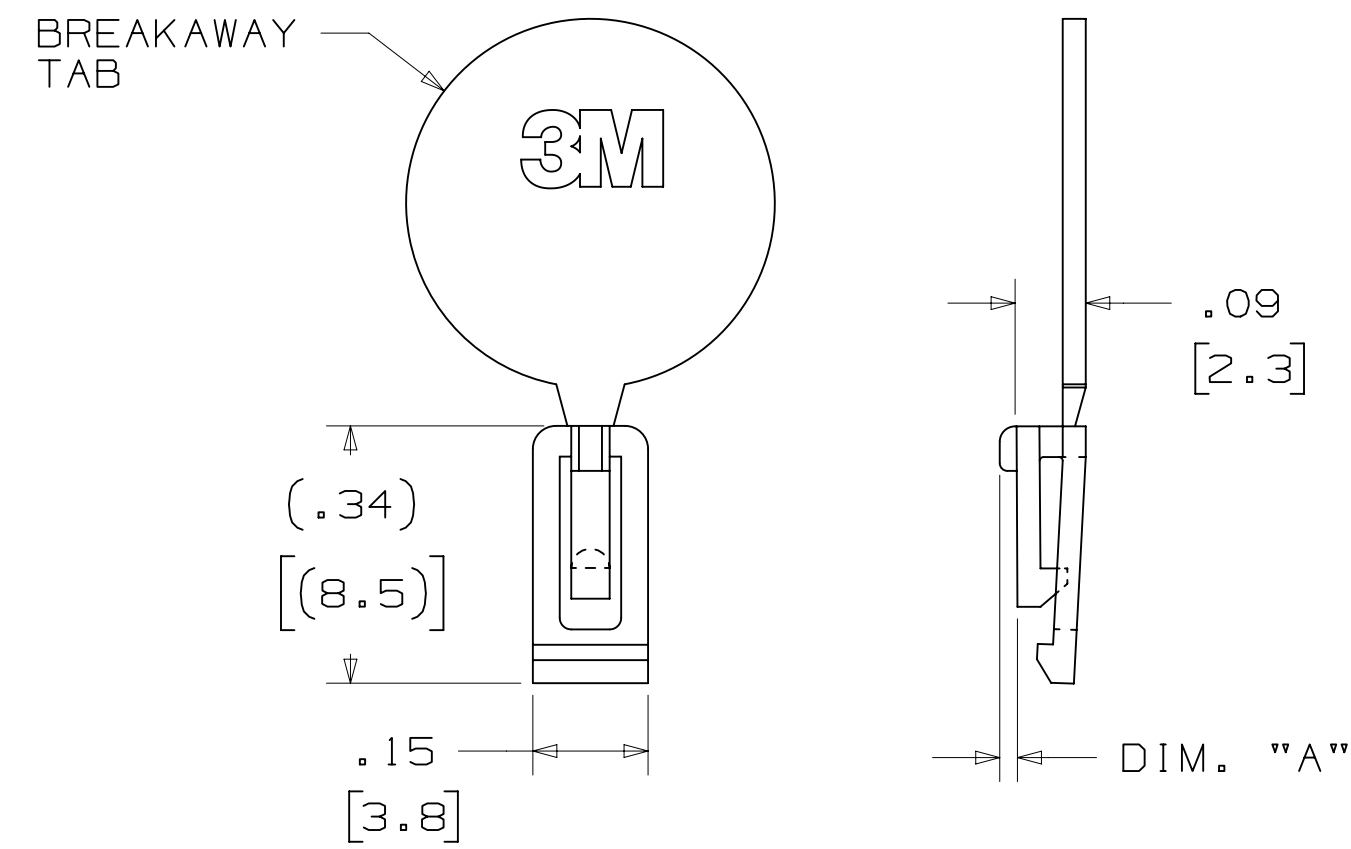

3M PART NO.	MATERIAL	COLOR	DIM. "A"
N3518	LCP	BLACK	.02

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO ADHERE KEYS.


LOW PROFILE LATCH

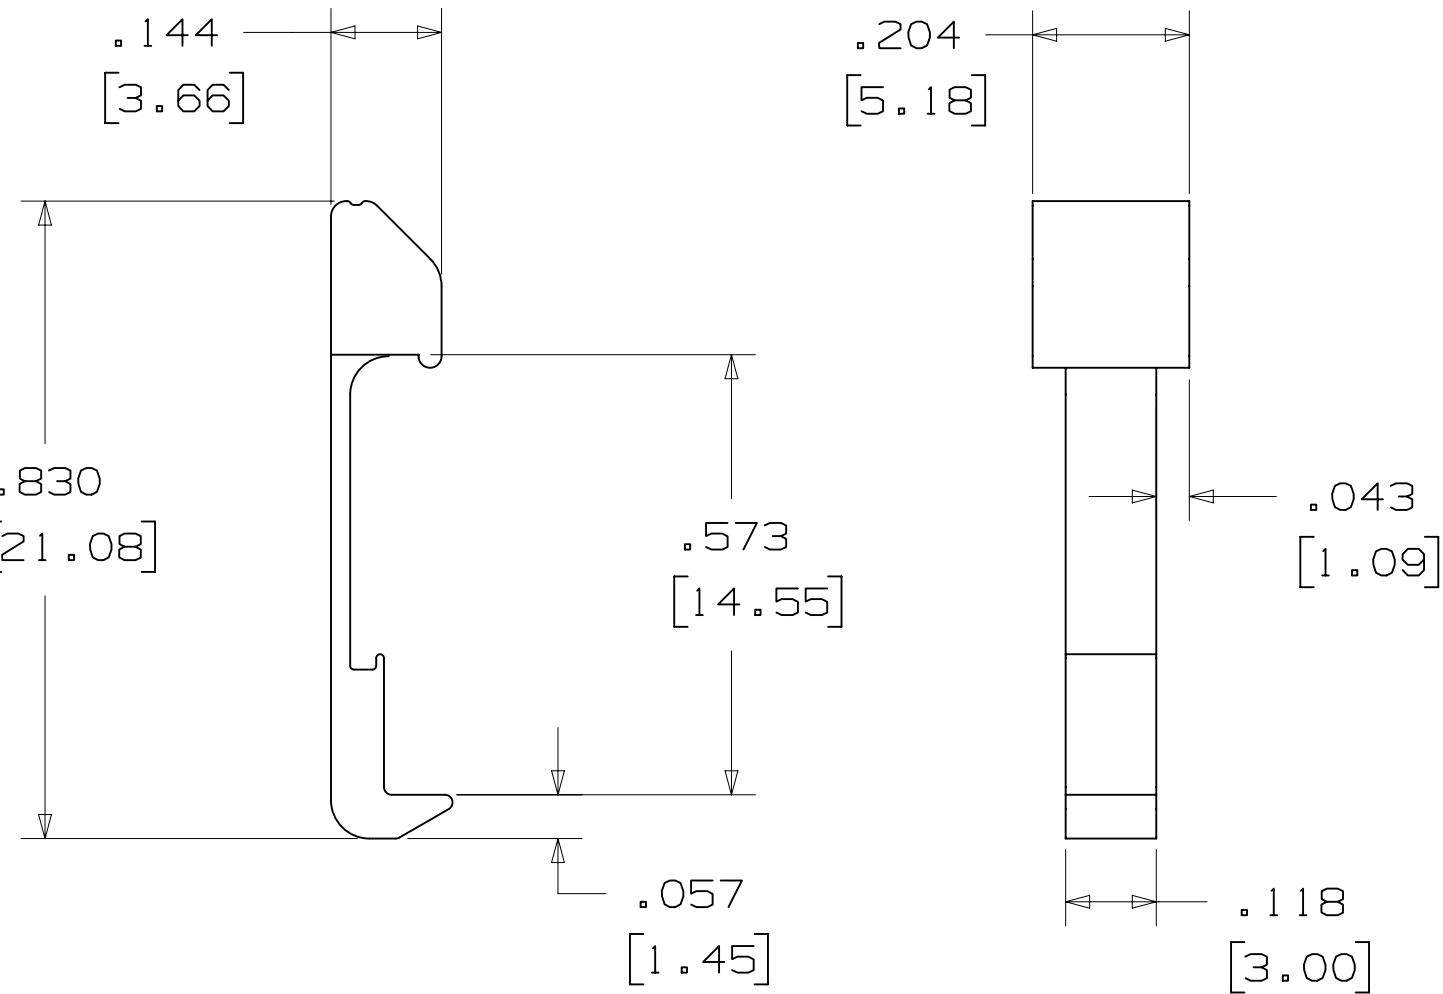

PART NO.	MATERIAL	COLOR
3505-33B	NYLON	BLACK



NOTE:
LATCHES NOT COMPATIBLE WITH REFLOW SOLDERING.
ATTACH LATCHES AFTER SOLDERING.

POLARIZING POST

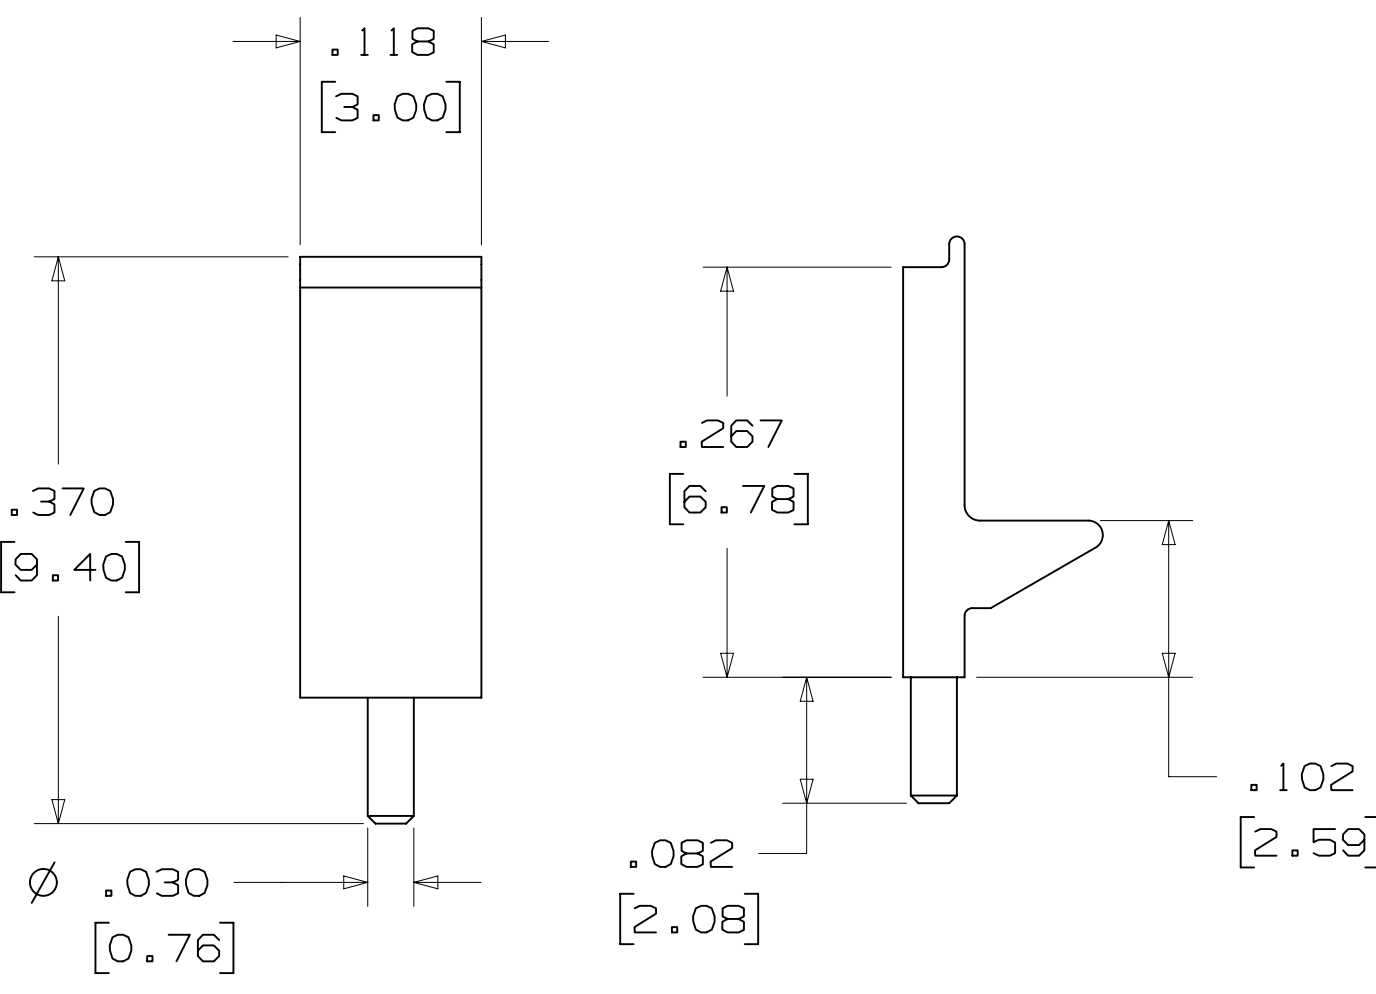

PART NO.	MATERIAL	COLOR
3201-3	PCT	BLACK

SHORT/LONG SOCKET RETAINER CLIP

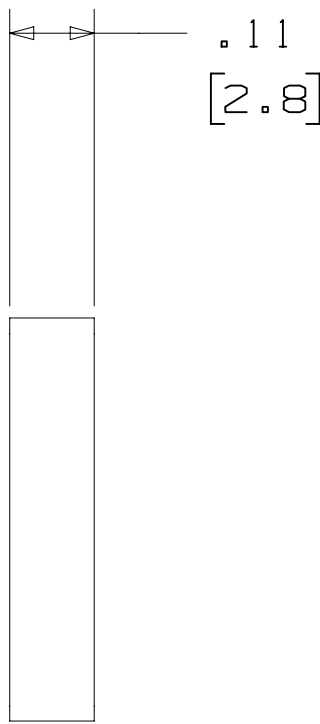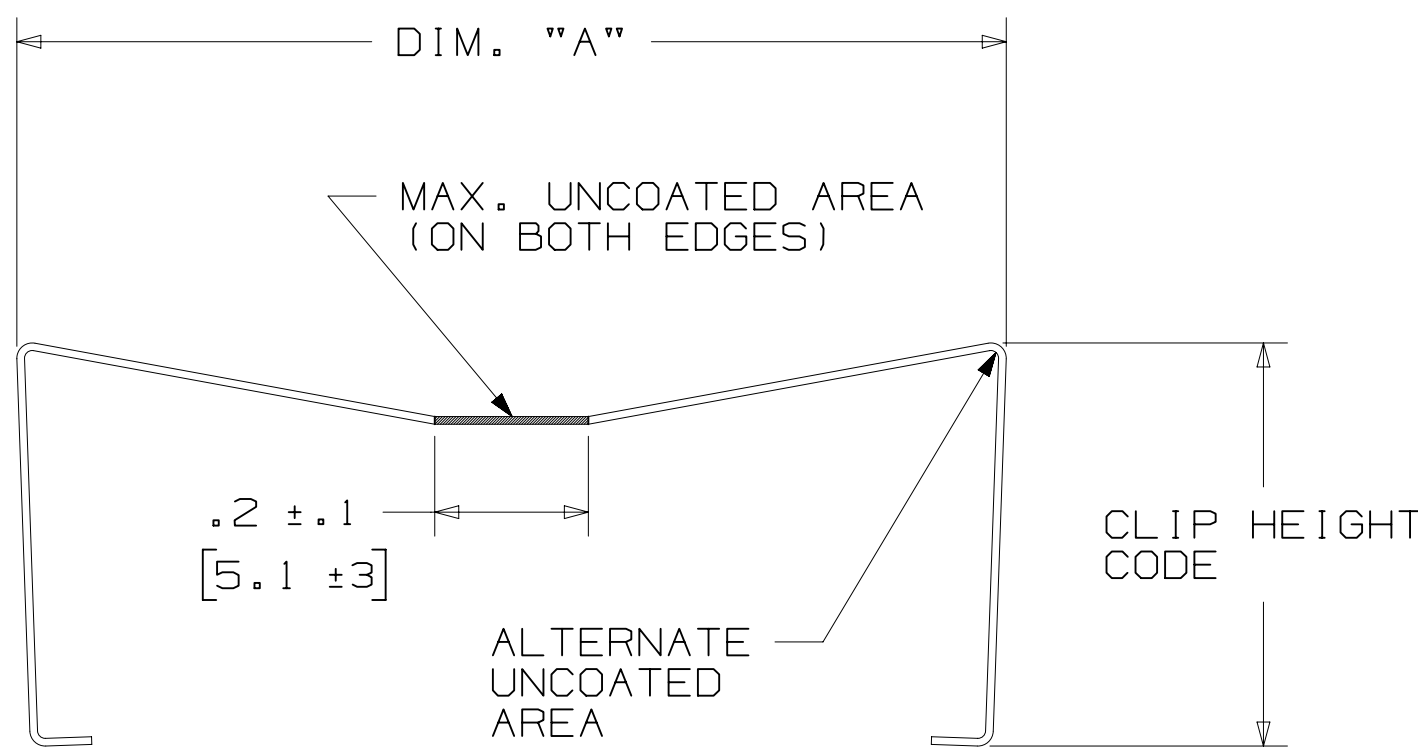

PIN QTY.	DIM. "A"
06	N/A
08	N/A
10	.81 [20.6]
14	1.02 [25.9]
16	1.12 [28.4]
20	1.32 [33.5]
24	1.52 [38.7]
26	1.63 [41.4]
30	1.83 [46.4]
34	2.03 [51.6]
36	N/A
40	2.33 [59.2]
50	2.83 [71.9]
60	3.33 [84.6]
64	3.53 [89.7]

NOTE:
STAINLESS STEEL WITH GRAY POLYURETHANE COATING.

3505-8XXX

CLIP HEIGHT CODE — PIN COUNT (SEE TABLE)
0 = .31 [7.9] FOR SOCKETS WITHOUT STRAIN RELIEF
1 = .53 [13.5] FOR SOCKETS WITH STRAIN RELIEF

NOTE:
1) THE FOLLOWING RETAINER CLIPS HAVE BEEN DISCONTINUED:
3505-8064
3505-8124
3505-8150

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
800000		1		AUG 11, 2014		
800000		2		AUG 11, 2014		
800000		3		AUG 11, 2014		
800000		4		AUG 11, 2014		
800000		5		AUG 11, 2014		
800000		6		AUG 11, 2014		
800000		7		AUG 11, 2014		
800000		8		AUG 11, 2014		
800000		9		AUG 11, 2014		
800000		10		AUG 11, 2014		
800000		11		AUG 11, 2014		
800000		12		AUG 11, 2014		
800000		13		AUG 11, 2014		
800000		14		AUG 11, 2014		
800000		15		AUG 11, 2014		
800000		16		AUG 11, 2014		
800000		17		AUG 11, 2014		
800000		18		AUG 11, 2014		
800000		19		AUG 11, 2014		
800000		20		AUG 11, 2014		
800000		21		AUG 11, 2014		
800000		22		AUG 11, 2014		
800000		23		AUG 11, 2014		
800000		24		AUG 11, 2014		
800000		25		AUG 11, 2014		
800000		26		AUG 11, 2014		
800000		27		AUG 11, 2014		
800000		28		AUG 11, 2014		
800000		29		AUG 11, 2014		
800000		30		AUG 11, 2014		
800000		31		AUG 11, 2014		
800000		32		AUG 11, 2014		
800000		33		AUG 11, 2014		
800000		34		AUG 11, 2014		
800000		35		AUG 11, 2014		
800000		36		AUG 11, 2014		
800000		37		AUG 11, 2014		
800000		38		AUG 11, 2014		
800000		39		AUG 11, 2014		
800000		40		AUG 11, 2014		
800000		41		AUG 11, 2014		
800000		42		AUG 11, 2014		
800000		43		AUG 11, 2014		
800000		44		AUG 11, 2014		
800000		45		AUG 11, 2014		
800000		46		AUG 11, 2014		
800000		47		AUG 11, 2014		
800000		48		AUG 11, 2014		
800000		49		AUG 11, 2014		
800000		50		AUG 11, 2014		
800000		51		AUG 11, 2014		
800000		52		AUG 11, 2014		
800000		53		AUG 11, 2014		
800000		54		AUG 11, 2014		
800000		55		AUG 11, 2014		
800000		56		AUG 11, 2014		
800000		57		AUG 11, 2014		
800000		58		AUG 11, 2014		
800000		59		AUG 11, 2014		
800000		60		AUG 11, 2014		
800000		61		AUG 11, 2014		
800000		62		AUG 11, 2014		
800000		63		AUG 11, 2014		
800000		64		AUG 11, 2014		
800000		65		AUG 11, 2014		
800000		66		AUG 11, 2014		
800000		67		AUG 11, 2014		
800000		68		AUG 11, 2014		
800000		69		AUG 11, 2014		
800000		70		AUG 11, 2014		
800000		71		AUG 11, 2014		
800000		72		AUG 11, 2014		
800000		73		AUG 11, 2014		
800000		74		AUG 11, 2014		
800000		75		AUG 11, 2014		
800000		76		AUG 11, 2014		
800000		77		AUG 11, 2014		
800000		78		AUG 11, 2014		
800000		79		AUG 11, 2014		
800000		80		AUG 11, 2014		
800000		81		AUG 11, 2014		
800000		82		AUG 11, 2014		
800000		83		AUG 11, 2014		
800000		84		AUG 11, 2014		
800000		85		AUG 11, 2014		
800000		86		AUG 11, 2014		
800000		87		AUG 11, 2014		
800000		88		AUG 11, 2014		
800000		89		AUG 11, 2014		
800000		90		AUG 11, 2014		
800000		91		AUG 11, 2014		
800000		92		AUG 11, 2014		
800000		93		AUG 11, 2014		
800000		94		AUG 11, 2014		
800000		95		AUG 11, 2014		
800000		96		AUG 11, 2014		
800000		97		AUG 11, 2014		
800000		98		AUG 11, 2014		
800000		99		AUG 11, 2014		
800000		100		AUG 11, 2014		
800000		101		AUG 11, 2014		
800000		102		AUG 11, 2014		
800000		103		AUG 11, 2014		
800000		104		AUG 11, 2014		
800000		105		AUG 11, 2014		
800000		106		AUG 11, 2014		
800000		107		AUG 11, 2014		
800000		108		AUG 11, 2014		
800000		109		AUG 11, 2014		
800000		110		AUG 11, 2014		
800000		111		AUG 11, 2014		
800000		112		AUG 11, 2014		
800000		113		AUG 11, 2014		
800000		114		AUG 11, 2014		
800000		115		AUG 11, 2014		
800000		116		AUG 11, 2014		
800000		117		AUG 11, 2014		
800000		118		AUG 11, 2014		
800000		119		AUG 11, 2014		
800000		120		AUG 11, 2014		
800000		121		AUG 11, 2014		
800000		122		AUG 11, 2014		
800000		123		AUG 11, 2014		
800000		124		AUG 11, 2014		
800000		125		AUG 11, 2014		
800000		126		AUG 11, 2014		
800000		127		AUG 11, 2014		
800000		128		AUG 11, 2014		
800000		129		AUG 11, 2014		
800000		130		AUG 11, 2014		
800000		131		AUG 11, 2014		
800000		132		AUG 11, 2014		
800000		133		AUG 11, 2014		
800000		134		AUG 11, 2014		
800000		135		AUG 11, 2014		
800000		136		AUG 11, 2014		
800000		137		AUG 11, 2014		
800000		138		AUG 11, 2014		
800000		139		AUG 11, 2014		
800000		140		AUG 11, 2014		
800000		141		AUG 11, 2014		
800000		142		AUG 11, 2014		
800000		143		AUG 11, 2014		
800000		144		AUG 11, 2014		
800000		145		AUG 11, 2014		
800000		146		AUG 11, 2014		
800000		147		AUG 11, 2014		
800000		148		AUG 11, 2014		
800000		149		AUG 11, 2014		
800000		150		AUG 11, 2014		
800000		151		AUG 11, 2014		
800000		152		AUG 11, 2014		
800000		153		AUG 11, 2014		
800000		154		AUG 11, 2014		
800000		155		AUG 11, 2014		
800000		156		AUG 11, 2014		
800000		157		AUG 11, 2014		
800000		158		AUG 11, 2014		
800000		159		AUG 11, 2014		
800000		160		AUG 11, 2014		
800000		161		AUG 11, 2014		
800000		162		AUG 11, 2014		
800000		163		AUG 11, 2014		
800000		164		AUG 11, 2014		
800000		165		AUG 11, 2014		
800000		166		AUG 11, 2014		
800000		167		AUG 11, 2014		
800000		168		AUG 11, 2014		
800000		169		AUG 11, 2014		
800000		170		AUG 11, 2014		
800000		171		AUG 11, 2014		
800000		172		AUG 11, 2014		
800000		173		AUG 11, 2014		
800000		174		AUG 11, 2014		
800000		175		AUG 11, 2014		
800000		176		AUG 11, 2014		
800000		177		AUG 11, 2014		
800000		178		AUG 11, 2014		
800000		179		AUG 11, 2014		
800000		180		AUG 11, 2014		
800000		181		AUG 11, 2014		
800000		182		AUG 11, 2014		
800000		183		AUG 11, 2014		
800000		184		AUG 11, 2014		
800000		185		AUG 11, 2014		
800000		186		AUG 11, 2014		
800000		187		AUG 11, 2014		
800000		188		AUG 11, 2014		
800000		189		AUG 11, 2014		
800000		190		AUG 11, 2014		
800000		191		AUG 11, 2014		
800000		192		AUG 11, 2014		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.