International
IOR Rectifier

PD - 94937

IRG4PC40UDPbF

INSULATED GATE BIPOLAR TRANSISTOR WITH
ULTRAFAST SOFT RECOVERY DIODE



V_{CES} = 600V

$V_{CE(on)\ typ.}$ = 1.72V

@V_{GE} = 15V, I_C = 20A



Features

- UltraFast: Optimized for high operating frequencies 8-40 kHz in hard switching, >200 kHz in resonant mode
- Generation 4 IGBT design provides tighter parameter distribution and higher efficiency than Generation 3
- IGBT co-packaged with HEXFRED™ ultrafast, ultra-soft recovery anti-parallel diodes for use in bridge configurations
- Industry standard TO-247AC package
- Lead-Free

Benefits

- Generation -4 IGBT's offer highest efficiencies available
- IGBT's optimized for specific application conditions
- HEXFRED diodes optimized for performance with IGBT's. Minimized recovery characteristics require less/no snubbing
- Designed to be a "drop-in" replacement for equivalent industry-standard Generation 3 IR IGBT's

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	600	V
I_C @ T_C = 25°C	Continuous Collector Current	40	A
I_C @ T_C = 100°C	Continuous Collector Current	20	
I_{CM}	Pulsed Collector Current ①	160	
I_{LM}	Clamped Inductive Load Current ②	160	
I_F @ T_C = 100°C	Diode Continuous Forward Current	15	
I_{FM}	Diode Maximum Forward Current	160	
V_{GE}	Gate-to-Emitter Voltage	± 20	V
P_D @ T_C = 25°C	Maximum Power Dissipation	160	W
P_D @ T_C = 100°C	Maximum Power Dissipation	65	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	°C
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	
	Mounting Torque, 6-32 or M3 Screw.	10 lbf•in (1.1 N•m)	

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case - IGBT	------	------	0.77	°C/W
$R_{\theta JC}$	Junction-to-Case - Diode	------	------	1.7	
$R_{\theta CS}$	Case-to-Sink, flat, greased surface	------	0.24	------	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	-----	-----	40	
Wt	Weight	------	6 (0.21)	------	g (oz)

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage③	600	----	----	V	V_{GE} = 0V, I_C = 250µA
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	----	0.63	----	V/°C	V_{GE} = 0V, I_C = 1.0mA
$V_{CE(on)}$	Collector-to-Emitter Saturation Voltage	----	1.72	2.1	V	I_C = 20A, V_{GE} = 15V
		----	2.15	----		I_C = 40A, See Fig. 2, 5
		----	1.7	----		I_C = 20A, T_J = 150°C
$V_{GE(th)}$	Gate Threshold Voltage	3.0	----	6.0		V_{CE} = V_{GE}, I_C = 250µA
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	----	-13	----	mV/°C	V_{CE} = V_{GE}, I_C = 250µA
g_{fe}	Forward Transconductance ④	11	18	----	S	V_{CE} = 100V, I_C = 20A
I_{CES}	Zero Gate Voltage Collector Current	----	----	250	µA	V_{GE} = 0V, V_{CE} = 600V
		----	----	3500		V_{GE} = 0V, V_{CE} = 600V, T_J = 150°C
V_{FM}	Diode Forward Voltage Drop	----	1.3	1.7	V	I_C = 15A, See Fig. 13
		----	1.2	1.6		I_C = 15A, T_J = 150°C
I_{GES}	Gate-to-Emitter Leakage Current	----	----	±100	nA	V_{GE} = ±20V

Switching Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	----	100	150	nC	I_C = 20A
Qge	Gate - Emitter Charge (turn-on)	----	16	25		V_{CC} = 400V, See Fig. 8
Q_{gc}	Gate - Collector Charge (turn-on)	----	40	60		V_{GE} = 15V
$t_{d(on)}$	Turn-On Delay Time	----	54	----	ns	T_J = 25°C
t_r	Rise Time	----	57	----		I_C = 20A, V_{CC} = 480V
$t_{d(off)}$	Turn-Off Delay Time	----	110	165		V_{GE} = 15V, R_G = 10Ω
t_f	Fall Time	----	80	120		Energy losses include "tail" and
E_{on}	Turn-On Switching Loss	----	0.71	----	mJ	diode reverse recovery.
E_{off}	Turn-Off Switching Loss	----	0.35	----		See Fig. 9, 10, 11, 18
E_{ts}	Total Switching Loss	----	1.10	1.5		
$t_{d(on)}$	Turn-On Delay Time	----	40	----	ns	T_J = 150°C, See Fig. 9, 10, 11, 18
t_r	Rise Time	----	52	----		I_C = 20A, V_{CC} = 480V
$t_{d(off)}$	Turn-Off Delay Time	----	200	----		V_{GE} = 15V, R_G = 10Ω
t_f	Fall Time	----	130	----		Energy losses include "tail" and
E_{ts}	Total Switching Loss	----	1.6	----	mJ	diode reverse recovery.
L_E	Internal Emitter Inductance	----	13	----	nH	Measured 5mm from package
C_{ies}	Input Capacitance	----	2100	----	pF	V_{GE} = 0V
C_{oes}	Output Capacitance	----	140	----		V_{CC} = 30V, See Fig. 7
C_{res}	Reverse Transfer Capacitance	----	34	----		f = 1.0MHz
t_{rr}	Diode Reverse Recovery Time	----	42	60	ns	T_J = 25°C, See Fig. 14, I_F = 15A
		----	74	120		T_J = 125°C, I_F = 15A
I_{rr}	Diode Peak Reverse Recovery Current	----	4.0	6.0	A	T_J = 25°C, See Fig. 15, V_R = 200V
		----	6.5	10		T_J = 125°C, V_R = 200V
Q_{rr}	Diode Reverse Recovery Charge	----	80	180	nC	T_J = 25°C, See Fig. 16, di/dt 200A/µs
		----	220	600		T_J = 125°C, di/dt 200A/µs
$di_{(rec)M}/dt$	Diode Peak Rate of Fall of Recovery During t_b	----	190	----	A/µs	T_J = 25°C
		----	160	----		T_J = 125°C

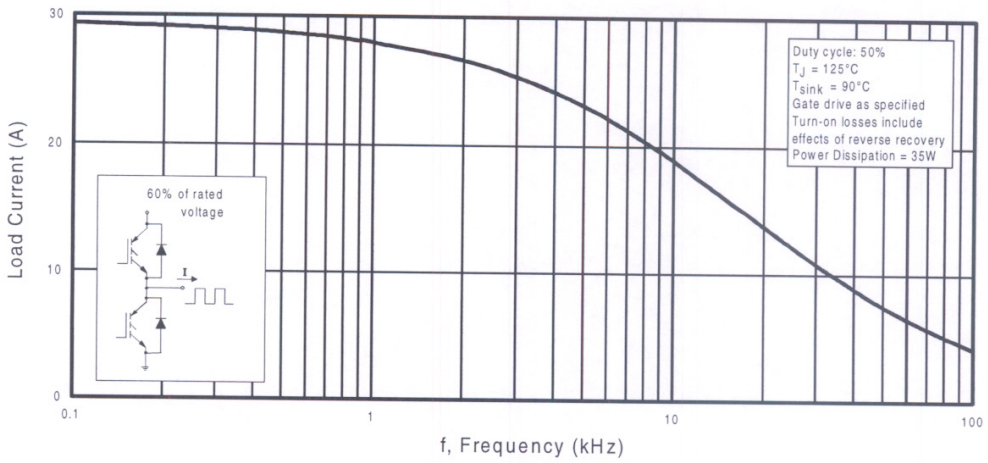

Fig. 1 - Typical Load Current vs. Frequency
(Load Current = I_{RMS} of fundamental)

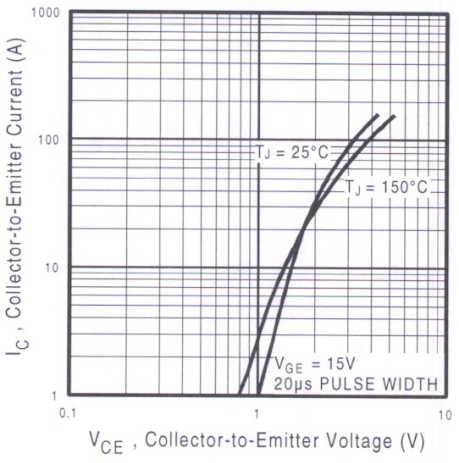

Fig. 2 - Typical Output Characteristics

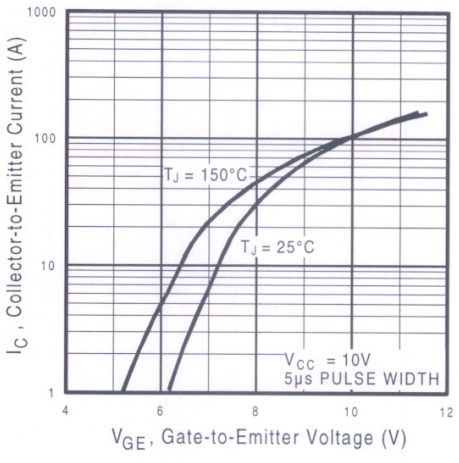

Fig. 3 - Typical Transfer Characteristics

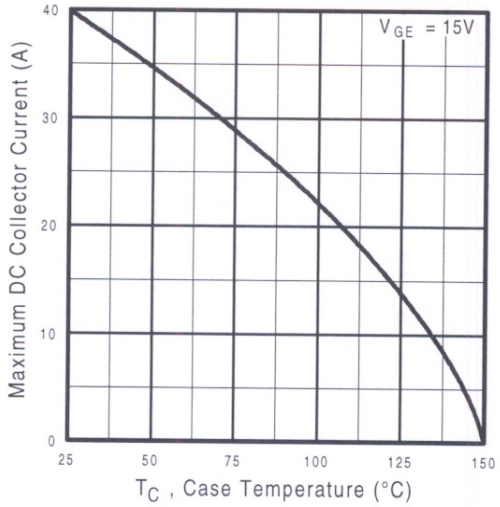

Fig. 4 - Maximum Collector Current vs. Case Temperature

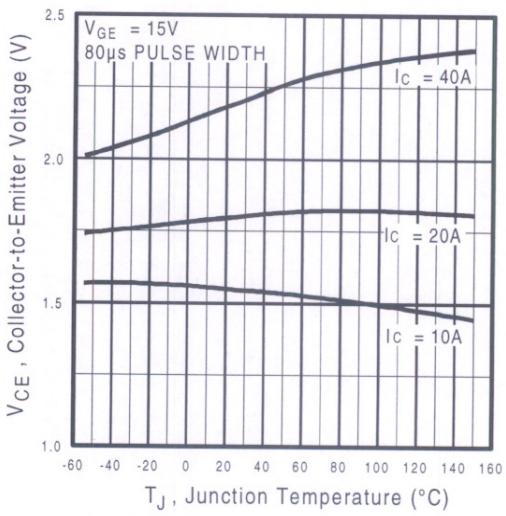

Fig. 5 - Collector-to-Emitter Voltage vs. Junction Temperature

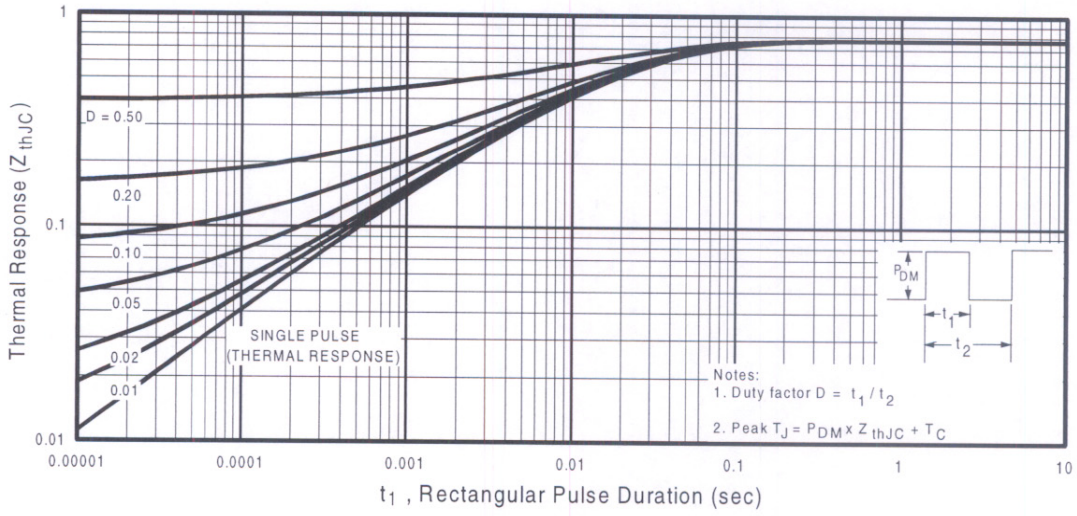

Fig. 6 - Maximum IGBT Effective Transient Thermal Impedance, Junction-to-Case

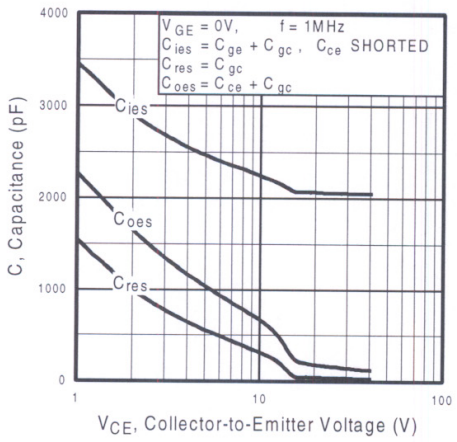

Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

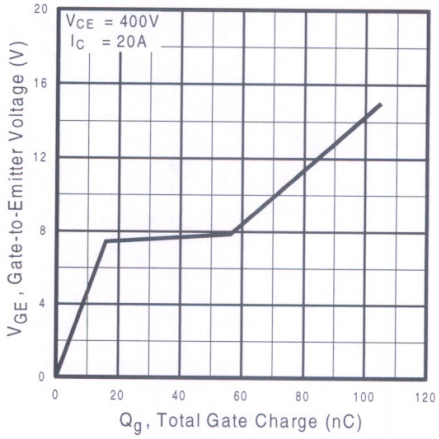

Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

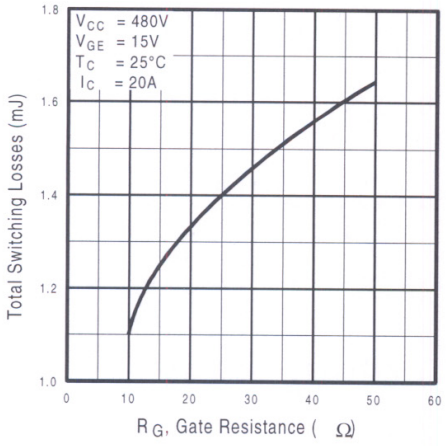

Fig. 9 - Typical Switching Losses vs. Gate Resistance

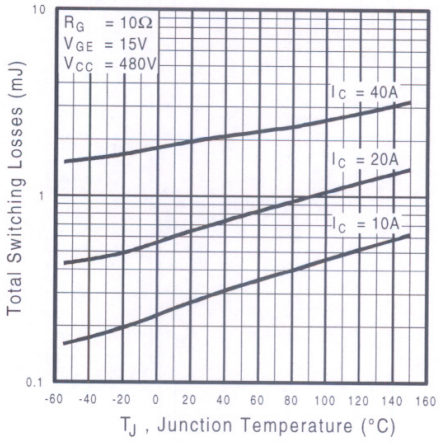

Fig. 10 - Typical Switching Losses vs. Junction Temperature

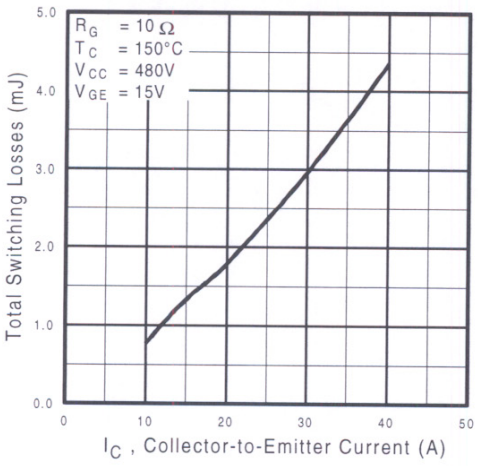

Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

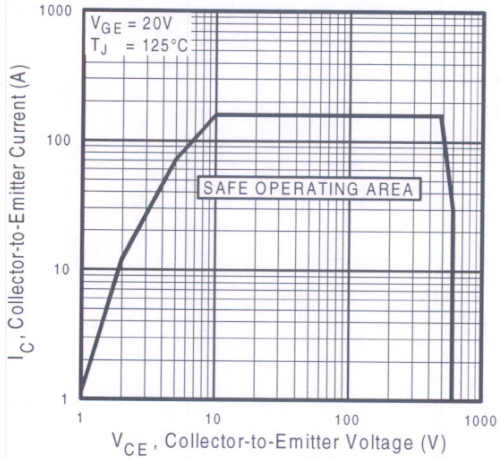

Fig. 12 - Turn-Off SOA

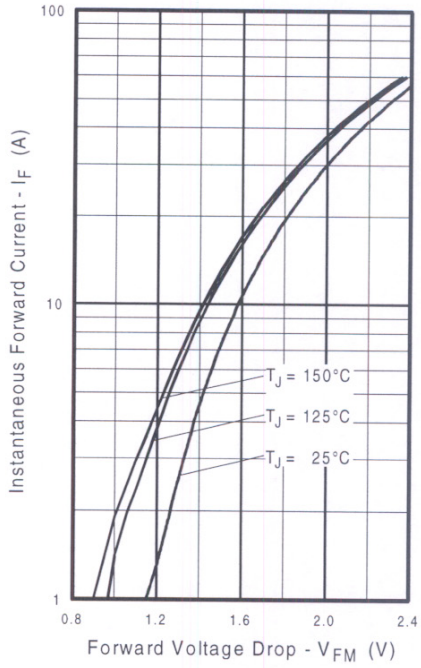

Fig. 13 - Maximum Forward Voltage Drop vs. Instantaneous Forward Current

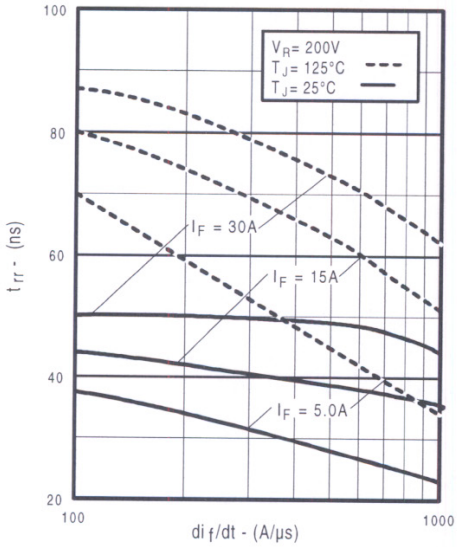

Fig. 14 - Typical Reverse Recovery vs. di_f/dt

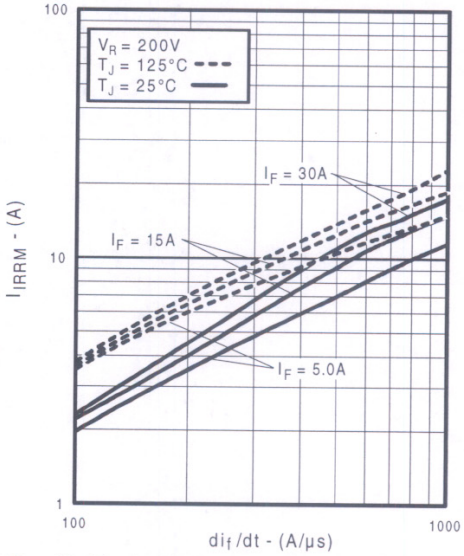

Fig. 15 - Typical Recovery Current vs. di_f/dt

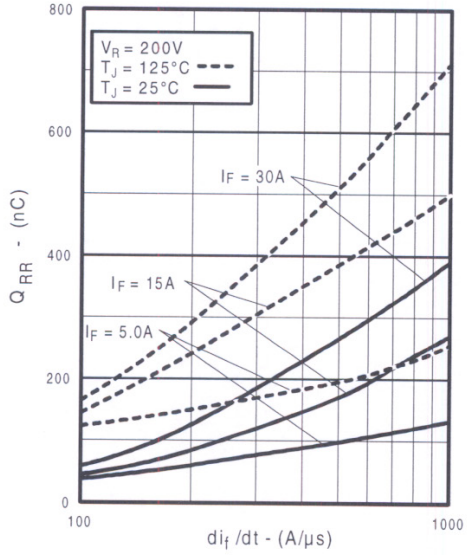

Fig. 16 - Typical Stored Charge vs. di_f/dt

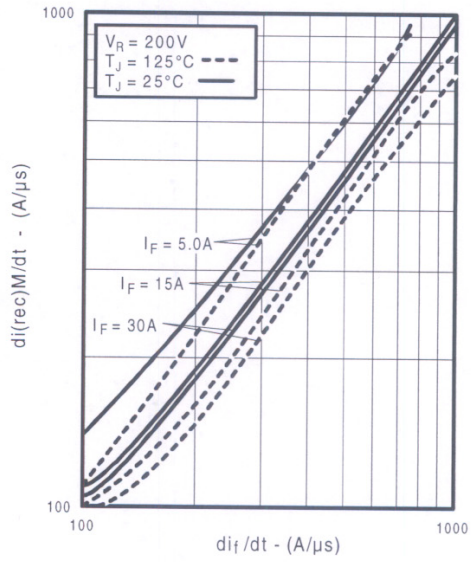

Fig. 17 - Typical $di_{(rec)M}/dt$ vs. di_f/dt

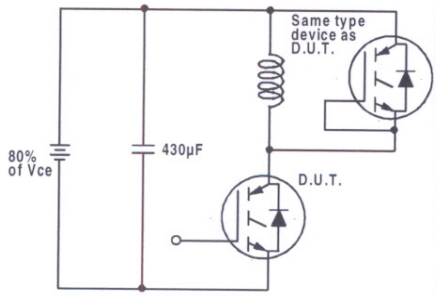

Fig. 18a - Test Circuit for Measurement of I_{LM}, E_{on}, $E_{off(diode)}$, t_{rr}, Q_{rr}, I_{rr}, $t_{d(on)}$, t_r, $t_{d(off)}$, t_f

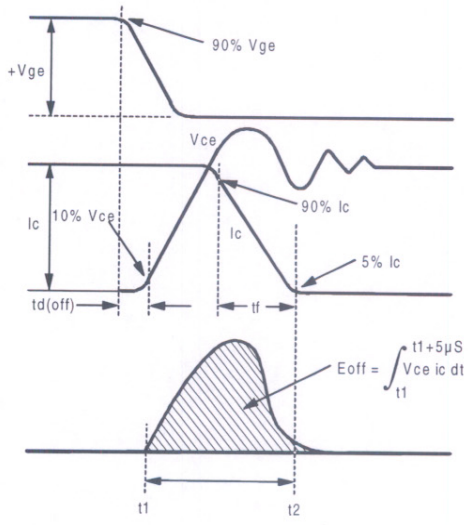

Fig. 18b - Test Waveforms for Circuit of Fig. 18a, Defining E_{off}, $t_{d(off)}$, t_f

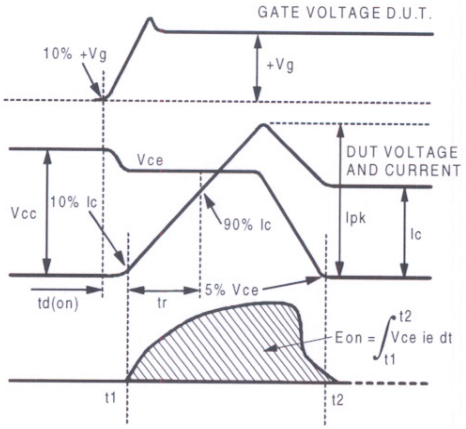

Fig. 18c - Test Waveforms for Circuit of Fig. 18a, Defining E_{on}, $t_{d(on)}$, t_r

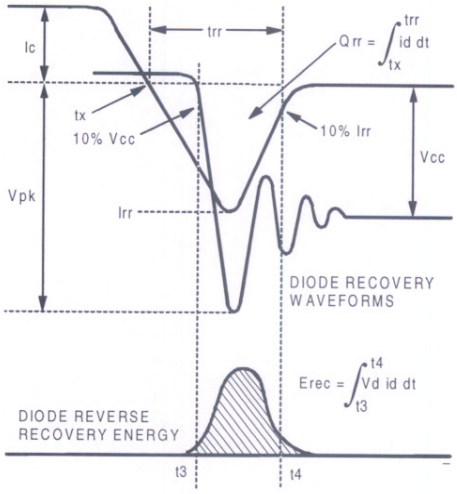

Fig. 18d - Test Waveforms for Circuit of Fig. 18a, Defining E_{rec}, t_{rr}, Q_{rr}, I_{rr}

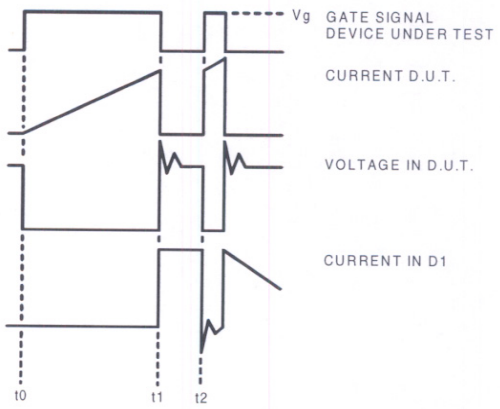

Figure 18e. Macro Waveforms for Figure 18a's Test Circuit

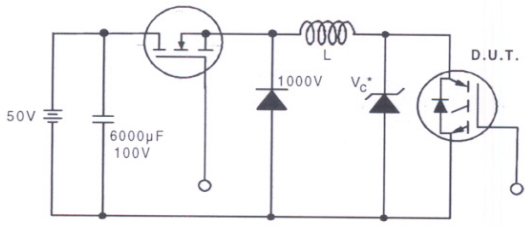

Figure 19. Clamped Inductive Load Test Circuit

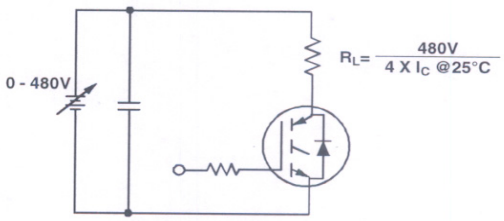

Figure 20. Pulsed Collector Current Test Circuit

TO-247AC Package Outline

Dimensions are shown in millimeters (inches)

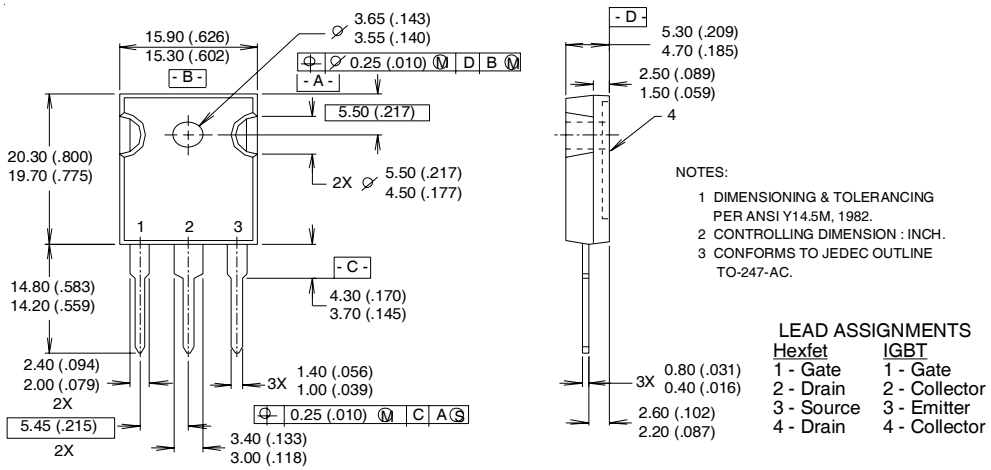

NOTES:

1 DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
2 CONTROLLING DIMENSION : INCH.
3 CONFORMS TO JEDEC OUTLINE TO-247-AC.

LEAD ASSIGNMENTS

Hexfet	IGBT
1 - Gate	1 - Gate
2 - Drain	2 - Collector
3 - Source	3 - Emitter
4 - Drain	4 - Collector

TO-247AC Part Marking Information

EXAMPLE: THIS IS AN IRFPE30
WITH ASSEMBLY
LOT CODE 5657
ASSEMBLED ON WW 35, 2000
IN THE ASSEMBLY LINE "H"

Note: "P" in assembly line position indicates "Lead-Free"

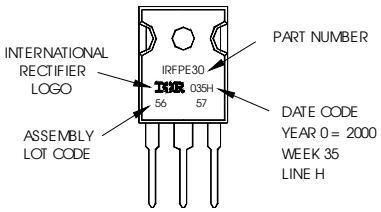

Notes:

① Repetitive rating: V_{GE}=20V; pulse width limited by maximum junction temperature (figure 20)

② V_{CC}=80%(V_{CES}), V_{GE}=20V, L=10μH, R_G= 10Ω (figure 19)

③ Pulse width ≤ 80μs; duty factor ≤ 0.1%.

④ Pulse width 5.0μs, single shot.

Data and specifications subject to change without notice.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.01/04

Note: For the most current drawings please refer to the IR website at:
http://www.irf.com/package/

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.