

FUJITSU Component Connector

FCN-118X series (Grounding Springs)

Fujitsu grounding springs for mobile devices

Overview

Fujitsu Components' grounding spring FCN-118X provides secure frame grounding between pc board and frame of smart phones. Its unique side-wing structure increases the spring's rigidity and strength to resist deformation from applied outside force.

Features

- Unique side-wing structure prevents deformation from applied outside force (patent pending)
- Capable to use as 4A power contact
- Custom designs possible
- RoHS compliant

Item	Specification
Contact resistance	40mΩ (20mVDC, 1mA)
Attach/remove endurance	50mΩ (after 10 attachments/removals)
Operating temperature	-40 to +85°C, 95RH% max.
Storage temperature	-10 to +40°C, 90RH% max. (no frost)

Item	Material
Base material	Copper alloy
Surface treatment	Gold plated nickel

■ Part numbers and dimensions

Part number	Dimensions (LxWxH mm)	Flexion range (mm)	Working range (mm)	Contact Force (N)
FCN-118X001-G/0	3.7 x 1.4 x 2.05	0.80	1.25 ~ 1.8	1.0±0.3 (at height = 1.4mm)
FCN-118X003-G/0	3.0 x 1.3 x 2.85	0.75	2.1 ~ 2.4	1.0±0.3 (at height = 2.25mm)
FCN-118X004-G/0	3.7 x 1.4 x 1.8	0.95	0.85 ~ 1.4	0.8±0.2 (at height = 0.8mm)



FCN-118X001-G/0




FCN-118X003-G/0



FCN-118X004-G/0


■ FCN-118X001-G/O

■ Dimensions

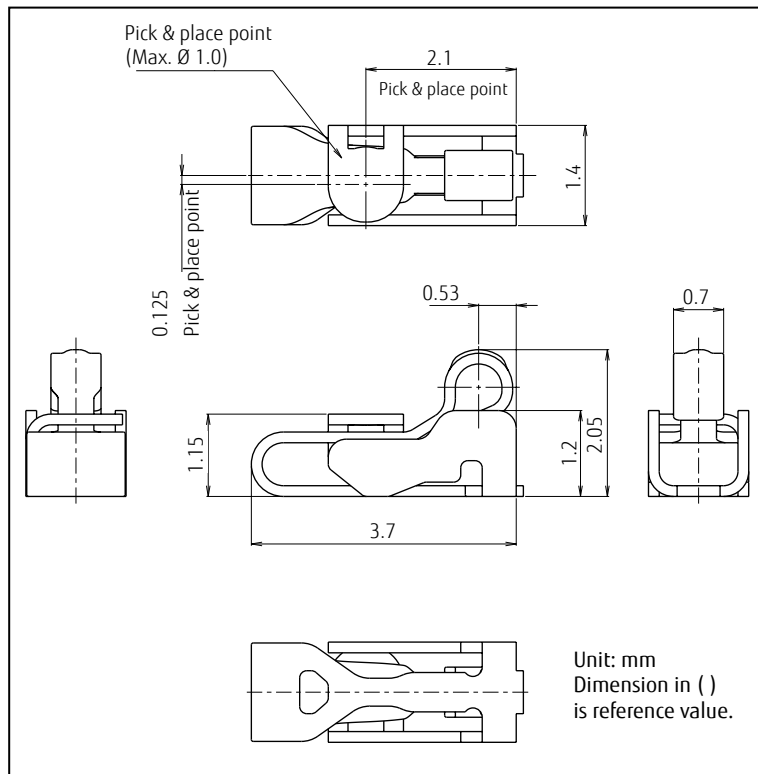


■ FCN-118X003-G/O

■ Dimensions

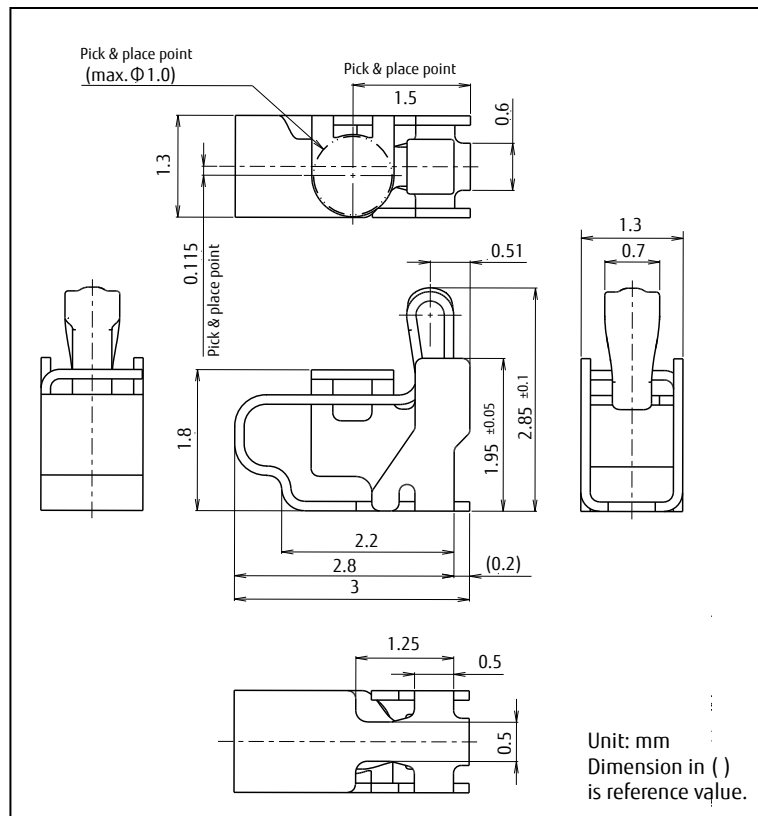


■ Mounting Position

• Recommended PCB layout




Unit: mm
Tolerance is ± 0.5 mm unless otherwise specified.
Dimension in () is reference value.

• Recommended mounting position




■ Recommended metal mask layout



Recommended metal mask layout thickness: 0.12
Unit: mm
Tolerance is ± 0.5 mm unless otherwise specified.


■ Packaging

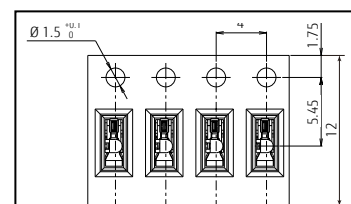

1 reel: 4,000
Diameter of a reel: 330 mm
Unit: mm


■ Mounting Position

• Recommended PCB layout




Unit: mm
Tolerance is ± 0.5 mm unless otherwise specified.
Dimension in () is reference value.

• Recommended mounting position




■ Recommended metal mask layout



Recommended metal mask layout thickness: 0.12
Unit: mm
Tolerance is ± 0.5 mm unless otherwise specified.


■ Packaging

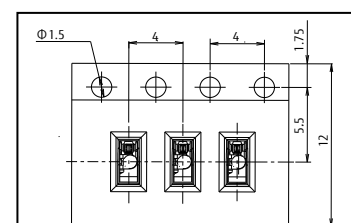

1 reel: 4,000
Diameter of a reel: 330 mm
Unit: mm


■ FCN-118X004-G/0

■ Dimensions

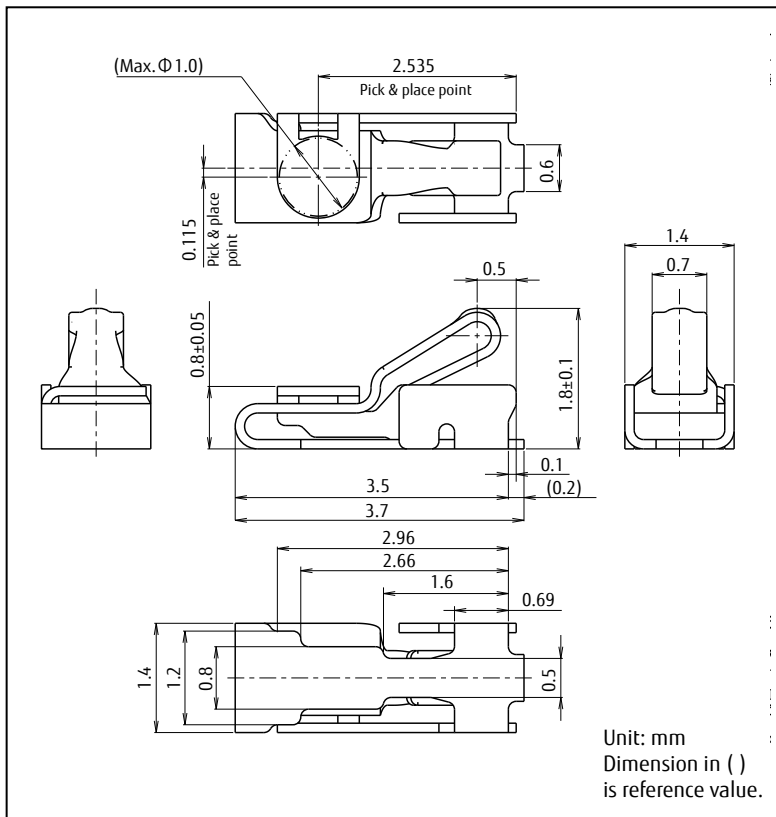


■ Mounting Position

• Recommended PCB layout



• Recommended mounting position

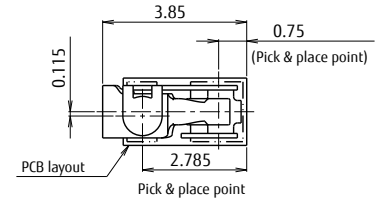


Unit: mm

Tolerance is ± 0.5 mm unless otherwise specified.

Dimension in () is reference value.

■ Recommended metal mask layout




Recommended metal mask layout thickness: 0.12

Unit: mm

Tolerance is ± 0.5 mm unless otherwise specified.

■ Packaging




1 reel: 4,000


Diameter of a reel: 330mm

Unit: mm

■ Recommended Soldering Conditions

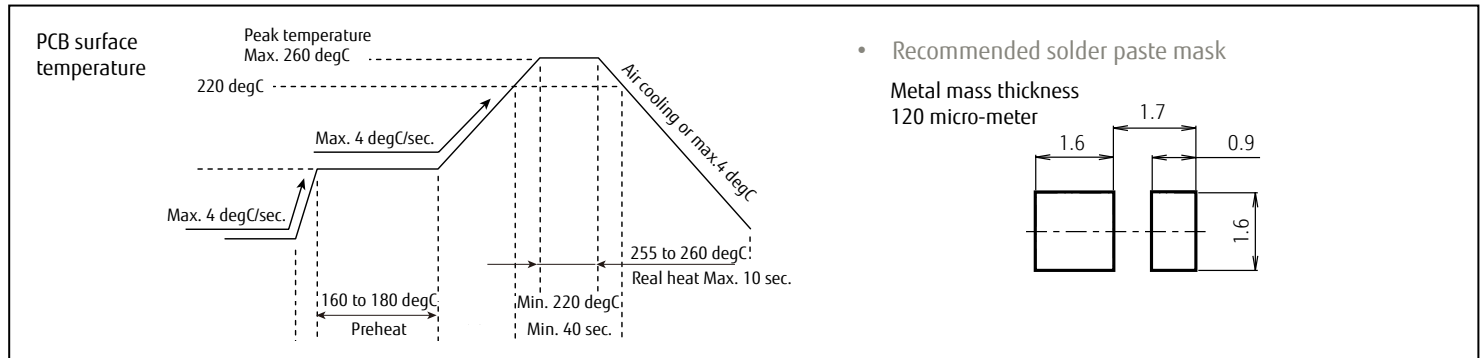

■ Amount of displacement and working range

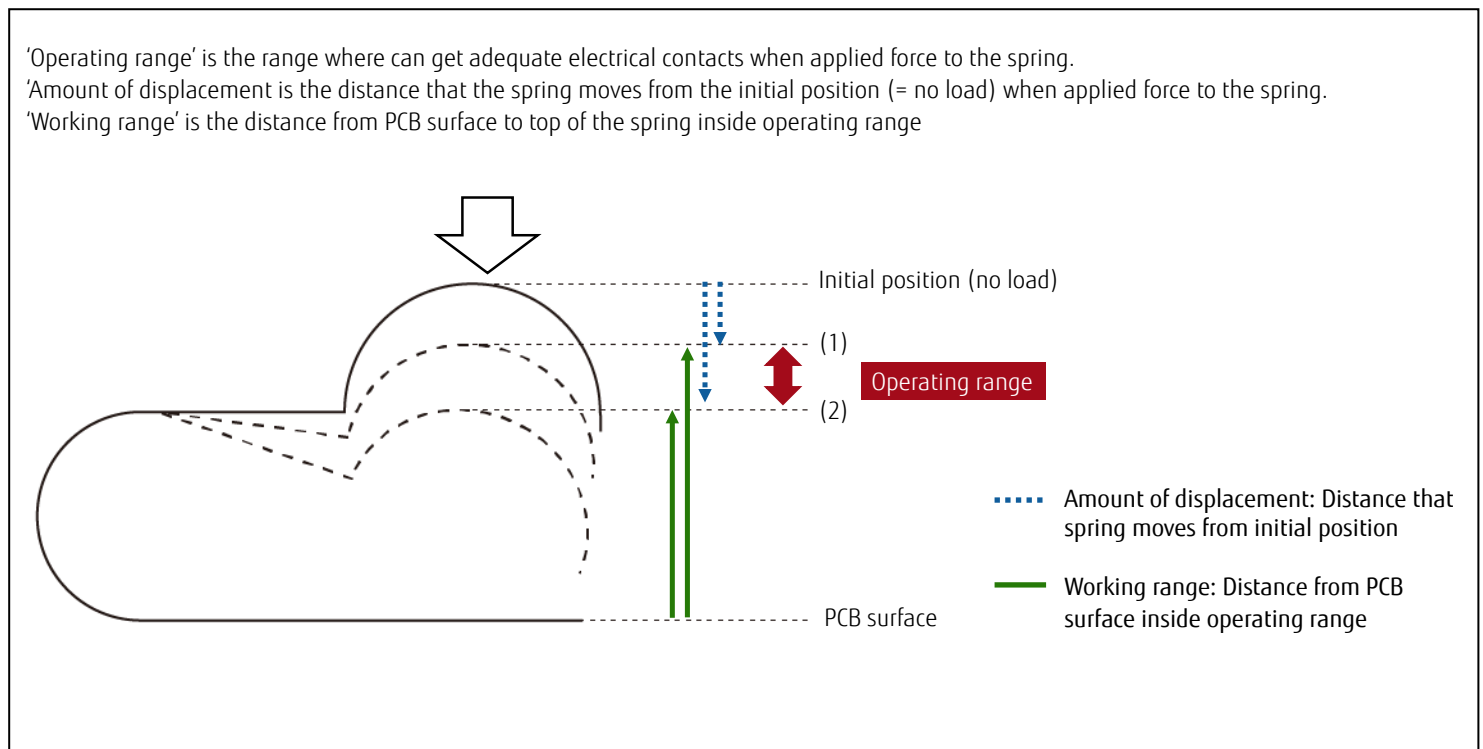

Contact

Japan

FUJITSU COMPONENT LIMITED
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141 8630, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@fcl.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

FUJITSU COMPONENTS AMERICA, INC.
2290 North First Street, Suite 212
San Jose, CA 95131 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components/>

Europe

FUJITSU COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

FUJITSU COMPONENTS ASIA, Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex,
Singapore 118529
Tel: (65) 6375-8560 / Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
www.fujitsu.com/sg/services/micro/components

China

FUJITSU COMPONENTS SHENZHEN
Room 1001, Di Wang Commercial Ctr.
5002 shen Nan Dong Road
Shenzhen 518008, PRC
Tel: (86 755) 8247 8463
Fax: (86 755) 8246 1510
Email: fcal@fcal.fujitsu.com
www.fujitsu.com/sg/services/micro/components

Hong Kong

FUJITSU COMPONENTS HONG KONG Co., Ltd.
Suite 913, Ocean Centre, 5 Canton Rd, TST
Kowloon, Hong Kong 118529
Tel: (852) 2881 8495
Fax: (852) 2894 9512
Email: fcal@fcal.fujitsu.com
www.fujitsu.com/sg/services/micro/components

Copyright

All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/ datasheets without prior notice. Copyright ©2014 Fujitsu Components America, Inc.

All rights reserved.
Revised December 22, 2014



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.