

Kyocera Electronic Components

RESISTORS

- Thick Film Chip Resistors **2-3**
- Low Resistance Chip Resistors **4**
- Chip Resistor Arrays **5-7**
- Chip Resistor Networks **8**
- Test Conditions **9-10**
- Packaging **11**
- Recommended Land Pattern **12**
- Sample Kit **13**

TIMING DEVICES

- Frequency Band Chart **14**
- MHz Band Ceramic Resonators **15-22**
- SAW Resonators **23-25**
- MHz Band Quartz Crystal **26-27**
- Clock Oscillators **28-36**
- VCO (Voltage Controlled Oscillators) **37-41**
- TCXO (Temperature Compensated Crystal Oscillators) **42-45**

FILTERS & RF MODULE

- KHz Band Ceramic IF Filters **46-47**
- SAW Filters (Surface Acoustic Wave) **48-54**
- Antenna Switch Module **55-58**

EMC COMPONENTS

- EMI Filters **59-63**

ACOUSTIC GENERATORS

- Piezo Ceramic Elements **64-65**
- Piezo Buzzers **66**

TRIMMER CAPACITORS

- Trimmer Capacitors **67-73**

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.



Resistor Product Discontinuation & Update

We would like to take this opportunity to thank you for your patronage and the many years of support you have given to our resistive products. As you know we are de-emphasizing the product line and would like to inform you of our decision to re-align our product offering.

AVX will expand our focus on our 0408 and smaller resistor array products and discontinue to offer our larger case size resistor chip series along with the 1206 resistor arrays. This will be accomplished in several stages over the next twelve months. Please refer to each product series below and the effective dates we will cease to supply the products.

- **Chip Resistor Series (CR63, CR32, CR21, CR10)**
Final Ship Date: February 1st, 2004

- **Chip Resistor Series (CR05)**
Final Ship Date: August 1st, 2004

- **1206 Resistor Array Series (CRA3A4E, CRB3A4E, CRC3A4E)**
Final Ship Date: August 1st, 2004

We would like to work closely with you during the discontinuation period and minimize any inconveniences that may arise. Should you have any questions or comments, please contact KDP Marketing.


Thick Film Chip Resistors



CR, CJ Series




STRUCTURE AND MATERIAL

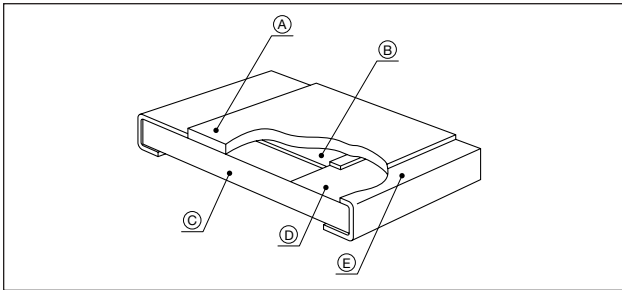

| Code | Structure | Material |
|------|-------------|---------------------------------------------------------------------------------|
| A | Coating | Glass or Epoxy |
| B | Resistor | RuO ₂ Resistor (The same material of Termination for chip jumper) |
| C | Substrate | 96% Alumina |
| D | Termination | Silver |
| E | Plating | (Ni, Sn-Pb) Plating |

DIMENSIONS



| | CR03, CJ03 (0201) | CR05, CJ05 (0402) | CR10, CJ10 (0603) | CR21, CJ21 (0805) | CR32, CJ32 (1206) |
|---|----------------------------|----------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| W | 0.30±0.03 (0.012±0.001) | 0.50±0.05 (0.020±0.002) | 0.80 ^{+0.15} _{-0.10} (0.031 ^{+0.006} _{-0.004}) | 1.25 ^{+0.15} _{-0.10} (0.050 ^{+0.006} _{-0.004}) | 1.55 ^{+0.15} _{-0.10} (0.061 ^{+0.006} _{-0.004}) |
| L | 0.60±0.03 (0.024±0.001) | 1.00±0.05 (0.039±0.002) | 1.60±0.10 (0.063±0.004) | 2.00±0.10 (0.080±0.004) | 3.10±0.10 (0.122±0.004) |
| c | 0.15±0.10 (0.006±0.004) | 0.20±0.15 (0.008±0.006) | 0.25±0.20 (0.010±0.008) | 0.35±0.20 (0.014±0.008) | 0.45±0.20 (0.018±0.008) |
| d | 0.15±0.05 (0.006±0.002) | 0.20±0.10 (0.008±0.004) | 0.20 ^{+0.20} _{-0.15} (0.008 ^{+0.008} _{-0.008}) | 0.40±0.20 (0.016±0.008) | 0.45±0.20 (0.018±0.008) |
| T | 0.23±0.05 (0.009±0.002) | 0.35±0.05 (0.014±0.002) | 0.50±0.10 (0.020±0.004) | 0.55±0.10 (0.022±0.004) | 0.55 ^{+0.10} _{-0.05} (0.022 ^{+0.004} _{-0.002}) |

SPECIFICATIONS

| Series | CR03 (0201) | CR05 (0402) | CR10 (0603) | CR21 (0805) | CR32 (1206) |
|------------------------|----------------|------------------------------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| Rated Power | 0.050 (1/20) W | 0.0625 (1/16) W | 0.10 (1/10) W | 0.125 (1/8) W | 0.25 (1/4) W |
| Max. Working Voltage | 15V | 50V | 50V | 100V | 200V |
| Resistance Tolerance | J = ±5% | F = ±1% J = ±5% | D = ±0.5% F = ±1% J = ±5% | D = ±0.5% F = ±1% J = ±5% | D = ±0.5% F = ±1% J = ±5% |
| Resistance Value Range | 10Ω to 1MΩ | 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J | 10Ω to 1MΩ : D 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J | 10Ω to 1MΩ : D 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J | 10Ω to 1MΩ : D 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J |
| Working Temperature | -55 to +125°C | -55 to +125°C | -55 to +125°C | -55 to +125°C | -55 to +125°C |

FEATURES

- Low Noise
- Nickel Barrier Terminations

APPLICATION

- General Purpose

HOW TO ORDER

CR 05 - 472 J - H

Packaging

- T = 7" Reel/Punched Paper Tape (5,000 pcs/reel) except CR05
- H = 7" Reel/Punched Paper Tape (10,000 pcs/reel, 2mm pitch taping) CR03 and CR05
- D = 10" Reel/Punched Paper Tape (10,000 pcs/reel) CR32, CR21, CR10

Resistance Tolerance

- D = ±0.5% J = ±5%
- F = ±1% Blank = Chip Jumper

Resistance Value (3 digits or 4 digits)

- Example: 2 significant figures and 1 multiplier
- R indicator decimal or values <10Ω
- Chip Jumper = 000

Size (EIA)

- 03 = 0201 21 = 0805
- 05 = 0402 32 = 1206
- 10 = 0603

Series

- CR = Resistor
- CJ = Jumper

Thick Film Chip Resistors



CR, CJ Series

SPECIFICATIONS

CJ Series

| Part Number | CJ03 | CJ05, CJ10, CJ21 (0402, 0603, 0805 Type) | CJ32 (1206 Type) |
|---------------------|---------------|---------------------------------------------|---------------------|
| Rated Current | 0.5A (70°C) | 1A (70°C) | 2A (70°C) |
| Resistivity | 50mΩ max. | 50mΩ max. | 50mΩ max. |
| Working Temperature | -55 to +125°C | -55 to +125°C | -55 to +125°C |

HOW TO CALCULATE RATED VOLTAGE

$$E = \sqrt{P \cdot R}$$

E = Rated Voltage (V)


P = Rated Power (W)

R = Standard Resistance Value (Ω)

Rated voltage should be lower than max. working voltage.

RECOMMENDED LAND PATTERN

millimeters (inches)

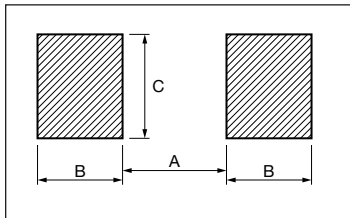

| EIA Size | 0201 | 0402 | 0603 | 0805 | 1206 |
|----------|------------------|-----------------|-----------------|-----------------|-----------------|
| A | 0.25 (0.010) | 0.50 (0.020) | 0.80 (0.031) | 1.00 (0.039) | 2.00 (0.079) |
| B | 0.225 (0.009) | 0.40 (0.016) | 0.70 (0.028) | 0.80 (0.031) | 0.80 (0.031) |
| C | 0.30 (0.012) | 0.50 (0.020) | 0.80 (0.031) | 1.20 (0.047) | 1.50 (0.059) |

MARKING

Marking available as follows:

Series: CR32, CJ32, CR21, CJ21, CR10, CJ10

3 digit indication


Example: 473=47x10³ = 47000 Ω = 47 kΩ

0 = 0 Ω (Jumper)

100 = 10 Ω

102 = 1 kΩ

105 = 1 MΩ



Series: CR03, CJ03, CR05 and CJ05 - No marking

Note: On CR32 4 digit marking is standard for ±1% and ±0.5% tolerances.

STANDARD RESISTANCE VALUE

| E24 | 1.0 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 | 1.8 | 2.0 | 2.2 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 | 3.9 | 4.3 | 4.7 | 5.1 |
| | 5.6 | 6.2 | 6.8 | 7.5 | 8.2 | 9.1 | | | |


For ±1% and ±.5% Tolerance

| E96 | 10.0 | 10.2 | 10.5 | 10.7 | 11.0 | 11.3 | 11.5 | 11.8 | 12.1 | 12.4 |
|-----|------|------|------|------|------|------|------|------|------|------|
| | 12.7 | 13.0 | 13.3 | 13.7 | 14.0 | 14.3 | 14.7 | 15.0 | 15.4 | 15.8 |
| | 16.2 | 16.5 | 16.9 | 17.4 | 17.8 | 18.2 | 18.7 | 19.1 | 19.6 | 20.0 |
| | 20.5 | 21.0 | 21.5 | 22.1 | 22.6 | 23.2 | 23.7 | 24.3 | 24.9 | 25.5 |
| | 26.1 | 26.7 | 27.4 | 28.0 | 28.7 | 29.4 | 30.1 | 30.9 | 31.6 | 32.4 |
| | 33.2 | 34.0 | 34.8 | 35.7 | 36.5 | 37.4 | 38.3 | 39.2 | 40.2 | 41.2 |
| | 42.2 | 43.2 | 44.2 | 45.3 | 46.4 | 47.5 | 48.7 | 49.9 | 51.1 | 52.3 |
| | 53.6 | 54.9 | 56.2 | 57.6 | 59.0 | 60.4 | 61.9 | 63.4 | 64.9 | 66.5 |
| | 68.1 | 69.8 | 71.5 | 73.2 | 75.0 | 76.8 | 78.7 | 80.6 | 82.5 | 84.5 |
| | 86.6 | 88.7 | 90.9 | 93.1 | 95.3 | 97.6 | | | | |

DERATING CURVE

Rated power should be reduced as below when temperature become higher.

Under high temperature, power derated as follows:

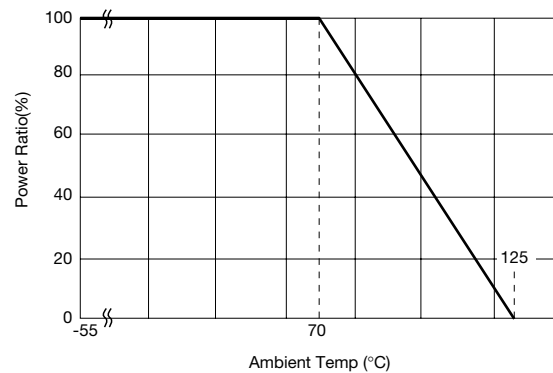


TEMPERATURE CHARACTERISTICS

| Resistance (Ω) | TCR (ppm/°C) |
|--------------------------------------|----------------------------------------------|
| D, F 10 ≤ R ≤ 1M | -100 to +100 |
| J R < 10 10 ≤ R ≤ 1M 1M < R | -100 to +600 -200 to +200 -500 to +300 |

Low Resistance Chip Resistors



LR Series

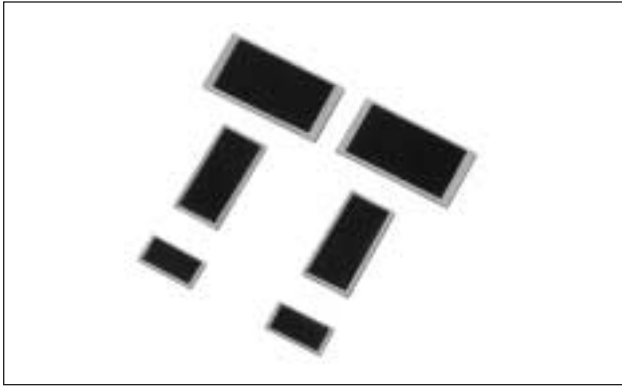

FEATURES

Suitable for voltage detector circuit of mobile computing device and cellular phone.

HOW TO ORDER

LR 63 - R100 F - U

Packaging

T = Paper Taping (LR32),
5,000 pcs/7" reel
U = Plastic Taping, (LR50, LR63),
4,000 pcs/7" reel

Resistance Tolerance

K = $\pm 10\%$
F = $\pm 1\%$

Resistance Value (4 digits)

R020 = 20m Ω
R100 = 100m Ω
R1000 = 1000m Ω

Size (EIA)

32 = 1206
50 = 1020
63 = 2512

Series

LR

DIMENSIONS

millimeters (inches)


| | LR32 (1206) | LR50 (1020) | LR63 (2512) |
|----------|----------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|
| W | 1.55 ^{+0.15} _{-0.10} (0.061 ^{+0.006} _{-0.004}) | 5.00 \pm 0.20 (0.197 \pm 0.008) | 3.20 \pm 0.20 (0.126 \pm 0.008) |
| L | 3.10 \pm 0.10 (0.122 \pm 0.004) | 2.50 \pm 0.20 (0.098 \pm 0.008) | 6.30 \pm 0.20 (0.248 \pm 0.008) |
| c | 0.25 \pm 0.20 (0.010 \pm 0.008) | 0.20 \pm 0.15 (0.008 \pm 0.006) | 0.45 \pm 0.20 (0.018 \pm 0.008) |
| d | 0.45 \pm 0.20 (0.018 \pm 0.008) | 0.50 \pm 0.20 (0.020 \pm 0.008) | 0.45 \pm 0.20 (0.018 \pm 0.008) |
| T | 0.55 ^{+0.10} _{-0.05} (0.022 ^{+0.004} _{-0.002}) | 0.60 \pm 0.10 (0.024 \pm 0.004) | 0.60 \pm 0.10 (0.024 \pm 0.004) |

SPECIFICATIONS

| Series | Rated Power | Max. Working Voltage | Resistance Tolerance | Resistance Value | Working Temperature | Temperature Characteristics |
|-------------|--------------|----------------------|----------------------|-----------------------|---------------------|------------------------------|
| LR32 (1206) | 0.5W (1/2) W | 707mV | K = $\pm 10\%$ | 20 to 50m Ω | -55 to +125°C | ± 3000 ppm/ $^{\circ}$ C |
| | | | F = $\pm 1\%$ | 100 to 149m Ω | | ± 150 ppm/ $^{\circ}$ C |
| | | | | 150 to 1000m Ω | | ± 100 ppm/ $^{\circ}$ C |
| LR50 (1020) | 1W | 316mV | F = $\pm 1\%$ | 20 to 29m Ω | -55 to +125°C | ± 150 ppm/ $^{\circ}$ C |
| | | | | 30 to 100m Ω | | ± 100 ppm/ $^{\circ}$ C |
| LR63 (2512) | 1W | 574mV | F = $\pm 1\%$ | 100 to 330m Ω | -55 to +125°C | ± 100 ppm/ $^{\circ}$ C |


Chip Resistor Arrays

CRA Series (Convex Scallop Corner Type)

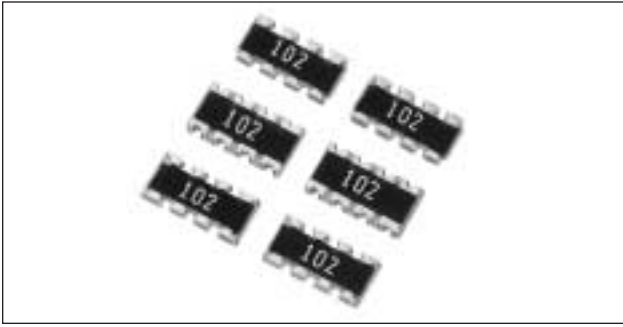

Chip Resistor Arrays have several resistor elements integrated as a single component.

CIRCUIT DIAGRAM

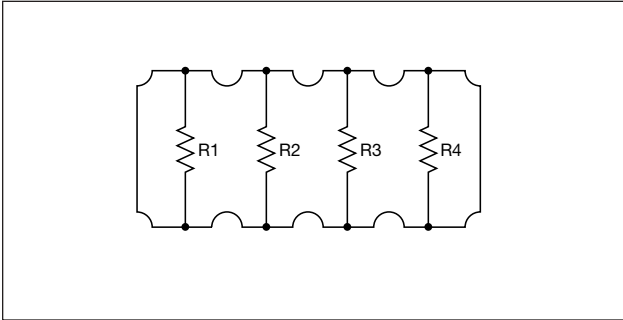

RATING

| Chip Resistor Arrays | |
|-----------------------|------------------|
| Item | Rating |
| Rated Power (70°C)* | 1/16W Element |
| Max. Working Voltage | 50V |
| Max. Overload Voltage | 100V |
| Resistance Value | J = 10Ω to 2.2MΩ |
| Tolerance | J±5% |
| Working Temperature | -55 to +125°C |
| Number of Elements | 4E = 4 Elements |

*Rated voltage = 50V or $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less


FEATURES

- Reduction in mounting process & costs
- Save PCB space
- Reduction of inventory control costs

APPLICATIONS

- Computer
- Hard Disk Drive
- Printer
- CD-ROM

HOW TO ORDER

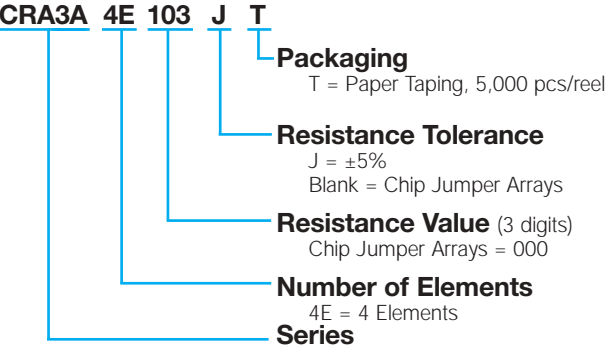

| Chip Jumper Arrays | |
|-----------------------------|-------------------------|
| Item | Rating |
| Rated Current | 1A |
| Conductive Resistance Value | 50MΩ max. |
| Resistance Value | Zero ohms (0 ± .5 ohms) |
| Working Temperature | -55 to +125°C |

DIMENSIONS

mm (inches)


| Style | 4 Elements CRA3A4E Series | |
|-------|------------------------------|---------------|
| | mm | (inches) |
| W | 1.60±0.15 | (0.063±0.006) |
| L | 3.20±0.15 | (0.126±0.006) |
| c | 0.30±0.20 | (0.012±0.008) |
| d | 0.20±0.15 | (0.008±0.006) |
| t | 0.50±0.10 | (0.020±0.004) |
| p | 0.80 typ | (0.031) |

Detailed specifications are available on request.


Chip Resistor Arrays



CRB Series (Concave Type)

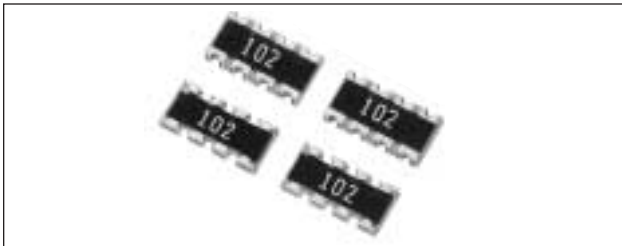

Chip Resistor Arrays have several resistor elements integrated as a single component.

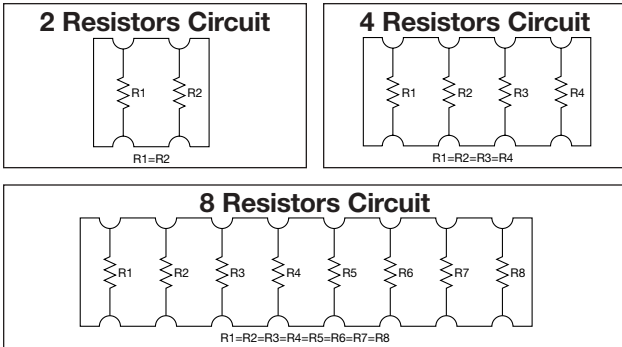


FEATURES

- Reduction in mounting process & costs
- Save PCB space
- Reduction of inventory control costs

APPLICATIONS

- Computer
- Hard Disk Drive
- Printer
- CD-ROM

HOW TO ORDER

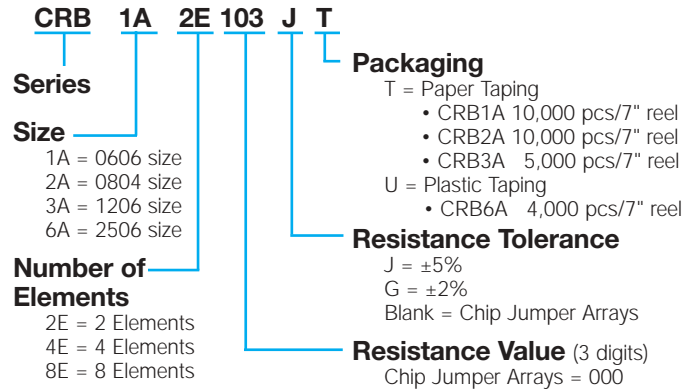

RATING

| Chip Resistor Arrays | |
|-----------------------|-------------------------------|
| Item | Rating |
| Rated Power (70°C)* | 1/16W Element |
| Max. Working Voltage | 50V |
| Max. Overload Voltage | 100V |
| Resistance Value | 10Ω to 2.2MΩ (CRB6A 1MΩ max.) |
| Tolerance | J±5% (CRB6A G ± 2% only) |
| Working Temperature | -55 to +125°C |

| Chip Jumper Arrays | |
|-----------------------------|-------------------------|
| Item | Rating |
| Rated Current | 1A |
| Conductive Resistance Value | 50MΩ max. |
| Resistance Value | Zero ohms (0 ± .5 ohms) |
| Working Temperature | -55 to +125°C |

*Rated voltage = 50V or $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less

DIMENSIONS

millimeters (inches)

| Code | W | L | C | d | t | a | b | P |
|---------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Dim. | 1.60±0.15 (0.063±0.006) | 1.60±0.20 (0.063±0.008) | 0.30±0.20 (0.012±0.008) | 0.40±0.15 (0.016±0.006) | 0.60±0.10 (0.024±0.006) | 0.50±0.15 (0.020±0.006) | 0.30±0.10 (0.012±0.004) | 0.80±0.10 (0.031±0.004) |
| No Marking on chips | | | | | | | | |

| Code | L | W | T | P | b | c | d | e |
|------|----------------------------|----------------------------|----------------------------|-------------------------|---------------------------|----------------------------|-----------------------------|-------------------------|
| Dim. | 2.00±0.10 (0.079±0.004) | 1.00±0.10 (0.039±0.004) | 0.40±0.10 (0.016±0.004) | 0.50 typ (0.020 typ) | ∅0.15 typ (∅0.006 typ) | 0.20±0.15 (0.008±0.006) | 0.25±0.015 (0.010±0.006) | 0.25 typ (0.010 typ) |

| Code | W | L | C | D | T | P |
|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|-------------------------|
| Dim. | 1.60±0.15 (0.063±0.006) | 3.20±0.15 (0.126±0.006) | 0.30±0.20 (0.012±0.008) | 0.40±0.15 (0.016±0.006) | 0.60±0.10 (0.024±0.004) | 0.80 typ (0.031 typ) |


| Code | L | W | T | P | c | d | e (top) | e (bottom) |
|------|----------------------------|----------------------------|----------------------------|-------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Dim. | 6.40±0.20 (0.252±0.008) | 1.60±0.20 (0.063±0.008) | 0.60±0.10 (0.024±0.004) | 0.80 typ (0.031 typ) | 0.30±0.20 (0.012±0.008) | 0.40±0.15 (0.016±0.006) | 0.50±0.10 (0.020±0.004) | 0.40±0.15 (0.016±0.006) |

Detailed specifications are available on request.


Chip Resistor Arrays



CRC Series (Convex Square Corner Type)

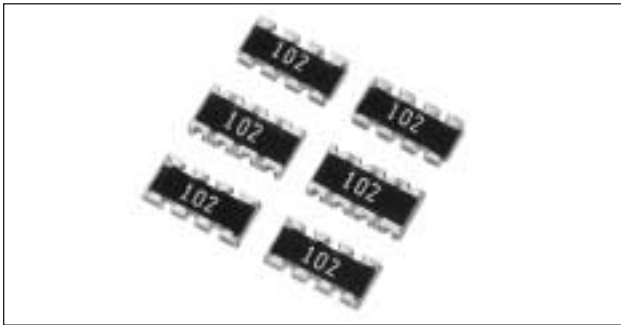

Chip Resistor Arrays have several resistor elements integrated as a single component.

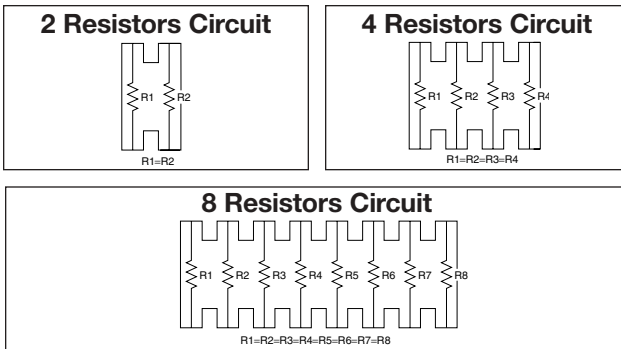


FEATURES

- Reduction in mounting process & costs
- Save PCB space
- Reduction of inventory control costs

APPLICATIONS

- Computer
- Hard Disk Drive
- Printer
- CD-ROM

HOW TO ORDER

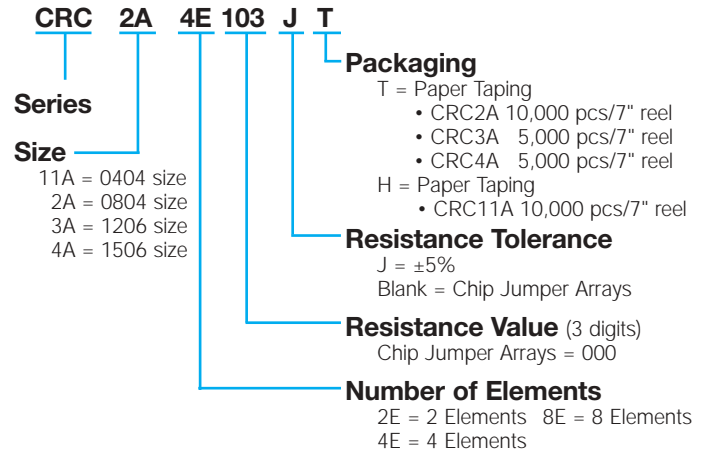

RATING

| Chip Resistor Arrays | |
|-----------------------|-------------------------------------|
| Item | Rating |
| Rated Power (70°C)* | 1/16W Element |
| Max. Working Voltage | 50V (25V CRC4A) |
| Max. Overload Voltage | 100V (50V CRC4A) |
| Resistance Value | J = 10Ω to 2.2MΩ (CRC4A8E 1MΩ max.) |
| Tolerance | J±5% |
| Working Temperature | -55 to +125°C |

| Chip Jumper Arrays | |
|-----------------------------|-------------------------|
| Item | Rating |
| Rated Current | 1A |
| Conductive Resistance Value | 50MΩ max. |
| Resistance Value | Zero ohms (0 ± .5 ohms) |
| Working Temperature | -55 to +125°C |

*Rated voltage = 50V or $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less


DIMENSIONS

millimeters (inches)

| Code | W | L | c | d | t | P | | |
|---------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Dim. | 1.00±0.10 (0.040±0.004) | 1.00±0.10 (0.040±0.004) | 0.20±0.15 (0.008±0.006) | 0.20±0.15 (0.008±0.006) | 0.35±0.06 (0.014±0.002) | 0.65 typ (0.026 typ) | | |
| No Marking on chips | | | | | | | | |
| Code | L | W | T | P | c | d | e1 | e2 |
| Dim. | 2.00±0.10 (0.079±0.004) | 1.00±0.10 (0.039±0.004) | 0.40±0.10 (0.016±0.004) | 0.50 typ (0.020 typ) | 0.15±0.15 (0.006±0.006) | 0.25±0.15 (0.010±0.006) | 0.30±0.10 (0.012±0.004) | 0.40±0.10 (0.016±0.004) |
| No Marking on chips | | | | | | | | |
| Code | W | L | c | d | T | P | | |
| Dim. | 1.60±0.15 (0.063±0.006) | 3.20±0.15 (0.126±0.006) | 0.30±0.20 (0.012±0.008) | 0.20±0.15 (0.008±0.006) | 0.50±0.10 (0.020±0.004) | 0.80 typ (0.031 typ) | | |
| No Marking on chips | | | | | | | | |
| Code | L | W | T | P | c | d | e | |
| Dim. | 3.80±0.10 (0.150±0.004) | 1.60±0.10 (0.063±0.004) | 0.45±0.10 (0.018±0.004) | 0.50 typ (0.020 typ) | 0.30±0.20 (0.012±0.008) | 0.30±0.15 (0.012±0.006) | 0.30±0.10 (0.012±0.004) | |
| No Marking on chips | | | | | | | | |

Chip Resistor Networks

RNA4A Series

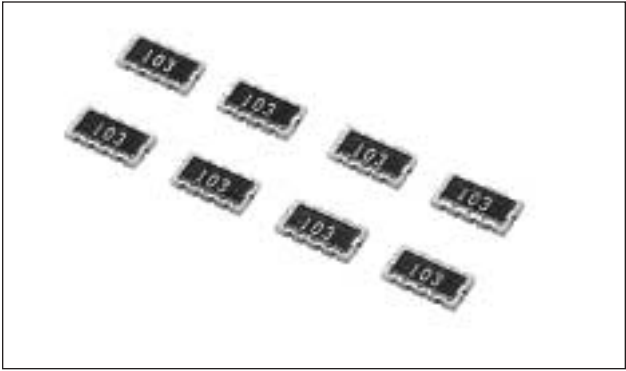


FEATURES

- Reduction in mounting costs & process
- Save PCB space
- Eight resistors in one SMD package
- Reduction of inventory control costs

APPLICATIONS


- Lap Top Computer
- Printer
- CD-ROM
- Notebook Computer
- Hard Disk Drive
- Facsimile

CIRCUIT DIAGRAM

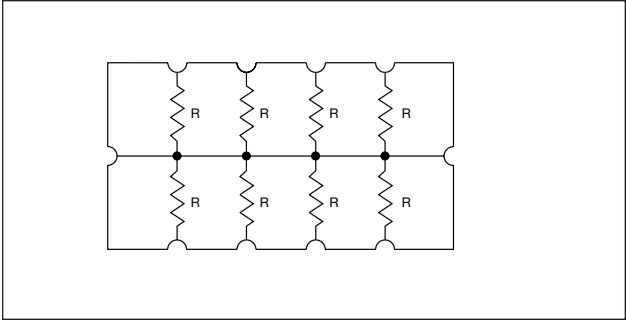


*Nominal resistance value is all the same.

HOW TO ORDER

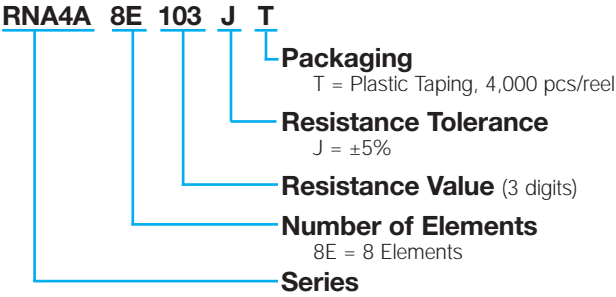

SHAPE AND DIMENSIONS

millimeters (inches)

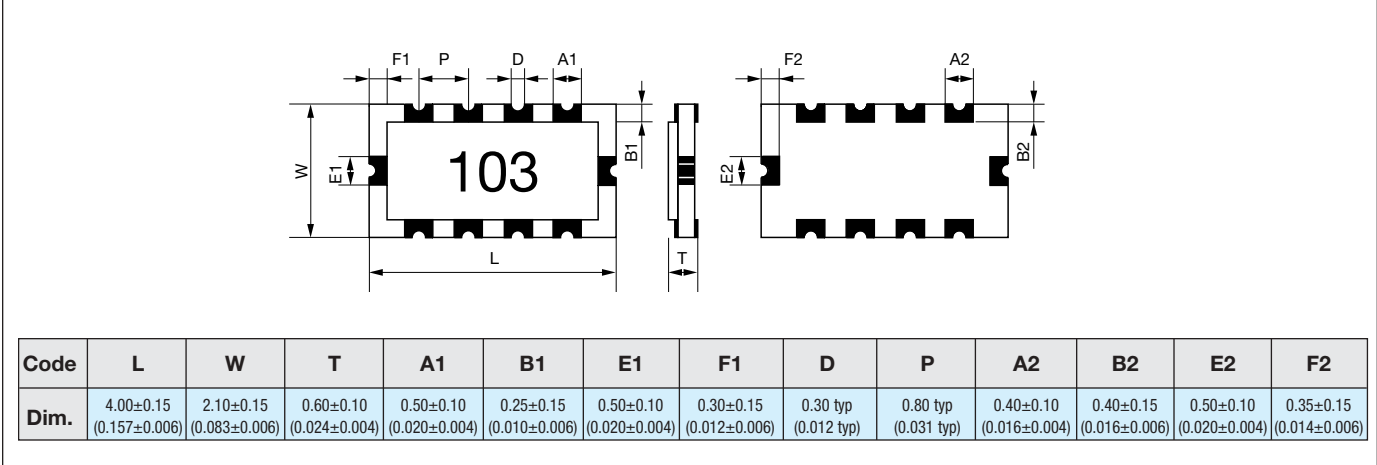

SPECIFICATIONS

| Item | Rating |
|------------------------|-------------------------|
| Rated Power (70°C) | 1/16W (0.0625W) Element |
| Max. Working Voltage* | 25V |
| Max. Overload Voltage | 50V |
| Resistance Tolerance | J = ±5% |
| Resistance Value Range | 100Ω to 220KΩ |
| Number of Elements | 8E = 8 Elements |
| Working Temperature | -55 to +125°C |

STANDARD RESISTANCE VALUE

| | | | |
|----|----|----|----|
| E6 | 10 | 15 | 22 |
| | 33 | 47 | 68 |

*Rated voltage = $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less

*If resistance value under 100Ω is needed, please contact sales.


Chip Resistor Arrays



CR, CJ, CRA, CRB, CRC Series - Test Conditions

ELECTRICAL CHARACTERISTICS

| Item | Standard | | Test Conditions | | | | | | | | |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------|----------------------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| | Resistor | Jumper | Resistor | Jumper | | | | | | | |
| DC Resistance | Within Initial Tolerance | | Power Condition A (20°C, 65% RH) | | | | | | | | |
| Temperature Characteristics | <table border="1"> <thead> <tr> <th>Resistance (Ω)</th> <th>TCR (ppm/°C)</th> </tr> </thead> <tbody> <tr> <td>*D, F 10 ≤ R ≤ 1M</td> <td>-100 to +100</td> </tr> <tr> <td>J, CR05 = F R < 10 10 ≤ R ≤ 1M 1M < R</td> <td>-100 to +600 -250 to +250 -500 to +300</td> </tr> </tbody> </table> | | Resistance (Ω) | TCR (ppm/°C) | *D, F 10 ≤ R ≤ 1M | -100 to +100 | J, CR05 = F R < 10 10 ≤ R ≤ 1M 1M < R | -100 to +600 -250 to +250 -500 to +300 | / | Test Temperature: 25, 125(°C) $\Delta R/R = R_2 - R_1 / R_1 \times 1 / T_2 - T_1 \times 10^6$ $\Delta R/R = \text{Temp. Coefficient (ppm/°C)}$ $T_1 = 25(°C)$ $T_2 = 125(°C)$ $R_1 = T_1 \text{ Resistance at } (\Omega)$ $R_2 = T_2 \text{ Resistance at } (\Omega)$ | / |
| | Resistance (Ω) | TCR (ppm/°C) | | | | | | | | | |
| *D, F 10 ≤ R ≤ 1M | -100 to +100 | | | | | | | | | | |
| J, CR05 = F R < 10 10 ≤ R ≤ 1M 1M < R | -100 to +600 -250 to +250 -500 to +300 | | | | | | | | | | |
| Short-time Overload | $\Delta R/R$ | ±(2.0%+0.10 Ω) max. of the initial value | 50m Ω max. | (1) Apply 2.0 x rated voltage for 5 sec. (2.5 x rated voltage for Arrays) (2) Wait 30 minutes (3) Measure resistance CR03 = 30V max. CR05 = 50V max. CR10 = 100V max. CR21 = 200V max. CR32 = 400V max. CRA3A, CRB3A, CRC3A = 100V max. | (1) 2A for 5 sec. (CJ03 = 1A) (2) Wait 30 minutes (3) Measure resistance | | | | | | |
| Intermittent Overload | $\Delta R/R$ | ±(5%+0.1 Ω) max. of the initial value | 50m Ω max. | (1) Perform 10,000 voltage cycles as follows: ON (2.0 x rated voltage, 2.5 x for Arrays) 1 sec. OFF 25 sec. (2) Stabilization time 30 min. without loading (3) Measure resistance CR03 = 30V max. CR05 = 50V max. CR10 = 150V max. CR21 = 200V max. CR32 = 400V max. CRA, CRB, CRC = 100V max. | (1) Perform 10,000 current cycles as follows: ON (2A) 1 sec. OFF 25 sec. (2) Wait 30 minutes (3) Measure resistance CJ03 = 1A max. | | | | | | |
| | Visual | No evidence of mechanical damage intermittent overload | | | | | | | | | |
| Dielectric Withstanding Voltage | No evidence of mechanical damage | | Apply 500 VAC for 1 min. (CR10 300 VAC) (CR05, CRA3A, CRB3A, CRC3A 300 VAC/1 sec. CR03 50 VAC/min.) | | | | | | | | |
| Insulation Resistance | <ul style="list-style-type: none"> • CR03, CJ03 = 10⁸Ω min. • CR05, CJ05 = 10⁸Ω min. • CR10, CJ10 = 10⁹Ω min. • CR21, CJ21 = 10¹⁰Ω min. • CR32, CJ32 = 10¹²Ω min. • CRA3A, CRB3A, CRC3A = 10⁹Ω min. | | Apply 500V DC (CR05, CRA3A, CRB3A, CRC3A 100V DC CR03 50 VDC) | | | | | | | | |



Chip Resistor Arrays



CR, CJ, CRA, CRB, CRC Series - Test Conditions

MECHANICAL CHARACTERISTICS

| Item | | Standard | | Test Conditions | |
|---------------------------|--------------|---------------------------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| | | Resistor | Jumper | Resistor | Jumper |
| Terminal Strength | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max. of the initial value | 50m Ω max. | Apply the load as shown: Measure resistance during load application | |
| | Visual | No evidence of mechanical damage after loading | | <p>PC Board = Glass epoxy t = 1.60 (0.063)</p> | |
| Soldering Heat Resistance | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max. of the initial value | 50m Ω max. | Immerse into molten solder at 260 \pm 5 $^{\circ}$ C for 10 \pm 1 sec. Stabilize component at room temperature for 1 hr. Measure resistance. | |
| | Visual | No evidence of leaching | | | |
| Solderability | | Coverage \geq 95% each termination end | | Immerse in Rogin Flux for 2 \pm 0.5 sec. and in SN62 solder at 235 \pm 5 $^{\circ}$ C for 2 \pm 0.5 sec. | |
| Anti-Vibration Test | $\Delta R/R$ | $\pm(1\%+0.1\Omega)$ max. of the initial value | 50m Ω max. | 2 hrs. each in X, Y and Z axis. (TTL 6 hrs.) 10 to 55 Hz sweep in 1 min. at 1.5mm amplitude. | |
| | Visual | No evidence of mechanical damage | | | |
| Solvent Resistance | $\Delta R/R$ | $\pm(0.5\%+0.05\Omega)$ max. of the initial value | 50m Ω max. | Immerse in static state butyl acetate at 20 $^{\circ}$ C to 25 $^{\circ}$ C for 30 \pm 5 sec. Stabilize component at room temperature for 30 min. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |

ENVIRONMENTAL CHARACTERISTICS

| Item | | Standard | | Test Conditions | |
|--------------------------|--------------|-------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| | | Resistor | Jumper | Resistor | Jumper |
| Temperature Cycle | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max. of the initial value | 50m Ω max. | (1) Run 5 cycles as follows: -55 \pm 3 $^{\circ}$ C for 30 min. 125 \pm 3 $^{\circ}$ C for 30 min. Room temp. for 10-15 min. (2) Stabilize component at room temperature for 1 hr. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |
| Low Temperature Storage | $\Delta R/R$ | $\pm(2\%+0.1\Omega)$ max. of the initial value | 50m Ω max. | (1) Dwell in -55 $^{\circ}$ C chamber without loading for 1000 $^{+48}$ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |
| High Temperature Storage | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max. of the initial value | 50m Ω max. | (1) Dwell in 125 $^{\circ}$ C chamber without loading for 1000 $^{+48}$ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |
| Moisture Resistance | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max. of the initial value | 50m Ω max. | (1) Dwell in temp.: 65 $^{\circ}$ C RH90 to 95% RH chamber without loading for 1000 $^{+48}$ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |
| Life Test | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max. of the initial value | 50m Ω max. | (1) Temp.: 70 \pm 3 $^{\circ}$ C Voltage: (rated voltage) on 90 min. off 30 min. Duration: 1000 $^{+48}$ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |
| Loading Life in Moisture | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max. of the initial value | 50m Ω max. | (1) Temp.: 40 \pm 2 $^{\circ}$ C RH: 90-95% Voltage Cycle: on 90 min. (rated voltage) off 30 min. Duration: 1000 $^{+48}$ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value. | |
| | Visual | No evidence of mechanical damage | | | |

Packaging of Chip Component




Automatic Insertion Packaging

TAPE AND REEL

REEL DIMENSIONS

millimeters (inches)

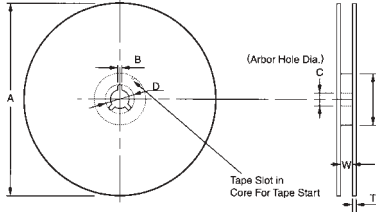


| Tape Size | A Max. | B Min. | C | D Min. | N Min. | W | T Max. |
|-----------|-------------|-----------------|----------------------------|-----------------|---------------|----------------------------|-----------------|
| 8mm | 178 (7) | 1.50 (0.059) | 13.0±0.50 (0.512±0.020) | 20.2 (0.795) | 50 (1.969) | 10.0±1.50 (0.394±0.059) | 2.50 (0.098) |
| | 260 (10) | | | | | | |

Metric dimensions will govern.
English measurements rounded and for reference only.

millimeters (inches)

PUNCHED TAPE CONFIGURATION 8MM TAPE ONLY

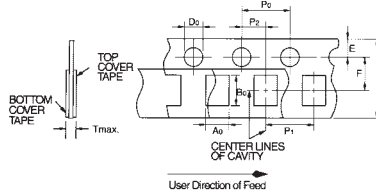


| Tape Size | D ₀ | E | P ₀ | P ₂ | W | F |
|-----------|-------------------------------------------------------------|----------------------------|---------------------------|----------------------------|----------------------------|----------------------------|
| 8mm | 1.50 ^{+0.10} / _{-0.004} (0.059 ±0.004) | 1.75±0.10 (0.069±0.004) | 4.0±0.10 (0.157±0.004) | 2.00±0.05 (0.079±0.002) | 8.00±0.20 (0.135±0.008) | 3.50±0.05 (0.138±0.002) |

VARIABLE DIMENSIONS

| Style | P ₁ | A ₀ | B ₀ | T max. |
|-------------------------|----------------------------------------------------------|----------------------------|----------------------------|-----------------|
| CR/CJ03 CR/CJ05 | 2.00±0.10 (0.079±0.004) | 0.65±0.10 (0.026±0.004) | 1.15±0.10 (0.045±0.004) | 0.60 (0.024) |
| CR/CJ/FR10 | 4.00±0.10 (0.157±0.004) or 2.00±0.10 (0.079±0.004) | 1.10±0.20 (0.043±0.008) | 1.90±0.20 (0.075±0.008) | 1.10 (0.043) |
| CR/CJ/FR21 | 4.00±0.10 (0.157±0.004) | 1.65±0.20 (0.065±0.008) | 2.40±0.20 (0.094±0.008) | |
| CR/CJ/FR32 | | 2.00±0.20 (0.079±0.008) | 3.60±0.20 (0.142±0.008) | |
| CRB1A | | 1.90±0.20 (0.075±0.008) | 1.90±0.20 (0.075±0.008) | |
| CRA3A CRB3A CRC3A | | 2.00±0.20 (0.079±0.008) | 3.60±0.20 (0.142±0.008) | |
| CRB2A | | 2.00±0.10 (0.079±0.004) | 1.25±0.20 (0.049±0.008) | |


PUNCHED CARRIER

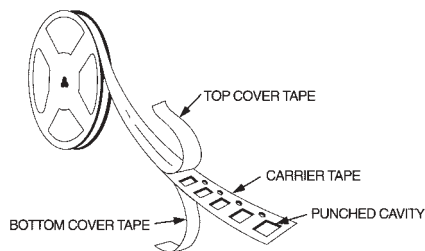


RECOMMENDED LAND PATTERNS IS REFERRED THE FOLLOWING FOR EXAMPLE

millimeters (inches)


CRA3A4E Series

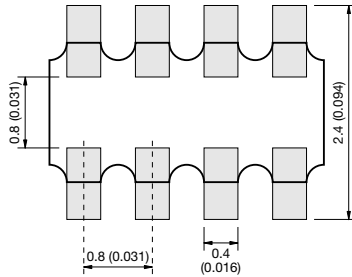


RNA4A8E Series

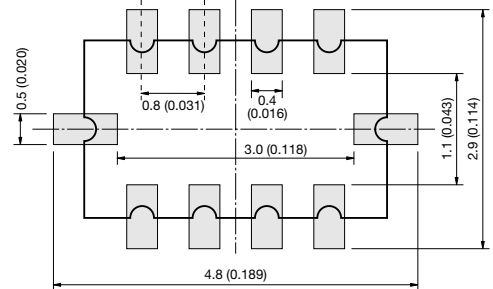


CRB1A2E Series




CRB3A4E Series

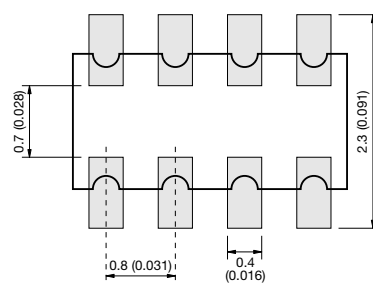


CRB2A4E Series

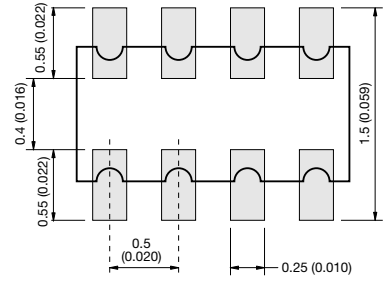


CRC3A4E Series

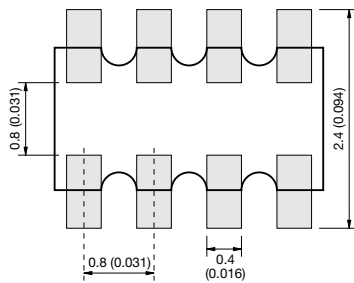


CRC2A4E Series

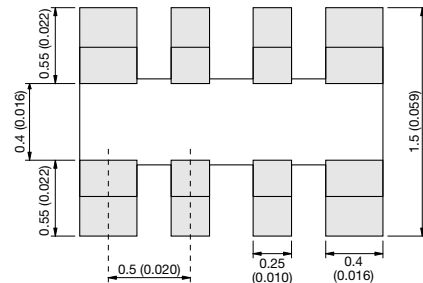

CRC4A8E Series

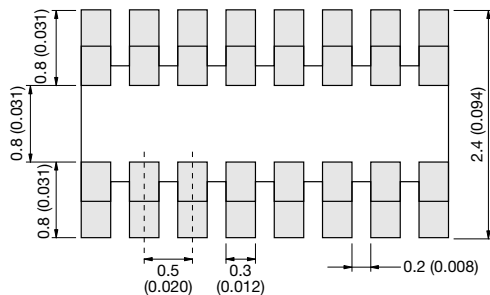

CRB6A8E Series

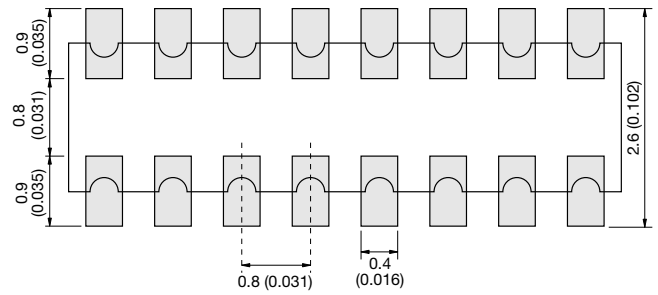



SAMPLE KIT PART NUMBERS

| Part Number | Description |
|------------------------|------------------------------------------------------------------------------------------------------|
| CRJ-E6-Kit | Combination 0603, 0805, 1206, 5% parts 21 values per case size 100 pcs. per value (approx.) |
| CR05-E12-Kit | 0402, 5% parts 63 values 100 pcs. per value |
| CR10J-E12-Kit | 0603, 5% parts 63 values 100 pcs. per value (approx.) |
| CR21J-E12-Kit | 0805, 5% parts 63 values 100 pcs. per value (approx.) |
| CR32J-E12-Kit | 1206, 5% parts 63 values 100 pcs. per value (approx.) |
| CR05F-E24-Kit | 0402, 1% parts 63 values 100 pcs. per value |
| CR10F-E24-Kit | 0603, 1% parts 63 values 100 pcs. per value |
| CR-ARRAY-E6-Kit | Arrays, Various styles, CRA, CRB, CRC, RNA, 5% 13 values per style (approx.) 20 pcs. per value |

FREQUENCY BAND CHART

| Product Name | | Type | Oscillating Frequency | | | | | | | Applications | |
|-------------------------------------|------------------|--------|-----------------------|-------|--------|-------|-------|--------|------|--------------|-------------------|
| | | | 1kHz | 10kHz | 100kHz | 1MHz | 10MHz | 100MHz | 1GHz | | 10GHz |
| Ceramic Resonator | MHz Band | Leaded | | | | 1.92M | 13.0M | | | | MicroProcessor |
| | | SMD | | | | 2.0M | 60.0M | | | | MicroProcessor |
| SAW Resonator | | Leaded | | | | | 55M | 500M | | | RF Modulator |
| | | SMD | | | | | | 300M | 500M | | Keyless Entry |
| Clock Oscillator | Clock Oscillator | SMD | | | | 8.0M | 75M | | | | MicroProcessor |
| | TCXO | SMD | | | | 12.0M | 26.0M | | | | Telecommunication |
| Voltage Controlled Oscillator (VCO) | VK Series | SMD | | | | | 100M | 700M | | | Telecommunication |
| | YK Series | SMD | | | | | | 700M | 2.0G | | Telecommunication |



Product Discontinuation - Leaded Resonators

We would like to thank you for your patronage and support for our products.

AVX is in the process of discontinuing the Leaded MHz Ceramic Resonator offering. We have chosen the effective dates below so that our customers and distributors may entertain last time purchases.

FINAL Order Acceptance: February 1st, 2004

LAST Shipment: May 1st, 2004

The specific products subject to this notice are: **ALL KBR Series**

2-Terminal (No Built-In Capacitor) LEADED Resonators

- KBR-x.xxM
- KBR-x.xxMS
- KBR-x.xxMSA
- KBR-x.xxMSB
- KBR-x.xxMSE

3-Terminal (Built-In Capacitor) LEADED Resonators

- KBR-x.xxMKC
- KBR-x.xxMKD
- KBR-x.xxMKS
- KBR-x.xxMKE

(Both bulk and T & R packages)

We regret any inconvenience caused by this action.

Should you have any questions or comments, please contact KDP Marketing for details.

MHz Band Ceramic Resonators

KBR, -M, MS, -MSA, -MSB Series



f_0 : 1.92 to 13.00MHz



FEATURES

- Small, lightweight design
- Excellent temperature stability
- Low cost
- Bulk packaged 500 pieces per bag or 2000 pieces per reel
- Sold in increments of 2000 pieces

HOW TO ORDER

KBR - 4.00 MSA TR

Packaging

- TR = Tape and reel
- TF = Ammo pack
- = Bulk

Resonator Type

- MS = 1.92 to 3.57MHz
- MSA = 3.58 to 8.00MHz (Washable Type)
- MSB = 3.58 to 6.00MHz
- M = 8.00 to 13.00MHz


Oscillation Frequency (MHz)

Series


SPECIFICATIONS (KBR-□MS/KBR-□MSA/KBR-□MSB/KBR-□M Series)

| Series | MS | MSA/MSB | M |
|--------------------------------------------|-----------------|-----------------|------------------|
| Dimension | Fig. A | Fig. B | Fig. C |
| Oscillation Frequency | 1.92 to 3.50MHz | 3.58 to 8.00MHz | 8.00 to 13.00MHz |
| Frequency Tolerance | ±0.5% | ±0.5% | ±0.5% |
| Resonant Impedance | 100Ω Max. | 30Ω Max. | 40Ω Max. |
| Temperature Characteristics (-20 to +80°C) | ±0.3% | ±0.3% | ±0.5% |

DIMENSIONS

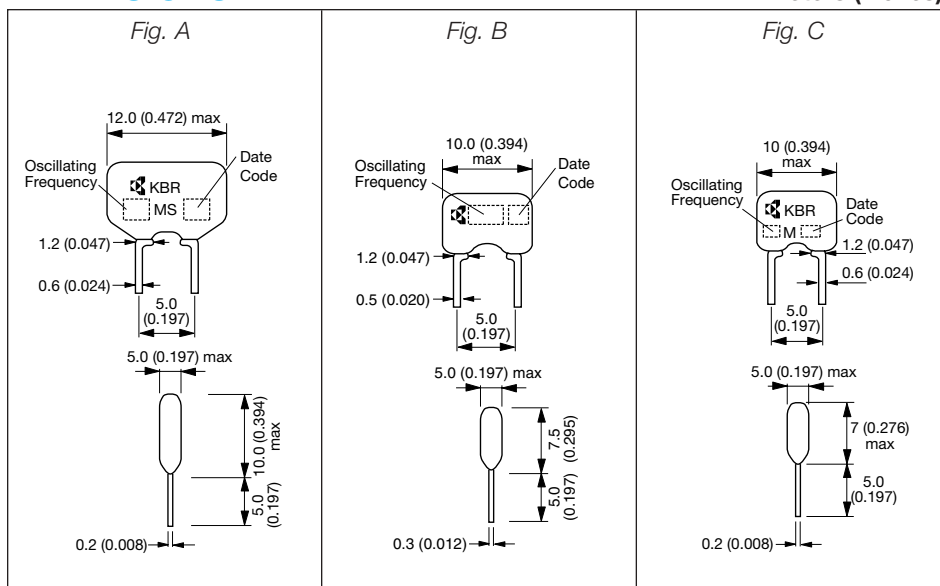

TEST CIRCUIT

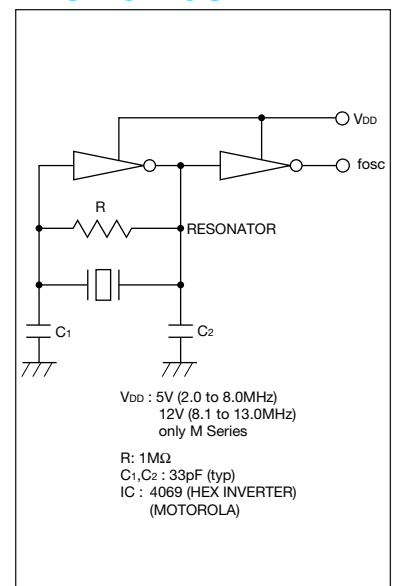

Built-in Capacitor



MHz Band Ceramic Resonators KBR-MKS/MKD Series




FEATURES

- Component (Capacitor) cost and space saving
- Mounting cost saving
- High density mounting possible

APPLICATIONS

- Clock for micro computer
- Telephone
- Frequency synthesizer
- Voice synthesizer IC
- Motor control unit
- Remote controller

TEST CIRCUIT

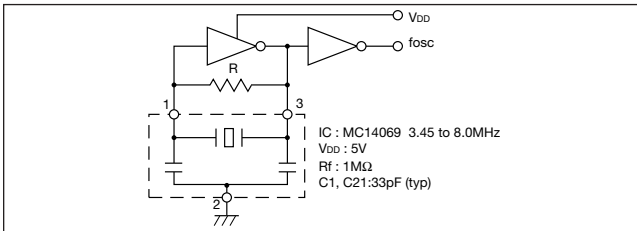

HOW TO ORDER

KBR - 4.00 MKS TR

Packaging

- TR = Tape and reel 2,000 pcs
- TF = Ammopack
- = Bulk

Type


- MKS = Capacitor built-in low profile type
- MKD = Capacitor built-in washable type

Oscillating Frequency (MHz)

Series

TAPING

millimeters (inches)

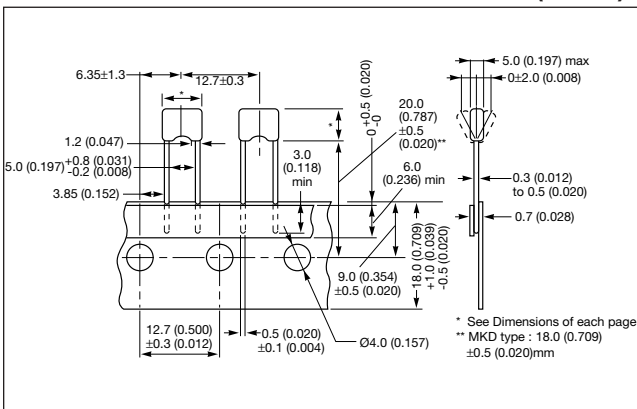

DIMENSIONS

millimeters (inches)

3.52 to 8.0MHz (MKS type)

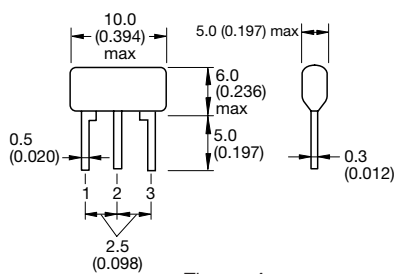


Figure A

3.52 to 8.0MHz (MKD type)

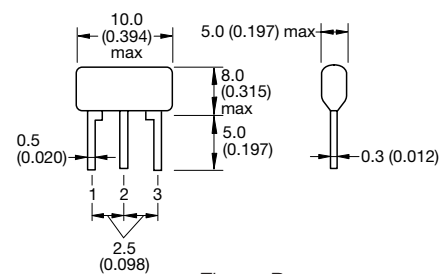


Figure B

SPECIFICATIONS


| Series | Frequency Range (MHz) | Figure | Frequency Tolerance | Temperature Stability (-20 to 80°C) | Standard Frequencies (MHz) | Taping |
|----------|-----------------------|--------|---------------------|-------------------------------------|------------------------------------|-----------|
| KBR-□MKS | 3.52 to 8.00 | Fig. A | ±0.5% | ±0.5% | 3.58, 4.00, 4.19, 5.00, 6.00, 8.00 | Available |
| KBR-□MKD | 3.52 to 8.00 | Fig. B | ±0.5% | ±0.5% | 3.58, 4.00, 4.19, 5.00, 6.00, 8.00 | Available |

Please contact your local AVX sales office for custom frequency.

MHz Band Ceramic Resonators (SMD) PBRC-G Series




TEST CIRCUIT

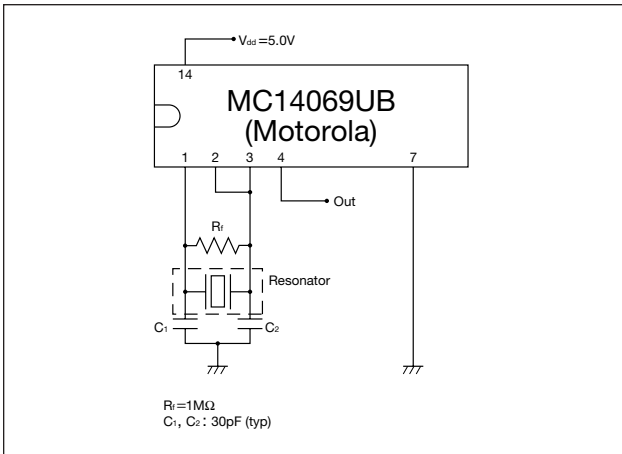

DIMENSIONS

millimeters (inches)

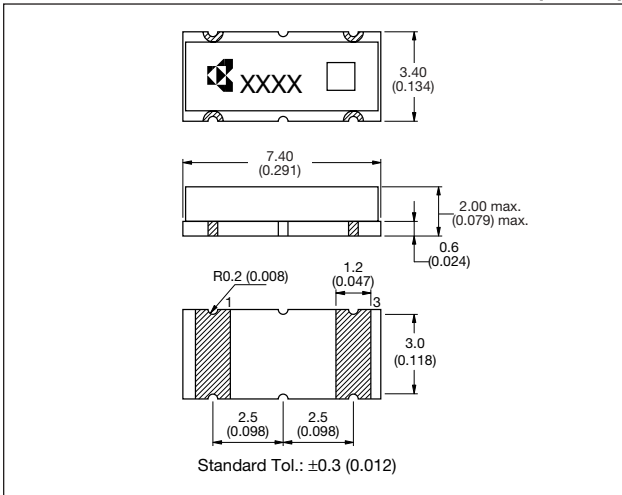

FEATURES

- Excellent frequency stability
- Low profile
- Reflow solderable
- Excellent solderability (Nickel barrier + Au flash termination)

APPLICATIONS

- Car Accessories
- Cam-corders
- Digital Cameras
- PDAs
- PC Peripherals

HOW TO ORDER

PBRC - 4.00 G R □

Tolerance

- = $\pm 0.5\%$ (Standard)
- 03 = $\pm 0.3\%$ (Option)

Packaging

Tape and reel, 2,000 pcs/reel

G: No Built-in Capacitor

Oscillating Frequency (MHz)

3.58 to 8.00MHz


Series

Note: C1 & C2 are referenced capacitance value to measure each parameter under. Test circuit (IC = MC14069UB).
C1 & C2 values would be modified - depend upon various IC to be used.


SPECIFICATIONS

| Series | Frequency Range | Frequency Tolerance (25°C) | Temperature Stability | IC | Standard Frequency (MHz) |
|--------|-----------------|------------------------------------|-------------------------------|-----------------------|------------------------------------|
| PBRC-G | 3.58 to 8.00 | $\pm 0.05\%$ (op. $\pm 0.3\%$) | $\pm 0.05\%$ (-40 to 85°C) | MC14069UB MOTOROLA | 3.58, 4.00, 4.19, 6.00, 8.00 |


Recommended Land Pattern

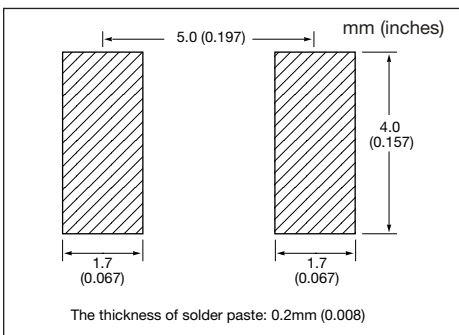

Recommended Reflow Profile

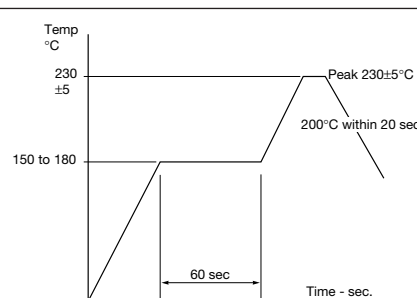


Packaging - Taping

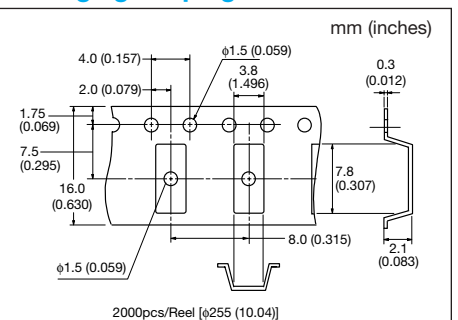

MHz Band Ceramic Resonators (SMD) PBRC-H Series




TEST CIRCUIT

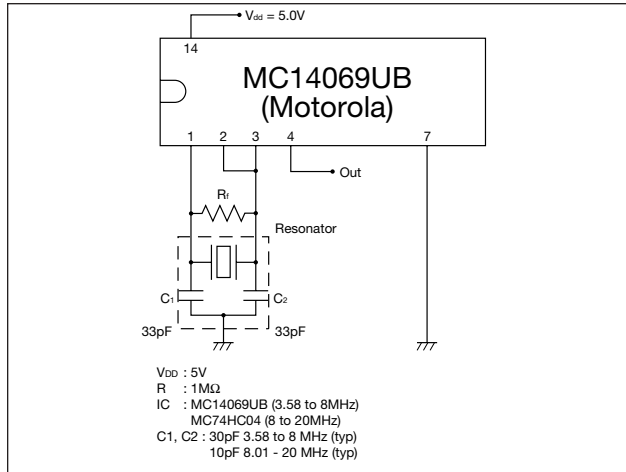

DIMENSIONS

millimeters (inches)

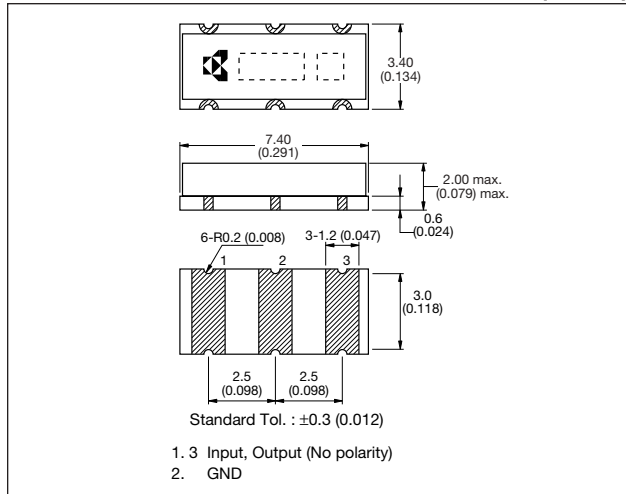

FEATURES

- Excellent frequency stability
- Low profile
- Reflow solderable
- Excellent solderability (Nickel barrier + Au flash termination)

APPLICATIONS

- Car Accessories
- Cam-corders
- Digital Cameras
- PDAs
- PC Peripherals

HOW TO ORDER

PBRC - 4.00 H R □

Tolerance

| | | |
|----|--------------|------------------------|
| | 2.00 to 8.00 | 8.01 to 20.00 |
| □ | $\pm 0.5\%$ | $\pm 0.7\%$ (Standard) |
| 03 | $\pm 0.3\%$ | — |
| 05 | — | $\pm 0.5\%$ |

Packaging

Tape and reel, 2,000 pcs/reel

H: Built-in Capacitor

Oscillating Frequency (MHz)

3.58 to 20.00MHz


Series

Note: Please refer to IC Application Guide book for IC matching


SPECIFICATIONS

| Series | Frequency Range (MHz) | Tolerance (25°C) | Temperature Stability | IC | Standard Frequencies |
|--------|-----------------------|-----------------------------------|------------------------------|-----------------------|--------------------------------|
| PBRC-H | 3.58 to 8.00 | $\pm 0.5\%$ (op. $\pm 0.3\%$) | $\pm 0.5\%$ (-40 to 85°C) | MOTOROLA MC74HC04 | 3.58, 4.00, 4.19 6.00, 8.00 |
| | 8.01 to 20.00 | $\pm 0.7\%$ (op. $\pm 0.5\%$) | $\pm 0.1\%$ (-40 to 85°C) | MOTOROLA MC14069UB | 10.0, 12.0, 16.0, 20.0 |


Recommended Land Pattern

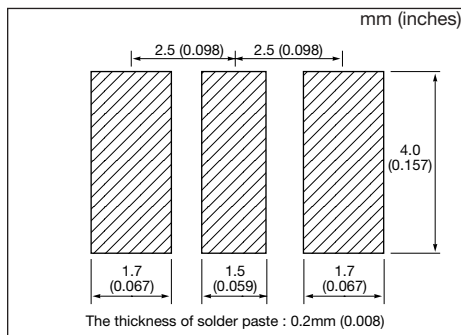

Recommended Reflow Profile

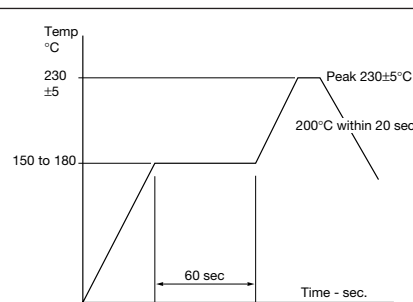

Packaging - Taping

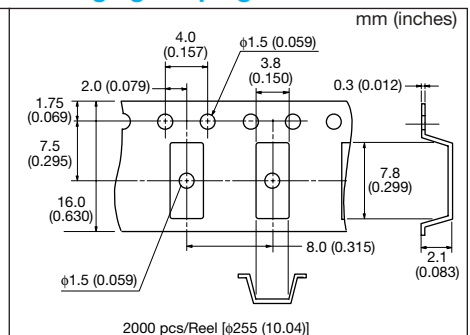

MHz Band Ceramic Resonators (SMD) for Automotive PBRV-H Series




FEATURES

- High reliable, excellent frequency stability
- Robust shock resistant
- Reflow solderable and washable
- Excellent solderability (Nickel barrier + Au flash termination)

APPLICATIONS

- ABS
- ECU
- Air-Bag System

TEST CIRCUIT

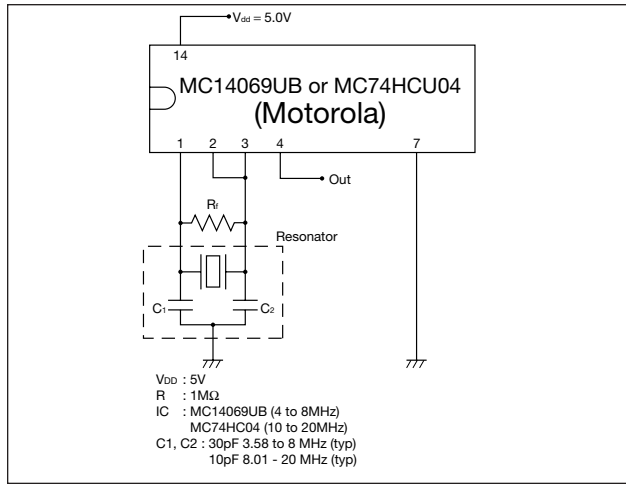

HOW TO ORDER

PBRV - 4.00 H R Y

Operating Temperature Range

Y = -40 to +125°C
Z = -40 to +150°C

Packaging

Tape and reel, 2,000 pcs/reel

Built-in Capacitor


Oscillating Frequency (MHz)

3.58 to 20.00MHz

Series

DIMENSIONS

millimeters (inches)

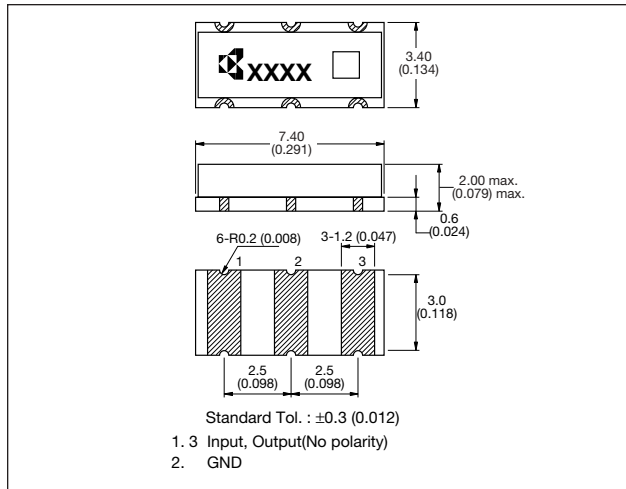


Note: Please refer to IC Application Guide book for IC matching


SPECIFICATIONS

| Series | Frequency Range (MHz) | Tolerance (25°C) | Temperature Stability | IC | Standard Frequencies |
|--------|-----------------------|-------------------|------------------------------------------------------|--------------------|------------------------|
| PBRV-H | 3.58 to 8.00 | ±0.5% (op. ±0.3%) | Y = ±0.5% (-40 to 125°C) Z = ±0.5% (-40 to 150°C) | MOTOROLA MC14069UB | 4.00, 6.00, 8.00 |
| | 8.01 to 20.00 | ±0.7% (op. ±0.5%) | Y = ±0.1% (-40 to 125°C) Z = ±0.2% (-40 to 150°C) | MOTOROLA MC74HC04 | 12.0, 16.0, 18.0, 20.0 |


Recommended Land Pattern

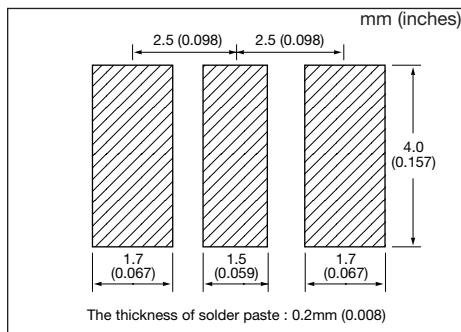

Recommended Reflow Profile

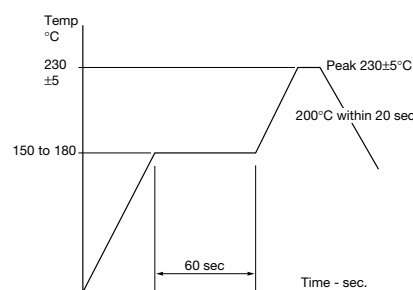

Packaging - Taping

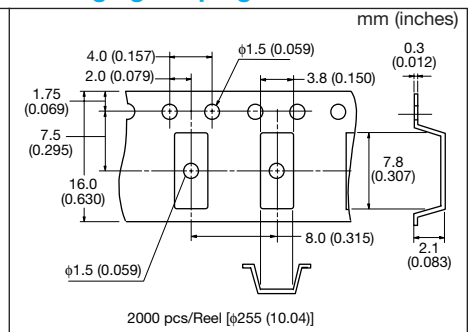


MHz Band Ceramic Resonators (SMD)



PACKAGING

millimeters (inches)

Reel

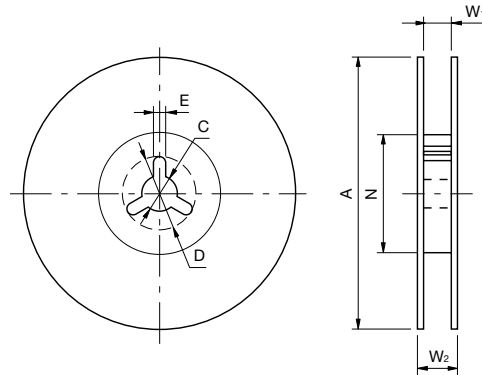


2,000 pcs/reel

| Code | A | N | W ₁ | W ₂ | C | D | E |
|------|---------------------------|--------------------------|----------------------------------------------------------------------------------------|---------------------------|----------------------------|----------------------------|----------------------------|
| Dim. | 250±2.00 (9.843±0.079) | 80±2.00 (3.150±0.079) | 16.5 ^{+1.10} _{-0.00} (0.650 ^{+0.043} _{-0.000}) | 23.6 max. (0.929 max.) | 13.0±0.50 (0.512±0.020) | 21.0±0.80 (0.827±0.031) | 2.00±0.50 (0.079±0.020) |

NOTICE

- Handling must be fully cared to avoid any failure, in case it is loaded over rated mechanical shock or vibration.
- Product is available for reflow soldering process, but not applicable for flow soldering.
- Land must be oriented as shown without applying excess stress by bending substrate.

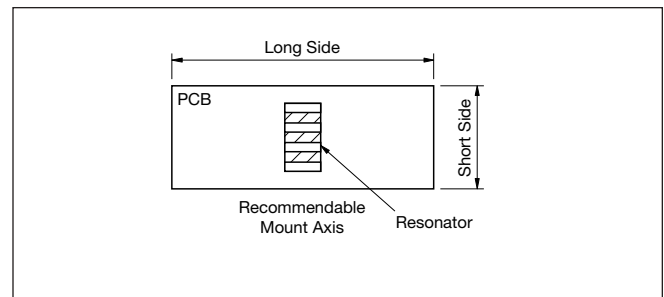

MHz Band Ceramic Resonators (SMD) SSR-B Series



FEATURES

- Miniature size (2.1x3.2x1.5mm)
- High density mounting possible
- Wide frequency range

APPLICATIONS

- CD-ROM
- Hard Disk Drive
- DVD-ROM
- MD
- Printer
- Cellular (CDMA/PCS)
- Portable Electronic Equipment

HOW TO ORDER

SSR - 33.86 B R

Packaging

Tape and reel, 2,000 pcs/reel

Type B


Built-in Capacitor

Oscillating Frequency (MHz)


Series

DIMENSIONS

millimeters (inches)

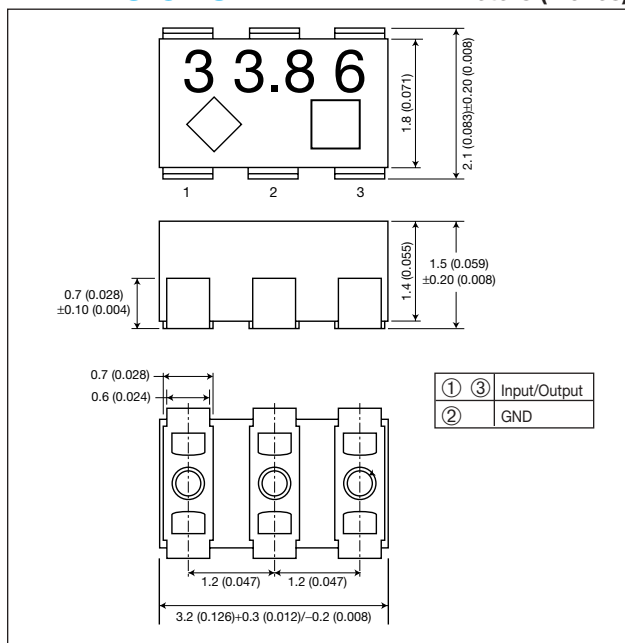

TEST CIRCUIT

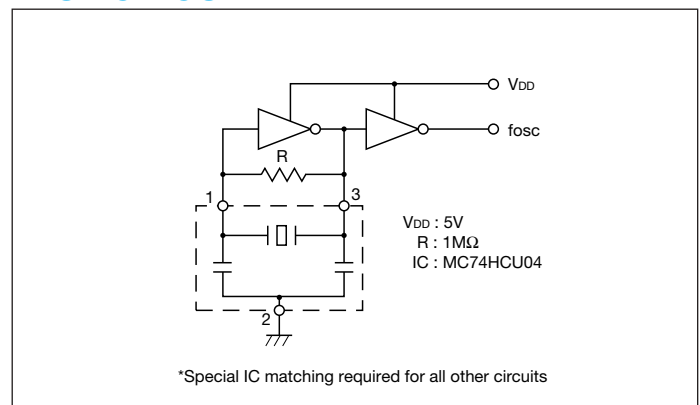


SPECIFICATIONS


| Frequency Range | Frequency Tolerance (25°C) | Temperature Stability (-20 to 80°C) | IC | Standard Frequency (MHz) |
|-----------------|----------------------------|-------------------------------------|-----------------------|--------------------------------|
| 16.0 to 60.0MHz | ±0.5% | ±0.3% | MC74HCU04 MOTOROLA | 16.93, 20.0, 27.0, 33.86, 50.8 |

Please contact your local AVX office for IC matching.


Recommended Land Pattern

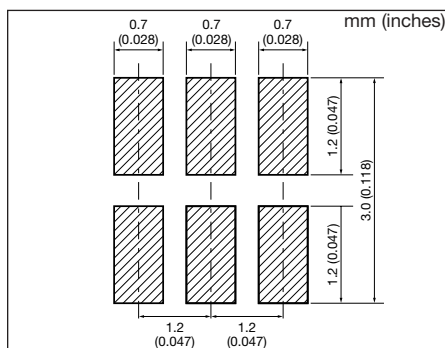

Recommended Reflow Profile

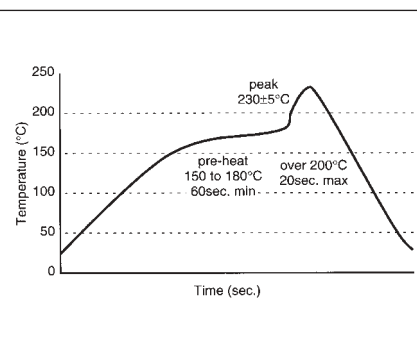

Packaging - Taping

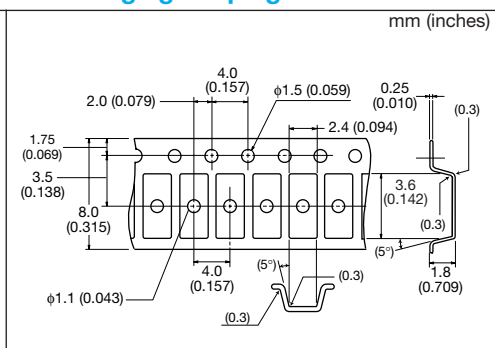

MHz Band Ceramic Resonators (SMD) SSR-D Series



FEATURES


- Fundamental (20 to 30MHz)
- Miniature size (2.5x2.0x1.0mm)
- High density mounting possible
- Wide frequency range
- Washable

APPLICATIONS

- CD-R/W
- Hard Disk Drive
- DVD-ROM
- MD
- Printer
- Cellular (CDMA/PCS)
- Portable Electronic Equipment
- Memory Card


HOW TO ORDER

SSR - 25.00 D R

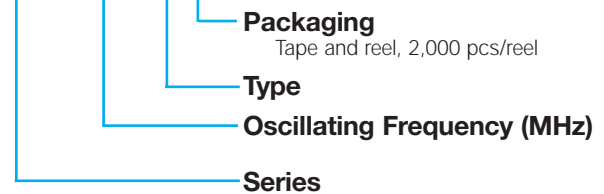


DIMENSIONS

millimeters (inches)

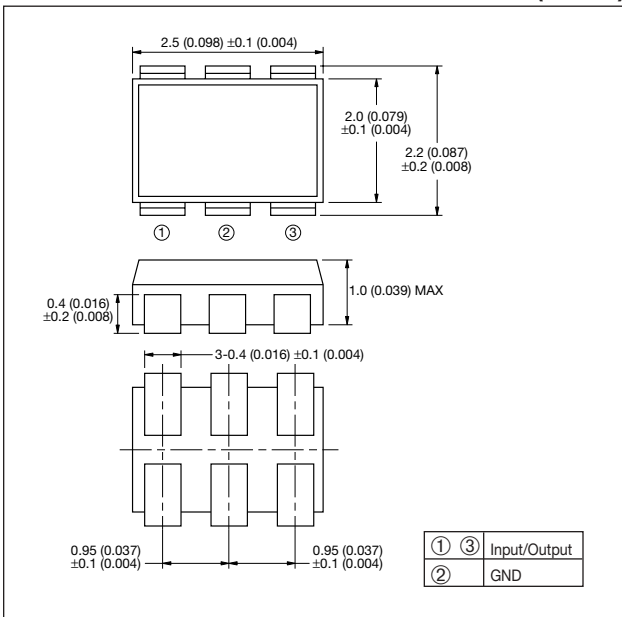

TEST CIRCUIT

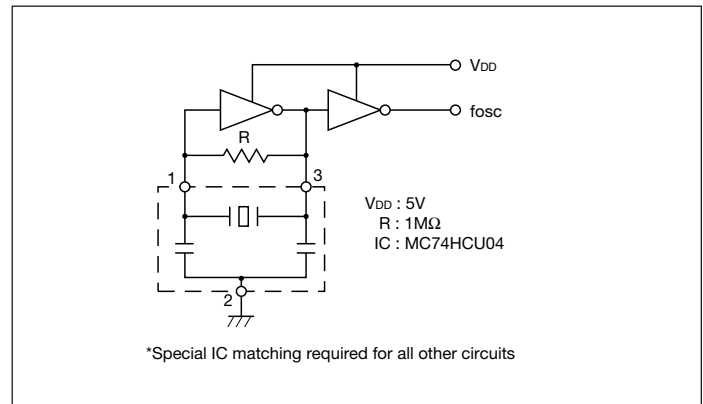


SPECIFICATIONS


| Frequency Range | Frequency Tolerance (25°C) | Temperature Stability (-20 to 80°C) | IC | Main Frequency (MHz) |
|-----------------|----------------------------|-------------------------------------|-----------------------|-------------------------------------|
| 20.0 to 60.0MHz | ±0.5% | ±0.3% | MC74HCU04 MOTOROLA | 20.0, 25.0, 30.0, 33.86, 40.0 |

Please contact your local AVX office for IC matching.


Recommended Land Pattern

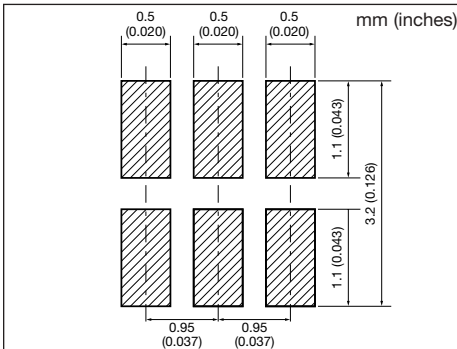

Recommended Reflow Profile

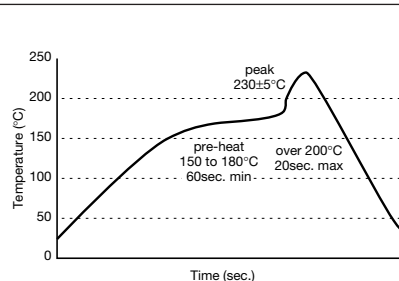


Packaging - Taping

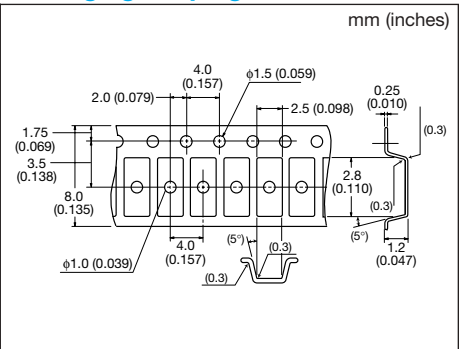

SAW Resonators



KAR Series

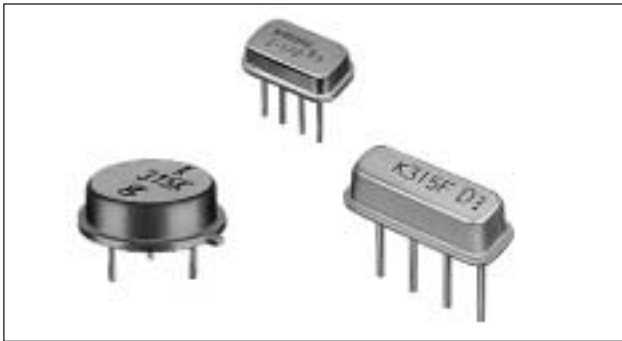

FEATURES


- 2 channels in one package
- High anti-shock stability
- Excellent Spurious response
- Low temperature coefficient
- Adjustment free
- Saving component cost and space

APPLICATIONS

- RF modulator of VCR, video disk player and CATV
- Remote keyless entry, garage openers

HOW TO ORDER

KAR - 91 CS

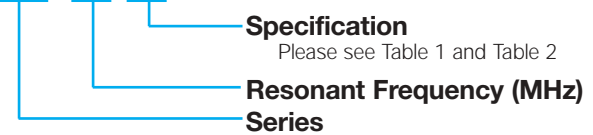

Specification




Please see Table 1 and Table 2

Resonant Frequency (MHz)

Series

DIMENSIONS

millimeters (inches)

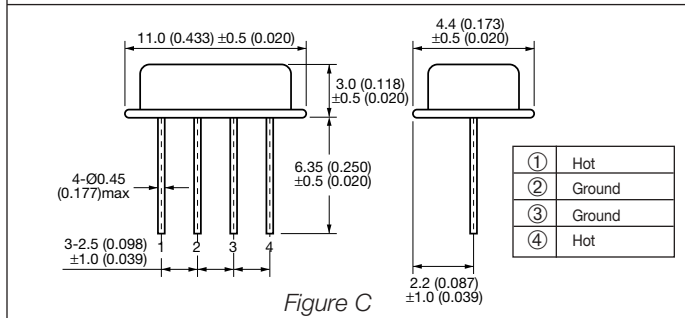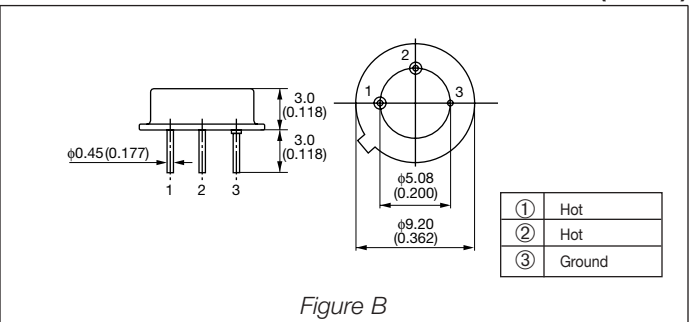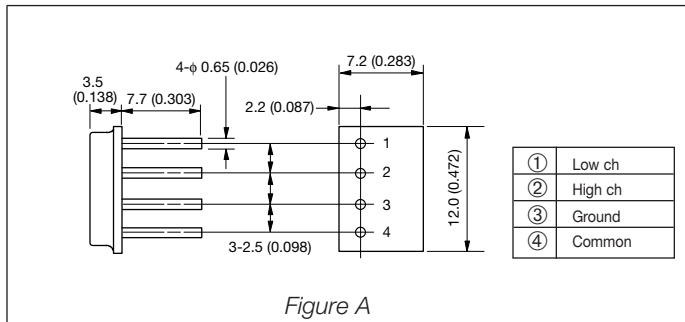

SPECIFICATIONS (for RF Module and CATV Converter)

Table 1

| Part Number | Channels* | Resonant Frequency (MHz) | Resonant Loss (dB) | Parallel Capacitance (pF) | Temperature Characteristics (ppm/°C) | Dimension |
|-------------|------------------|------------------------------|--------------------|---------------------------|--------------------------------------|-----------|
| KAR-55CS | W- $\frac{3}{4}$ | 55.240±0.080 62.240±0.080 | 5.0 Max. | 4.8±1 4.8±1 | ±8 | Fig. A |
| KAR-55CT | U- $\frac{2}{3}$ | 55.240±0.080 61.240±0.080 | 6.0 Max. | 3.6±1 3.7±1 | ±8 | |
| KAR-61CT | U- $\frac{3}{4}$ | 61.240±0.080 67.240±0.080 | 5.0 Max. | 4.4±1 4.2±1 | ±8 | |
| KAR-77CS | O- $\frac{3}{4}$ | 77.240±0.080 85.240±0.080 | 4.5 Max. | 3.1±1 2.8±1 | ±8 | |
| KAR-91CS | J- $\frac{1}{2}$ | 91.240±0.080 97.240±0.080 | 3.0 Max. | 4.0±1 4.0±1 | ±5 | |
| KAR-211CS | U-13 | 211.240±0.150 | 2.7 Max. | 3.0±1 | ±8 | |
| KAR-108CS | CATV | 108.200±0.030 | 3.0 Max. | 5.0 Max. | ±8 | |
| KAR-117CS | CATV | 117.200±0.030 | 3.0 Max. | 5.0 Max. | ±8 | |
| KAR-119CS | CATV | 119.200±0.030 | 3.0 Max. | 5.0 Max. | ±8 | |

*J = Japan U = United States W = Germany A = Australia O = Eastern Europe

SAW Resonators



KAR Series

SPECIFICATIONS (for Remote Keyless Entry)

Table 2

| Part Number | Resonant Frequency (MHz) | Resonant Loss (dB) | Parallel Capacitance (pF) | Temperature Characteristics (ppm/°C) | Dimension |
|-------------|--------------------------|--------------------|---------------------------|--------------------------------------|-----------|
| KAR-303CS | 303.875±0.250 | 2.5 Max. | 4.0 Max. | ±8 Max. | Fig. A |
| KAR-304CS | 304.300±0.250 | | | | |
| KAR-310CS | 310.000±0.250 | | | | |
| KAR-314CS | 314.000±0.250 | | | | |
| KAR-314CT | 314.500±0.250 | | | | |
| KAR-315CS | 315.000±0.250 | | | | |
| KAR-320CS | 320.650±0.250 | | | | |
| KAR-345CS | 345.000±0.250 | | | | |
| KAR-359CS | 359.900±0.250 | | | | |
| KAR-417CS | 417.500±0.250 | | | | |
| KAR-418CS | 418.000±0.250 | | | | |
| KAR-423CS | 423.220±0.250 | | | | |
| KAR-432CS | 432.920±0.250 | | | | |
| KAR-433CS | 433.920±0.250 | | | | |
| KAR-433CT | 433.420±0.250 | | | | |
| KAR-479CS | 479.500±0.500 | 2.3 Max. | | | |
| KAR-303CK | 303.875±0.250 | 2.5 Max. | 4.0 Max. | ±8 Max. | Fig. B |
| KAR-304CK | 304.300±0.250 | | | | |
| KAR-310CK | 310.000±0.250 | | | | |
| KAR-314CK | 314.000±0.250 | | | | |
| KAR-314CL | 314.500±0.250 | | | | |
| KAR-315CK | 315.000±0.250 | | | | |
| KAR-320CK | 320.650±0.250 | | | | |
| KAR-345CK | 345.000±0.250 | | | | |
| KAR-359CK | 359.900±0.250 | | | | |
| KAR-417CK | 417.500±0.250 | | | | |
| KAR-418CK | 418.000±0.250 | | | | |
| KAR-423CK | 423.220±0.250 | | | | |
| KAR-432CK | 432.920±0.250 | | | | |
| KAR-433CK | 433.920±0.250 | | | | |
| KAR-433CL | 433.420±0.250 | | | | |
| KAR-479CK | 479.500±0.500 | 2.3 Max. | | | |
| KAR-303CF | 303.875±0.250 | 2.5 Max. | 4.0 Max. | ±8 Max. | Fig. C |
| KAR-304CF | 304.300±0.250 | | | | |
| KAR-310CF | 310.000±0.250 | | | | |
| KAR-314CF | 314.000±0.250 | | | | |
| KAR-314CG | 314.500±0.250 | | | | |
| KAR-315CF | 315.000±0.250 | | | | |
| KAR-320CF | 320.650±0.250 | | | | |
| KAR-345CF | 345.000±0.250 | | | | |
| KAR-359CF | 359.900±0.250 | | | | |
| KAR-417CF | 417.500±0.250 | | | | |
| KAR-418CF | 418.000±0.250 | | | | |
| KAR-423CF | 423.220±0.250 | | | | |
| KAR-432CF | 432.920±0.250 | | | | |
| KAR-433CF | 433.920±0.250 | | | | |
| KAR-433CG | 433.420±0.250 | | | | |
| KAR-479CF | 479.500±0.500 | 2.3 Max. | | | |

JPN = Japan U = United States EU = Eastern Europe

The other frequency, please contact your nearest sales office.

SAW Resonators (SMD)



PARS Series



FEATURES


- Frequency range 300 to 480MHz
- 1 port type SMD resonator
- Small size (5.5x3.8mm)
- Low profile (1.5mm max.)
- SMT ceramic package
- High reliability sealing
- Excellent temperature characteristics
- +100ppm to -250ppm (-40 to 85°C)

APPLICATIONS

- Keyless entry systems
- Security systems
- Garage openers


DIMENSIONS

millimeters (inches)

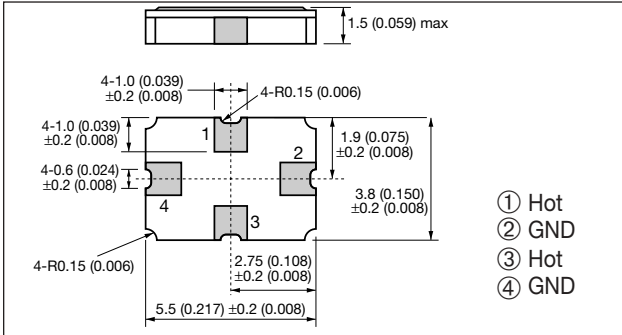


RECOMMENDED LAND PATTERN

mm (inches)

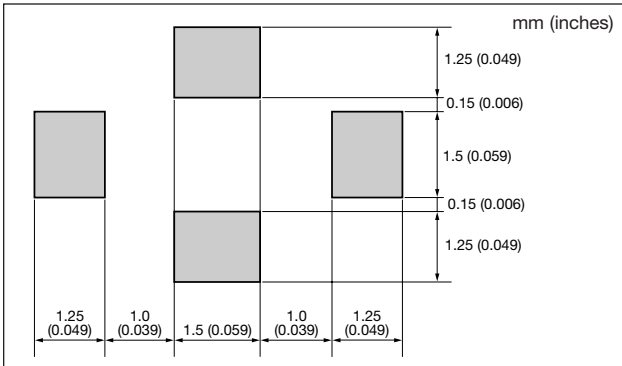

PACKAGING

mm (inches)

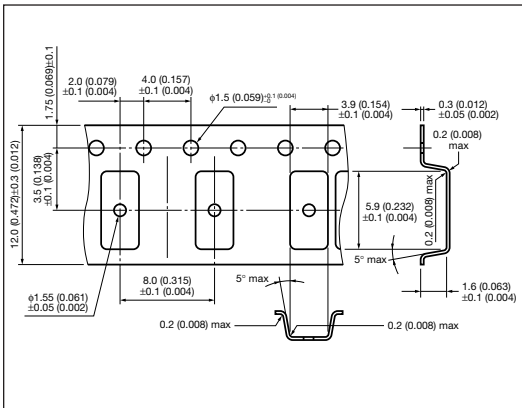

HOW TO ORDER

PARS 315.00 K 00 R

Packaging

R = Tape and reel, 2,000 pcs/reel

Frequency Tolerance or Custom Specs

| | | | |
|----|----------------|----|-----------|
| 00 | ±250kHz | 03 | ±100kHz |
| 01 | ±200kHz | 04 | ±75kHz |
| 02 | ±150kHz | 10 | Tolerance |
| 11 | ≤ Custom Specs | | |

Marking Code

Monthly Code



(4 digits Frequency Marking)

| Resonant Frequency (MHz) | Marking Code | Resonant Frequency (MHz) | Marking Code |
|--------------------------|--------------|--------------------------|--------------|
| 304.45 | 304 L | 423.22 | 423 K |
| 310.00 | 310 K | 432.92 | 432 K |
| 314.00 | 314 K | 433.42 | 433 L |
| 314.50 | 314 L | 433.92 | 433 K |
| 315.00 | 315 K | 479.50 | 479 L |
| 320.65 | 320 K | | |

Resonant Frequency (MHz)
Series

SPECIFICATIONS

| Part Number | Resonant Frequency (MHz) | Resonant Loss (dB) | Parallel Capacitance (pF) | Temperature Characteristics (ppm/°C) | |
|----------------|--------------------------|--------------------|---------------------------|--------------------------------------|----------|
| PARS303.00N00R | 303.000±0.250 | 2.5 Max. | 4.0 Max. | ±8 Max. | |
| PARS303.33L00R | 303.330±0.250 | | | | |
| PARS303.82M00R | 303.825±0.250 | | | | |
| PARS303.87K00R | 303.875±0.250 | | | | |
| PARS304.30K00R | 304.300±0.250 | | | | |
| PARS304.45L00R | 304.450±0.250 | | 3.2 Max. | | |
| PARS310.00K00R | 310.000±0.250 | | | | |
| PARS314.00K00R | 314.000±0.250 | | | | |
| PARS314.50K00R | 314.500±0.250 | | | | |
| PARS315.00K00R | 315.000±0.250 | | | | |
| PARS320.65K00R | 320.650±0.250 | 2.5 Max. | 3.2 Max. | ±8 Max. | |
| PARS345.00K00R | 345.000±0.250 | | | | |
| PARS418.00K00R | 418.000±0.250 | | | | |
| PARS423.22K00R | 423.220±0.250 | | | | |
| PARS432.92K00R | 432.920±0.250 | | | | |
| PARS433.42L00R | 433.420±0.250 | | | | |
| PARS433.92K00R | 433.920±0.250 | | | | |
| PARS479.50K00R | 479.500±0.500 | | | | 2.3 Max. |
| | | | | | |

Please contact your local sales office for custom frequency.

MHz Band Quartz Crystal




KSX-35 Series




DIMENSIONS


millimeters (inches)

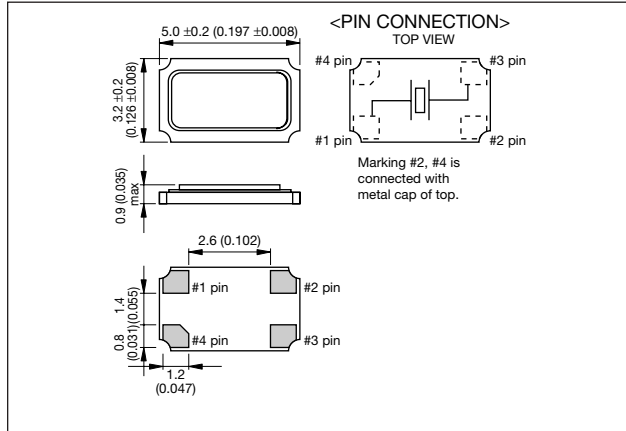


Packaging Reel

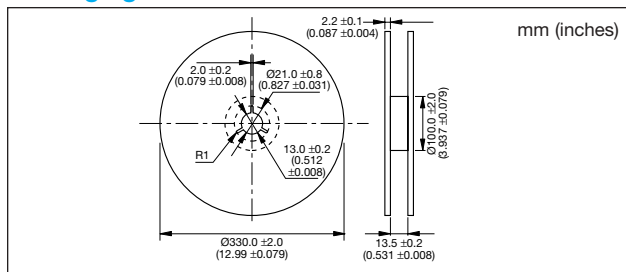


Packaging Tape

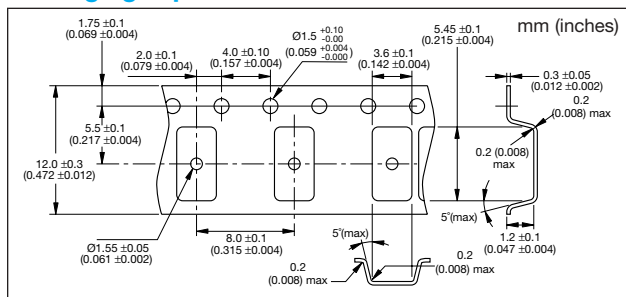

Recommended Land Pattern

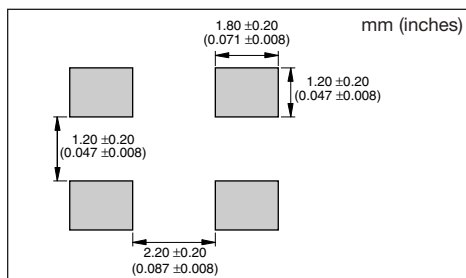

Recommended Reflow Profile

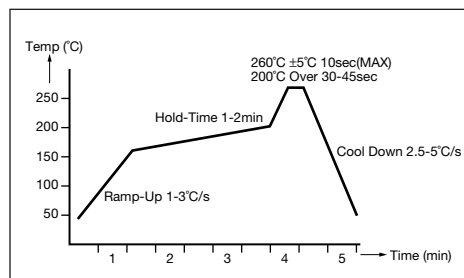

FEATURES

- Reference frequency for telecommunication system is in product line up
- Reflow soldering available
- Using Ceramic Package of which reliability is high
- Small, low profile and market standard dimensions

APPLICATIONS

- Mobile phone
- IC Card
- GPS

HOW TO ORDER

KSX-35-13000K C A-Q C 0 R

Series

Nominal Frequency

| Code | Freq. (MHz) |
|--------|-------------|
| 13000K | 13.000000 |
| 14400K | 14.400000 |
| 16800K | 16.800000 |
| 19200K | 19.200000 |
| 19440K | 19.440000 |
| 19680K | 19.680000 |
| 19800K | 19.800000 |
| 26000K | 26.000000 |

*Please ask sales if you request other frequency.

Packaging

R = Taping

Frequency Offset

0 = 0Hz (Standard)

Frequency

Temperature

Stability

C = ±15ppm

Operating

Temperature

Q = -30°C to +85°C

Frequency Stability

A = ±10ppm

Load Capacitance

C = 12pF

SPECIFICATIONS

| Parameters | Symbol | Specification | Remark |
|----------------------------------|------------------|----------------|--------------------------------|
| Nominal Frequency | f ₀ | 13 to 26MHz | — |
| Mode of Vibration | — | Fundamental | Standard |
| Load Capacitance | C _L | 12.0pF | Standard |
| Frequency Stability | Δf/f | ±10.0ppm | +25°C±2°C |
| Storage Temp. | T _{STG} | -40°C to +85°C | — |
| Operating Temp. | T _{OPR} | -30°C to +85°C | for Mobile Phone |
| Frequency Temp. Stability | Δf/T | ±15.0ppm | for Mobile Phone |
| Series Resistance | C _i | 50Ω(max.) | Different by Nominal Frequency |

MHz Band Quartz Crystal




KSX-36 Series




DIMENSIONS


millimeters (inches)

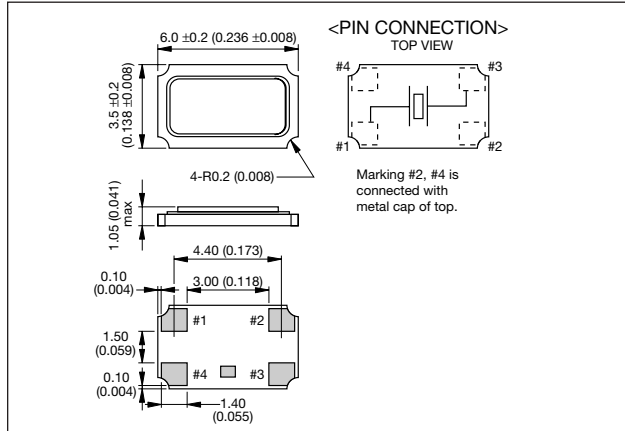


Packaging Reel

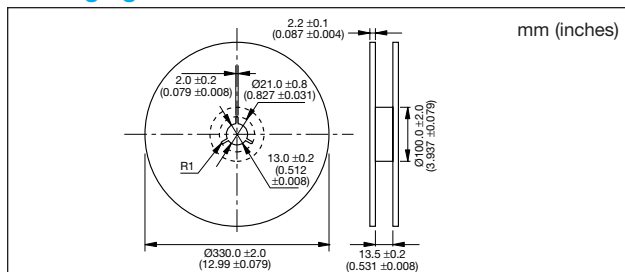


Packaging Tape

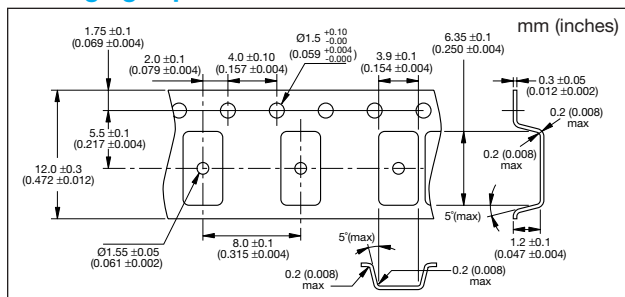

Recommended Land Pattern

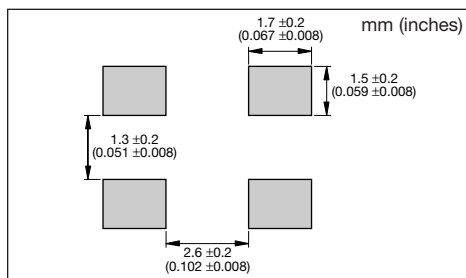

Recommended Reflow Profile

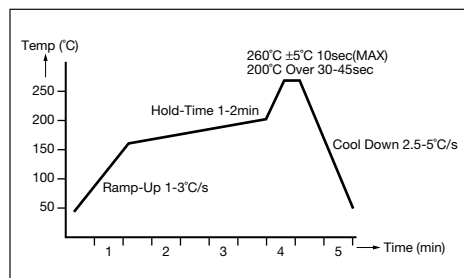

FEATURES

- Reference frequency for telecommunication system is in product line up
- Reflow soldering available
- Using Ceramic Package of which reliability is high
- Small, low profile and market standard dimensions

APPLICATIONS

- Mobile phone
- IC Card
- GPS

HOW TO ORDER

KSX-36-13000K C A-Q C 0 R

Series —

Nominal Frequency —

| Code | Freq. (MHz) |
|--------|-------------|
| 13000K | 13.000000 |
| 14400K | 14.400000 |
| 16800K | 16.800000 |
| 19200K | 19.200000 |
| 19440K | 19.440000 |
| 19680K | 19.680000 |
| 19800K | 19.800000 |
| 26000K | 26.000000 |
| 27820K | 27.820800 |

Packaging — R = Taping

Frequency Offset — 0 = 0Hz (Standard)

Frequency Temperature Stability — C = ±15ppm

Operating Temperature — Q = -30°C to +85°C

Frequency Stability — A = ±10ppm

Load Capacitance — C = 12pF

SPECIFICATIONS

| Parameters | Symbol | Specification | Remark |
|---------------------------|------------------|------------------|--------------------------------|
| Nominal Frequency | f ₀ | 13 to 27.8208MHz | — |
| Mode of Vibration | — | Fundamental | Standard |
| Load Capacitance | C _L | 12.0pF | Standard |
| Frequency Stability | Δf/f | ±10.0ppm | +25°C ± 2°C |
| Storage Temp. | T _{STG} | -40°C to +85°C | — |
| Operating Temp. | T _{OPR} | -30°C to +85°C | for Mobile Phone |
| Frequency Temp. Stability | Δf/T | ±15.0ppm | for Mobile Phone |
| Series Resistance | C _i | 50Ω(max.) | Different by Nominal Frequency |


Clock Oscillators




K30/K50 Series

Kyocera has a wide range of clock oscillators with frequency and package size to match the various customer requirements.


K50/K30 HC SERIES TEST CIRCUIT

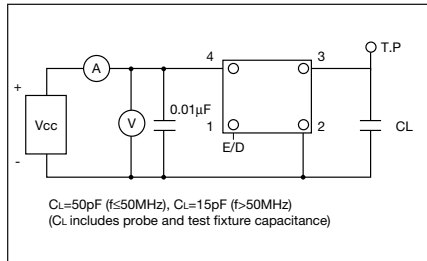


K50/K30 3C SERIES TEST CIRCUIT

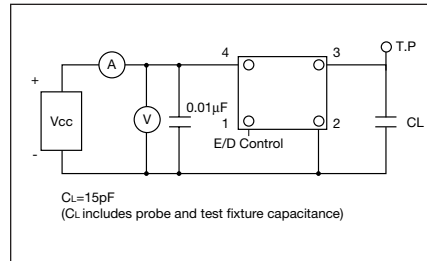

K50H 3C SERIES TEST CIRCUIT

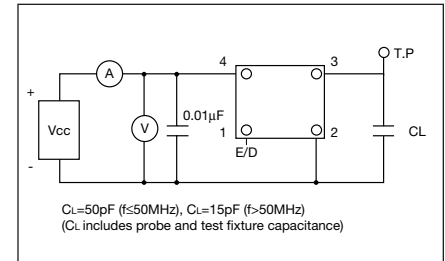

OUTPUT WAVE FORM FOR ALL SERIES

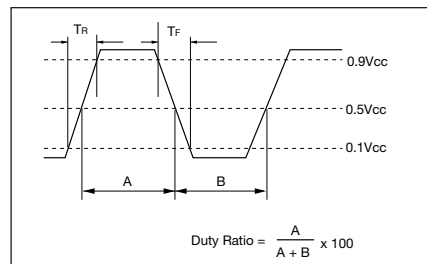

SPECIFICATIONS

| Type | Frequency Range (MHz) | Load | Drive Level | Duty Ratio | Features |
|---------|-----------------------|---------------------------------------------------------|------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|
| K50-HC | 8 to 68 | $C_L=50\text{pF (max.)}$ ($f_0 \leq 50\text{MHz}$) | CMOS $V_{OH}0.9V_{CC}$ $V_{OL}0.1V_{CC}$ | 45/55% (0.5Vcc) | 1. IR Reflowable 2. Mini-SMD 3. Tristate Output, Enable/Disable Function F>50MHz $C_L=15\text{pF}$ |
| K50-3C | 8 to 80 | $C_L=15\text{pF (max.)}$ | CMOS $V_{OH}0.9V_{CC}$ $V_{OL}0.1V_{CC}$ | 40/60% (0.5Vcc) | 1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function |
| K50H-3C | 50 to 160 | $C_L=15\text{pF (max.)}$ | CMOS $V_{OH}0.9V_{CC}$ $V_{OL}0.1V_{CC}$ | 45/55% (0.5Vcc) | 1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function |
| K30-HC | 8 to 50 | $C_L=50\text{pF (max.)}$ ($f_0 \leq 50\text{MHz}$) | CMOS $V_{OH}0.9V_{CC}$ $V_{OL}0.1V_{CC}$ | 45/55% (0.5Vcc) | 1. IR Reflowable 2. Mini-SMD 3. Tristate Output, Enable/Disable Function |
| K30-3C | 8 to 67 | $C_L=15\text{pF (max.)}$ | CMOS $V_{OH}0.9V_{CC}$ $V_{OL}0.1V_{CC}$ | 40/60% (0.5Vcc) | 1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function |

Clock Oscillators (SMD)




K50-HC Series (5.0V)

K50 SERIES



DIMENSIONS

millimeters (inches)

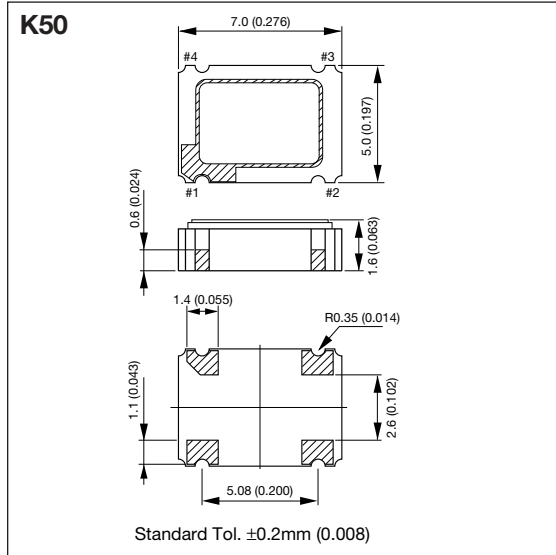

FEATURES

- High reliable SMD ceramic package
- Frequency range = 8MHz to 68MHz
- Frequency tolerance = $\pm 100\text{ppm}$, $\pm 50\text{ppm}$
- Tristate output inhibit

APPLICATIONS

- Routers
- Switches
- Servers

HOW TO ORDER

K50 - HC 1 C S E 40.0000M R

Series

Tolerance
 1 = $\pm 100\text{ppm}$
 0 = $\pm 50\text{ppm}$

Packaging

R = Tape and reel,
 1,000 pcs/reel

Frequency (MHz)

| | | |
|----------|---------|---------|
| 8.0000 | 27.0000 | 49.1520 |
| 14.31818 | 29.4989 | 50.0000 |
| 16.0000 | 30.0000 | 60.0000 |
| 20.0000 | 32.0000 | 64.0000 |
| 24.0000 | 33.8688 | 66.6667 |
| 24.5760 | 40.0000 | — |
| 25.0000 | 48.0000 | — |

Tristate Output

E = with function (STD)

Duty Ratio

S = 45% to 55% (STD)

Output

C = CMOS/Compatibility

PIN CONNECTION

| Pin # | Function |
|-------|------------------|
| 1 | CONTROL |
| 2 | CASE GND |
| 3 | OUTPUT |
| 4 | +V _{CC} |

ENABLE/DISABLE

| Pin #1 | Pin #3 |
|-------------|----------------|
| "H" or Open | Oscillation |
| "L" | High Impedance |

SPECIFICATIONS

| Items | Code | Rating | Unit | Remarks |
|-----------------------|---------------------------------|--------------------------|-------|----------------------------------------|
| Output Frequency | F _{OUT} | 8 to 68 | MHz | — |
| Frequency Tolerance | $\Delta F/F$ | ± 100 , ± 50 | ppm | Over all conditions |
| Aging | $\Delta F/F$ | ± 5 | ppm/y | @ 25°C |
| Operating Temperature | T _{OPR} | -10 to 70 | °C | — |
| Storage Temperature | T _{STR} | -55 to 125 | °C | — |
| Supply Voltage | V _{CC} | 5 \pm 0.5 | V | — |
| Supply Current | I _{CC} | 50 max. | mA | Loaded @ 68MHz |
| Disable Current | I _{DE} | 30 max. | mA | — |
| Duty Ratio | SYM | 45 to 55 | % | 0.5V _{CC} DC Level |
| Output 0 Level | V _{OL} | 0.1 V _{CC} max. | V | I _{OL} = 16mA |
| Output 1 Level | V _{OH} | 0.9 V _{CC} min. | V | I _{OH} = -16mA |
| Rise/Fall Time | T _R , T _F | 10 max. | nsec | 0.1V _{CC} -0.9V _{CC} |
| Load Capacitance | C _L | 50 max. | pF | F>50MHz C _L =15pF (max.) |
| Enable/Disable Time | — | 100 max. | nsec | — |
| Input Voltage Low | V _{IL} | 0.8 max. | V | — |
| Input Voltage High | V _{IH} | 2.2 min. | V | — |
| Start-up Time | ST | 10 max. | mS | Minimum Operating Voltage to be 0sec |

*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.

Clock Oscillators (SMD)




K50-3C Series (3.3V)

K50 SERIES



DIMENSIONS millimeters (inches)

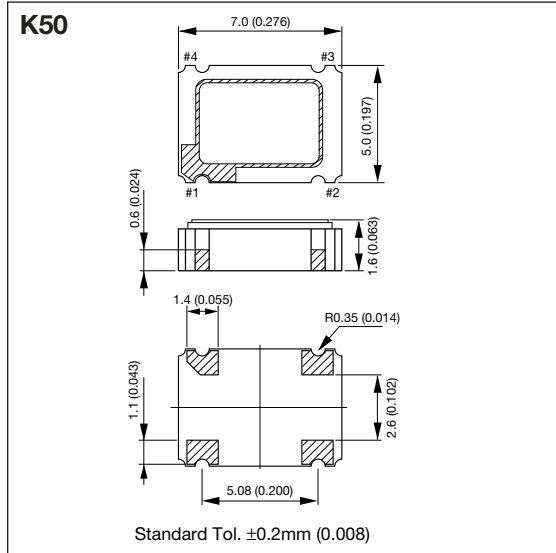

PIN CONNECTION ENABLE/DISABLE

| Pin # | Function |
|-------|------------------|
| 1 | CONTROL |
| 2 | CASE GND |
| 3 | OUTPUT |
| 4 | +V _{CC} |

| Pin #1 | Pin #3 |
|-------------|------------------------------------|
| "H" or Open | Oscillation |
| "L" | High Impedance or Oscillation Stop |

SPECIFICATIONS

| Items | Code | Rating | Unit | Remarks |
|--------------------------|----------------------------------|-------------------------|---------|----------------------------------------|
| Output Frequency | F _{OUT} | 8 to 80 | MHz | — |
| Frequency Tolerance | $\Delta F/F$ | $\pm 100, \pm 50$ | ppm | Over all conditions |
| Aging | $\Delta F/F$ | ± 5 | ppm/y | @ 25°C |
| Operating Temperature | T _{OPR} | -10 to 70 | °C | — |
| Storage Temperature | T _{STR} | -55 to 125 | °C | — |
| Supply Voltage | V _{CC} | 3.3 \pm 0.3 | V | — |
| Supply Current | I _{CC} | 25 max. | mA | Loaded @ 80MHz |
| Disable/Stand by Current | I _{DE} /I _{ST} | 10 max. | μ A | 8 \leq F \leq 32MHz |
| | | 15 max. | mA | 32<F \leq 50MHz |
| | | 10 max. | μ A | 50<F \leq 80MHz |
| Duty Ratio | SYM | 40 to 60 | % | 0.5V _{CC} DC Level |
| Output 0 Level | V _{OL} | 0.1V _{CC} max. | V | I _{OL} = 8mA |
| Output 1 Level | V _{OH} | 0.9V _{CC} min. | V | I _{OH} = -8mA |
| Rise/Fall Time | T _R , T _F | 10 max. | nsec | 0.1V _{CC} -0.9V _{CC} |
| Load Capacitance | C _L | 15 max. | pF | — |
| Enable/Disable Time | — | 5 max. | msec | 8 \leq F \leq 32MHz |
| | | 150 max. | nsec | 32<F \leq 50MHz |
| | | 5 max. | msec | 50<F \leq 80MHz |
| Input Voltage Low | V _{IL} | 0.3V _{CC} max. | V | — |
| Input Voltage High | V _{IH} | 0.7V _{CC} min. | V | — |
| Start-up Time | ST | 10 max. | mS | Minimum Operating Voltage to be 0sec |

*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.

FEATURES

- High reliable SMD ceramic package
- Frequency range = 8MHz to 80MHz
- Frequency tolerance = $\pm 100\text{ppm}$, $\pm 50\text{ppm}$
- Tristate output inhibit

APPLICATIONS

- PDAs
- Switches
- Routers
- Servers

HOW TO ORDER

K50 - 3C 1 □ E 40.0000M R

Series
K50 - 3C

Tolerance
1 = $\pm 100\text{ppm}$
0 = $\pm 50\text{ppm}$

Frequency (MHz)

| | | |
|----------|---------|---------|
| 8.00000 | 27.0000 | 49.0000 |
| 13.0000 | 29.4989 | 49.1520 |
| 14.31818 | 30.0000 | 50.0000 |
| 16.0000 | 32.0000 | 53.1250 |
| 20.0000 | 33.8688 | 64.0000 |
| 24.0000 | 35.3280 | 66.6667 |
| 24.5760 | 40.0000 | 80.0000 |
| 25.0000 | 44.0000 | — |

Package
R = Tape and reel, 1,000 pcs/reel

Enable/Disable Function
E = with function (STD)

Duty Ratio
□ = 40% to 60% (STD)
S = 45% to 55% (f>20MHz)

Clock Oscillators (SMD)




K50H-3C Series (3.3V)

K50 SERIES



DIMENSIONS

millimeters (inches)

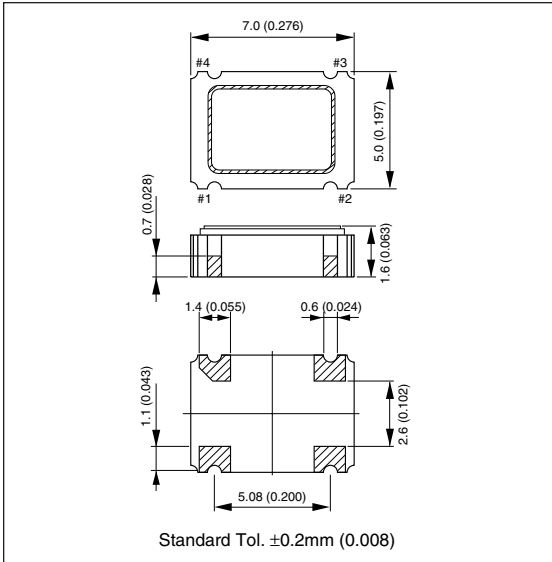

PIN CONNECTION

| Pin # | Function |
|-------|------------------|
| 1 | CONTROL |
| 2 | CASE GND |
| 3 | OUTPUT |
| 4 | +V _{CC} |

ENABLE/DISABLE

| Pin #1 | Pin #3 |
|-------------|------------------------------------|
| "H" or Open | Oscillation |
| "L" | High Impedance or Oscillation Stop |

FEATURES

- Special design package for high frequency applications
- Frequency range = 50MHz to 160MHz
- Frequency tolerance = $\pm 100\text{ppm}$, $\pm 50\text{ppm}$, $\pm 25\text{ppm}$
- Tristate output inhibit
- Low jitter

APPLICATIONS

- Fibre channel
- 10 Gigabit Ethernet
- Networking Devices

HOW TO ORDER

K50H - 3C 1 S E 125.000M R

Packaging

R = Tape and reel,
1,000 pcs/reel

Frequency (MHz)

| | | |
|---------|---------|---------|
| 50.0000 | 100.000 | 106.250 |
| 125.000 | 133.333 | 155.520 |
| 156.250 | — | — |

Enable/Disable Function

E = with function (STD)

Duty Ratio

S = 45% to 55% (STD)

Tolerance

1 = $\pm 100\text{ppm}$
0 = $\pm 50\text{ppm}$
S = $\pm 30\text{ppm}$
U = $\pm 25\text{ppm}$

Series

SPECIFICATIONS

| Items | Code | Rating | Unit | Remarks |
|-----------------------|---------------------------------|------------------------------------------|-------|----------------------------------------|
| Output Frequency | F _{OUT} | 50 to 160 | MHz | — |
| Frequency Tolerance | $\Delta F/F$ | ± 100 , ± 50 ± 30 , ± 25 | ppm | Over all conditions |
| Aging | $\Delta F/F$ | ± 5.0 ± 1.5 | ppm/y | @ 25°C |
| Operating Temperature | T _{OPR} | -10 to 70 | °C | — |
| Storage Temperature | T _{STR} | -55 to 125 | °C | — |
| Supply Voltage | V _{CC} | 3.3 \pm 0.3 | V | — |
| Supply Current | I _{CC} | 60 max. | mA | Loaded @ 160MHz |
| Duty Ratio | SYM | 45 to 55 | % | 0.5V _{CC} DC Level |
| Output 0 Level | V _{OL} | 0.1V _{CC} max. | V | I _{OL} = 8mA |
| Output 1 Level | V _{OH} | 0.9V _{CC} min. | V | I _{OH} = -8mA |
| Rise/Fall Time | T _R , T _F | 10 max. | nsec | 0.1V _{CC} -0.9V _{CC} |
| Load Capacitance | C _L | 15 max. | pF | — |
| Enable Time | — | 10 max. | msec | — |
| Disable Time | — | 10 max. | msec | — |
| Input Voltage Low | V _{IL} | 0.3V _{CC} max. | V | — |
| Input Voltage High | V _{IH} | 0.7V _{CC} min. | V | — |


*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.

Clock Oscillators (SMD)




K50/K50H Series

RECOMMENDED LAND PATTERN

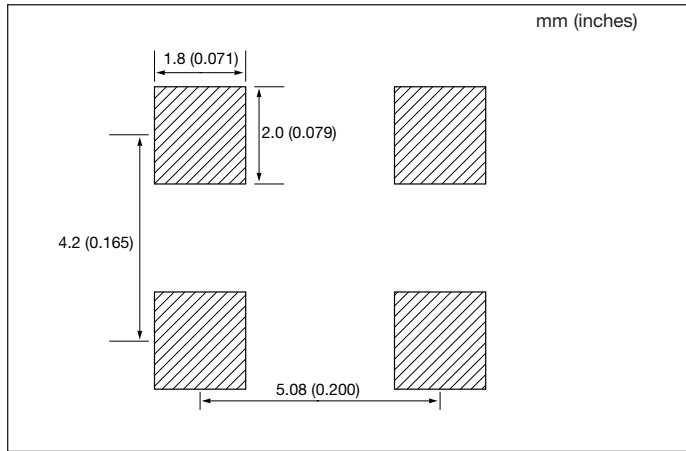


RECOMMENDED REFLOW PROFILE (Lead Free)

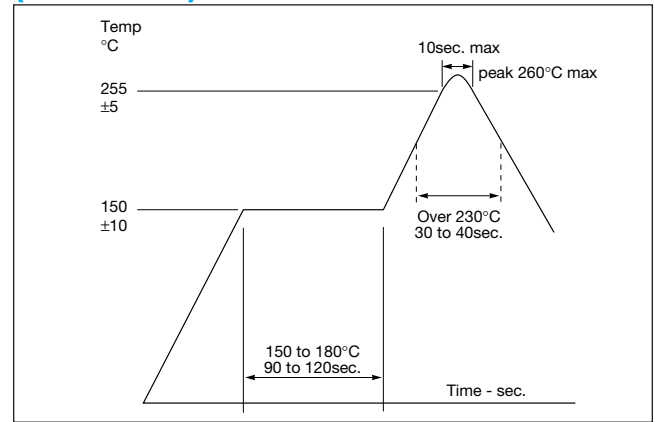


PACKAGING

millimeters (inches)

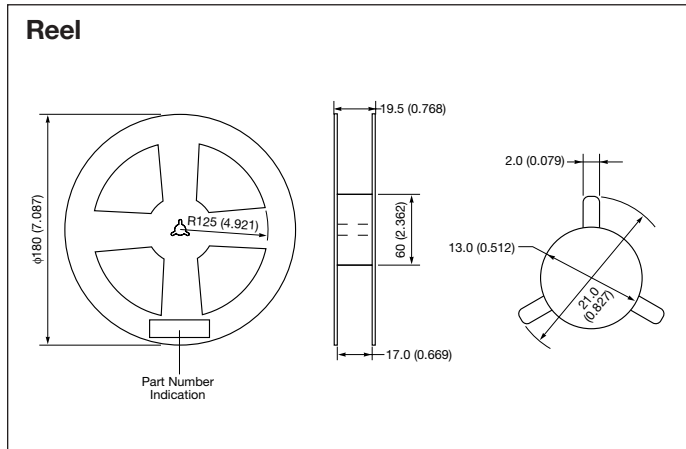


MARKING SPECIFICATIONS

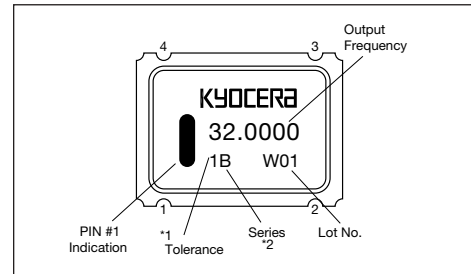

- *1 1 = ± 100 ppm
0 = ± 50 ppm
S = ± 30 ppm
U = ± 25 ppm
- *2 B = K50-HC
L = K50-3C-E
M = K50-3C-SE
D = K50-CL
H = K50H-3C-SE

Carrier Tape

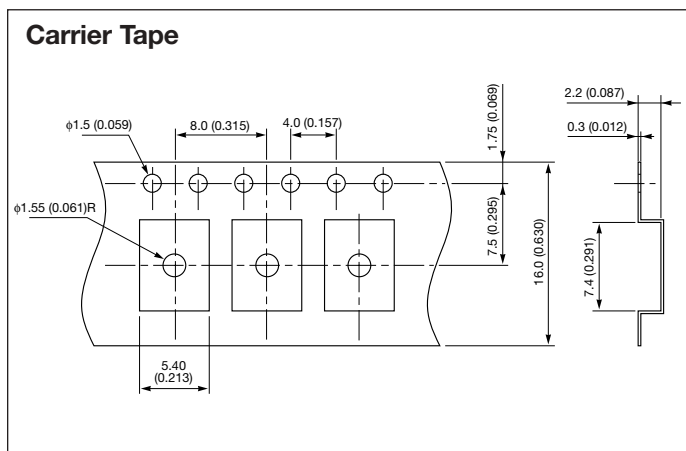

PACKAGING

1,000pcs/Reel

Clock Oscillators (SMD)




K30-HC Series (5.0V)

K30 SERIES



DIMENSIONS

millimeters (inches)

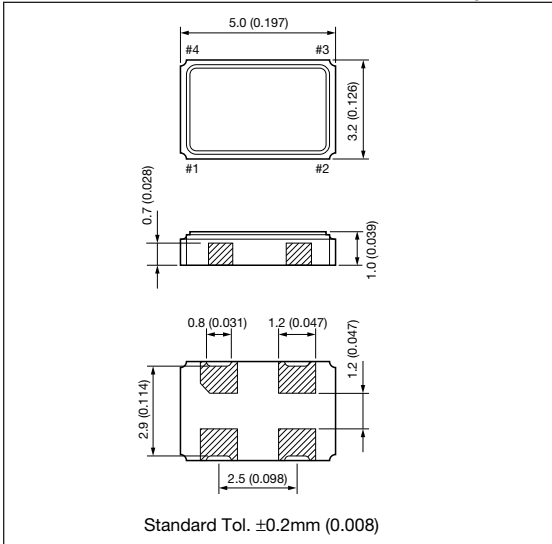

PIN CONNECTION

| Pin # | Function |
|-------|----------|
| 1 | CONTROL |
| 2 | CASE GND |
| 3 | OUTPUT |
| 4 | +Vcc |

ENABLE/DISABLE

| Pin #1 | Pin #3 |
|-------------|----------------|
| "H" or Open | Oscillation |
| "L" | High Impedance |

SPECIFICATIONS

| Items | Code | Rating | Unit | Remarks |
|-----------------------|--------------|-------------------|-------|--------------------------------------|
| Output Frequency | F_{OUT} | 8 to 50 | MHz | — |
| Frequency Tolerance | $\Delta F/F$ | $\pm 100, \pm 50$ | ppm | Over all conditions |
| Aging | $\Delta F/F$ | ± 5 | ppm/y | @ 25°C |
| Operating Temperature | T_{OPR} | -10 to 70 | °C | — |
| Storage Temperature | T_{STR} | -55 to 125 | °C | — |
| Supply Voltage | V_{CC} | 5 ± 0.5 | V | — |
| Supply Current | I_{CC} | 50 max. | mA | Loaded @ 50MHz |
| Disable Current | I_{DE} | 30 max. | mA | — |
| Duty Ratio | SYM | 45 to 55 | % | 0.5Vcc DC Level |
| Output 0 Level | V_{OL} | $0.1V_{CC}$ max. | V | $I_{OL} = 16\text{mA}$ |
| Output 1 Level | V_{OH} | $0.9V_{CC}$ min. | V | $I_{OH} = -16\text{mA}$ |
| Rise/Fall Time | T_R, T_F | 10 max. | nsec | $0.1V_{CC} - 0.9V_{CC}$ |
| Load Capacitance | C_L | 50 max. | pF | — |
| Enable/Disable Time | — | 100 max. | nsec | — |
| Input Voltage Low | V_{IL} | 0.8 max. | V | — |
| Input Voltage High | V_{IH} | 2.2 min. | V | — |
| Start-up Time | ST | 10 max. | mS | Minimum Operating Voltage to be 0sec |

*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.

FEATURES

- High reliable miniature SMD ceramic package
- Frequency range = 8MHz to 50MHz
- Frequency tolerance = $\pm 100\text{ppm}$, $\pm 50\text{ppm}$
- Tristate output inhibit

APPLICATIONS

- PDAs
- Portable electronics

HOW TO ORDER

K30 - HC 1 C S E 25.0000M R

Packaging

R = Tape and reel,
1,000 pcs/reel

Frequency (MHz)

| | | |
|----------|----------|---------|
| 14.31818 | 24.5760 | 30.0000 |
| 16.0000 | 25.0000 | 32.0000 |
| 17.7345 | 27.0000 | 33.8688 |
| 20.0000 | 28.37516 | 48.0000 |
| 24.0000 | 28.63636 | — |

Enable/Disable Function

E = with function (STD)

Duty Ratio

S = 45% to 55% (STD)

Output

C = CMOS/Compatibility

Tolerance

1 = $\pm 100\text{ppm}$
0 = $\pm 50\text{ppm}$

Series

Clock Oscillators (SMD)




K30-3C Series (3.3V)

K30 SERIES



DIMENSIONS

millimeters (inches)

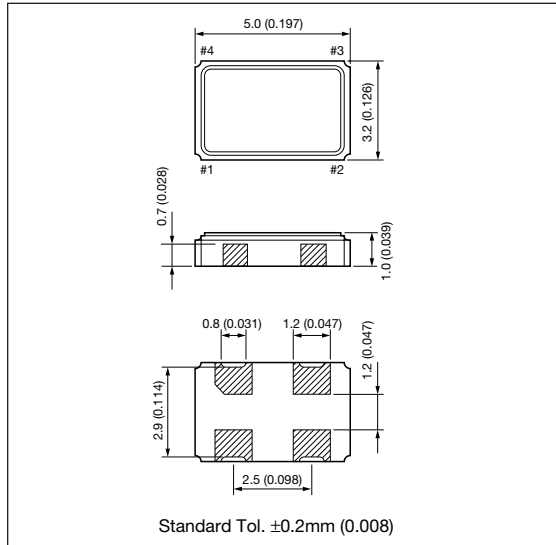

PIN CONNECTION

| Pin # | Function |
|-------|------------------|
| 1 | CONTROL |
| 2 | CASE GND |
| 3 | OUTPUT |
| 4 | +V _{CC} |

ENABLE/DISABLE

| Pin #1 | Pin #3 |
|-------------|------------------------------------|
| "H" or Open | Oscillation |
| "L" | High Impedance or Oscillation Stop |

FEATURES

- High reliable miniature SMD ceramic package
- Frequency range = 8MHz to 67MHz
- Frequency tolerance = ±100ppm, ±50ppm
- Tristate output inhibit
- Low current consumption

APPLICATIONS

- PDAs
- Notebook PC
- Portable electronics

HOW TO ORDER

K30 - 3C 1 **E 40.0000M R**

Packaging

R = Tape and reel,
1,000 pcs/reel

Frequency (MHz)

| | | |
|----------|----------|---------|
| 13.0000 | 24.5760 | 30.0000 |
| 14.31818 | 25.0000 | 32.0000 |
| 16.0000 | 27.0000 | 44.0000 |
| 17.7345 | 28.37516 | 48.0000 |
| 20.0000 | 28.63636 | 66.6667 |
| 24.0000 | 29.4989 | — |

Enable/Disable Function

E = with function (STD)

Duty Ratio

= 40% to 60% (STD)
S = 45% to 55%
(f>20MHz)

Tolerance

1 = ±100ppm
0 = ±50ppm

Series

SPECIFICATIONS

| Items | Code | Rating | Unit | Remarks |
|-----------------------|---------------------------------|-------------------------|-------|----------------------------------------|
| Output Frequency | F _{OUT} | 8 to 67 | MHz | — |
| Frequency Tolerance | ΔF/F | ±100, ±50 | ppm | Over all Conditions |
| Aging | ΔF/F | ±5 | ppm/y | @ 25°C |
| Operating Temperature | T _{OPR} | -10 to 70 | °C | — |
| Storage Temperature | T _{STR} | -55 to 125 | °C | — |
| Supply Voltage | V _{CC} | 3.3±0.3 | V | — |
| Supply Current | I _{CC} | 25 max. | mA | Loaded @ 67 MHz |
| Stand by Current | I _{ST} | 10 max. | μA | — |
| Duty Ratio | SYM | 40 to 60, 45 to 55 | % | 0.5V _{CC} DC Level |
| Output 0 Level | V _{OL} | 0.1V _{CC} max. | V | I _{OL} = 8mA |
| Output 1 Level | V _{OH} | 0.9V _{CC} min. | V | I _{OH} = -8mA |
| Rise/Fall Time | T _R , T _F | 10 max. | nsec | 0.1V _{CC} -0.9V _{CC} |
| Load Capacitance | C _L | 15 max. | pF | — |
| Enable/Disable Time | — | 5 max. | msec | — |
| Input Voltage Low | V _{IL} | 0.3V _{CC} max. | V | — |
| Input Voltage High | V _{IH} | 0.7V _{CC} min. | V | — |
| Start-up Time | ST | 10 max. | mS | Minimum Operating Voltage to be 0sec |

Clock Oscillators (SMD)




K30-3C Tight Tolerance Series (3.3V)

K30 SERIES



DIMENSIONS millimeters (inches)

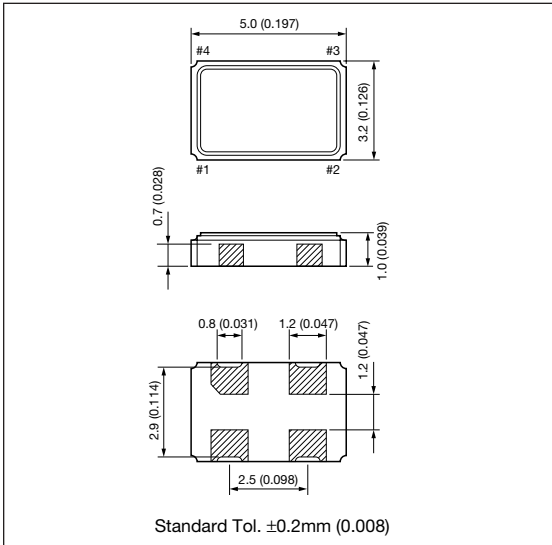

PIN CONNECTION ENABLE/DISABLE

| Pin # | Function |
|-------|------------------|
| 1 | CONTROL |
| 2 | CASE GND |
| 3 | OUTPUT |
| 4 | +V _{CC} |

| Pin #1 | Pin #3 |
|-------------|------------------------------------|
| "H" or Open | Oscillation |
| "L" | High Impedance or Oscillation Stop |

SPECIFICATIONS

| Items | Code | Rating | Unit | Remarks |
|-----------------------|---------------------------------|-------------------------|---------|----------------------------------------|
| Output Frequency | F _{OUT} | 8 to 67 | MHz | — |
| Frequency Tolerance | $\Delta F/F$ | ± 25 | ppm | Over all conditions |
| Aging | $\Delta F/F$ | ± 3 | ppm/y | @ 25°C |
| Operating Temperature | T _{OPR} | -10 to 70 | °C | — |
| Storage Temperature | T _{STR} | -55 to 125 | °C | — |
| Supply Voltage | V _{CC} | 3.3 \pm 0.16 | V | — |
| Supply Current | I _{CC} | 25 max. | mA | Loaded @ 67 MHz |
| Stand by Current | I _{ST} | 10 max. | μ A | — |
| Duty Ratio | SYM | 40 to 60, 45 to 55 | % | 0.5V _{CC} DC Level |
| Output 0 Level | V _{OL} | 0.1V _{CC} max. | V | I _{OL} = 8mA |
| Output 1 Level | V _{OH} | 0.9V _{CC} min. | V | I _{OH} = -8mA |
| Rise/Fall Time | T _R , T _F | 10 max. | nsec | 0.1V _{CC} -0.9V _{CC} |
| Load Capacitance | C _L | 15 max. | pF | — |
| Enable/Disable Time | — | 5 max. | msec | — |
| Input Voltage Low | V _{IL} | 0.3V _{CC} max. | V | — |
| Input Voltage High | V _{IH} | 0.7V _{CC} min. | V | — |
| Start-up Time | ST | 10 max. | mS | Minimum Operating Voltage to be 0sec |

*Please contact us for inquires about Supply Voltage, other condition.

FEATURES

- High reliable miniature SMD ceramic package
- Excellent frequency precision
- Tristate output inhibit
- Low current consumption

APPLICATIONS

- IEEE 802.11
- Wireless LAN

HOW TO ORDER

K30 - 3C U **E** **44.0000M** **R**

Packaging

R = Tape and reel, 1,000 pcs/reel

Frequency (MHz)

| | | |
|---------|----------|---------|
| 13.0000 | 28.37516 | 44.0000 |
| 26.0000 | 28.63636 | — |
| 27.0000 | 32.0000 | — |

Enable/Disable Function

E = with function (STD)

Duty Ratio

= 40% to 60% (STD)
S = 45% to 55% (f > 20MHz)

Tolerance

U = ± 25 ppm


Series

Clock Oscillators (SMD)




K30 Series

RECOMMENDED LAND PATTERN

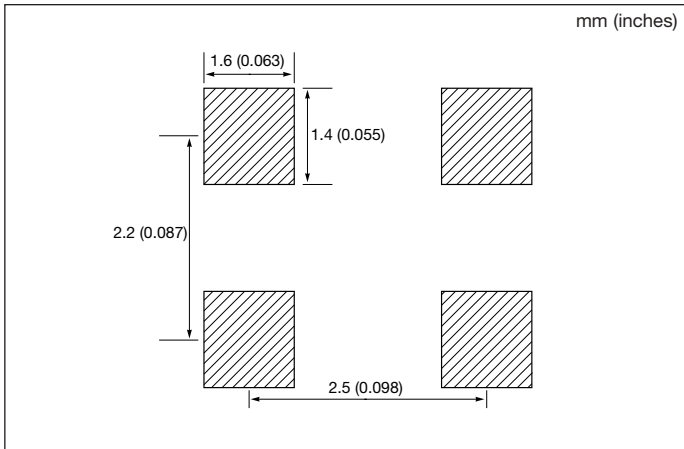


RECOMMENDED REFLOW PROFILE (Lead Free)

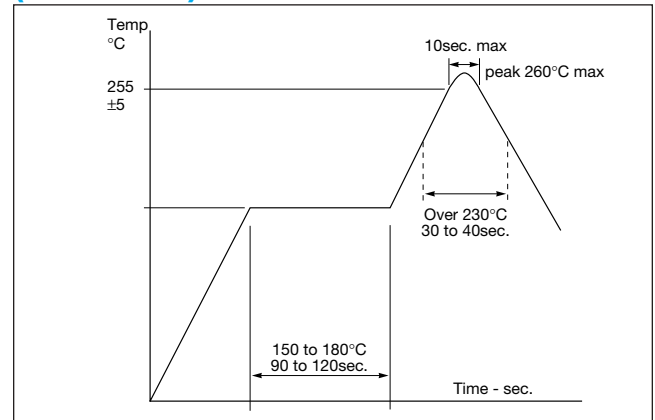


PACKAGING


millimeters (inches)

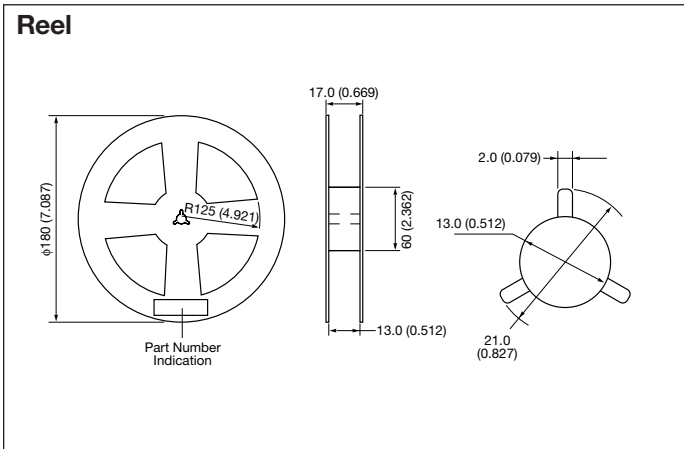

MARKING SPECIFICATIONS

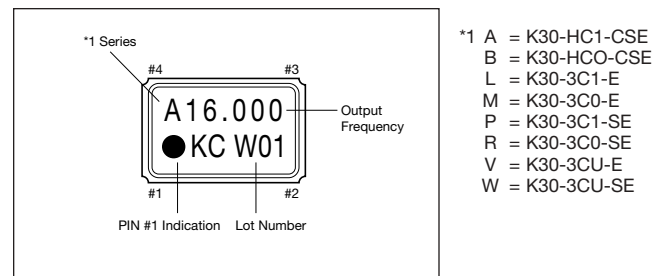

Carrier Tape

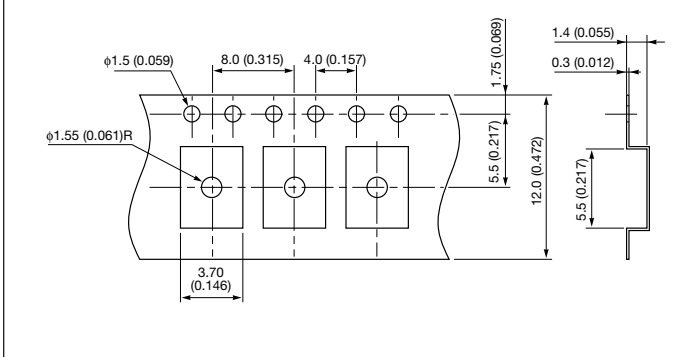


PACKAGING

1,000 pcs/Reel

Voltage Controlled Oscillators




YKS1 Series

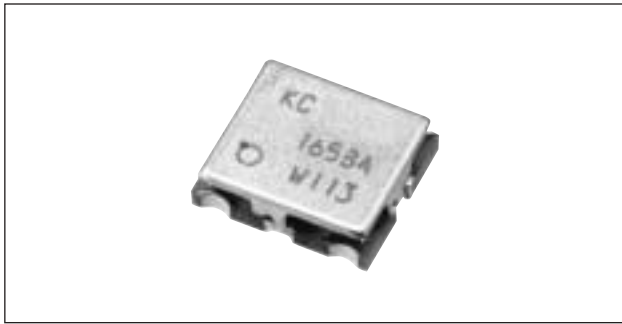

FEATURES


- Small and low profile
- Frequency 700MHz to 2.5GHz available
- Application for UMTS, AMPS(CDMA), PCS, PDC, PHS

HOW TO ORDER

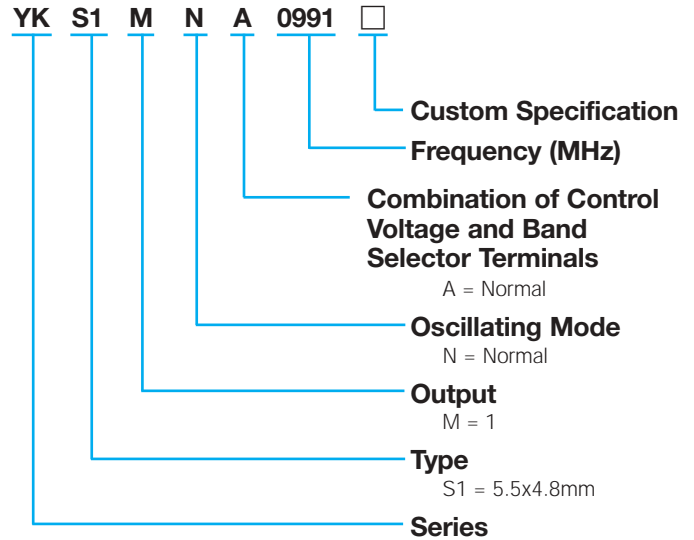

DIMENSIONS

millimeters (inches)

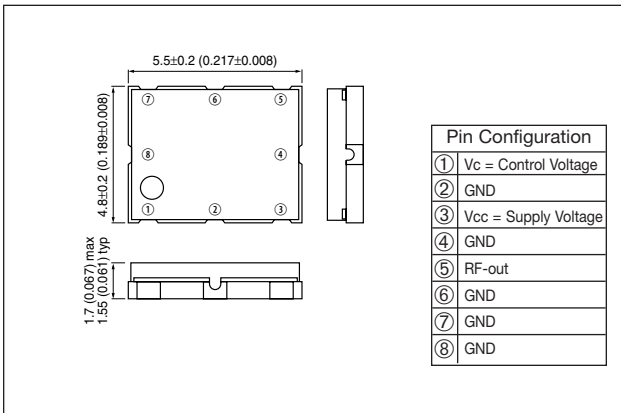


SPECIFICATIONS


| Part Number | System | Function | Frequency MHz | Vcc (V) | Icc (mA) | Po (dBm) | fru (MHz/V) | C/N (dBC/Hz) |
|--------------|------------|----------|------------------|-----------|----------|----------|-------------|---------------------------|
| YKS1MNA0991* | AMPS(CDMA) | RF | 978 to 1004 | 2.45±0.10 | ≤8.0 | -1.5±3 | 27±4 | ≥117@60kHz ≥140@900kHz |
| YKS1MNA2070* | PCS | RF | 2039 to 2100 | 2.45±0.10 | ≤9.5 | -1.5±3 | 60±10 | ≥137@1.25MHz |
| YKS1MNA1668* | PHS | RF | 1649.5 to 1686.5 | 2.80±0.40 | ≤6.0 | ≥-7 | 45±7 | ≥125@600kHz |

Vcc: Power supply Icc: Current consumption Po: Output level fru: Tuning voltage sensitivity Top: Operating temperature range

RECOMMENDED LAND PATTERN

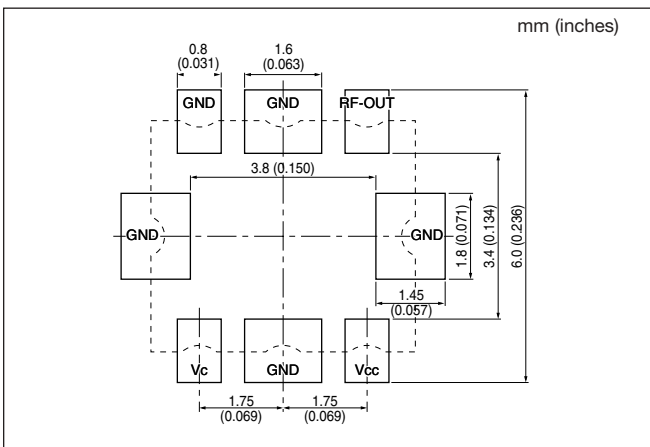

RECOMMENDED REFLOW PROFILE

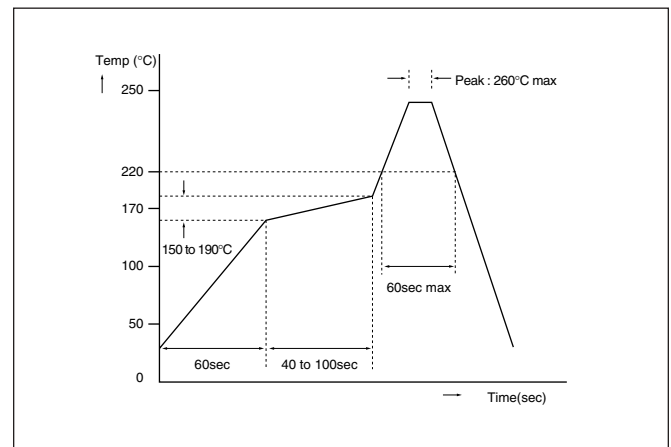

Voltage Controlled Oscillators




YK509 Series



DIMENSIONS

millimeters (inches)

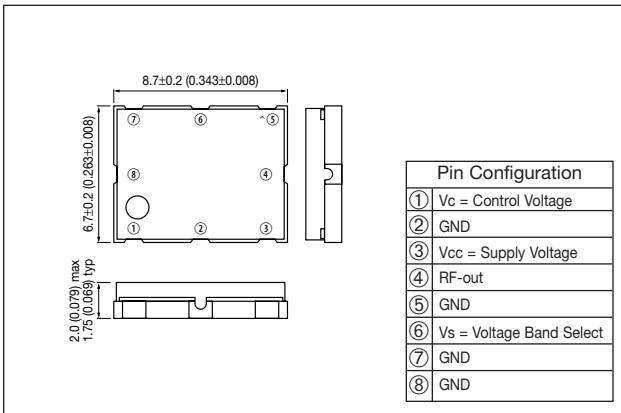

FEATURES

- For Dualband Offset Solution
- Dual high power signal output
- Small Size (8.7x6.7mm)

HOW TO ORDER

YK 509 M D B 1390M2139 A

Custom Specification

Frequency (MHz)

Frequency Band 1
Frequency Band 2

Combination of Control Voltage and Band Selector and Power Save Terminals

| | Vc | Band Select | Power Save | Vc | Band Select | Power Save |
|---|----|-------------|------------|----|-------------|-------------|
| A | 1 | 0 | - | E | 2 | - |
| B | 1 | 1 | - | F | 1 | Low/Active |
| C | 1 | 2 | - | G | 1 | High/Active |
| D | 2 | 1 | - | H | 1 | High/Active |

Oscillating Mode

S = Shift W = Doubler
N = Normal D = 2 Resonator

Output

M = 1 D = 2

Type


509 = 8.7x6.7mm

Series


SPECIFICATIONS

| Part Number | System | Function | Frequency MHz | Vcc (V) | Icc (mA) | Po (dBm) | f _{ru} (MHz/V) | C/N (dBC/Hz) |
|--------------------|----------|----------|---------------|-----------|----------|----------|-------------------------|---------------------------|
| YK509MDB1390M2139* | GPS | RF | 1385 to 1396 | 2.80±0.10 | ≤15 | 0 typ | 14±3 | ≥90@10kHz ≥139@1.25MHz |
| | AMPS/PCS | RF | 2104 to 2174 | 2.80±0.10 | ≤15 | 0 typ | 50±10 | ≥112@60kHz ≥118@120kHz |

RECOMMENDED LAND PATTERN

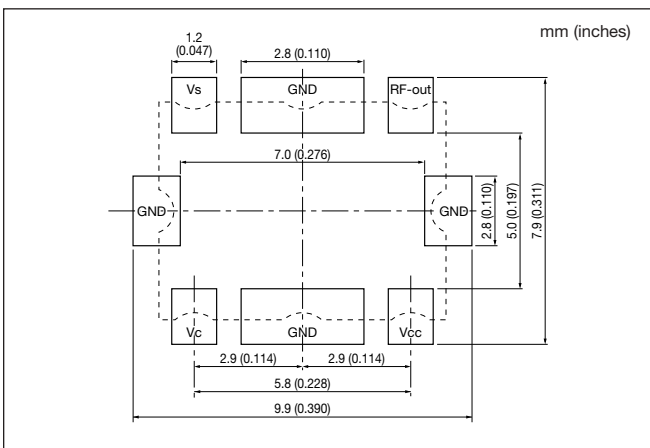


RECOMMENDED REFLOW PROFILE

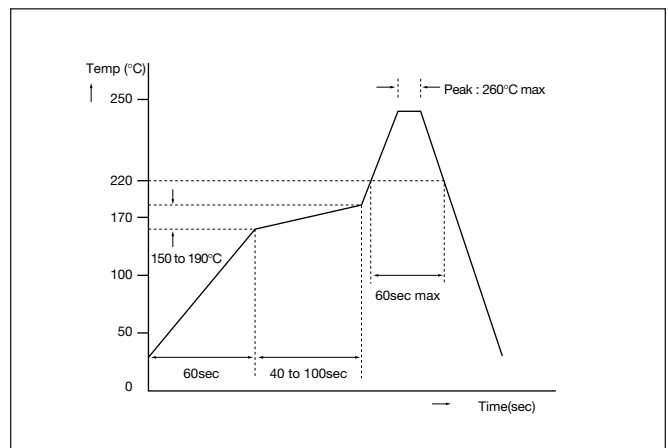

Voltage Controlled Oscillators




YK511 Series

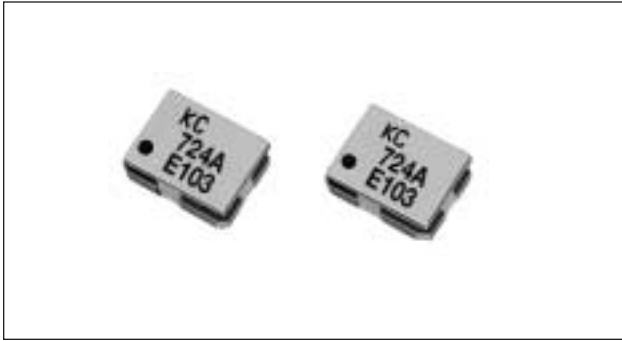

DIMENSIONS


millimeters (inches)

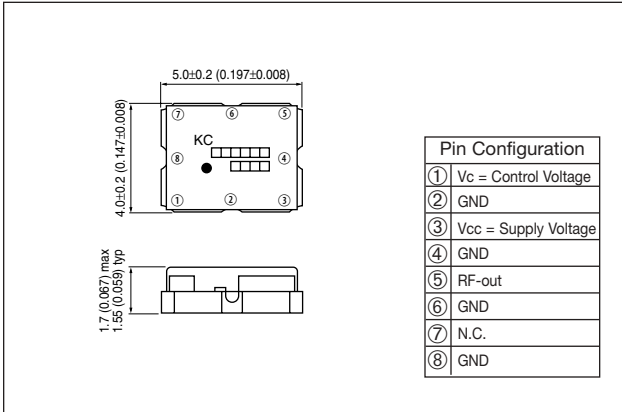

FEATURES

- Small and low profile
- Frequency 700MHz to 2GHz available
- Application for PDC CDMA

HOW TO ORDER

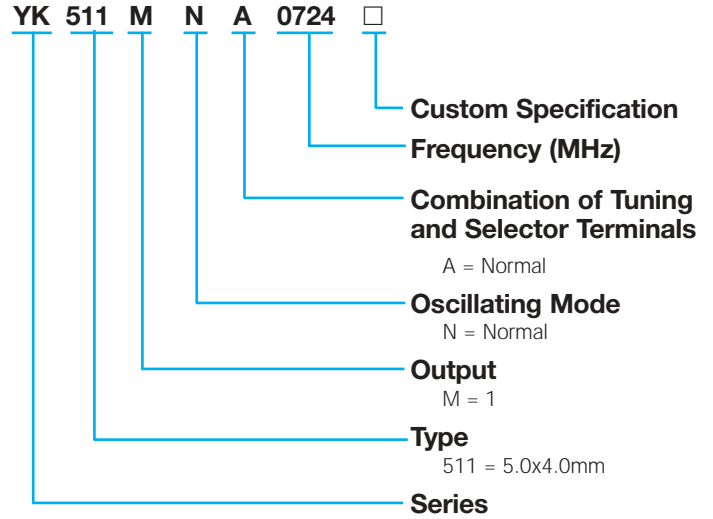


SPECIFICATIONS


| Part Number | System | Function | Frequency MHz | Vcc (V) | Icc (mA) | Po (dBm) | f _{TU} (MHz/V) | C/N (dBC/Hz) |
|---------------|----------|----------|----------------|-----------|----------|----------|-------------------------|----------------------------|
| YK511MNA0724* | PDC800 | RF | 680 to 766.4 | 2.80±0.10 | ≤4.0 | ≥-8 | 61±9 | ≥104@25kHz |
| YK511MNA0741* | CDMA-ONE | RF | 721.5 to 760.5 | 2.70±0.10 | ≤6.0 | ≥-4 | 34±4 | ≥107@25kHz ≥119@100kHz |
| YK511MNA0760* | W-CDMA | IF | 760 | 2.70±0.10 | ≤5.0 | -7±3 | 19.5±3 | ≥118@200kHz ≥142@5.0MHz |
| YK511MNA2330* | W-CDMA | RF | 2270 to 2390 | 2.70±0.10 | ≤8.0 | ≥-5 | 82±12 | ≥109@200kHz ≥136@5.0MHz |

Vcc: Power supply Icc: Current consumption Po: Output level f_{TU}: Tuning voltage sensitivity Top: Operating temperature range

RECOMMENDED LAND PATTERN

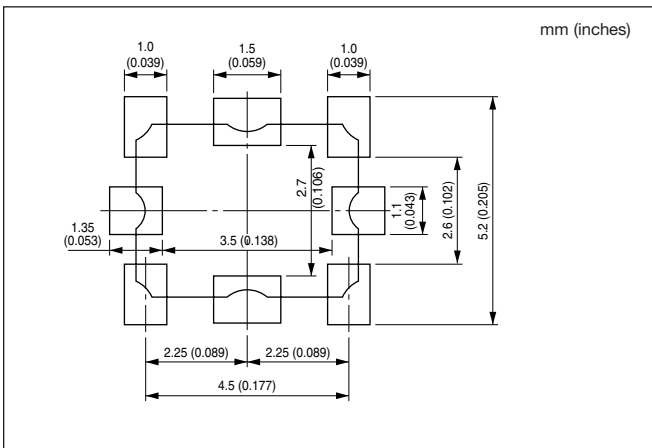


RECOMMENDED REFLOW PROFILE

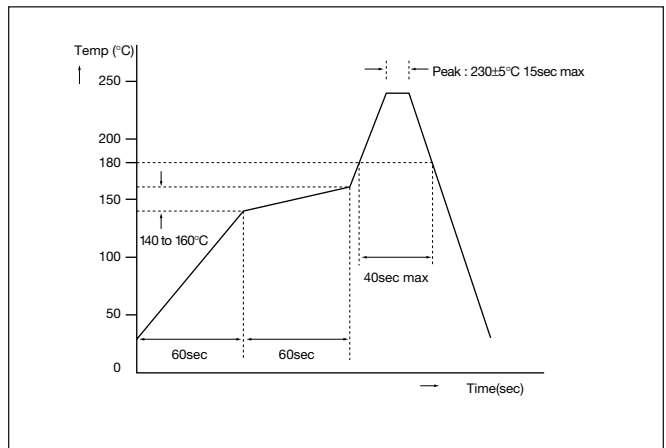

Voltage Controlled Oscillators




YK512 Series

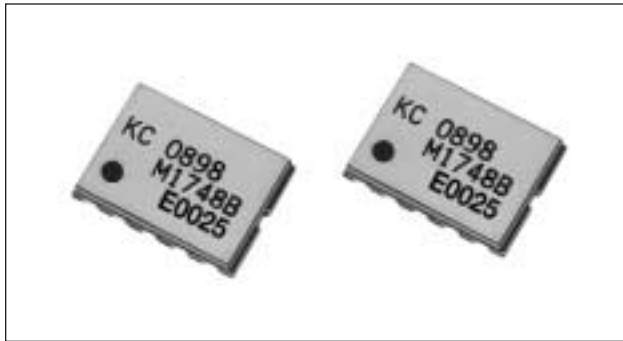

DIMENSIONS

millimeters (inches)

YK512 DD



| Pin Configuration | | |
|-------------------|------|------|
| P/N | DDC | DDF |
| ① | Vcc2 | GND |
| ② | GND | GND |
| ③ | Vc | Vc |
| ④ | GND | Ps |
| ⑤ | Vcc1 | Vcc |
| ⑥ | GND | GND |
| ⑦ | OUT1 | OUT1 |
| ⑧ | Vs1 | Vs |
| ⑨ | GND | GND |
| ⑩ | Vs2 | GND |
| ⑪ | GND | OUT2 |
| ⑫ | GND | GND |

Vcc = Supply Voltage
Vc = Control Voltage
Vs = Band Select
Ps = Power Save

FEATURES

- Small and low profile (1.7mm max.)
- Dual high power signal output
- For Dualband Offset Solution

HOW TO ORDER

YK 512 D D C 0898M1748 A

Custom Specification

Frequency (MHz)

Frequency Band 1
Frequency Band 2

Combination of Control Voltage and Band Selector and Power Save Terminals

| | Vc | Band Select | Power Save | Vc | Band Select | Power Save |
|---|----|-------------|------------|----|-------------|------------|
| A | 1 | 0 | - | E | 2 | 2 |
| B | 1 | 1 | - | F | 1 | 1 |
| C | 1 | 2 | - | G | 1 | 1 |
| D | 2 | 1 | - | H | 1 | 2 |

Oscillating Mode

S = Shift W = Doubler
N = Normal D = 2 Resonator

Output

M = 1 D = 2

Type


512 = 9.6x7.0mm

Series


SPECIFICATIONS

| Part Number | System | Function | Frequency MHz | Vcc (V) | Icc (mA) | Po (dBm) | f _{TU} (MHz/V) | C/N (dBC/Hz) |
|--------------------|--------|----------|---------------|-----------|----------|----------|-------------------------|----------------------------|
| YK512DDC0898M1748* | GSM | Tx | 880 to 915 | 2.75±0.10 | ≤27 | 9.5 typ | 52±8 | ≥117@100kHz ≥164@ 20MHz |
| | DCS | Tx | 1710 to 1785 | 2.75±0.10 | ≤35 | 9.5 typ | 90±12 | ≥110@100kHz ≥156@ 20MHz |
| YK512DDF0898M1748* | GSM | Tx | 880 to 915 | 2.80±0.10 | ≤30 | 9.0 typ | 33±5 | ≥120@100kHz ≥162@ 20MHz |
| | DCS | Tx | 1710 to 1785 | 2.80±0.10 | ≤30 | 9.0 typ | 66±10 | ≥110@100kHz ≥154@ 20MHz |

RECOMMENDED LAND PATTERN

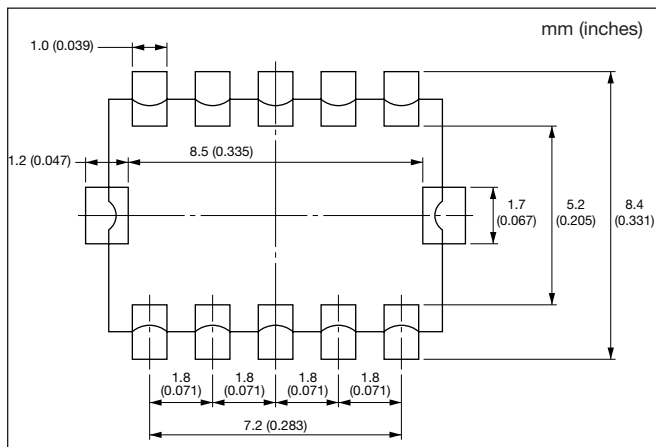

RECOMMENDED REFLOW PROFILE


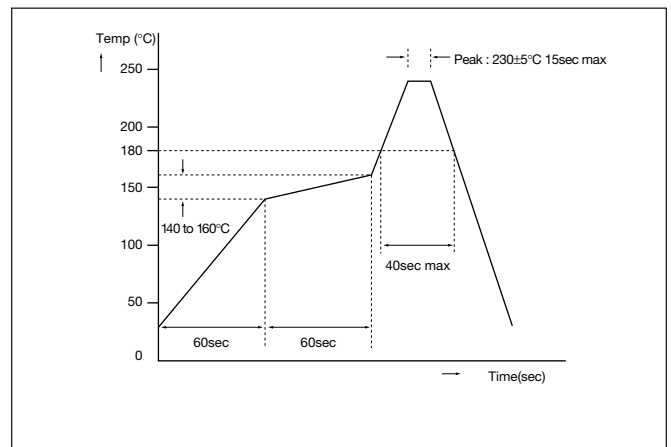


Voltage Controlled Oscillators



Packaging YK Series


PACKAGING

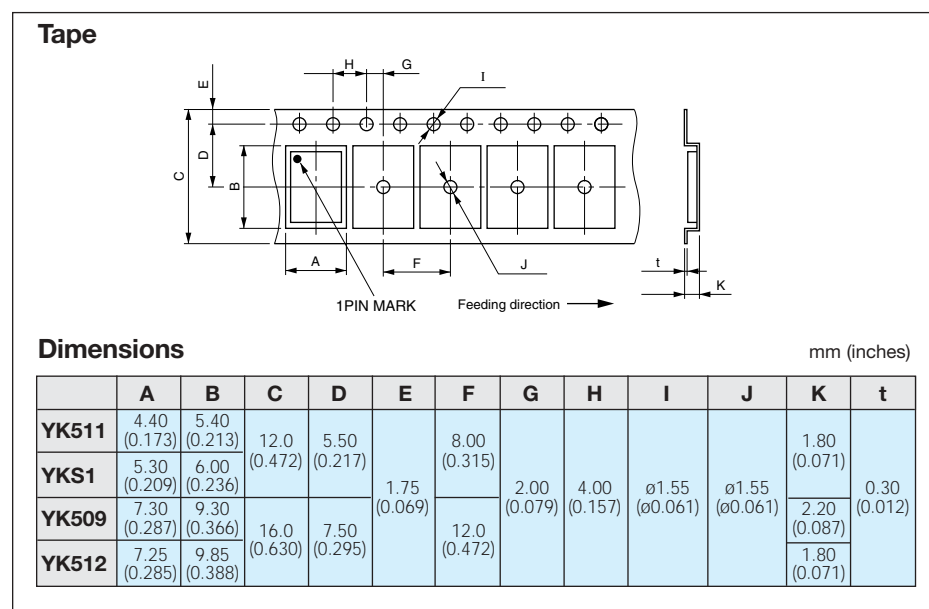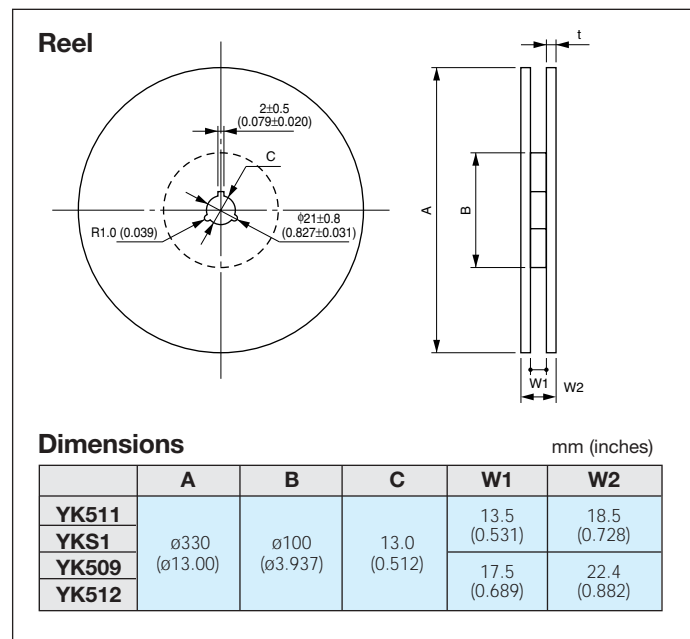

PACKAGING


| Part Number | Packaging Quantity (pcs/reel) |
|--------------|----------------------------------|
| YK511 | 3,000 |
| YKS1 | |
| YK509 | 2,000 |
| YK512 | |

Temperature Compensated Crystal Oscillators KT14 Series

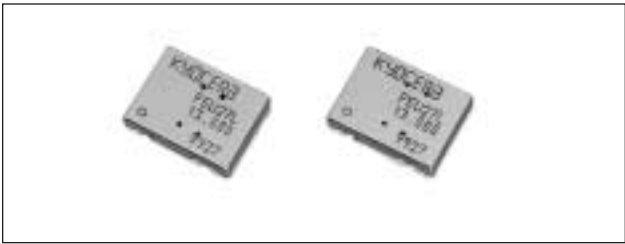

DIMENSIONS

millimeters (inches)

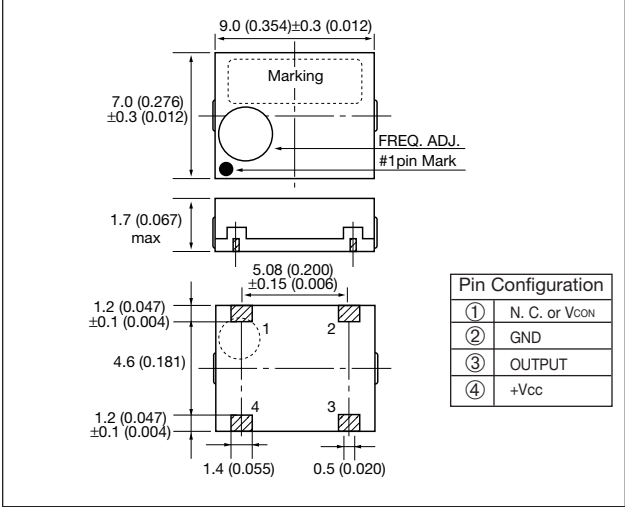

FEATURES


- Low profile SMD type (9.0x7.0x1.7mm)
- Frequency adjustment free after reflow soldering process
- AFC function available
- 2.8, 3.0, 3.3V drive available

APPLICATIONS


- PHS, PDC, GSM, DCS1800, AMPS, CDMA, D-AMPS, PCS1900, etc.

HOW TO ORDER

KT14 - E G R 28 N - 19.200M T

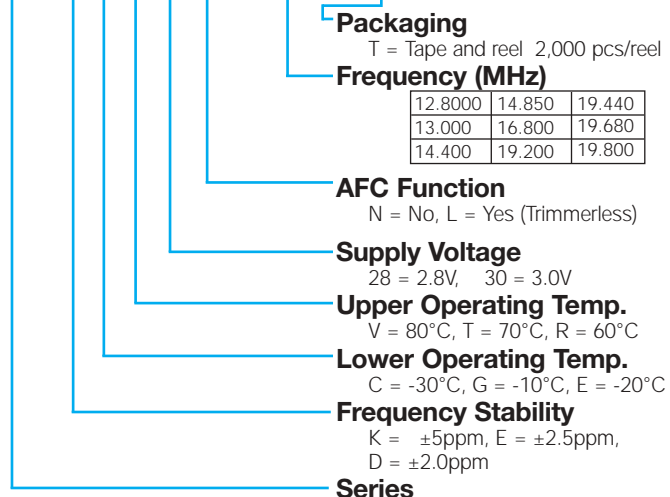

TEST CIRCUIT

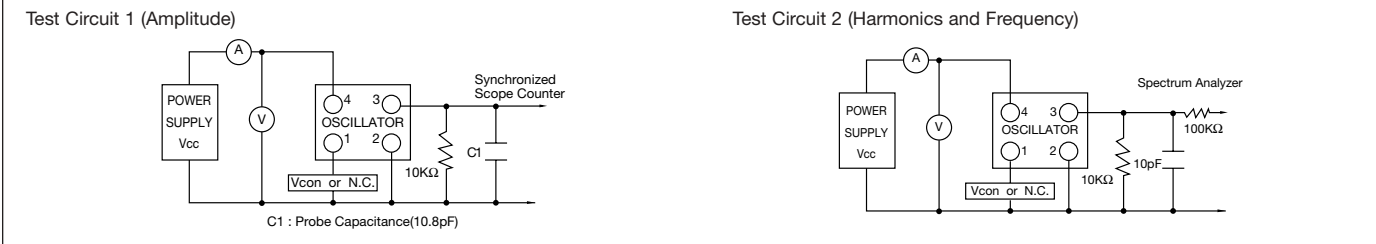

SPECIFICATIONS

| Items | Code | Specifications | | Unit | Remarks |
|-----------------------|-------|----------------|----------------------|----------|-------------------------------|
| | | PHS | Cellular | | |
| Supply Voltage | Vcc | 2.8±5% | 2.8±5% | V | — |
| | | | 3.0±5% | | |
| | | | 3.3±5% | | |
| Output Frequency | fo | 19.200 | 12.800 13.000 14.000 | MHz | — |
| | | | 14.850 16.800 | | |
| | | | 19.200 19.440 | | |
| | | | 19.680 19.800 | | |
| Operating Temperature | Topr | -10 to 60 | -30 to +80 | °C | — |
| Storage Temperature | Tstr | -20 to 70 | -40 to 85 | °C | — |
| Frequency Stability | Δf/fo | ±2.5 max. | ±2.0 max. | ppm | vs temperature (after reflow) |
| | | | ±2.5 max. | | |
| | | | ±0.2 max. | | |
| Aging Rate | Aging | ±1.0 max. | ±0.3 max. | ppm/year | 1 year |
| | | | ±1.0 max. | | |
| Output Voltage | Vout | 0.8 min. | — | Vp-p | load 10kΩ/10pF |
| Supply Current | Icc | 2.0 max. | — | mA | no load |
| Trimmer Control Range | Δf/C | ±3.0 min. | — | ppm | — |
| Voltage Control Range | Δf/V | — | ex: ±4.0 to ±8.0 | ppm | 1.5V±1V, 2.5V±1V |
| Harmonics | — | — | -3.0 max. | dBc | — |

Temperature Compensated Crystal Oscillators KT16 Series



FEATURES

- Miniature SMD type (7.0x5.2.0x1.8mm)
- Frequency adjustment free after reflow soldering process
- AFC function available
- 2.7V, 3.0V, 3.3V drive available
- Frequency Stability = ± 2 ppm at 30 to +80°C

APPLICATIONS

- PDC, GSM, CDMA, TDMA

HOW TO ORDER

KT16 - D C V 30 L - 19.680M T

Packaging

T = Tape and reel 4,000 pcs/reel

Frequency (MHz)

| | | |
|--------|--------|--------|
| 12.800 | 14.850 | 19.440 |
| 13.000 | 16.800 | 19.680 |
| 14.400 | 19.200 | 19.800 |

AFC Function

L = Yes

Supply Voltage

28 = 2.8V, 30 = 3.0V

Upper Operating Temp.

V = 80°C, T = 70°C, R = 60°C

Lower Operating Temp.

C = -30°C, G = -10°C, E = -20°C

Frequency Stability


K = ± 5 ppm, E = ± 2.5 ppm,

D = ± 2.0 ppm

Series


DIMENSIONS

millimeters (inches)

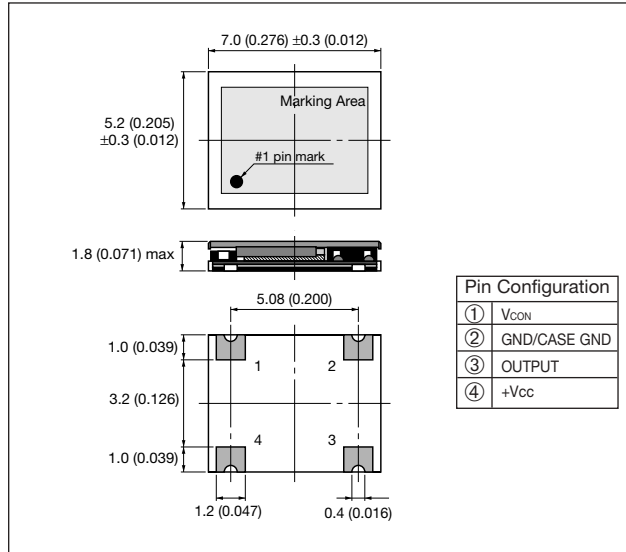


TEST CIRCUIT

Test Circuit 1 (Amplitude)

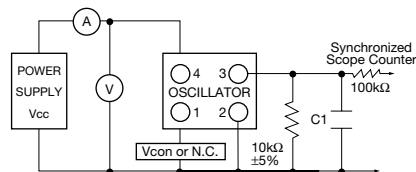

Test Circuit 2 (Harmonics and Frequency)

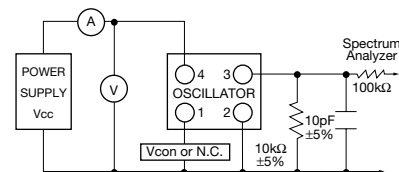

SPECIFICATIONS


| Items | Code | Specifications | | Unit | Remarks |
|-----------------------|------------------|-----------------------|--------|------------------|-------------------------------|
| | | Cellular | | | |
| Supply Voltage | V _{CC} | 2.7 | | V | — |
| | | 3.0 | | | |
| | | 3.3 | | | |
| Output Frequency | f _o | 26.000 | 19.440 | MHz | — |
| | | 19.680 | 14.400 | | |
| | | 13.000 | 12.800 | | |
| Operating Temperature | T _{opr} | -30 to +80 | | °C | — |
| Storage Temperature | T _{stg} | -40 to +85 | | °C | — |
| Frequency Stability | $\Delta f/f_0$ | ± 2.0 max. | | ppm | vs temperature (after reflow) |
| | | ± 2.5 max. | | ppm | vs load |
| | | ± 0.2 max. | | ppm | vs voltage |
| | | ± 0.3 max. | | ppm | — |
| Aging Rate | Aging | ± 1.0 max. | | ppm/year | 25°C ± 2 °C |
| Output Voltage | V _{out} | 0.8 min. | | V _{p-p} | load 10k Ω /10pF |
| Supply Current | I _{CC} | 1.5 max. | | mA | — |
| Trimmer Control Range | $\Delta f/C$ | — | | ppm | — |
| Voltage Control Range | $\Delta f/V$ | ± 8.0 to ± 15 | | ppm | — |
| Harmonics | — | -3.0 max. | | dBc | — |

Temperature Compensated Crystal Oscillators KT18 Series




DIMENSIONS

millimeters (inches)

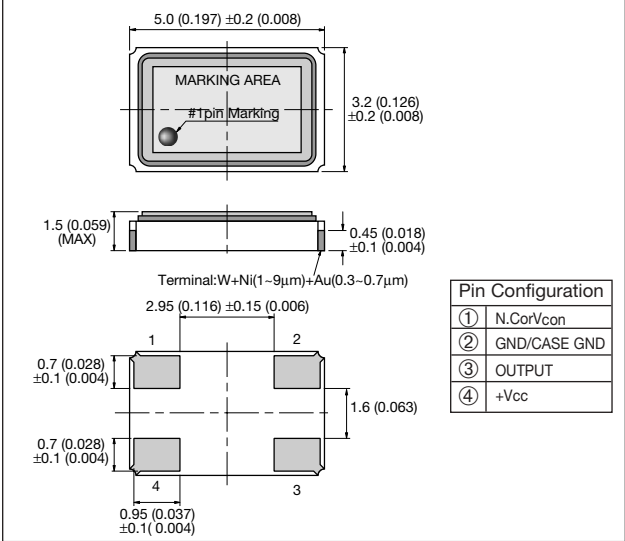

TEST CIRCUIT

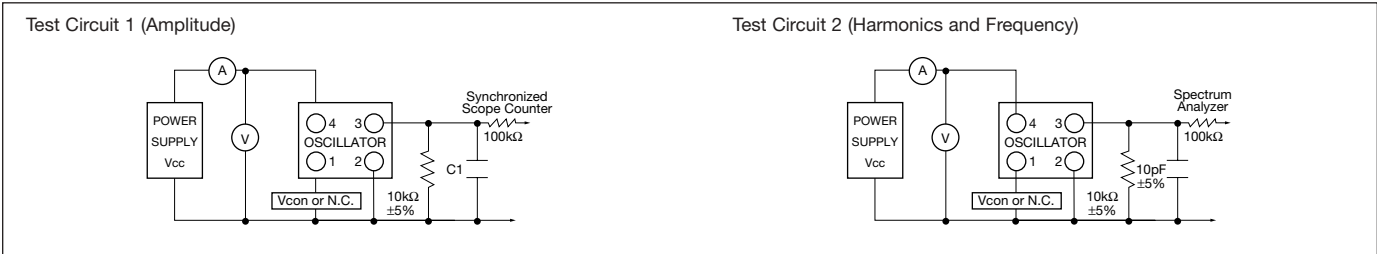

SPECIFICATIONS

| Items | Code | Specifications | | | Unit | Remarks |
|-----------------------|-------|----------------|--------|--------|----------|-------------------------------|
| | | Cellular | | | | |
| Supply Voltage | Vcc | 2.6 to 5.5 | | | V | — |
| Output Frequency | fo | 26.000 | 19.440 | 19.200 | MHz | — |
| | | 19.680 | 14.400 | 19.800 | | |
| | | 13.000 | 12.800 | 16.800 | | |
| Operating Temperature | Topr | -30 to +80 | | | °C | — |
| Storage Temperature | Tstg | -40 to +85 | | | °C | — |
| Frequency Stability | Δf/fo | ±1.5 max. | | | ppm | vs temperature (after reflow) |
| | | ±2.0 max. | | | ppm | vs load |
| | | ±0.2 max. | | | ppm | vs voltage |
| | | ±0.3 max. | | | ppm/year | 25°C±2°C |
| Aging Rate | Aging | ±1.0 max. | | | ppm/year | — |
| Output Voltage | Vout | 0.8 min. | | | Vp-p | load 10kΩ/10pF |
| Supply Current | Icc | 2.0 max. | | | mA | — |
| Trimmer Control Range | Δf/C | — | | | ppm | — |
| Voltage Control Range | Δf/V | ±8.0 to ±15 | | | ppm | — |
| Harmonics | — | -3.0 max. | | | dBc | — |

FEATURES

- Miniature SMD type (5.0x3.2x1.5mm)
- Frequency adjustment free after reflow soldering process
- AFC function available
- 2.6 to 5.5V drive available
- Frequency Stability = ±2ppm at 30 to +80°C

APPLICATIONS

- PDC, GSM, CDMA, TDMA

HOW TO ORDER

KT18 - D C V 30 A - 19.680M T

Packaging

T = Tape and reel 4,000 pcs/reel

Frequency (MHz)

| | | |
|--------|--------|--------|
| 12.800 | 16.800 | 19.680 |
| 13.000 | 19.200 | 19.800 |
| 14.400 | 19.440 | 26.000 |

AFC Function

A = Yes

Supply Voltage

28 = 2.8V, 30 = 3.0V

Upper Operating Temp.

V = 80°C, T = 70°C, R = 60°C

Lower Operating Temp.

C = -30°C, G = -10°C, E = -20°C

Frequency Stability

K = ±5ppm, E = ±2.5ppm,


D = ±2.0ppm

Series

Temperature Compensated Crystal Oscillators




RECOMMENDED LAND PATTERN

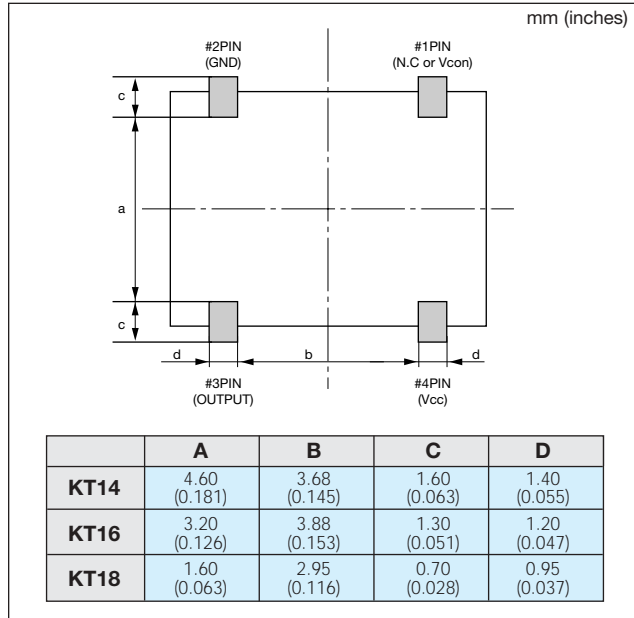


REEL DIMENSIONS

millimeters (inches)

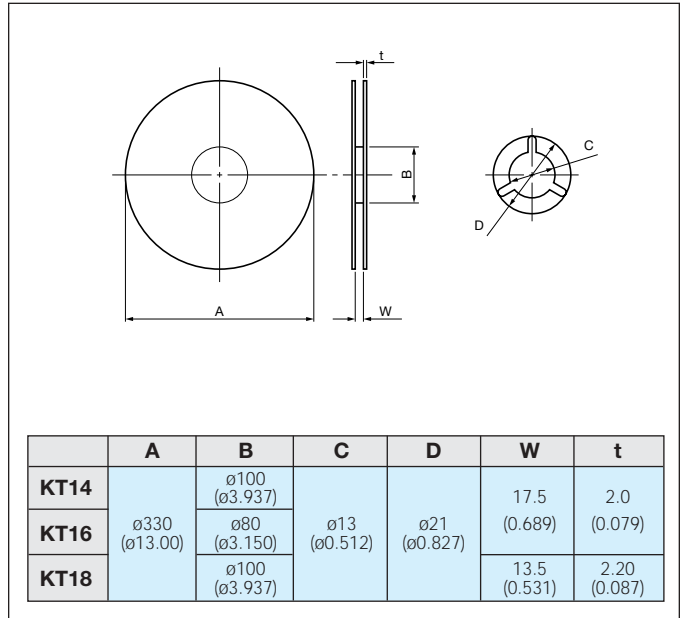


PACKAGING

millimeters (inches)

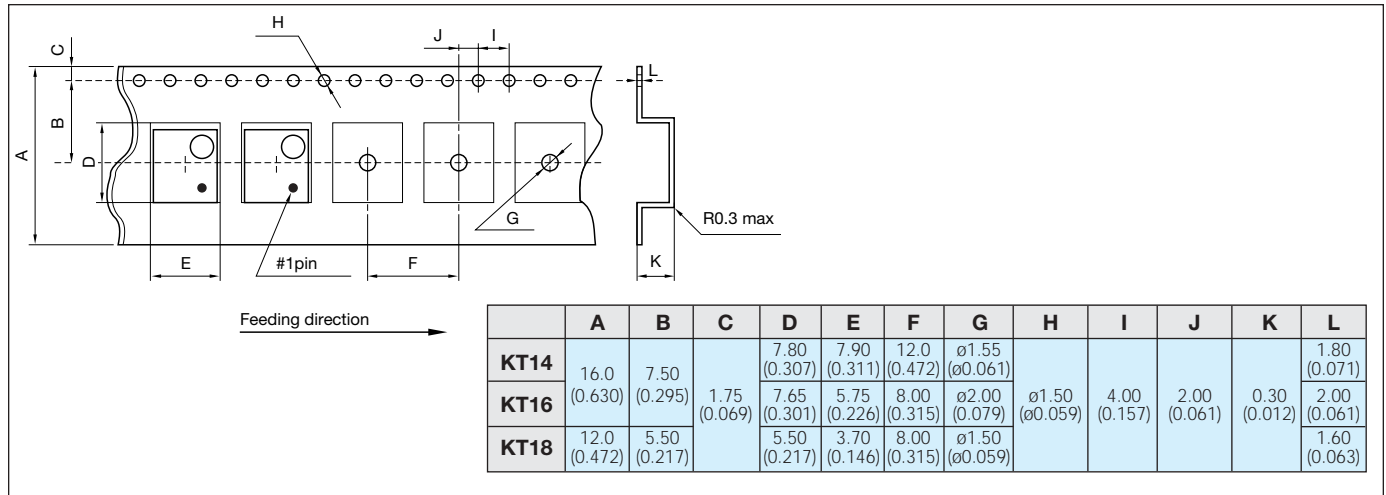

RECOMMENDED REFLOW PROFILE

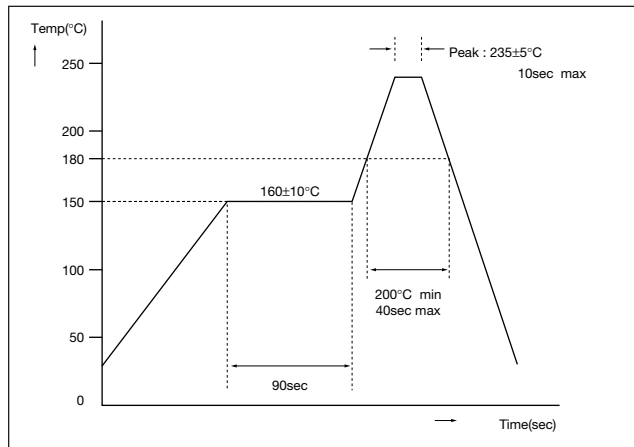


PACKAGING

KT14: 2,000 pcs/reel
 KT16/KT18: 4,000 pcs/reel


KHz Band Ceramic IF Filters



KBF-RL, PL Series

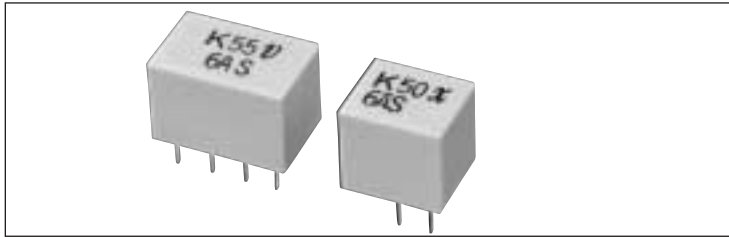


TEST CIRCUIT

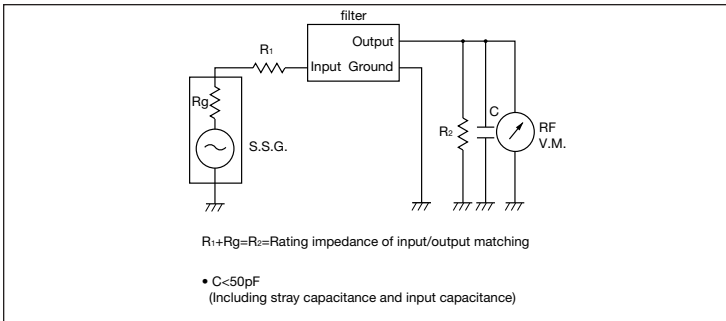

DIMENSIONS

millimeters (inches)

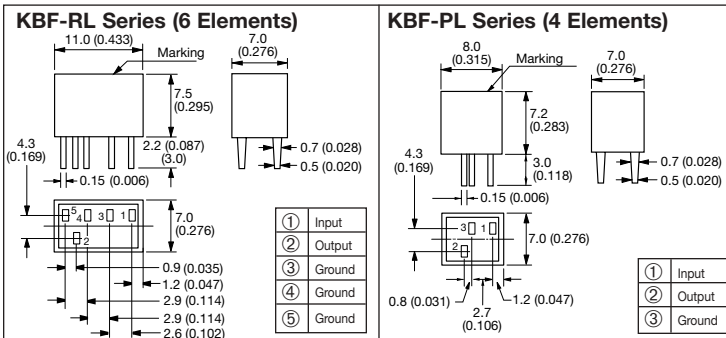

FEATURES

- Small and high selectivity
- Low insertion loss
- Adjustment free
- Various pass band width available

APPLICATIONS

- Walkie & Talkie
- Car audio (AM radio section)
- Cordless phone
- Remote control receiver

HOW TO ORDER

KBF - 455 RL - 20 A

Selectivity

- A = High selectivity
- AS = Super high selectivity

Pass Band-Width (kHz) at 6dB

- 6 Elements = 20, 15, 10, 9, 7, 6, 4
- 4 Elements = 25, 20, 15, 10, 9, 7, 6, 4

Number of Element

- RL = 6 Elements
- PL = 4 Elements

Center Frequency

450-460kHz available

Series

SPECIFICATIONS (455 kHz)

KBF-RL Series (6 Elements)

| Part Number | Center Frequency (f ₀) | Ripple | Pass Band Width | | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|------------------------------------|------------|-----------------|---------------|-----------------------|----------------|---------------------------------|-----------------------|
| | | | 6dB | 40dB | | | | |
| KBF-455RL-20A | 455kHz±1.5kHz | 2.0dB max. | ±10kHz min. | ±20kHz max. | 37dB min. | 4dB max. | 1.5kΩ | -20°C to +80°C |
| KBF-455RL-15A | | | ±7.5kHz min. | ±15kHz max. | | | | |
| KBF-455RL-12A | | | ±6.0kHz min. | ±12.5kHz max. | | | | |
| KBF-455RL-10A | | | ±5.0kHz min. | ±12kHz max. | | | | |
| KBF-455RL- 9A | | | ±4.5kHz min. | ±10kHz max. | | | | |
| KBF-455RL- 7A | 455kHz±1.0kHz | 2.0dB max. | ±3.5kHz min. | ±9kHz max. | 55dB min. | 6dB max. | 2.0kΩ | -20°C to +80°C |
| KBF-455RL- 6AS | | | ±3.0kHz min. | ±9kHz max. | | | | |
| KBF-455RL- 4AS | | | ±2.0kHz min. | ±7.5kHz max. | | | | |

KBF-PL Series (4 Elements)


| Part Number | Center Frequency (f ₀) | Ripple | Pass Band Width | | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|------------------------------------|------------|-----------------|---------------|-----------------------|----------------|---------------------------------|-----------------------|
| | | | 6dB | 40dB | | | | |
| KBF-455PL-25A | 455kHz±1.5kHz | 2.0dB max. | ±12.5kHz min. | ±24kHz max. | 27dB min. | 4dB max. | 1.5kΩ | -20°C to +80°C |
| KBF-455PL-20A | | | ±10.0kHz min. | ±20kHz max. | | | | |
| KBF-455PL-15A | | | ±7.5kHz min. | ±15kHz max. | | | | |
| KBF-455PL-12A | | | ±6.0kHz min. | ±12.5kHz max. | | | | |
| KBF-455PL-10A | | | ±5.0kHz min. | ±12kHz max. | | | | |
| KBF-455PL- 7A | 455kHz±1.0kHz | 2.0dB max. | ±3.5kHz min. | ±9kHz max. | 35dB min. | 6dB max. | 2.0kΩ | -20°C to +80°C |
| KBF-455PL- 6AS | | | ±3.0kHz min. | ±9kHz max. | | | | |
| KBF-455PL- 4AS | | | ±2.0kHz min. | ±7.5kHz max. | | | | |

Note: Center frequency is 450-460kHz available


KHz Band Ceramic IF Filters



KBF-RS, PS Series

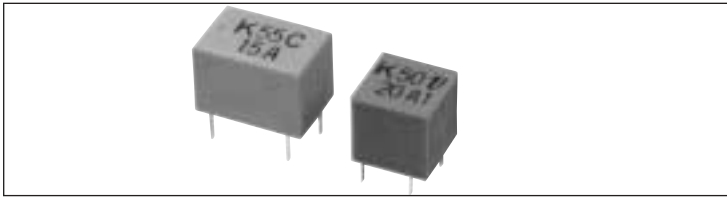


TEST CIRCUIT

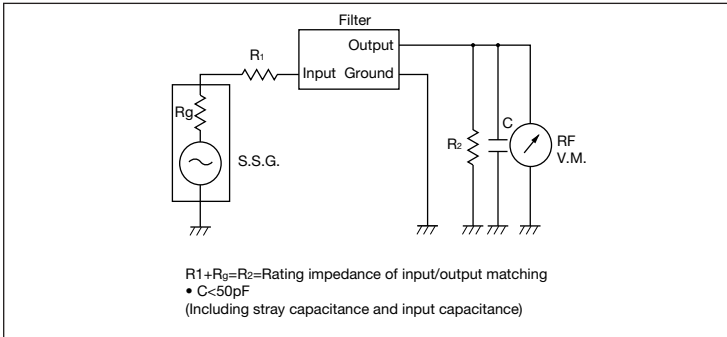

DIMENSIONS

millimeters (inches)

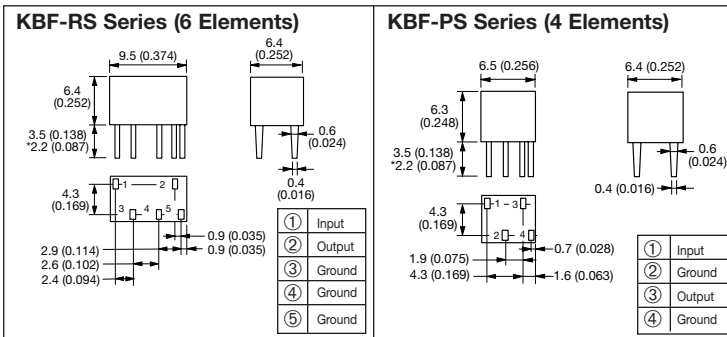

*Lead length variation = 3.5 (0.138), 2.2 (0.087).

SPECIFICATIONS (455 kHz)

KBF-RS Series (6 Elements)

*2.2 (0.087) Lead length available

| Part Number | Center Frequency (f_0) | RIPPLE | Pass Band Width | | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|----------------------------|------------|-------------------|--------------------|-----------------------|----------------|---------------------------------|-----------------------|
| | | | 6dB | 40dB | | | | |
| KBF-455RS-20A | 455kHz \pm 1.5kHz | 2.0dB max. | \pm 10kHz min. | \pm 20kHz max. | 37dB min. | 4dB max. | 1.5k Ω | -20°C to +80°C |
| KBF-455RS-15A | | | \pm 7.5kHz min. | \pm 15kHz max. | | | | |
| KBF-455RS-12A | | | \pm 6.0kHz min. | \pm 12.5kHz max. | | | | |
| KBF-455RS-10A | | | \pm 5.0kHz min. | \pm 12kHz max. | | | | |
| KBF-455RS- 9A | | | \pm 4.5kHz min. | \pm 10kHz max. | | | | |
| KBF-455RS- 7A | 455kHz \pm 1.0kHz | 2.0dB max. | \pm 3.5kHz min. | \pm 9kHz max. | 55dB min. | 6dB max. | 2.0k Ω | -20°C to +80°C |
| KBF-455RS- 6AS | | | \pm 3.0kHz min. | \pm 9kHz max. | | | | |
| KBF-455RS- 4AS | | | \pm 2.0kHz min. | \pm 7.5kHz max. | | | | |

KBF-PS Series (4 Elements)

*2.2mm Lead length available

| Part Number | Center Frequency (f_0) | RIPPLE | Pass Band Width | | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|----------------------------|------------|--------------------|--------------------|-----------------------|----------------|---------------------------------|-----------------------|
| | | | 6dB | 40dB | | | | |
| KBF-455PS-25A | 455kHz \pm 1.5kHz | 2.0dB max. | \pm 12.5kHz min. | \pm 24kHz max. | 27dB min. | 4dB max. | 1.5k Ω | -20°C to +80°C |
| KBF-455PS-20A | | | \pm 10kHz min. | \pm 20kHz max. | | | | |
| KBF-455PS-15A | | | \pm 7.5kHz min. | \pm 15kHz max. | | | | |
| KBF-455PS-12A | | | \pm 6.0kHz min. | \pm 12.5kHz max. | | | | |
| KBF-455PS-10A | | | \pm 5.0kHz min. | \pm 12kHz max. | | | | |
| KBF-455PS- 7A | 455kHz \pm 1.0kHz | 2.0dB max. | \pm 3.5kHz min. | \pm 9kHz max. | 35dB min. | 6dB max. | 2.0k Ω | -20°C to +80°C |
| KBF-455PS- 6AS | | | \pm 3.0kHz min. | \pm 9kHz max. | | | | |
| KBF-455PS- 4AS | | | \pm 2.0kHz min. | \pm 7.5kHz max. | | | | |

Note: Center frequency is 450-460kHz available.

FEATURES

- Small and low profile
- High selectivity
- Low insertion loss
- Adjustment free
- Various pass band width available

APPLICATIONS

- Cordless phone
- Car audio
- (AM radio section)
- Pager
- Walkie & Talkie
- Remote control receiver

HOW TO ORDER

KBF - 455 RS - 20 A □ □

Lead Length

- = 3.5mm
- C = 2.2mm

Option

- = Standard

Selectivity

- A = High selectivity
- AS = Super high selectivity

Pass Band-Width (kHz)

- 6 Elements = 20, 15, 10, 9, 7, 6, 4
- 4 Elements = 20, 15, 10, 9, 7, 6, 4

Number of Element

- RS = 6 Elements
- PS = 4 Elements

Center Frequency

- 450-460kHz available

Series

Surface Acoustic Wave Filters



PAFC Series




FEATURES

- Small and low profile
- Ceramic package type
- Flat pass band characteristics
- Low insertion loss
- Circuit simplification

APPLICATIONS


- PHS

HOW TO ORDER

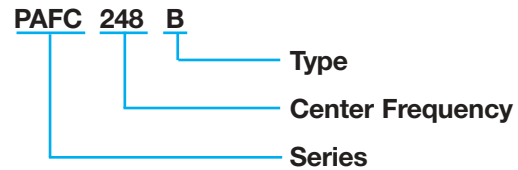


DIMENSIONS

millimeters (inches)

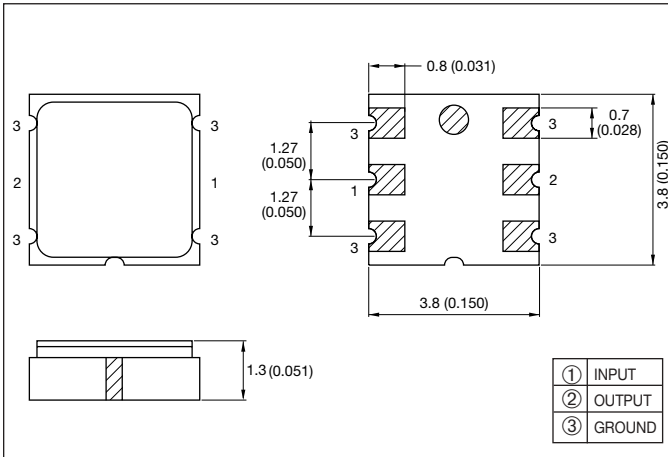

TEST CIRCUIT

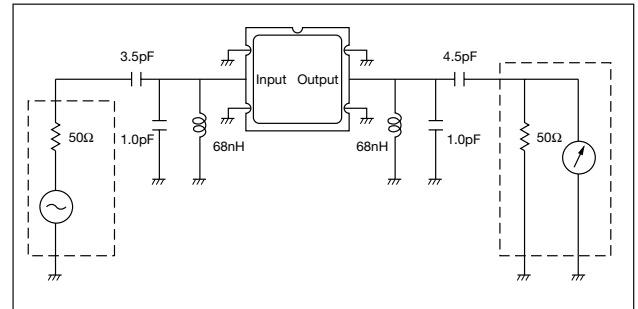


SPECIFICATIONS

| Part Number | Normal Center Frequency (Fn) | Insertion Loss | Pass Band Width (at 3dB) | Stop Band Attenuation | | | Ripple (fn±110kHz) | Group Delay Time (fn±110kHz) | Operating Temperature |
|-------------|------------------------------|----------------|--------------------------|-----------------------|-----------|-----------|--------------------|------------------------------|-----------------------|
| | | | | fn±600kHz | fn±1.2kHz | fn±faMHz* | | | |
| PAFC248B | 248.45MHz | 4.0dB max. | ±130kHz min. | 30dB min. | 40dB min. | 60dB min. | 1.5dB max.. | 1.2μs max. | -10 to 60°C |
| PAFC243B | 243.95MHz | 4.0dB max. | ±130kHz min. | 30dB min. | 40dB min. | 60dB min. | 1.5dB max.. | 1.2μs max. | -10 to 60°C |


RECOMMENDED LAND PATTERN

mm (inches)

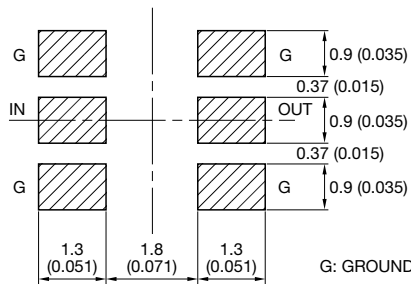

TAPING DIMENSION

mm (inches)

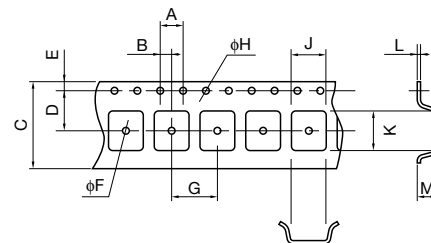


| Code | A | B | C | D | E | F | G | H | J | K | L | M |
|------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Dim. | 4.00 (0.157) | 2.00 (0.079) | 12.0 (0.472) | 5.50 (0.217) | 1.75 (0.069) | 1.55 (0.061) | 8.00 (0.315) | 1.55 (0.061) | 4.30 (0.169) | 4.30 (0.169) | 0.30 (0.012) | 2.05 (0.081) |

Surface Acoustic Wave Filters




PAFC Series

RECOMMENDED TEMPERATURE PROFILE IR REFLOW

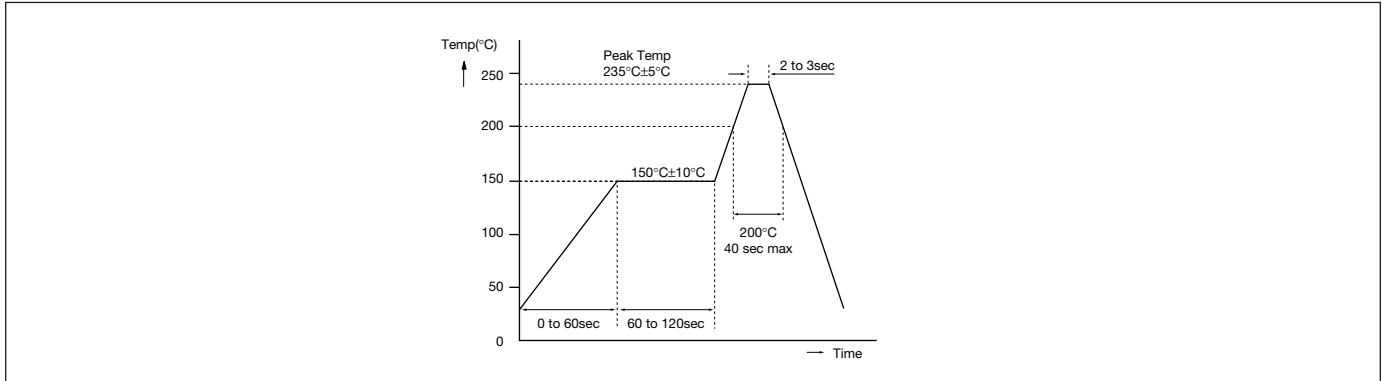


CHARACTERISTICS


PAFC248A Pass Band Characteristics

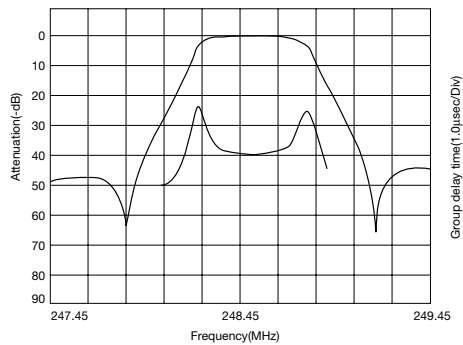


PAFC248A Spurious Characteristics

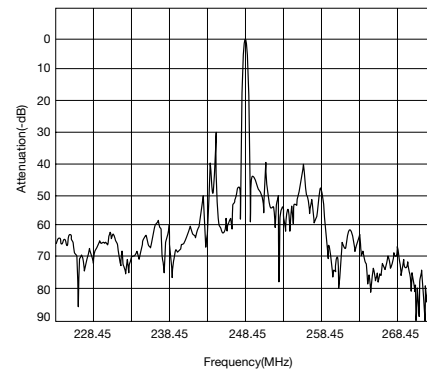

PAFC243B Pass Band Characteristics

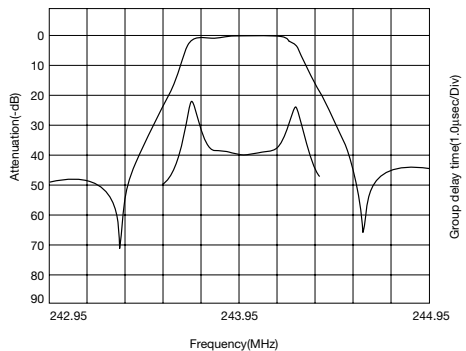

PAFC243B Spurious Characteristics

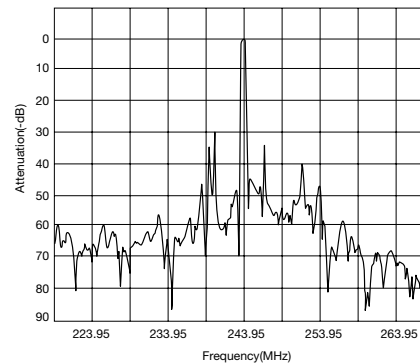

Surface Acoustic Wave Filters



SF Series



FEATURES


- Small and low profile
- Low insertion loss
- High selectivity
- Withstanding high voltage

APPLICATIONS




- PCS
- GPS

HOW TO ORDER

SF 30 - 1880 M 6 UU 01

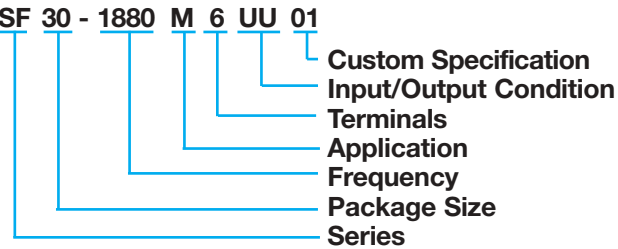

DIMENSIONS

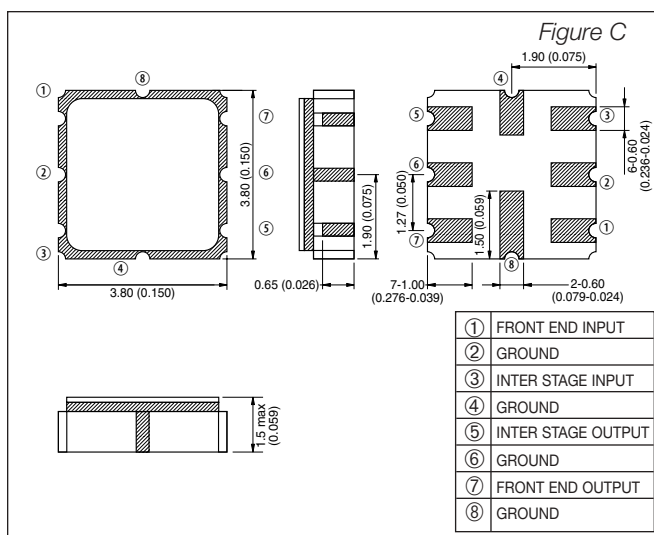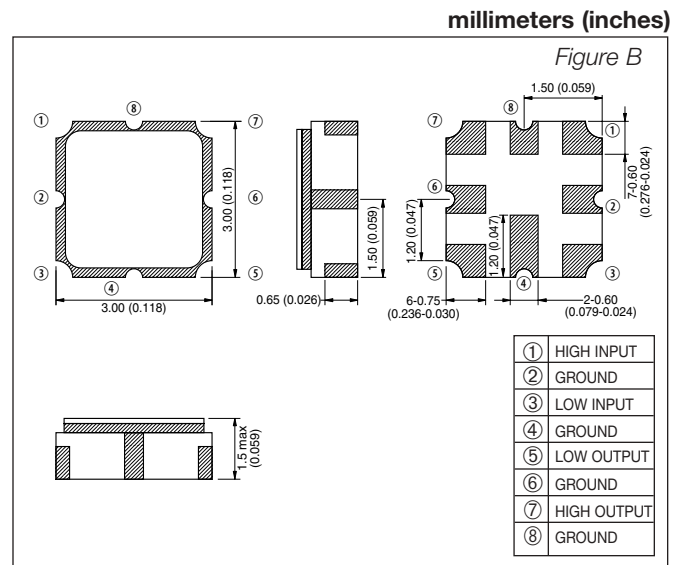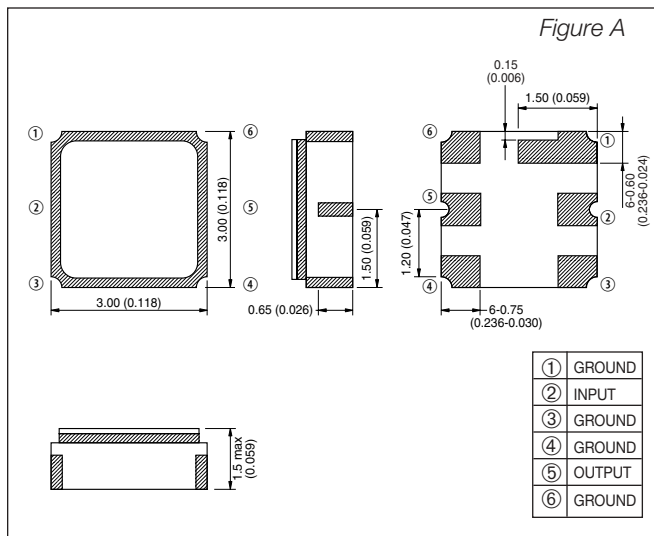




Surface Acoustic Wave Filters



SF Series

RECOMMENDED LAND PATTERN

millimeters (inches)

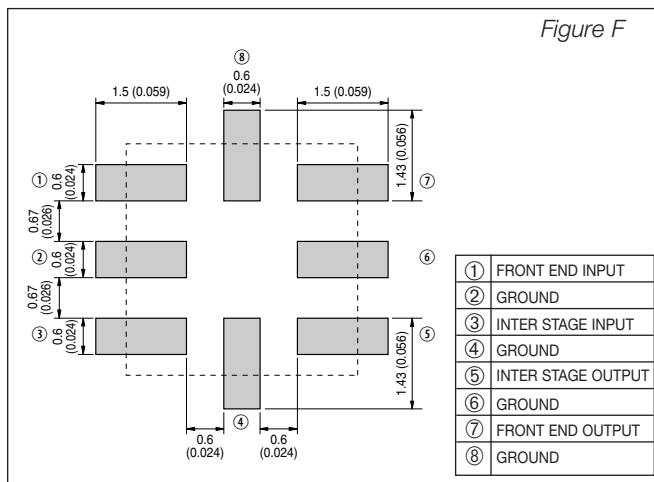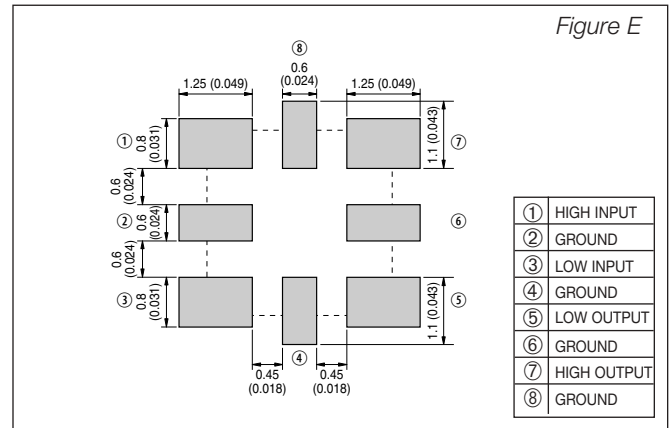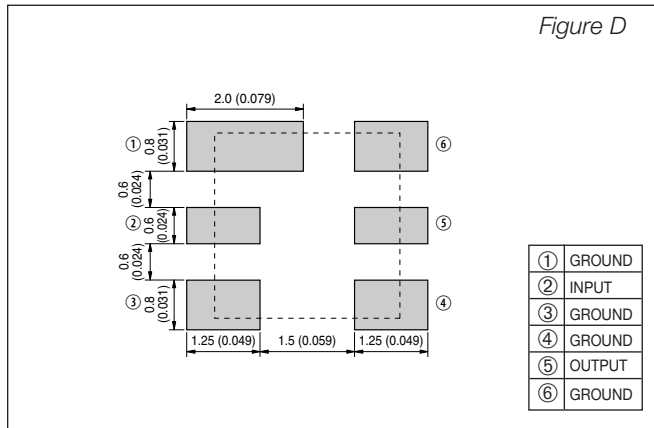

SPECIFICATIONS

| Part No. | Application | Pass Band Frequency | Pass Band Insertion Loss | Pass Band Variation | Pass Band VSWR | Absolute Rejection | | | | | | | | Operating Temperature | Storage Temperature | Dim. | Test Circuit | Rec. Land Pat. | Taping Dim. | |
|-----------------|---------------|-------------------------|-------------------------------|---------------------|----------------|--------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------------------|---------------------|--------------|--------------|----------------|-------------|--------|
| | | | | | | 1590MHz | 1720MHz | 1930MHz | 3400MHz | | | | | | | | | | | |
| SF30-1880M6UU00 | PCS Tx | 1850MHz - 1910MHz | 4.5dB max. | 2.8dB max. | 2.5 | 1590MHz | 1720MHz | 1930MHz | 3400MHz | | | | | | -30 to +80°C | -40 to +85°C | Fig. A | Fig. G | Fig. D | Dim. 1 |
| | | | | | | 20dB min. | 20dB min. | 7dB min. | 15dB min. | | | | | | | | | | | |
| SF30-1960M6UU00 | PCS Rx | 1930MHz - 1990MHz | 4.0dB max. | 2.8dB max. | 2.0 | 1509MHz | 1850MHz | 2100MHz | 3400MHz | | | | | | -30 to +80°C | -40 to +85°C | Fig. A | Fig. G | Fig. D | Dim. 1 |
| | | | | | | 20dB min. | 10dB min. | 24dB min. | 10dB min. | | | | | | | | | | | |
| SF30-1880H8UU00 | PCS (Half) | Tx (Low) | 1850MHz - 1880MHz | 3.0dB max. | 1.7dB max. | 2.3 | 0 | 1700MHz | 1930MHz | 2200MHz | 2700MHz | | | -30 to +80°C | -40 to +85°C | Fig. B | Fig. H | Fig. E | Dim. 1 | |
| | | Tx (High) | 1880MHz - 1910MHz | 3.0dB max. | 1.7dB max. | 2.3 | 1700MHz | 1760MHz | 1960MHz | 2700MHz | 3000MHz | | | | | | | | | |
| SF38-1575T8UU00 | GPS 2 in 1 | Front End | 1573.92MHz - 1576.92MHz | 1.8dB max. | 1.0dB max. | 2.0 | 850MHz | 1365MHz | 1463MHz | 1687MHz | 1785MHz | 1850MHz | 2450MHz | -30 to +80°C | -40 to +85°C | Fig. C | Fig. H | Fig. F | Dim. 2 | |
| | | Inter Stage | 1573.92MHz - 1576.92MHz | 3.0dB max. | 1.0dB max. | 2.0 | 17dB min. | 25dB min. | 25dB min. | 25dB min. | 25dB min. | 28dB min. | 18dB min. | | | | | | | |
| SF30-1575F6UU00 | GPS Single | Front End | 1573.92MHz - 1576.92MHz | 1.8dB max. | 1.0dB max. | 2.0 | 850MHz | 1365MHz | 1463MHz | 1687MHz | 1785MHz | 1850MHz | 2450MHz | -30 to +80°C | -40 to +85°C | Fig. A | Fig. G | Fig. D | Dim. 1 | |
| | | | | | | | 17dB min. | 25dB min. | 25dB min. | 25dB min. | 25dB min. | 28dB min. | 18dB min. | | | | | | | |
| SF30-1575S6UU00 | GPS Single | Inter Stage | 1573.92MHz - 1576.92MHz | 2.5dB max. | 1.0dB max. | 2.0 | DC | 1300MHz | 1710MHz | 1820MHz | | | | -30 to +80°C | -40 to +85°C | Fig. A | Fig. G | Fig. D | Dim. 1 | |
| | | | | | | | 25dB min. | 30dB min. | 25dB min. | 40dB min. | 30dB min. | | | | | | | | | |


Surface Acoustic Wave Filters




SF Series

CHARACTERISTICS

<PCS Tx Full>Parts No.: SF30-1880M6UU00

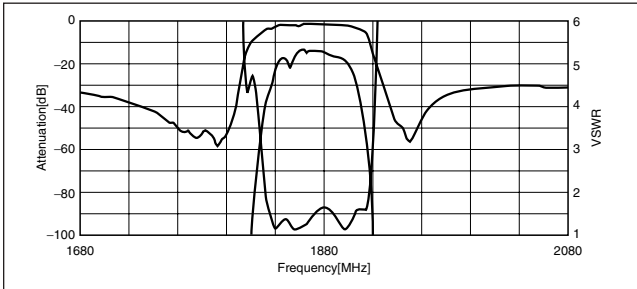


Pass Band Characteristics


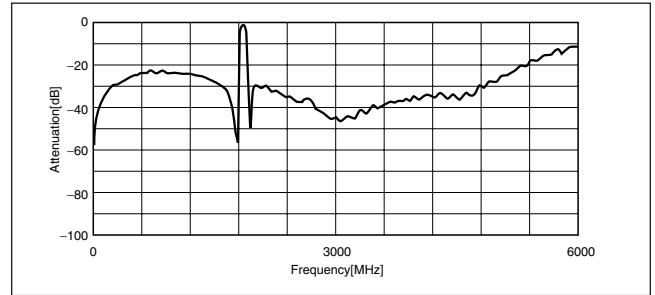


Spurious Characteristics


<PCS Tx Full>Parts No.: SF30-1880H8UU00

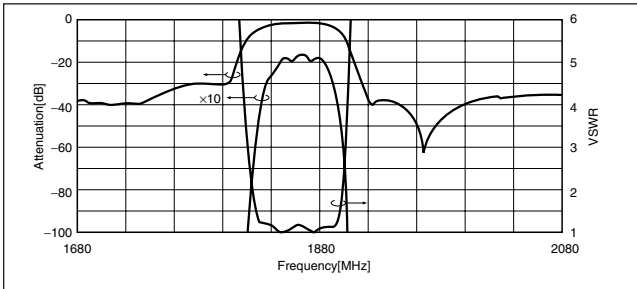

Low

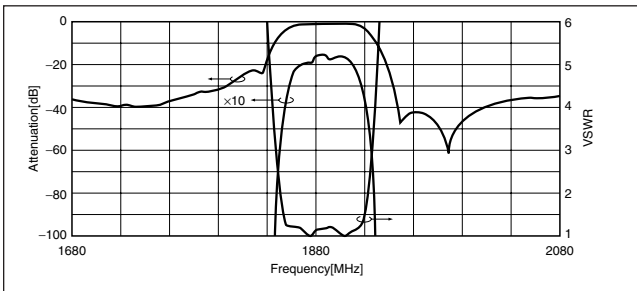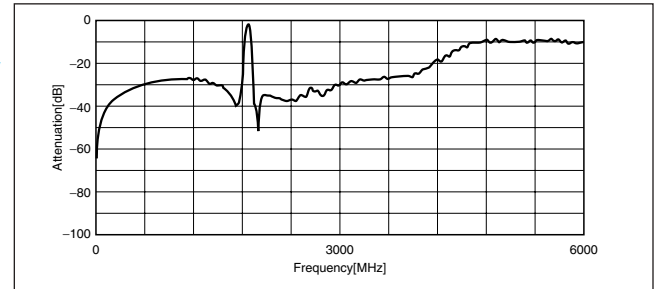


High

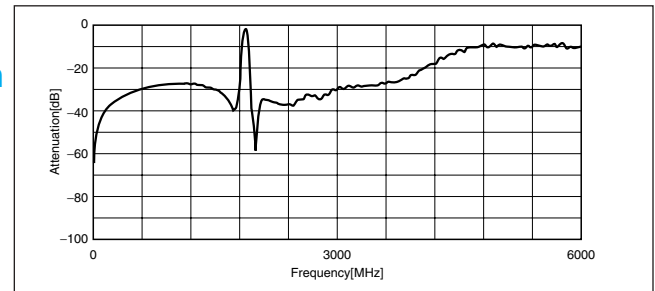



Pass Band Characteristics

Spurious Characteristics


<GPS 2 in 1>Parts No.: SF38-1575T8UU00

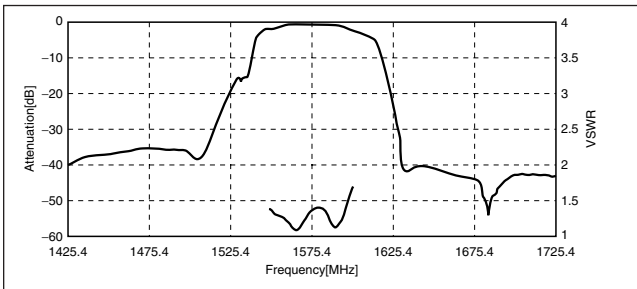

Front End

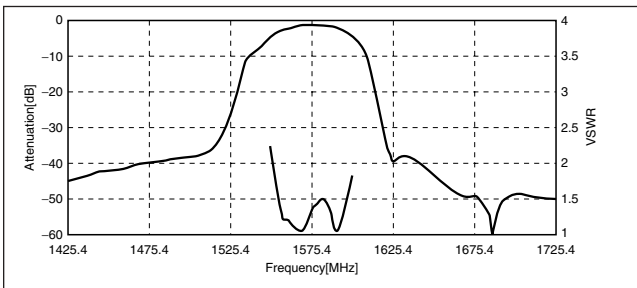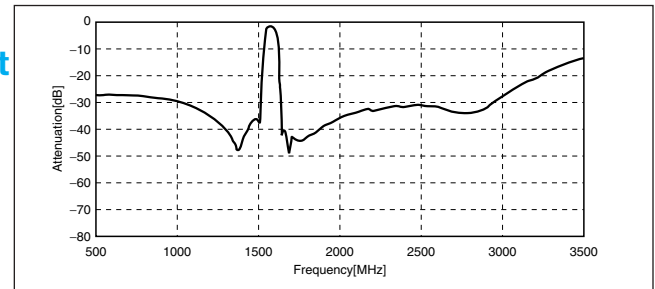

Inter Stage

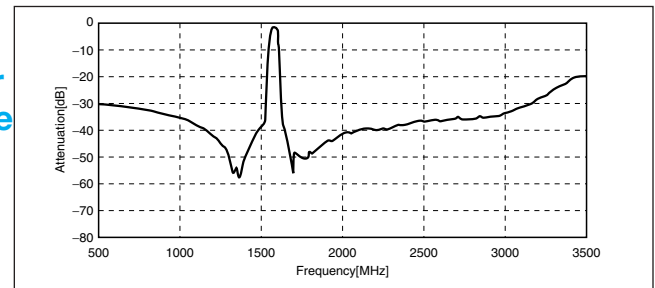

Pass Band Characteristics



Spurious Characteristics

Surface Acoustic Wave Filters




SF Series


TEST CIRCUIT

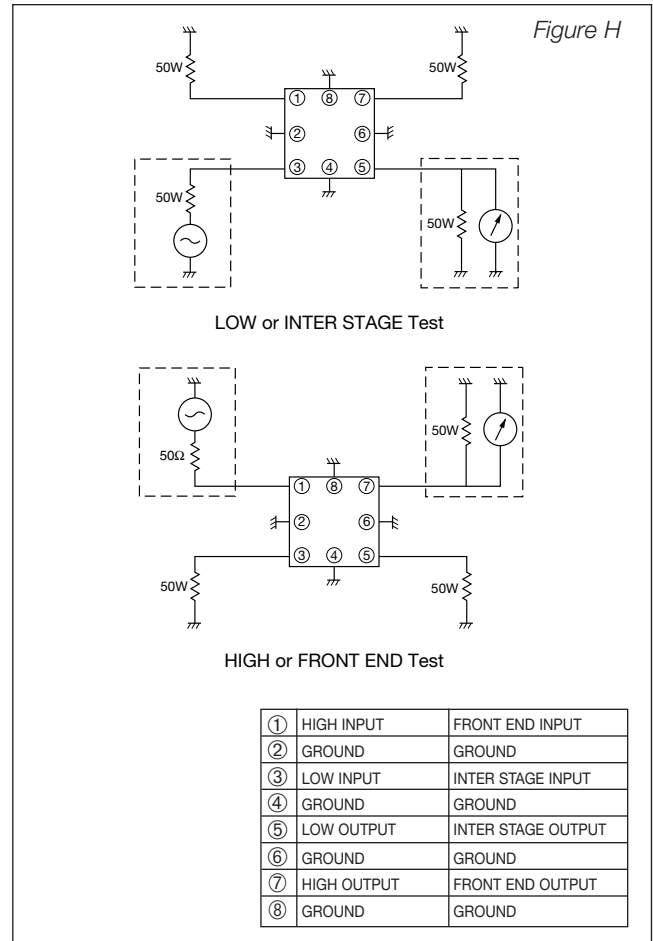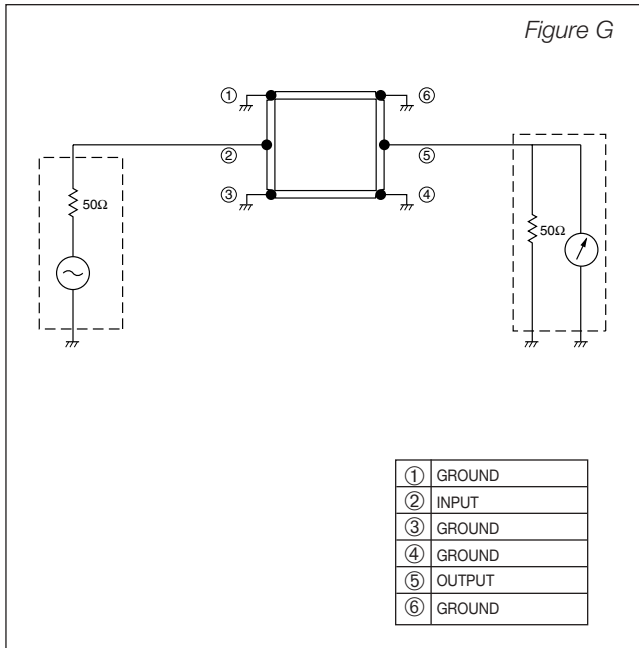

RECOMMENDED TEMPERATURE PROFILE IR REFLOW

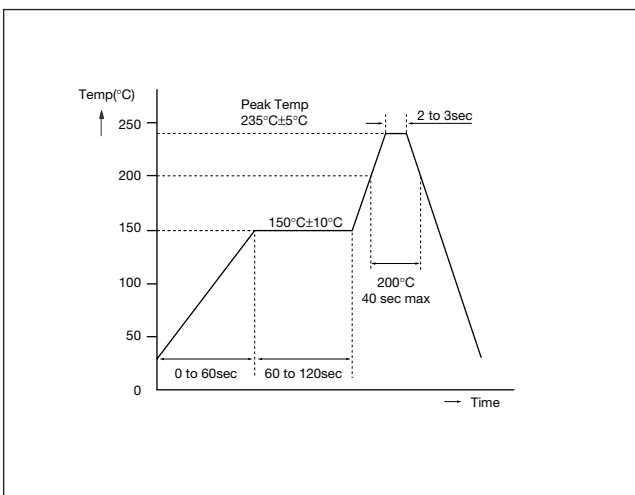

TAPING DIMENSIONS millimeters (inches)

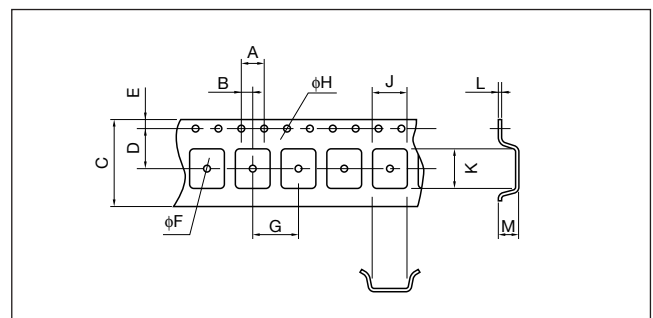

| Code | A | B | C | D | F | G | H | J | K | L | M |
|--------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Dim. 1 | 4.00 (0.157) | 2.00 (0.079) | 12.0 (0.472) | 5.50 (0.217) | 1.55 (0.061) | 8.00 (0.315) | 1.55 (0.061) | 3.30 (0.130) | 3.30 (0.130) | 0.30 (0.012) | 1.85 (0.073) |
| Dim. 2 | 4.00 (0.157) | 2.00 (0.079) | 12.0 (0.472) | 5.50 (0.217) | 1.55 (0.061) | 8.00 (0.315) | 1.55 (0.061) | 4.00 (0.157) | 4.00 (0.157) | 0.30 (0.012) | 1.40 (0.055) |

Surface Acoustic Wave Filters



KAF Series



FEATURES


- Adjustment free
- Component cost and space saving
- Excellent temperature characteristics
- High reliability

APPLICATIONS


- BS tuner and converter
- CATV converter
- Cordless phone

DIMENSIONS

millimeters (inches)

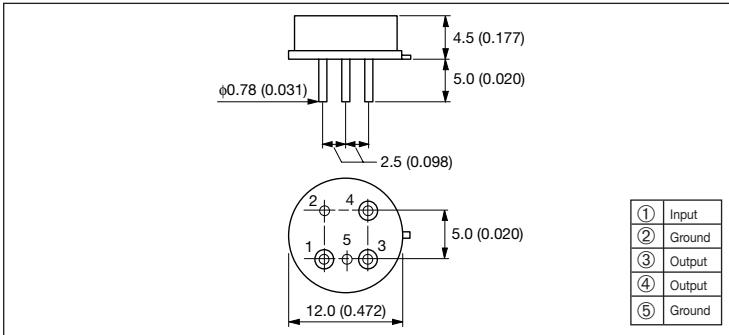


HOW TO ORDER

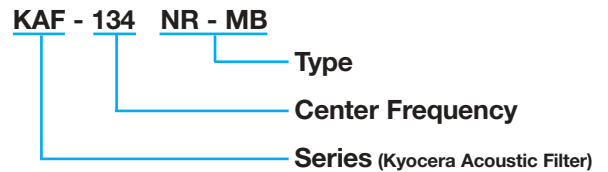


TEST CIRCUIT

KAF-134NR-MB
KAF-130NR-MA
KAF-130NR-MB
KAF- 70NR-WC
KAF- 70NR-WD



KAF- 46NR-ME
KAF- 49NR-MA

46 : L1=0.47uH
L2 No need
49 : L1=0.39uH
L2=0.33uH




SPECIFICATIONS

| Part Number | Insertion Loss (dB) | Center Frequency (MHz) | Pass Band Width at 3dB (MHz) | Pass Band Width at 30dB (MHz) | Pass Band Ripple (dB) | Group Delay Time Ripple (nSec) | Spurious Characteristics (dB) | Frequency Temperature Coefficient (ppm/°C) | |
|---------------------|---------------------|---------------------------------|------------------------------|--------------------------------|-----------------------|--------------------------------|-------------------------------|--------------------------------------------|---------------------------|
| KAF-134NR-MB | 25 max. | 134.26 | 26 min. | 50 max. | 1.0 max. | ±10 | 35 min. (30 to 200MHz) | -80 max. | |
| KAF-130NR-MA | 22 max. | 130 | 22 min. | 45 max. | | ±20 | | | |
| KAF-130NR-MB | 21 max. | | 26 min. | 50 max. | | ±30 | | | |
| KAF-70NR-WC | 32 max. | 70 | 23 min. | 30 max. | | ±30 | | | 30 min. (10 to 100MHz) |
| KAF-70NR-WD | 33 max. | 70 | 25 min. | 34 max. | | 25 min. (10 to 100MHz) | | | |
| KAF-46NR-ME | 3.0 max. | 46.61 to 46.97MHz 6.0dB max. | | 49.67 to 49.99MHz 30dB max. | | | | | |
| KAF-49NR-MA | | 49.67 to 49.99MHz 6.0dB max. | | 49.61 to 49.97MHz 30dB max. | | | | | |

Antenna Switch Module



LM-D118 Series - Dual Band

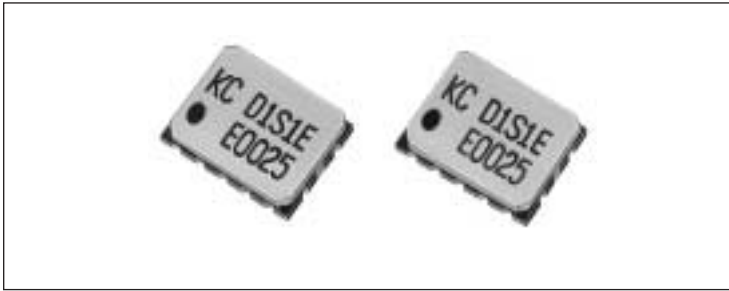

FEATURES


- Built-in ESD protection circuit
- Built-in 4 coupling capacitors and bias circuit drive the switch
- Built-in 2LPF for receiver
- Small and low profile

APPLICATIONS


- GSM/DCS, GSM/PCS

DIMENSIONS

millimeters (inches)

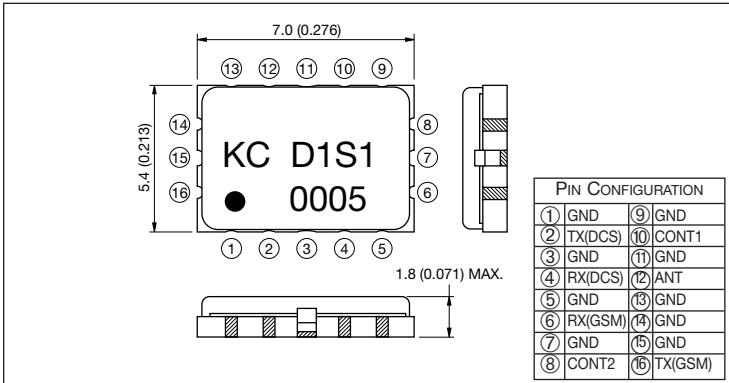


HOW TO ORDER

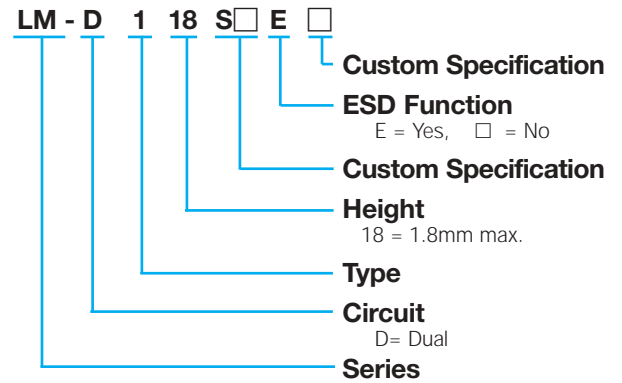


SPECIFICATIONS

| Part Number | GSM | | | | | DCS | | | | |
|--------------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
| | TX | | | RX | | TX | | | RX | |
| | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) |
| LM-D118S1E1 | 880 to 915 | ≤1.3 | ≥30 | 925 to 960 | ≤1.5 | 1710 to 1785 | ≤1.6 | ≥25 (2*f0), ≥30 (3*f0) | 1805 to 1880 | ≤1.6 |

RECOMMENDED LAND PATTERN

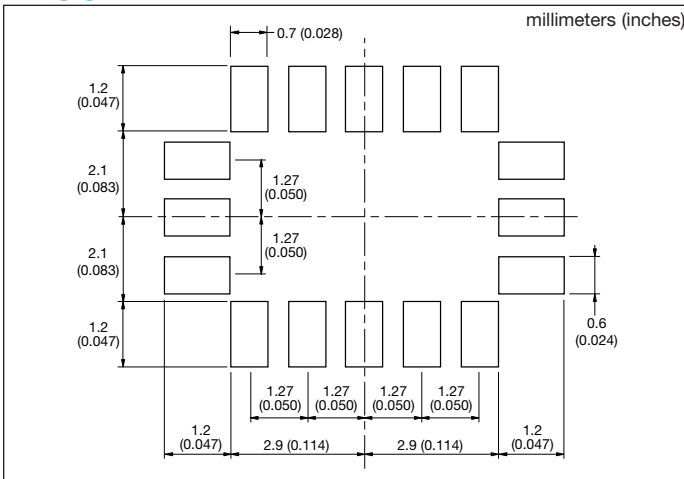


RECOMMENDED REFLOW PROFILE

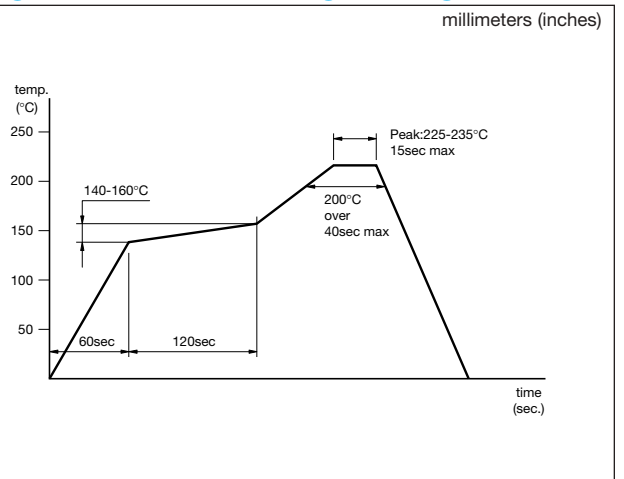

Antenna Switch Module



LM-D218 Series - Dual Band

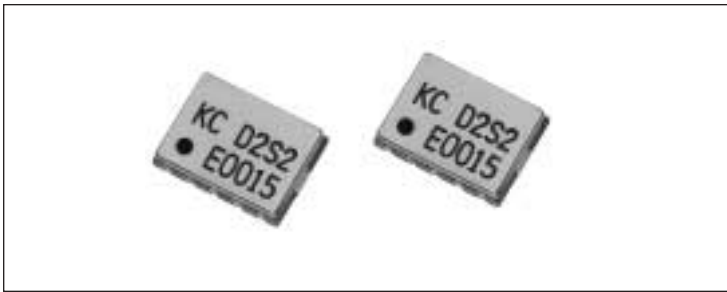

FEATURES


- Built-in ESD protection circuit (Option)
- Built-in 2LPF for receiver
- Small and low profile

APPLICATIONS

- GSM/DCS, GSM/PCS


DIMENSIONS

millimeters (inches)

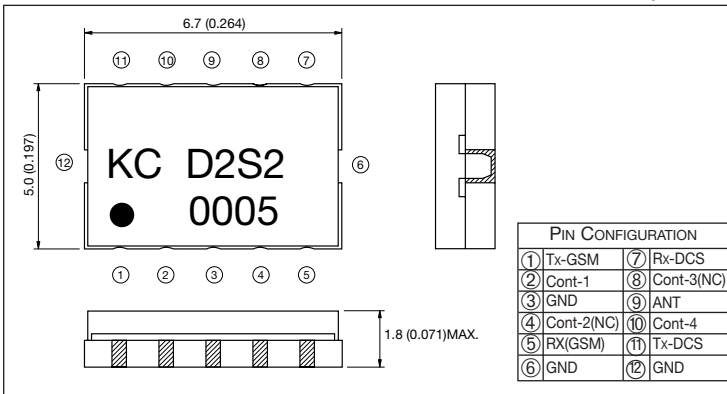

HOW TO ORDER

LM - D 2 18 S E

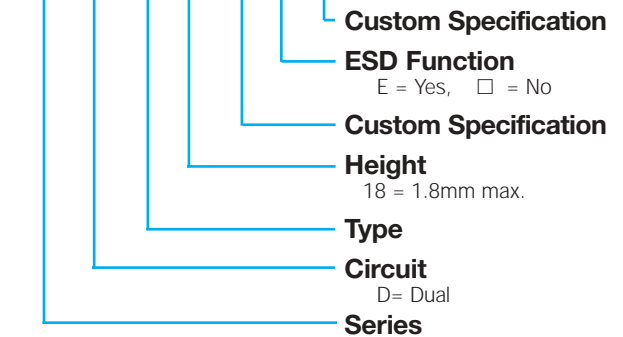


SPECIFICATIONS

| Part Number | GSM | | | | | DCS | | | | |
|-------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
| | TX | | | RX | | TX | | | RX | |
| | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) |
| LM-D218S2-2 | 880 to 915 | ≤1.2 | ≥30 | 925 to 960 | ≤1.3 | 1710 to 1785 | ≤1.5 | ≥25 | 1805 to 1880 | ≤1.3 |


RECOMMENDED LAND PATTERN

millimeters (inches)

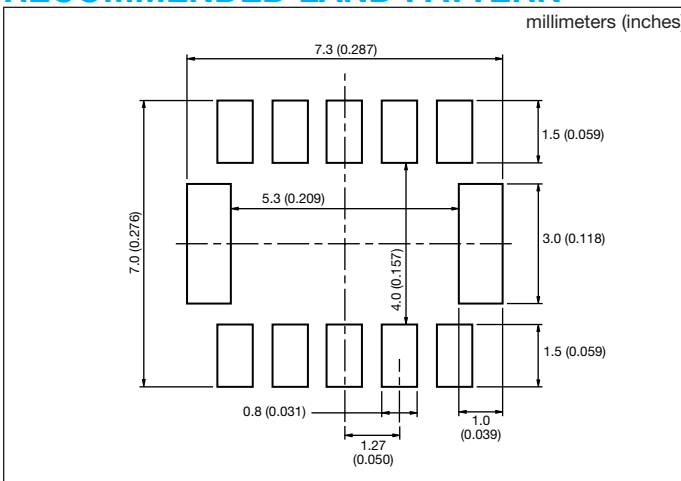

RECOMMENDED REFLOW PROFILE

millimeters (inches)

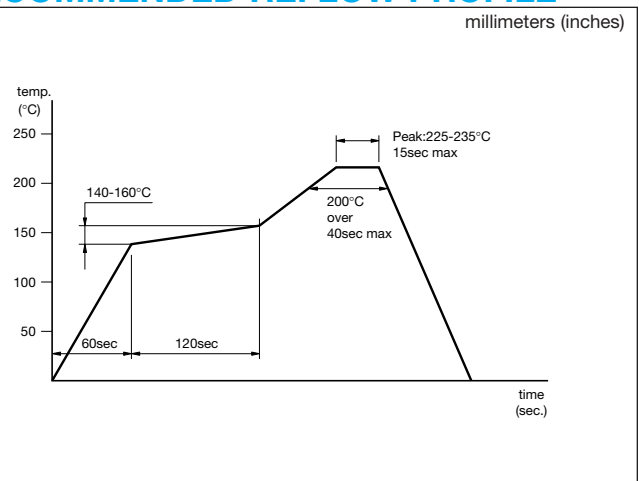

Antenna Switch Module



LM-D518 Series - Dual Band



FEATURES


- Small Size
- Low Loss
- Built-in ESD protection circuit (Option)
- Built-in 2LPF for receiver

APPLICATIONS


- GSM/DCS

DIMENSIONS

millimeters (inches)

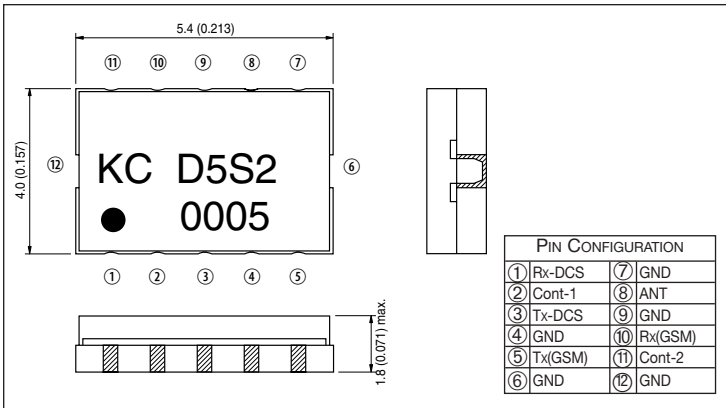


HOW TO ORDER

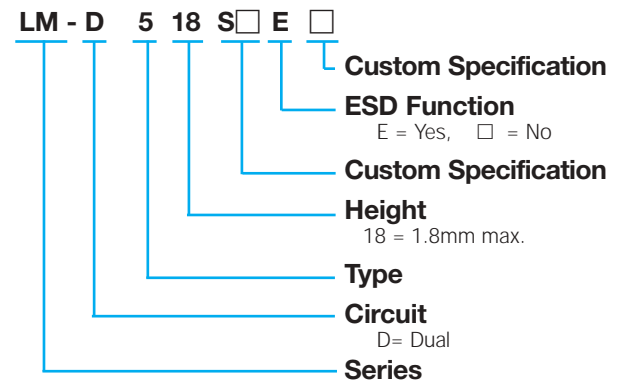


SPECIFICATIONS

| Part Number | GSM | | | DCS | | | DCS | | | |
|-------------|------------|----------------|------------------------|-------------|----------------|--------------|-------------|----------------|------------------------|------|
| | TX | RX | | TX | RX | | TX | RX | | |
| | Freq (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | |
| LM-D518S2-2 | 880 to 915 | ≤1.1 | ≥30 | 925 to 960 | ≤1.2 | 1710 to 1785 | ≤1.3 | ≥25 | 1805 to 1880 | ≤1.2 |

RECOMMENDED LAND PATTERN

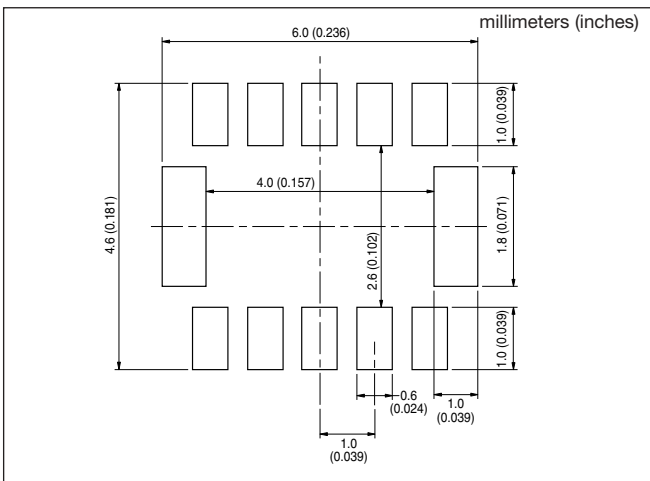


RECOMMENDED REFLOW PROFILE

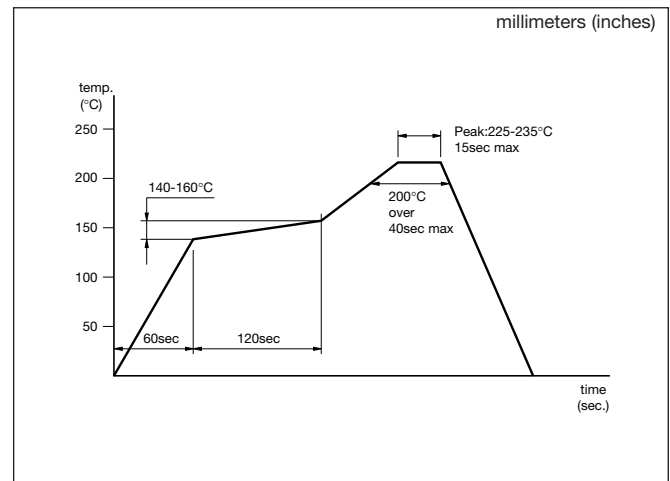

Antenna Switch Module



LM-T118 Series - Triple Band

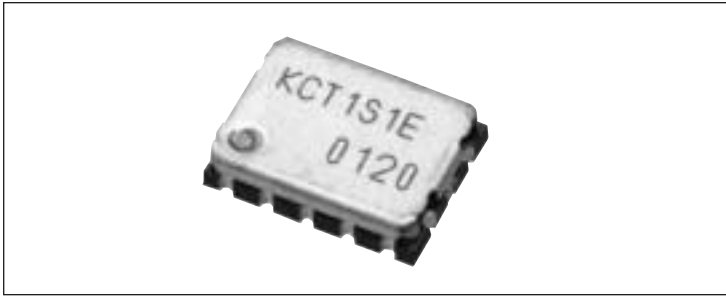

FEATURES


- Built-in ESD protection circuit
- Built-in 2 coupling capacitors and bias circuit to drive the switch
- Built-in 2LPF for receiver
- Small and low profile

APPLICATIONS


- GSM/DCS/PCS

DIMENSIONS

millimeters (inches)

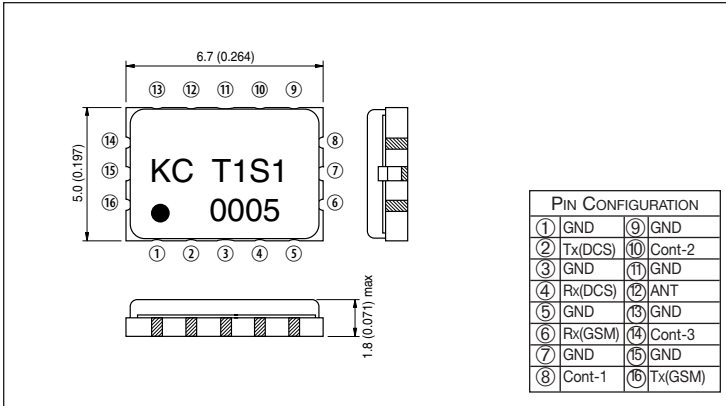


HOW TO ORDER

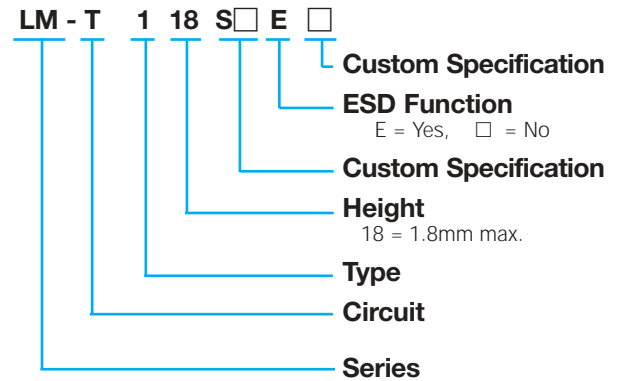


SPECIFICATIONS

| Part Number | GSM | | | | | DCS/PCS | | | | |
|-------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
| | TX | | | RX | | TX | | | RX | |
| | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) |
| LM-T118S1E2 | 880 to 915 | ≤1.2 | ≥35(2*f0), ≥30(3*f0) | 925 to 960 | ≤1.2 | 1710 to 1785 | ≤1.5 | ≥28(2*f0), ≥30(3*f0) | 1805 to 1880 | ≤1.5 |
| | | | | | | 1850 to 1910 | | | 1930 to 1990 | ≤1.6 |

RECOMMENDED LAND PATTERN

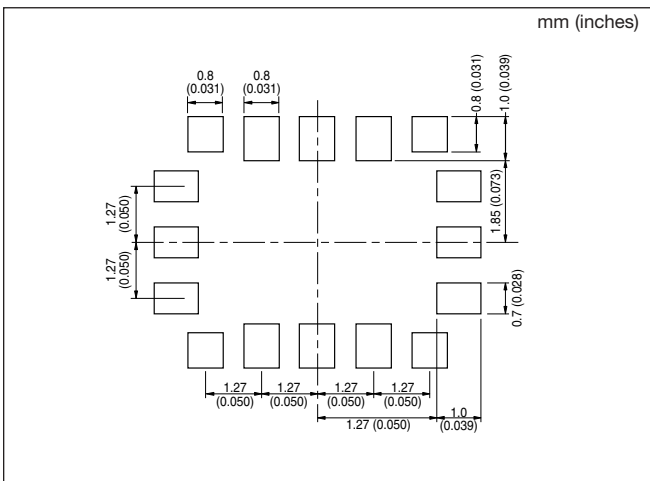

RECOMMENDED REFLOW PROFILE

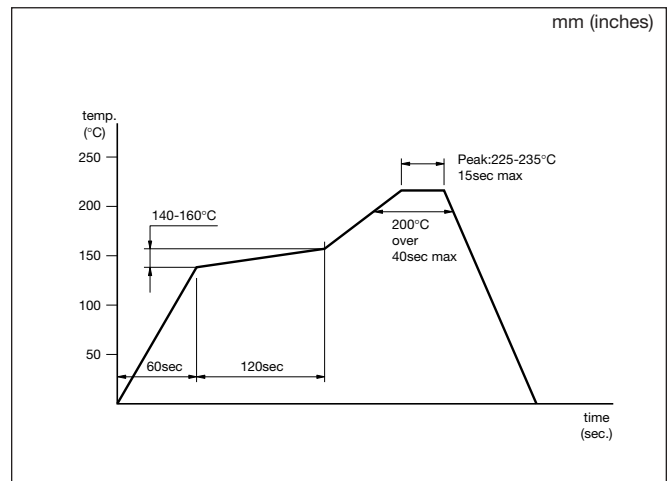


KNF Series



DIMENSIONS

millimeters (inches)

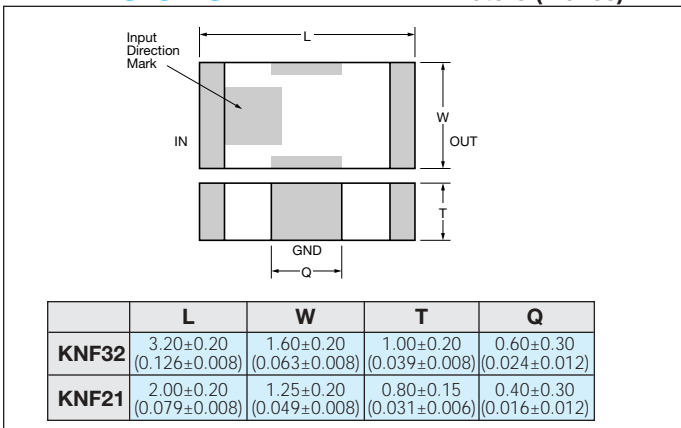

SPECIFICATIONS

| Part Number | Cut Off Frequency (MHz) | Capacitance (+50/-20%) (pF) | 20dB Attenuation (Typical) | Rated Current (mA) | Rated Voltage (VDC) |
|-------------|-------------------------|-----------------------------|----------------------------|--------------------|---------------------|
| KNF32025 | 25MHz | 235pF | 200 - 600 MHz | 200mA | 25VDC |
| KNF32050 | 50MHz | 130pF | 350 - 850 MHz | | |
| KNF32100 | 100MHz | 65pF | 450 - 950 MHz | | |
| KNF32200 | 200MHz | 33pF | 700 - 1200 MHz | | |
| KNF21025 | 25MHz | 235pF | 200 - 600 MHz | 150mA | |
| KNF21050 | 50MHz | 130pF | 350 - 850 MHz | | |
| KNF21100 | 100MHz | 65pF | 450 - 950 MHz | | |
| KNF21200 | 200MHz | 33pF | 700 - 1200 MHz | | |
| KNF21400 | 400MHz | 17pF | 900 - 1400 MHz | | |

Cut off frequency at attenuation typical 3dB, max 6dB
Operating temperature = -25 to 85°C

FEATURES

- Disturbed constant type LC filter. Prevents ringing caused by circuit impedance. Suitable for high speed digital circuits and visual line circuits.
- Stable noise attenuation over wide frequency ranges
- Low profile (H=0.95mm max.) suitable for miniature electronic equipment
- First class auto-placement

APPLICATIONS

- PCs, laser printers, cellular phone, clock data lines for LCD display
- High speed video signal circuits and interface circuits
- High speed digital circuits
- Anti-noise solution

Achieves effective noise suppression in noisy high speed circuits without signal waveform distortion

HOW TO ORDER

KNF - 21 050 - W 3

Quantity Per Reel

3 = 3,000 pcs

Taping Direction (See Table 1)

W = Standard X = Option

Frequency




025 = 25MHz 200 = 200MHz
050 = 50MHz 400 = 200MHz
100 = 100MHz

Size EIA (EIAJ)

32 = 1206 (3216)
21 = 0805 (2012)

Series

FREQUENCY CHARACTERISTICS

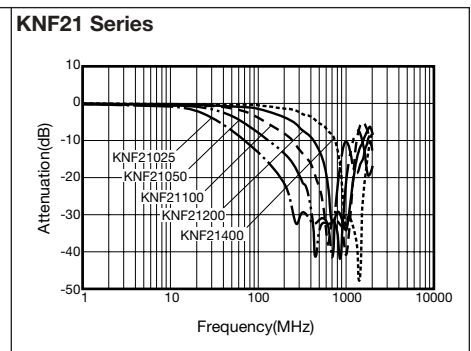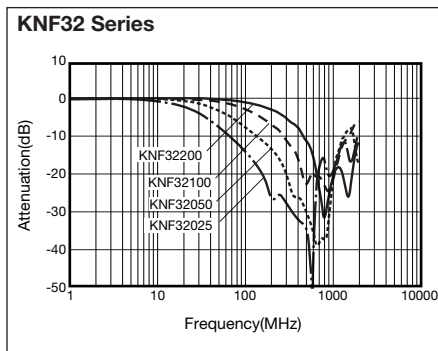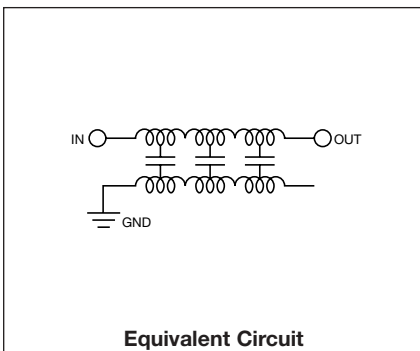


KNF Series


<IMPEDANCE FREE>

- Stable attenuation against impedance change
- Good impedance matching without ringing on distortion even at the time of IC ON/OFF and pattern layout change


TEST CIRCUIT

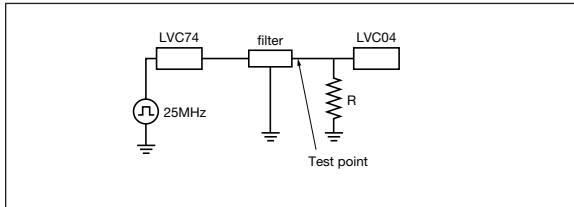

OUTPUT WAVE FORM (Clock Frequency 25MHz)

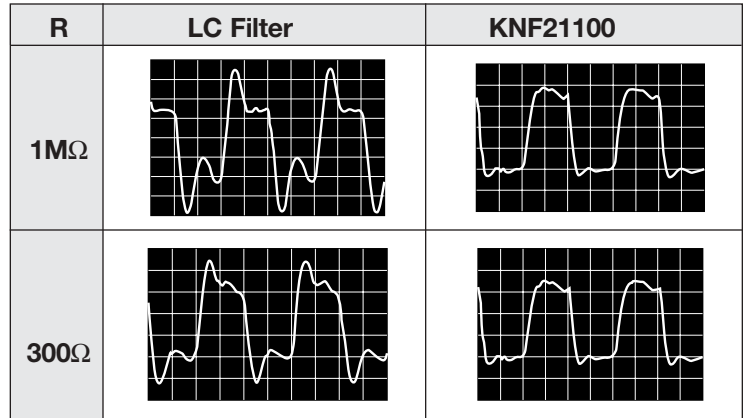


<NO RINGING> - EXCELLENT IMPEDANCE MATCHING

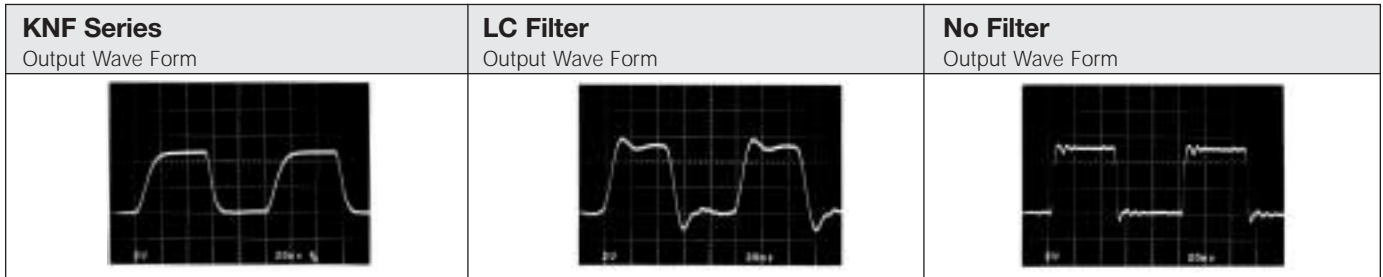


- Wide attenuation up to high frequency range without distortion


TEST CIRCUIT

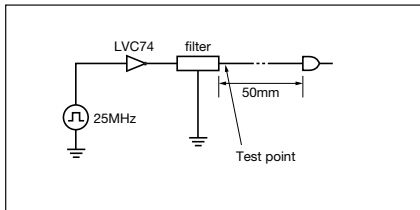


WIDE ATTENUATION BANDWIDTH

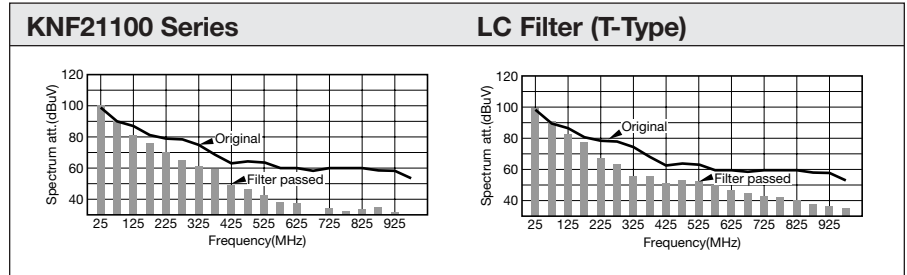

RECOMMENDED LAND PATTERN

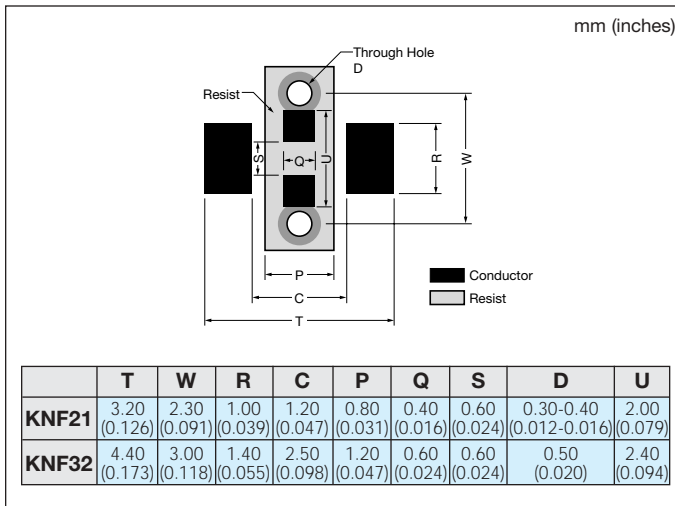

PACKAGING SPECIFICATION (Table 1)

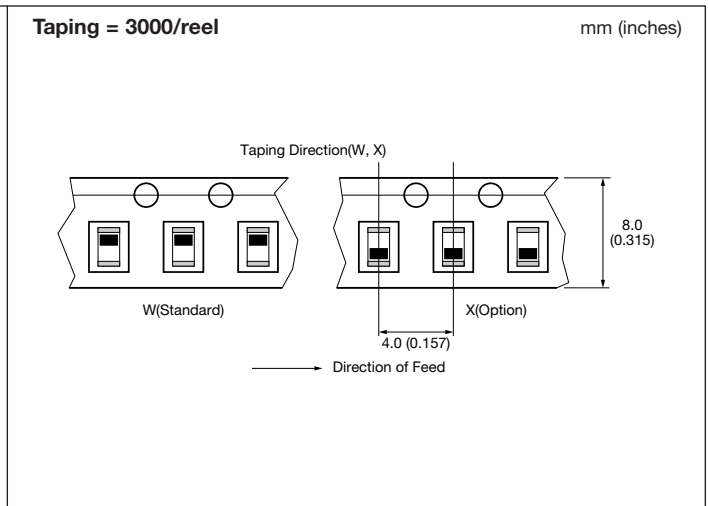

EMI Filter Array



KNA Series




FEATURES

- Disturbed constant type LC filter. Prevents ringing caused by circuit impedance. Suitable for high speed digital circuits and visual line circuits.
- Stable noise attenuation over wide frequency ranges.
- Low profile (H=1.0mm max.) suitable for miniature electronic equipment.
- First class auto-placement

DIMENSIONS


millimeters (inches)

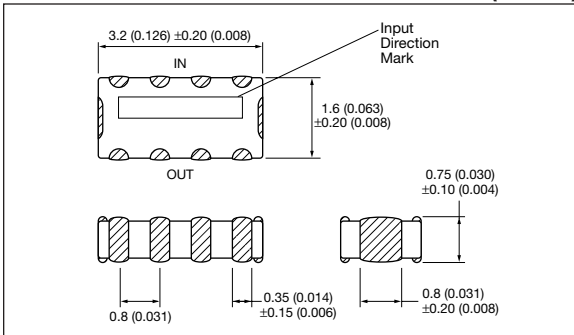

APPLICATIONS

- PCs, laser printers, cellular phone, clock data lines for LCD display
 - High speed video signal circuits and interface circuits
 - High speed digital circuits
 - Anti-noise solution
- Achieves effective noise suppression in noisy high speed circuits without signal waveform distortion

FREQUENCY CHARACTERISTICS

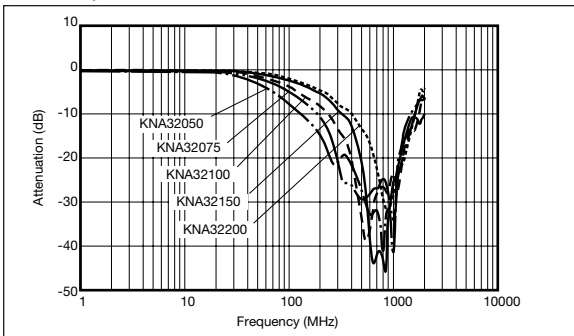

HOW TO ORDER

KNA - 32 050 - W 3

Quantity Per Reel

3 = 3,000 pcs

Taping Direction (See Table 1)

W = Standard X = Option

Frequency

050 = 50MHz 100 = 100MHz 200 = 200MHz

*Frequency at Attenuation typical 3dB, Max 6dB

Size EIA (EIAJ)

32 = 1206 (3216)

Series



SPECIFICATIONS

| Part Number | Cut Off Frequency (MHz) | Capacitance (+50/-20%) (pF) | 20dB Attenuation (Typical) | Rated Current (mA) | Rated Voltage (VDC) |
|-----------------|-------------------------|-----------------------------|----------------------------|--------------------|---------------------|
| KNA32050 | 50MHz | 115pF | 350 - 850 MHz | 100mA | 25VDC |
| KNA32075 | 75MHz | 82pF | 400 - 900 MHz | 100mA | 25VDC |
| KNA32100 | 100MHz | 65pF | 450 - 950 MHz | 100mA | 25VDC |
| KNA32150 | 150MHz | 45pF | 600 - 1100 MHz | 100mA | 25VDC |
| KNA32200 | 200MHz | 35pF | 700 - 1200 MHz | 100mA | 25VDC |

Operating temperature = -25 to 85(°C)


RECOMMENDED LAND PATTERN

PACKAGING SPECIFICATION (Table 1)

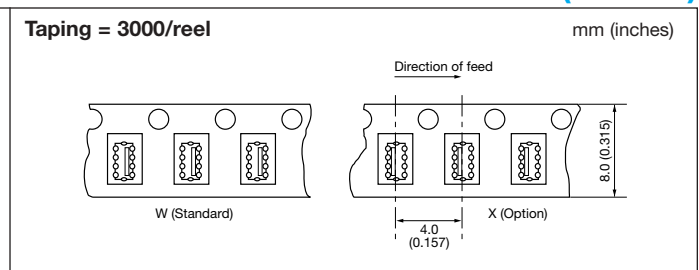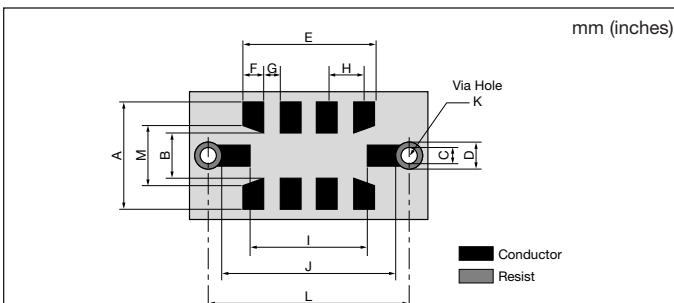

| Code | A | B | C | D | E | F | G | H | I | J | K | L | M |
|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------------|-----------------|-----------------|
| Dimension | 2.20 (0.087) | 1.00 (0.039) | 0.40 (0.016) | 0.60 (0.024) | 2.80 (0.110) | 0.40 (0.016) | 0.40 (0.016) | 0.80 (0.031) | 2.60 (0.102) | 3.80 (0.150) | 0.30-0.40 (0.012-0.016) | 4.20 (0.165) | 1.30 (0.051) |

KNH Series

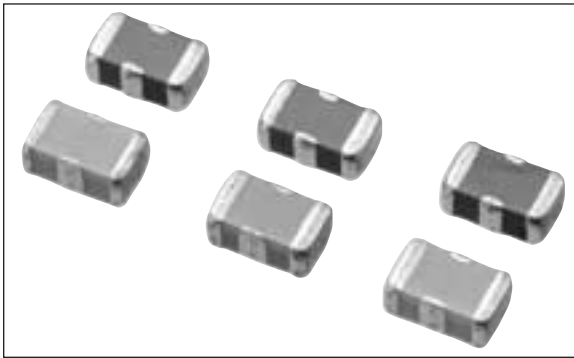

FEATURES


- 0805 size. Rated current up to 2A.
- Wider Attenuation bandwidth due to distributed constant circuit type
- Particularly effective for filtering power (Vcc) lines

APPLICATIONS


- PCs, laser printers, cellular phone, power/signal lines for LCD display, office equipment
- AV power supply/signal line, TV, VCR, etc.
- High current signal lines

DIMENSIONS

millimeters (inches)

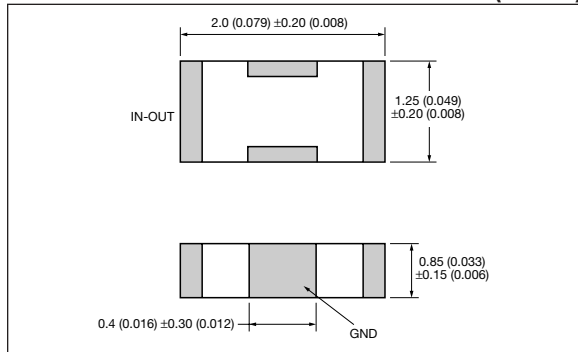

ATTENUATION CHARACTERISTICS

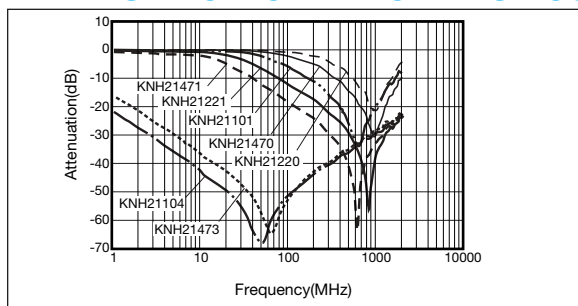

HOW TO ORDER

KNH - 21 104 - 3 AA

Code

AA = Standard

Quantity Per Reel

3 = 3,000 pcs

Capacitance Value

101 = 100pF 220 = 22pF 470 = 47pF
 104 = 100nF 221 = 220pF 471 = 470pF
 473 = 47nF

Size EIA (EIAJ)

21 = 0805 (2012)

Series

SPECIFICATIONS

| Type | Capacitance (+50/-20%) (pF) | Rated Current (A) | Rated Voltage (VDC) | Direct-Current Resistance (Ω) |
|----------|-----------------------------|-------------------|---------------------|-------------------------------|
| KNH21104 | 100,000 | 2.0 | 25 | <0.02 |
| KNH21473 | 47,000 | 2.0 | 50 | <0.02 |
| KNH21471 | 470 | 1.0 | 50 | <0.08 |
| KNH21221 | 220 | 1.0 | 50 | <0.08 |
| KNH21101 | 100 | 1.0 | 50 | <0.08 |
| KNH21470 | 47 | 1.0 | 50 | <0.08 |
| KNH21220 | 22 | 1.0 | 50 | <0.08 |


Operating temperature = -25 to 85(°C)

KNH Series


<ELECTRICAL CHARACTERISTICS>

- Wide attenuation range including surrounding circuit


TEST CIRCUIT

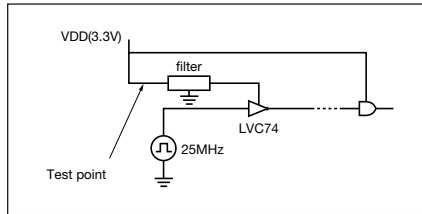


ATTENUATION EFFECT OF POWER SUPPLY NOISE

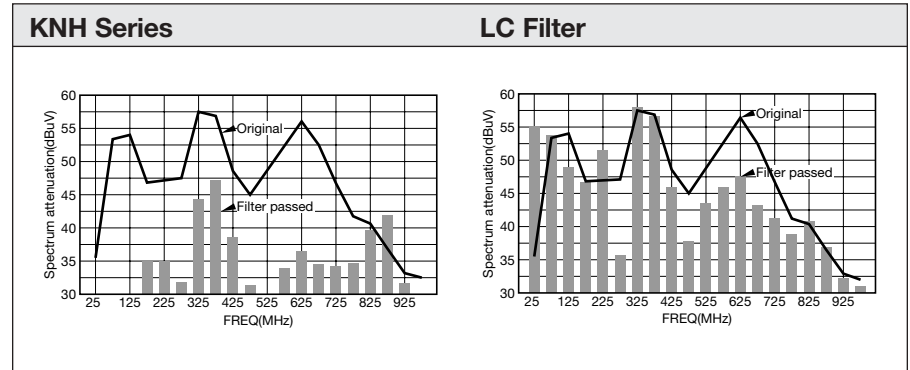

RECOMMENDED LAND PATTERN

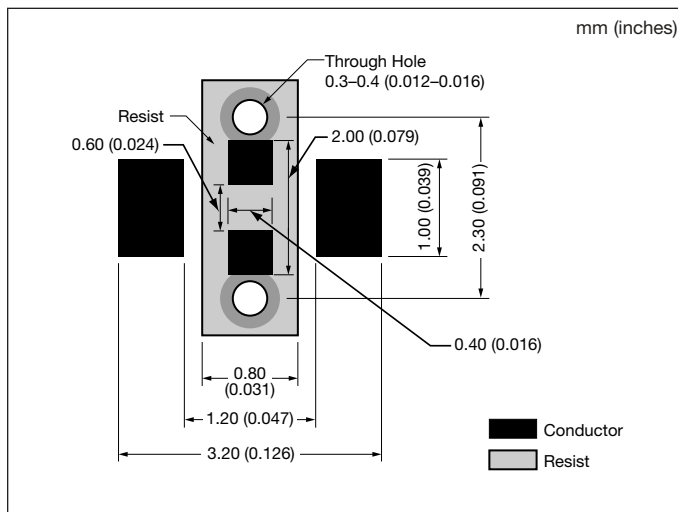

PACKAGING SPECIFICATION

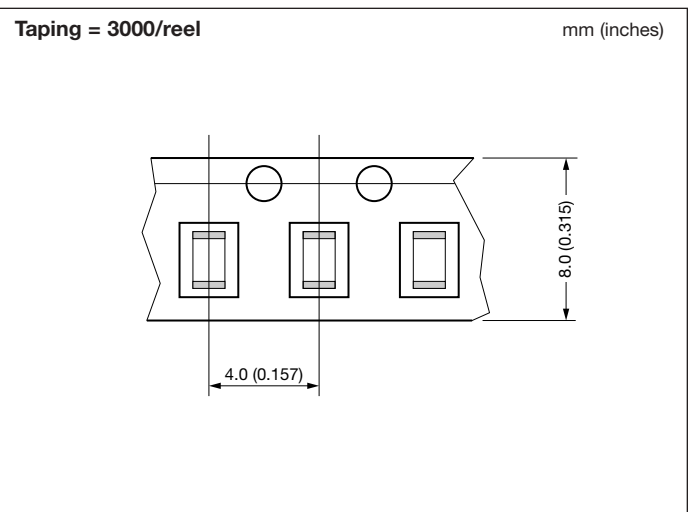


Piezo Ceramic Elements



KBS Series




DIMENSIONS

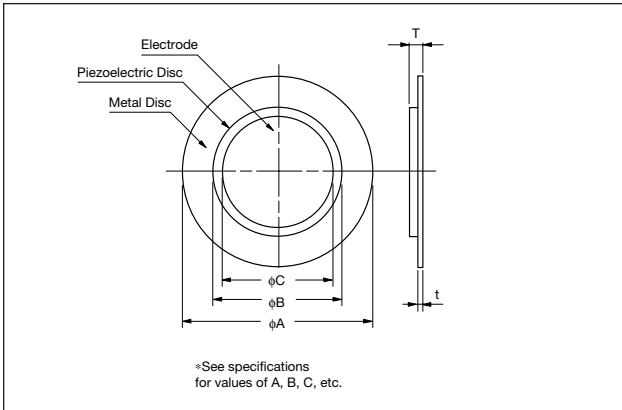

STANDARD LEADS

millimeters (inches)

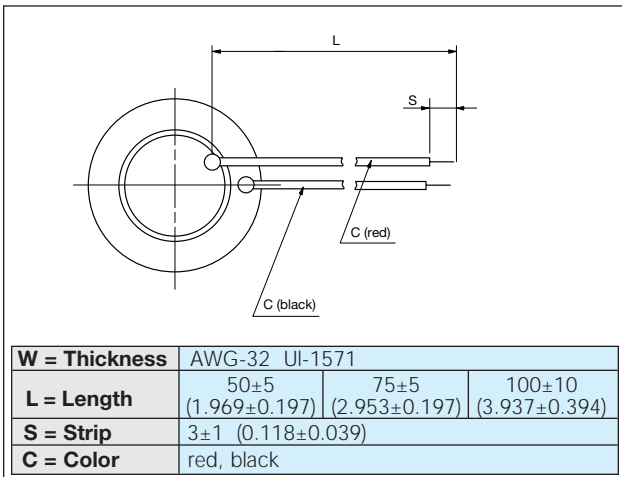

FEATURES


- Wide variety of tones by connecting to IC
- Low current consumption, thin and light design
- High reliability and no contact noise

APPLICATIONS

- Clocks, electronic calculators, pagers, cameras
- Equipment using microcontrollers (microwave ovens, TVs, stereos, automobiles, etc.)
- Telecommunications (facsimile machines, telephones)
- Electronic medical instruments

HOW TO ORDER

KBS - 20 DA - 7 A □ -1

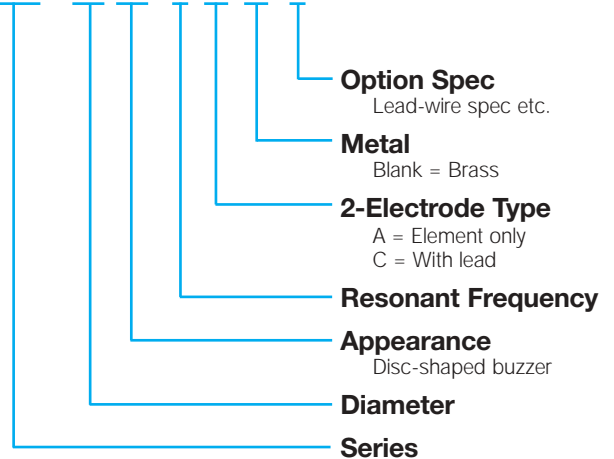

SPECIFICATIONS

millimeters (inches)

| Part Number | Resonant Frequency (kHz) | Resonant Impedance (Ω) | Static Capacitance (pF) | Dimensions | | | | Metal Disc Thickness (t) | Metal Disc Material |
|----------------------|--------------------------|------------------------|-------------------------|----------------------------|----------------------------|-----------------|----------------------------|----------------------------|---------------------|
| | | | | Metal Disc (øA) | Ceramic Disc (øB) | Electrode (øC) | Total Thickness (T) | | |
| KBS-13DA-12A | 12.0±1.2 | 700 | 5,000±30% | 13.4±0.10 (0.528±0.004) | 10.0±0.30 (0.394±0.012) | 9.00 (0.354) | 0.36±0.10 (0.014±0.004) | 0.15±0.03 (0.006±0.001) | Brass |
| KBS-15DA-9A-2 | 10.5±3.0 | 600 | 8,000±30% | 15.0±0.10 (0.591±0.004) | 12.0±0.30 (0.472±0.012) | 11.0 (0.433) | 0.42±0.10 (0.017±0.004) | 0.20±0.03 (0.008±0.001) | Brass |
| KBS-20DA-7A | 6.6±1.0 | 300 | 10,000±30% | 20.0±0.10 (0.787±0.004) | 14.2±0.30 (0.559±0.012) | 13.0 (0.512) | 0.45±0.10 (0.018±0.004) | 0.20±0.03 (0.008±0.001) | Brass |
| KBS-23DA-4A | 4.0±1.0 | 600 | 12,000±30% | 22.8±0.10 (0.898±0.004) | 15.0±0.30 (0.591±0.012) | 14.0 (0.551) | 0.41±0.10 (0.016±0.004) | 0.15±0.03 (0.006±0.001) | Brass |
| KBS-27DA-5A | 4.6±0.5 | 200 | 20,000±30% | 27.0±0.10 (1.063±0.004) | 20.2±0.30 (0.795±0.012) | 19.0 (0.748) | 0.53±0.10 (0.021±0.004) | 0.25±0.03 (0.010±0.001) | Brass |
| KBS-30DA-1A | 1.4±0.5 | 500 | *48,000±30% | 30.0±0.10 (1.181±0.004) | 20.2±0.30 (0.795±0.012) | 19.0 (0.748) | 0.23±0.10 (0.009±0.004) | 0.10±0.03 (0.004±0.001) | Brass |
| KBS-35DA-3A | 2.9±0.5 | 200 | 30,000±30% | 35.0±0.10 (1.378±0.004) | 25.0±0.30 (0.984±0.012) | 23.5 (0.925) | 0.53±0.10 (0.021±0.004) | 0.25±0.03 (0.010±0.001) | Brass |

*Measured at 120Hz, all others at 1kHz


Piezo Ceramic Elements



KBS Series




DIMENSIONS

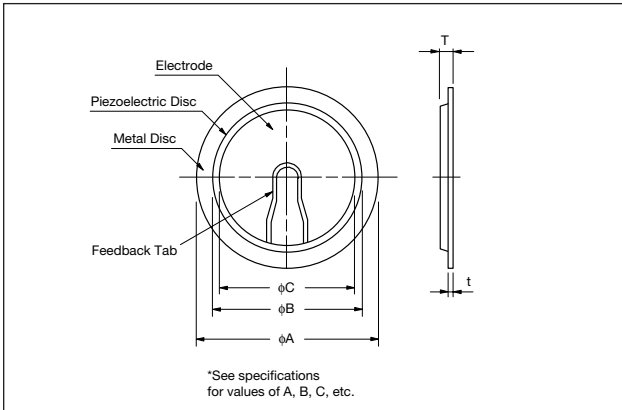

STANDARD LEADS

millimeters (inches)

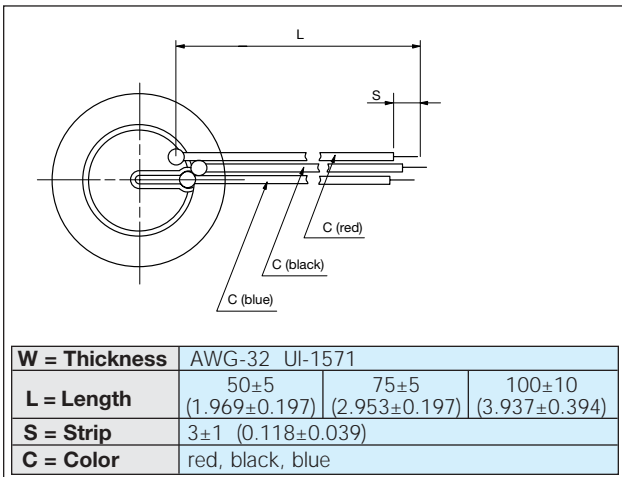

SPECIFICATIONS (G TYPE)

millimeters (inches)

| Part Number | Resonant Frequency (kHz) | Resonant Impedance (Ω) | Static Capacitance (pF) | Dimensions | | | Total Thickness (T) | Metal Disc Thickness (t) | Metal Disc Material |
|-------------|--------------------------|---------------------------------|-------------------------|----------------------------|----------------------------|------------------------|----------------------------|----------------------------|---------------------|
| | | | | Metal Disc (ϕA) | Ceramic Disc (ϕB) | Electrode (ϕC) | | | |
| KBS-27DA-5G | 4.6±0.5 | 200 | 16,000±30% | 27.0±0.10 (1.063±0.004) | 20.2±0.30 (0.795±0.012) | 19.0 (0.748) | 0.53±0.10 (0.021±0.004) | 0.25±0.03 (0.010±0.001) | Brass |
| KBS-35DA-3G | 2.9±0.5 | 200 | 25,000±30% | 35.0±0.10 (1.378±0.004) | 25.0±0.30 (0.984±0.012) | 23.6 (0.929) | 0.53±0.10 (0.021±0.004) | 0.25±0.03 (0.010±0.001) | Brass |

FEATURES

- High sound pressure level and clear sound by connecting to a self oscillating circuit
- Thin and light design
- High reliability and no contact noise

APPLICATIONS

- Smoke detectors, security alarms and other warning devices
- Pagers, electronic calculators, alarm signals
- Telephones

HOW TO ORDER

KBS - 35 DA - 3 G □ -3

Option Spec

Lead-wire spec etc.

Metal Disc Material

- = Brass
- S = Stainless Steel
- L = 42 Alloy

3-Electrode Type

- G = G-Pattern
- GC = G-Pattern with Leads

Resonant Frequency

Appearance

Disc-shaped buzzer

Diameter (mm)

Series

Piezo Buzzers



KBS Series



FEATURES

- Low current consumption - High sound pressure
- Compact, light design
- High reliability and no contact noise
- Easy-mounting
- Wide variety of tones can be made by cavity designing
- Functions over a wide range of Input Voltage

APPLICATIONS

- Confirmation tone for various office automation equipment
- Automobiles, microwave ovens, refrigerators
- Clocks, toys, game machines

HOW TO ORDER

KBS - 27 DB - 3 A

Type of Terminals

A = With lead P = Round pin

Resonant Frequency

Appearance

Buzzer with casing

Diameter (mm)

Series

DIMENSIONS

millimeters (inches)

| | | |
|---------------------------|-----------------------------|-----------------------------|
| <p>KBS-15DB-4A</p> | <p>KBS-13DB-4P-2</p> | <p>KBS-20DB-5A</p> |
| <p>KBS-27DB-3A</p> | <p>KBS-20DB-2P-0</p> | <p>KBS-20DB-4P-0</p> |


SPECIFICATIONS

| Part Number | Sound Pressure Level | Static Capacitance |
|----------------------|-----------------------------------|--------------------|
| KBS-13DB-4P-2 | 73db min. 4.096kHz 10Vp-p SQ 30cm | 10nF±30% |
| KBS-20DB-2P-0 | 75db min. 2.048kHz 10Vp-p SQ 30cm | 22nF±30% |
| KBS-20DB-4P-0 | 77db min. 4.096kHz 10Vp-p SQ 30cm | 14nF±30% |
| KBS-15DB-4A | 72db min. 4.096kHz 10Vp-p SQ 30cm | 9.5nF±30% |
| KBS-20DB-5A | 75db min. 5.0kHz 10Vp-p SQ 30cm | 10nF±30% |
| KBS-27DB-3A | 75db min. 5.0kHz 10Vp-p SQ 30cm | 20nF±30% |

Trimmer Capacitors



CTZ2, CTZ3 Series

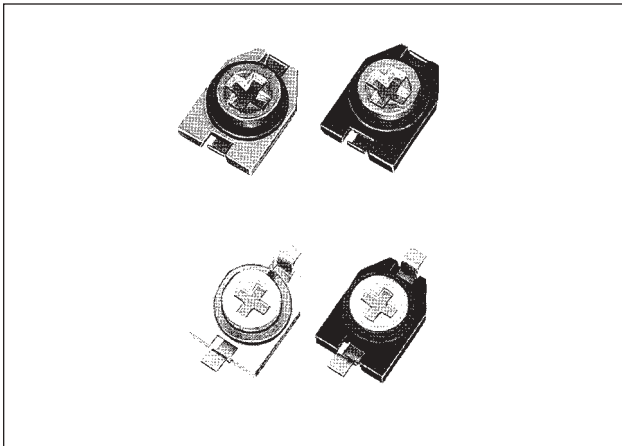

FEATURES

- SMD small & thin package
- Wide capacitance range
- CTZ3S-A series-small setting drift
- Washable and non-washable types available
- Plus slot(+) suitable for auto-adjustment
(Minus slot is also available)

APPLICATIONS

- AV equipment
- Cellular phone
- Cordless phone
- Pager
- TCXO
- Keyless Entry


SPECIFICATIONS

| Part Number | Capacitance (pF) | | | Q 1±0.1 (MHz) | Temperature Coefficient (ppm/°C) | |
|-------------|------------------------|------------|--------|---------------------|----------------------------------------|----------|
| | Max. Value -0%+100% | Min. Value | | | | |
| | | Standard | A Type | | | |
| CTZ2 S/E | 03A | 3 | 2.0 | — | >150 | NPO±500 |
| | 05A | 5 | 3.0 | — | >150 | NPO±500 |
| | 10A | 10 | 3.0 | — | >150 | NPO±500 |
| | 20C | 20 | 5.5 | — | >150 | N750±500 |
| CTZ3 S/E | 03A | 3 | 1.0 | 1.5 | >300 | NPO±500 |
| | 05A | 5 | 1.5 | 2.0 | >300 | NPO±500 |
| | 10A | 10 | 2.5 | 4.0 | >300 | NPO±500 |
| | 10B | 10 | 1.5 | 2.0 | >300 | N400±500 |
| | 20C | 20 | 4.5 | 7.5 | >300 | N750±500 |
| | 30C | 30 | 4.5 | — | >300 | N750±500 |
| | 40C | 40 | 4.5 | — | >300 | N750±500 |
| 50C | 50 | 4.5 | — | >200 | N750±500 | |

*Standard Specification = Rated Voltage (VDC) 25
 Temperature Range (°C) -40 to +85
 Insulation Resistance (MΩ) > 10⁴
 Torque (g-cm) 10 to 150

HOW TO ORDER

CTZ3 S - 05 A - W 1 - P F

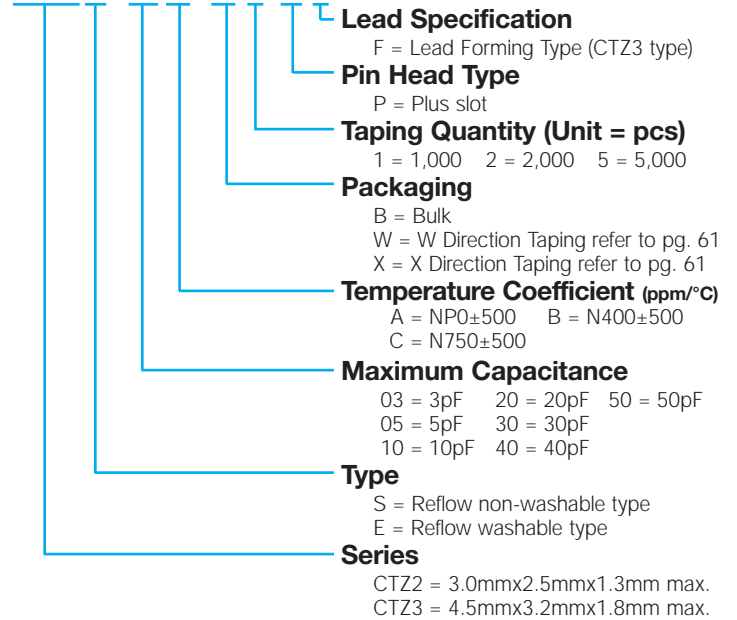


*No code for standard parts

Trimmer Capacitors




CTZ2, CTZ3 Series





SERIES

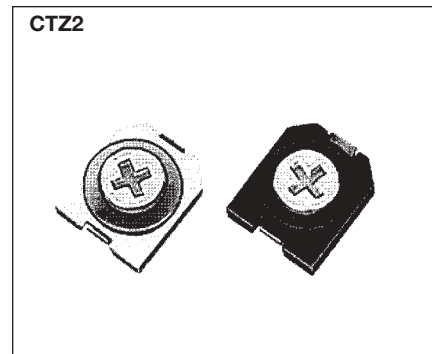

Dimensions

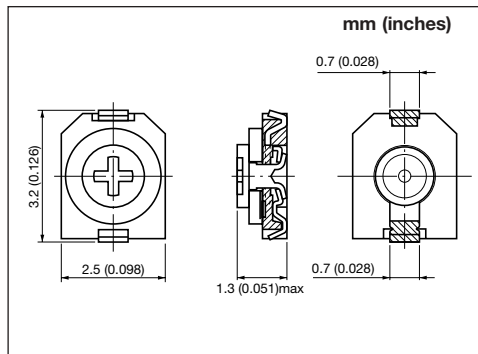

Recommended Land Pattern

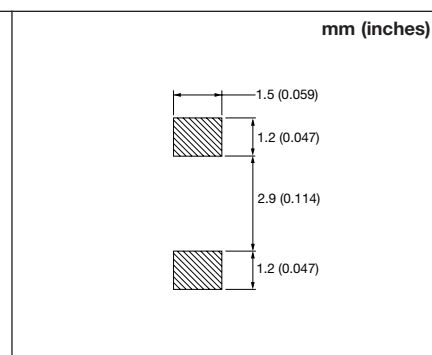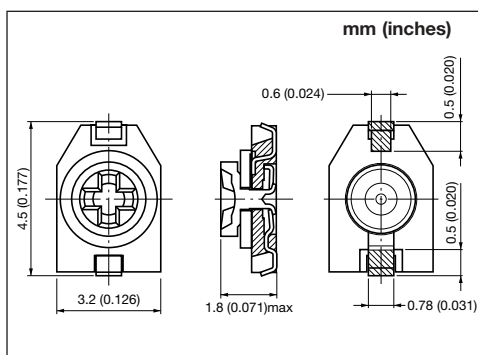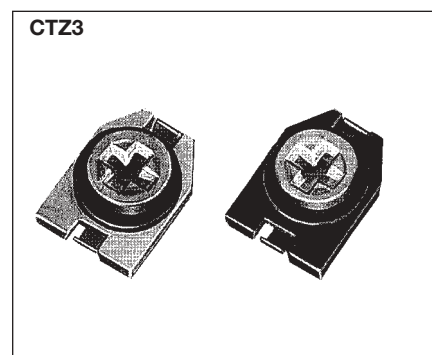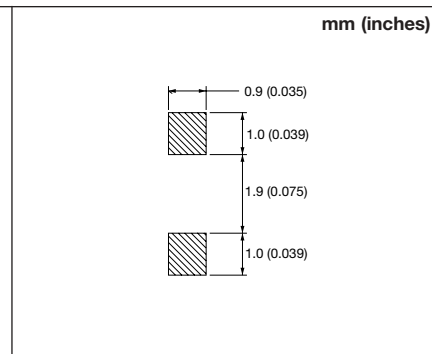


Trimmer Capacitors



CTZ2, CTZ3 Series

TAPE AND REEL

millimeters (inches)

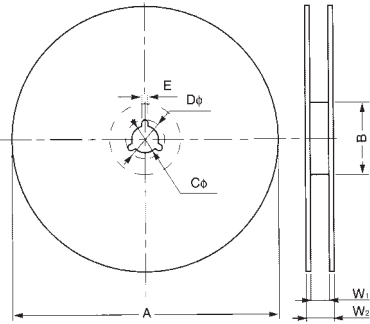


| | A | B | C | D | E | W ₁ | W ₂ |
|--------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| CTZ2 Series (2,000 pcs) | 180 ^{+0.00} _{-3.00} (7.087 ^{+0.000} _{-0.118}) | 60.0 ^{+1.00} _{-0.00} (2.362 ^{+0.000} _{-0.118}) | 13.0±0.20 (0.512±0.008) | 21.0±0.80 (0.827±0.031) | 2.00±0.50 (0.079±0.020) | 13.0±0.30 (0.512±0.012) | 15.4±1.00 (0.606±0.039) |
| CTZ3 Series (1,000 pcs) | | | | | | | |
| CTZ3 Series (5,000 pcs) | 420±2.00 (16.535±0.079) | 80.0±2.00 (3.150±0.079) | 13.0±0.50 (0.512±0.020) | 21.0±1.00 (0.827±0.039) | 2.00±0.50 (0.079±0.020) | 14.0±2.00 (0.551±0.079) | 16.0±2.50 (0.630±0.098) |

CARRIER TAPE


millimeters (inches)

TAPE LOADING

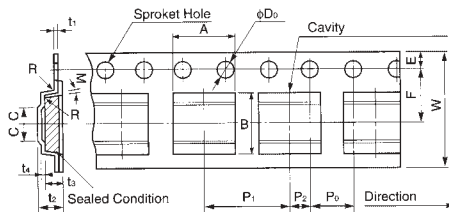


W Direction – Standard

X Direction – Option



→ Direction of feed
W Direction — Standard



→ Direction of feed
X Direction — Option


| Code | CTZ2 Series | | CTZ3 Series | |
|------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| | Standard | Reverse | Standard | Reverse |
| A | 2.70±0.10 (0.106±0.004) | 2.90±0.10 (0.114±0.004) | 3.35±0.10 (0.132±0.004) | 3.60±0.10 (0.142±0.004) |
| B | 3.20±0.10 (0.126±0.004) | 4.90±0.10 (0.193±0.004) | 4.60 ^{+0.20} _{-0.00} (0.181 ^{+0.008} _{-0.000}) | 7.2±0.10 (0.283±0.004) |
| W | 12.0±0.30 (0.472±0.012) | 12.0±0.30 (0.472±0.012) | 12.0±0.30 (0.472±0.012) | 12.0±0.30 (0.472±0.012) |
| F | 5.50±0.05 (0.217±0.002) | 5.50±0.05 (0.217±0.002) | 5.50±0.05 (0.217±0.002) | 5.50±0.05 (0.217±0.002) |
| E | 1.75±0.10 (0.069±0.004) | 1.75±0.10 (0.069±0.004) | 1.75±0.10 (0.069±0.004) | 1.75±0.10 (0.069±0.004) |
| P0 | 4.00±0.10 (0.157±0.004) | 4.00±0.10 (0.157±0.004) | 4.00±0.10 (0.157±0.004) | 4.00±0.10 (0.157±0.004) |
| P1 | 4.00±0.10 (0.157±0.004) | 4.00±0.10 (0.157±0.004) | 8.00±0.10 (0.315±0.004) | 8.00±0.10 (0.315±0.004) |
| P2 | 2.00±0.05 (0.079±0.002) | 2.00±0.05 (0.079±0.002) | 2.00±0.05 (0.079±0.002) | 2.00±0.05 (0.079±0.002) |
| φD0 | 1.50 ^{+0.10} _{-0.00} (0.059 ^{+0.004} _{-0.000}) | 1.50 ^{+0.10} _{-0.00} (0.059 ^{+0.004} _{-0.000}) | 1.50 ^{+0.10} _{-0.00} (0.059 ^{+0.004} _{-0.000}) | 1.50 ^{+0.10} _{-0.00} (0.059 ^{+0.004} _{-0.000}) |
| t1 | 0.30±0.10 (0.012±0.004) | 0.30±0.10 (0.012±0.004) | 0.30±0.10 (0.012±0.004) | 0.30±0.10 (0.012±0.004) |
| t2 | 2.00±0.10 (0.079±0.004) | 1.50 ^{+0.20} _{-0.00} (0.059 ^{+0.008} _{-0.000}) | 2.50±0.10 (0.098±0.004) | 2.20±0.10 (0.087±0.004) |
| t3 | 1.30 ^{+0.15} _{-0.00} (0.051 ^{+0.006} _{-0.000}) | 0.80 ^{+0.10} _{-0.00} (0.031 ^{+0.004} _{-0.000}) | 2.00±0.10 (0.079±0.004) | 1.00±0.10 (0.039±0.004) |
| t4 | 0.30±0.10 (0.012±0.004) | — | 0.30±0.05 (0.012±0.002) | — |
| C | 2.06±0.10 (0.081±0.004) | 2.50±0.10 (0.098±0.004) | 2.70±0.10 (0.106±0.004) | 2.00±0.10 (0.079±0.004) |

Trimmer Capacitors



CTZ2, CTZ3 Series


FREQUENCY CHARACTERISTICS

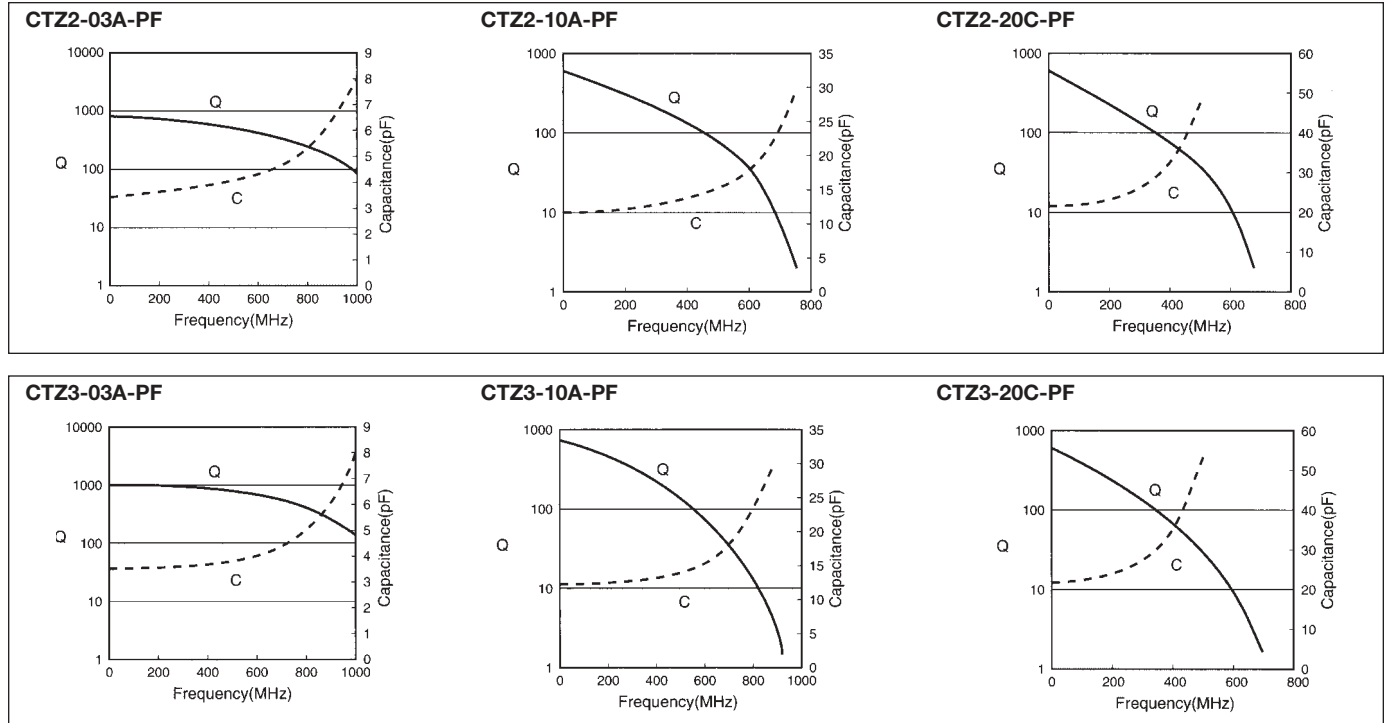

Trimmer Capacitors




TSR, TSW, TSF Series

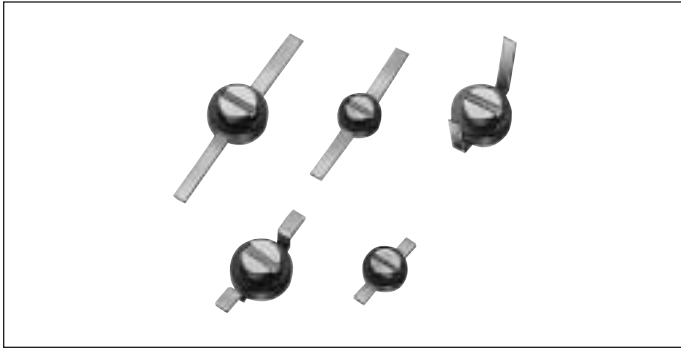


DIMENSIONS

3 ϕ Type

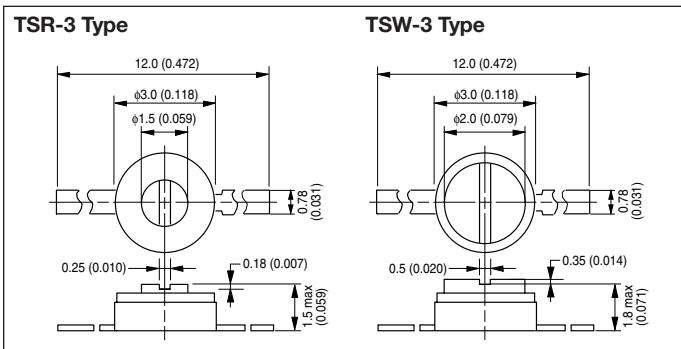

2 ϕ Type

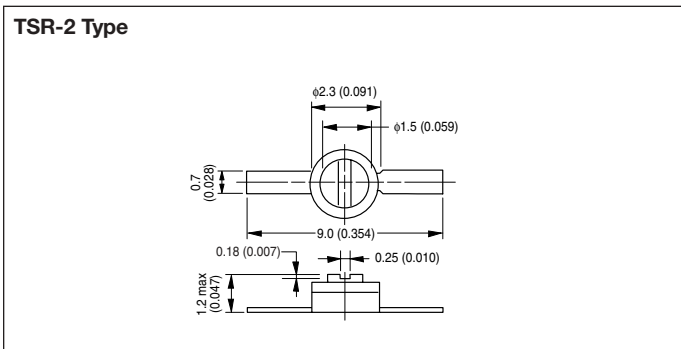

SPECIFICATIONS

| Part Number | Capacitance Range Mark | Capacitance Range Mark (pF) | Part Number | Thickness Marking | | | TC (ppm/°C) | Q Factor (1±0.1MHz) | Slot Dimension |
|--------------|------------------------|-----------------------------|-------------|-------------------|-----|-----|-------------|---------------------|-----------------------------------------------------|
| | | | | 120 | 150 | 180 | | | |
| TSR3 TSW3 | Z | 1 to 3 | TSW3 | — | — | ○ | NP0±300 | TSR3≥150 | TSR3 Normal Slot Width = 0.25 Depth = 0.18 |
| | P | 1.5 to 5 | TSW3 | — | — | ○ | | | |
| | SP | 1.5 to 10 | TSW3 | — | — | ○ | | | |
| | H | 2.5 to 10 | TSW3 | — | — | ○ | N750±500 | TSW3≥200 | |
| | S3 | 5.0 to 20 | TSR3 | — | ○ | — | | | |
| | S2 | 5.0 to 25 | TSR3 | — | ○ | — | | | |
| | | | TSW3 | — | — | ○ | | | |
| | S | 5.0 to 30 | TSR3 | — | ○ | — | | | |
| | | | TSW3 | — | — | ○ | | | |
| | □ | 5.0 to 35 | TSR3 | — | ○ | — | | | |
| TSW3 | | | — | — | ○ | | | | |
| TSF2 | L | 5.0 to 20 | TSF2 | ○ | — | — | N1200±800 | TSF2≥100 | TSF2 Normal Slot Width = 0.25, Depth = 0.18 |
| | | 5.0 to 25 | | | | | | | |
| | L2 | | | | | | | | |

FEATURES

- Ultra small and wide capacitance range
- Small ΔC after alcohol washing
- Better cost performance with Ag plated lead available
- Wide slot type adjustable by using nonconductive trimming driver

APPLICATIONS

- Watch
- Ultra miniature radio
- Telecommunication
- Ultra small video tuner
- Cordless phone
- Pager

HOW TO ORDER

TSR 3 S - 150 - AU

Lead Forming Type

Thickness Dimensions

| | | |
|-----|-------|-----------|
| 120 | 1.2mm | TSF2 Type |
| 150 | 1.5mm | TSR3 Type |
| 180 | 1.8mm | TSW3 Type |

Capacitance Range

Diameter Indication

3 = 3 ϕ Type 2 = 2 ϕ Type

Series




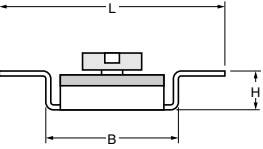




- TSR Series
- TSF Series
- TSW Series

Trimmer Capacitors




TSR, TSW, TSF Series

LEAD-FORMING TYPE

| Series | | Dimensions mm (inches) | | | Configuration |
|----------------------------------------------------------------------------------------------------|------|---------------------------|---------------------------|---------------------------|--------------------------------------------------------------------------------------|
| | | H | B | L | |
| Standard Type  | TSF2 | — | — | 9.0±1.0 (0.354±0.039) |  |
| | TSR3 | — | — | 12.0±1.0 (0.472±0.039) | |
| | TSW3 | — | — | 12.0±1.0 (0.472±0.039) | |
| HB Type  | TSF2 | 0.35±0.2 (0.014±0.008) | 2.85±0.3 (0.112±0.012) | 4.80±0.3 (0.189±0.012) |  |
| AB Type  | TSW3 | 3.65±0.5 (0.144±0.020) | 5.0±0.5 (0.197±0.020) | — |  |
| AU Type  | TSW3 | 3.65±0.5 (0.144±0.020) | 5.0±0.5 (0.197±0.020) | — |  |

CHARACTERISTICS

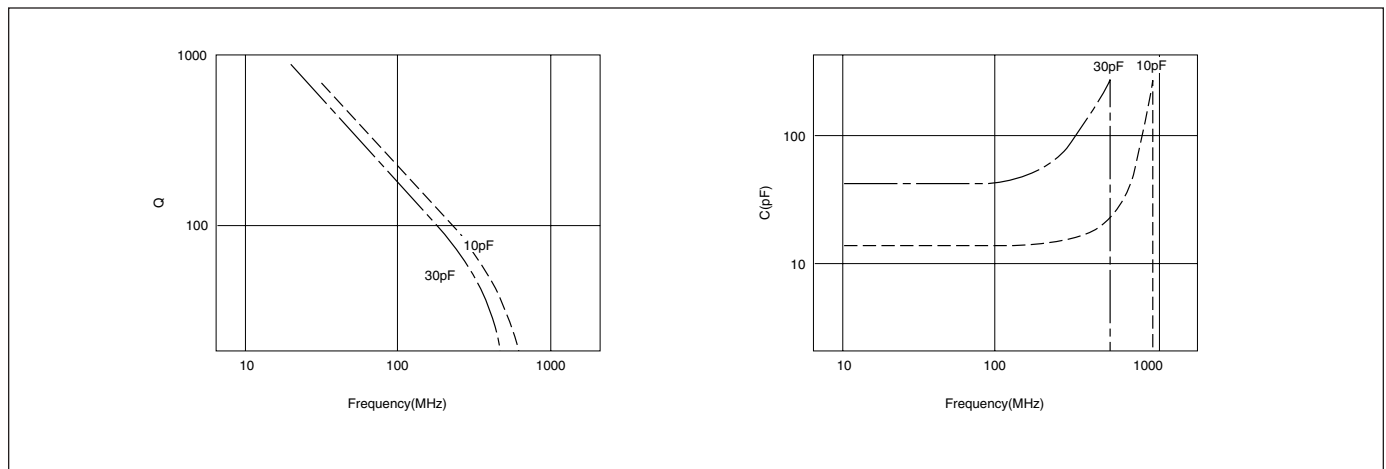


PCB MOUNTING

- Please use mounting hole suitable for lead dimension of trimmer capacitor.
- When our recommended land pattern is not used, please check mounting alignment.
- When mounting on PCB, please do not apply pressure to trimmer capacitors over 500g.f.

SOLDERING

- When using soldering iron, adjust iron tip to 280°C.
- Please find below recommended solder profile.

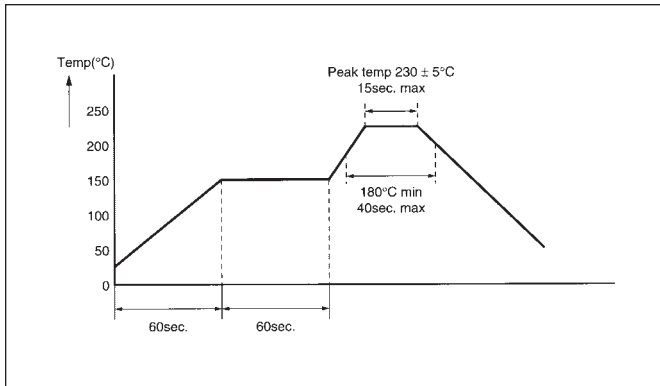

STORAGE CONDITIONS

- Please do not store chlorine and sulfides in same atmosphere.
- Storage life 6 months.

SCREWDRIVERS

Please use proper screwdriver for adjustment of the capacitor. Kyocera can supply suitable ceramic type screwdrivers specially designed for the use of CTZ series. Please contact your local AVX office for the details.

CTZ-3


Pin Head

- ⊕ = CTZ-3 Plus Ceramic Driver
- ⊖ = CTZ-3 Minus Ceramic Driver

CTZ-2

Pin Head

- ⊕ = CTZ-2 Plus Ceramic Driver
- ⊖ = CTZ-2 Minus Ceramic Driver

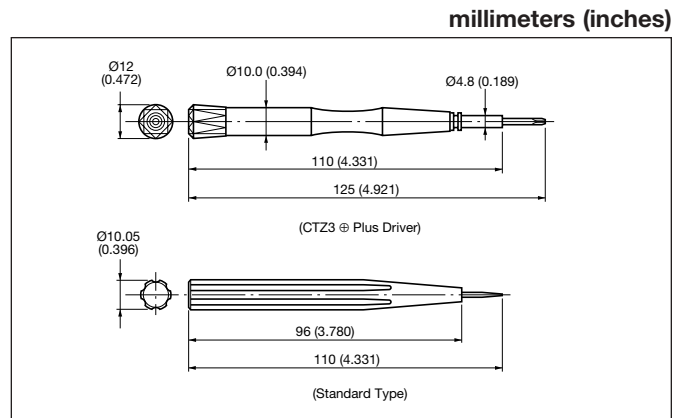

DRIVER HEAD TYPE

millimeters (inches)

| | |
|--------------------------|--------------------------|
| <p>CTZ3 Plus</p> | <p>CTZ2 Plus</p> |
| <p>CTZ3 Minus</p> | <p>CTZ2 Minus</p> |

**For additional information
on these products and
continuing updates
visit our Website**

<http://www.avxcorp.com>

USA

AVX Myrtle Beach, SC Corporate Offices

Tel: 843-448-9411
FAX: 843-626-5292

AVX Northwest, WA

Tel: 360-669-8746
FAX: 360-699-8751

AVX North Central, IN

Tel: 317-848-7153
FAX: 317-844-9314

AVX Mid/Pacific, MN

Tel: 952-974-9155
FAX: 952-974-9179

AVX Southwest, AZ

Tel: 480-539-1496
FAX: 480-539-1501

AVX South Central, TX

Tel: 972-669-1223
FAX: 972-669-2090

AVX Southeast, NC

Tel: 919-878-6223
FAX: 919-878-6462

AVX Canada

Tel: 905-564-8959
FAX: 905-564-9728

EUROPE

AVX Limited, England European Headquarters

Tel: ++44 (0) 1252 770000
FAX: ++44 (0) 1252 770001

AVX S.A., France

Tel: ++33 (1) 69.18.46.00
FAX: ++33 (1) 69.28.73.87

AVX GmbH, Germany - AVX

Tel: ++49 (0) 8131 9004-0
FAX: ++49 (0) 8131 9004-44

AVX GmbH, Germany - Elco

Tel: ++49 (0) 2741 2990
FAX: ++49 (0) 2741 299133

AVX srl, Italy

Tel: ++390 (0)2 614571
FAX: ++390 (0)2 614 2576

AVX Czech Republic, s.r.o.

Tel: ++420 (0)467 558340
FAX: ++420 (0)467 558345

ASIA-PACIFIC

AVX/Kyocera, Singapore Asia-Pacific Headquarters

Tel: (65) 258-2833
FAX: (65) 350-4880

AVX/Kyocera, Hong Kong

Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea

Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan

Tel: (886) 2-2696-4636
FAX: (886) 2-2696-4237

AVX/Kyocera, China

Tel: (86) 21-6249-0314-16
FAX: (86) 21-6249-0313

AVX/Kyocera, Malaysia

Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan

Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan - AVX

Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan - KDP

Tel: (81) 75-604-3424
FAX: (81) 75-604-3425

Contact:



<http://www.avxcorp.com>

S-KEC0M0502-C



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.