

Compensated High Current Choke, 3-phase



See below:

**Approvals and Compliances**

**Description**

- Current compensated choke
- 3-phase choke
- Flexible wire
- Flange for mounting onto printed circuit board
- Fully potted resin

**Applications**

- Placed in front of frequency converter
- Stepper motor drives
- UPS-systems
- Inverter

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

|                           |                            |                           |   |
|---------------------------|----------------------------|---------------------------|---|
| Rated voltage             | up to 540VAC               | Test Voltage              | 2.5kV, 50Hz, 2 sec, winding to winding      |
|                           | up to 760VDC               | Isolation Voltage         | 2.5kV eff., 50Hz, 2 sec, winding to ambient |
| Rated Current             | 10 - 50A @ Ta 40 °C        | Climatic Category         | 25/100/21 acc. to IEC 60068-1               |
| Rated inductance          | 0.6 - 5 mH, Tol. -30% +50% | Allowable Operation Temp. | -25 °C to 100 °C                            |
| Power Operating Frequency | 50 - 400Hz                 |                           |   |
| Terminal Type             | Flexible wire              |                           |   |
| Weight                    | 145 - 1864 g               |                           |   |
| Material: Housing         | UL 94V-0                   |                           |   |
| Sealing Compound          | UL 94V-0                   |                           |   |

**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

**Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: DKIP

| Approval Logo | Certificates                 | Certification Body | Description            |
|---------------|------------------------------|--------------------|------------------------|
|               | <a href="#">UL Approvals</a> | UL                 | UL File Number: E72928 |

**Application standards**

Application standards where the product can be used

| Organization | Design                         | Standard       | Description  |
|--------------|--------------------------------|----------------|--|
|              | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |


**Compliances**

The product complies with following Guide Lines


| Identification   | Details                                      | Initiator   | Description   |
|--|--|-------------|---|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS   | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863  |
|  | China RoHS                                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |
|  | REACH  | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

**Dimension [mm]**


Case 29-3W

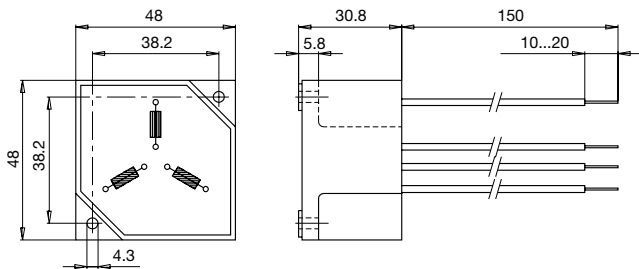

Case 31-3W

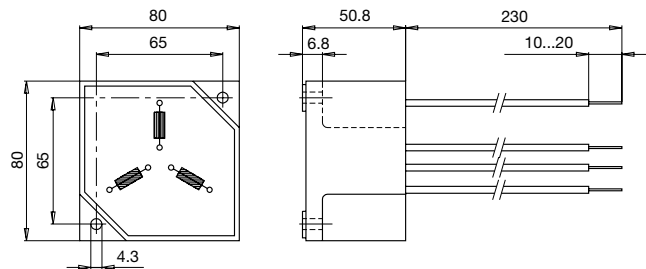


Case 33-3W

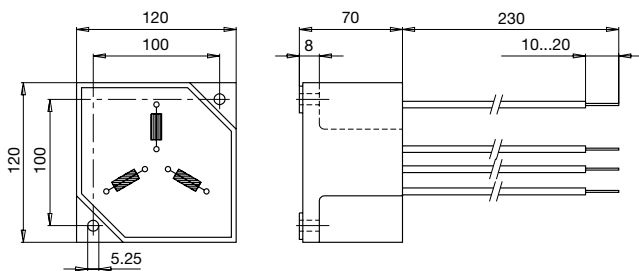


Impedance curves


DKIP-0329-xxxx

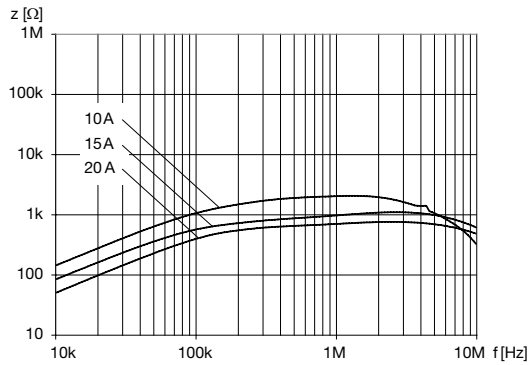

DKIP-0331-xxxx

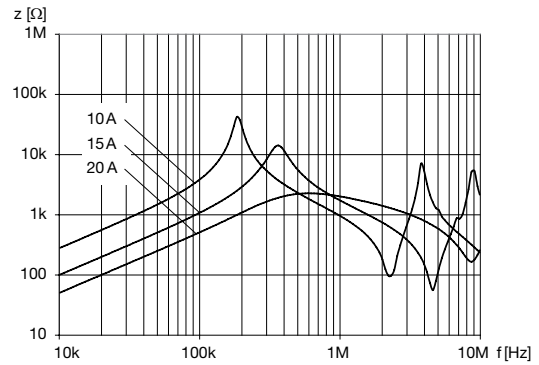

DKIP-0333-xxxx

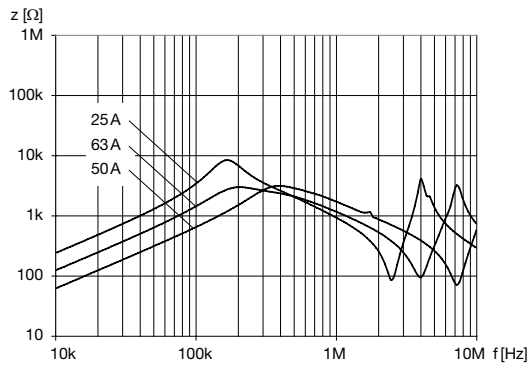

All Variants

| $I_n$ [A] | $L_n$ [mH] | $R_{CU}$ [mΩ] | Tripped Power Dissipation [W] | $f_{RES}$ [MHz] | Copper $\phi$ [mm] | Weight [g] | Housings | Packing unit [pcs.] | Order Number                   |
|-----------|------------|---------------|-------------------------------|-----------------|--------------------|------------|----------|---------------------|--------------------------------|
| 10        | 2.5        | 15            | 4.5                           | 0.5             | 1.25               | 145 g      | 29-3W    | 12                  | <a href="#">DKIP-0329-1002</a> |
| 15        | 1          | 7             | 4.7                           | 0.6             | 1.6                | 145 g      | 29-3W    | 12                  | <a href="#">DKIP-0329-1501</a> |
| 20        | 0.6        | 5             | 6                             | 2.6             | 1.8                | 145 g      | 29-3W    | 12                  | <a href="#">DKIP-0329-20D6</a> |
| 10        | 5          | 32            | 9.6                           | 0.22            | 1.25               | 526 g      | 31-3W    | 2                   | <a href="#">DKIP-0331-1005</a> |
| 15        | 2          | 13            | 8.8                           | 0.44            | 1.6                | 544 g      | 31-3W    | 2                   | <a href="#">DKIP-0331-1502</a> |
| 20        | 1          | 8             | 9.6                           | 0.68            | 1.8                | 544 g      | 31-3W    | 2                   | <a href="#">DKIP-0331-2001</a> |
| 25        | 4          | 12            | 22.5                          | 0.18            | 2                  | 1830 g     | 33-3W    | 1                   | <a href="#">DKIP-0333-2504</a> |
| 36        | 2          | 7.6           | 29.5                          | 0.25            | 2.36               | 1831 g     | 33-3W    | 1                   | <a href="#">DKIP-0333-3602</a> |
| 50        | 1          | 4             | 30                            | 0.5             | 1.5 x 4.5          | 1864 g     | 33-3W    | 1                   | <a href="#">DKIP-0333-5001</a> |

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.