


# Lead (Pb)-Bearing High Stability Thin Film Chip Resistors

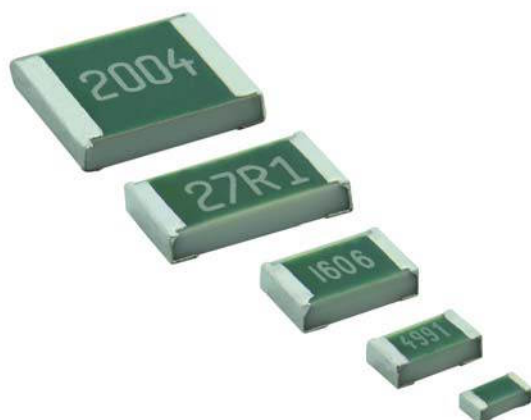

## FEATURES

- Metal film layer on high quality ceramic
- SnPb termination plating, Pb content > 6 %
- Excellent overall stability at different environmental conditions  $\leq 0.05$  % (1000 h rated power at 70 °C)
- Low temperature coefficient and tight tolerances ( $\pm 0.1$  %;  $\pm 10$  ppm/K)
- Single lot date code available

## APPLICATIONS

- Military
- Avionics
- Industrial

TNPW High Stability Thin Film Chip Resistors are the perfect choice for most fields of modern electronics where lead (Pb)-bearing terminations are mandatory and reliability and stability are of major concern.

| TECHNICAL SPECIFICATIONS                               |                                                                |                               |                             |                             |                                |
|--------------------------------------------------------|----------------------------------------------------------------|-------------------------------|-----------------------------|-----------------------------|--------------------------------|
| DESCRIPTION                                            | TNPW0402                                                       | TNPW0603                      | TNPW0805                    | TNPW1206                    | TNPW1210 <sup>(1)</sup>        |
| Imperial size                                          | 0402                                                           | 0603                          | 0805                        | 1206                        | 1210                           |
| Metric size code                                       | RR1005M                                                        | RR1608M                       | RR2012M                     | RR3216M                     | RR3225M                        |
| Resistance range                                       | 10 $\Omega$ to 100 k $\Omega$                                  | 10 $\Omega$ to 332 k $\Omega$ | 10 $\Omega$ to 1 M $\Omega$ | 10 $\Omega$ to 2 M $\Omega$ | 10 $\Omega$ to 3.01 M $\Omega$ |
| Resistance tolerance                                   | $\pm 1$ %; $\pm 0.5$ %; $\pm 0.1$ %                            |                               |                             |                             |                                |
| Temperature coefficient                                | $\pm 50$ ppm/K; $\pm 25$ ppm/K; $\pm 15$ ppm/K; $\pm 10$ ppm/K |                               |                             |                             |                                |
| Climatic category (LCT/UCT/days)                       | 55/125/56                                                      | 55/125/56                     | 55/125/56                   | 55/125/56                   | 55/125/56                      |
| Rated dissipation, $P_{70}$ <sup>(2)</sup>             | 0.063 W                                                        | 0.1 W                         | 0.125 W                     | 0.25 W                      | 0.33 W                         |
| Operating voltage, $U_{max}$ , AC <sub>RMS</sub> or DC | 50 V                                                           | 75 V                          | 150 V                       | 200 V                       | 200 V                          |
| Permissible film temperature, $\vartheta_{F max}$      | 155 °C                                                         |                               |                             |                             |                                |
| Operating Temperature Range                            | -55 °C to 125 °C (155 °C)                                      |                               |                             |                             |                                |
| Thermal resistance <sup>(3)</sup>                      | 870 K/W                                                        | 550 K/W                       | 440 K/W                     | 220 K/W                     | 170 K/W                        |
| Insulation voltage:                                    |                                                                |                               |                             |                             |                                |
| $U_{ins}$ 1 min                                        | 75 V                                                           | 100 V                         | 200 V                       | 300 V                       | 300 V                          |
| Continuous                                             | 75 V                                                           | 75 V                          | 75 V                        | 75 V                        | 75 V                           |
| Failure rate: FIT <sub>observed</sub>                  | $\leq 0.3 \times 10^{-9}/h$                                    |                               |                             |                             |                                |

## Notes

- <sup>(1)</sup> The detail specification EN140401-801 does not cover this product size.
- <sup>(2)</sup> Rated voltage  $\sqrt{P \times R}$ . The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded.
- <sup>(3)</sup> Measuring conditions in accordance with EN 140401-801.



## TEMPERATURE COEFFICIENT AND RESISTANCE RANGE

| TYPE      | TCR       | TOLERANCE | RESISTANCE      | E-SERIES        |
|-----------|-----------|-----------|-----------------|-----------------|
| TNPW0402  | ±50 ppm/K | ± 1 %     | 10 Ω to 100 kΩ  | E24; E96        |
|           | ±25 ppm/K | ± 0.5 %   |                 | 47 Ω to 100 kΩ  |
|           |           | ± 0.1 %   |                 |                 |
|           | ±15 ppm/K | ± 0.1 %   |                 |                 |
| ±10 ppm/K | ± 0.1 %   |           |                 |                 |
| TNPW0603  | ±50 ppm/K | ± 1 %     | 10 Ω to 332 kΩ  | E24; E96        |
|           | ±25 ppm/K | ± 0.5 %   |                 | 47 Ω to 332 kΩ  |
|           |           | ± 0.1 %   |                 |                 |
|           | ±15 ppm/K | ± 0.1 %   |                 |                 |
| ±10 ppm/K | ± 0.1 %   |           |                 |                 |
| TNPW0805  | ±50 ppm/K | ± 1 %     | 10 Ω to 1.0 MΩ  | E24; E96        |
|           | ±25 ppm/K | ± 0.5 %   |                 | 47 Ω to 1.0 MΩ  |
|           |           | ± 0.1 %   |                 |                 |
|           | ±15 ppm/K | ± 0.1 %   |                 |                 |
| ±10 ppm/K | ± 0.1 %   |           |                 |                 |
| TNPW1206  | ±50 ppm/K | ± 1 %     | 10 Ω to 2.0 MΩ  | E24; E96        |
|           | ±25 ppm/K | ± 0.5 %   |                 | 47 Ω to 2.0 MΩ  |
|           |           | ± 0.1 %   |                 |                 |
|           | ±15 ppm/K | ± 0.1 %   |                 |                 |
| ±10 ppm/K | ± 0.1 %   |           |                 |                 |
| TNPW1210  | ±50 ppm/K | ± 1 %     | 10 Ω to 3.01 MΩ | E24; E96        |
|           | ±25 ppm/K | ± 0.5 %   |                 | 47 Ω to 2.13 MΩ |
|           |           | ± 0.1 %   |                 |                 |
|           | ±15 ppm/K | ± 0.1 %   |                 |                 |
| ±10 ppm/K | ± 0.1 %   |           |                 |                 |

## PART NUMBER AND PRODUCT DESCRIPTION

Part Number: TNPW12061K32DETA

|                                                          |   |                                                          |   |                                           |   |                                                                      |   |                            |   |                                                  |   |   |   |   |   |  |  |
|----------------------------------------------------------|---|----------------------------------------------------------|---|-------------------------------------------|---|----------------------------------------------------------------------|---|----------------------------|---|--------------------------------------------------|---|---|---|---|---|--|--|
| T                                                        | N | P                                                        | W | 1                                         | 2 | 0                                                                    | 6 | 1                          | K | 3                                                | 2 | D | E | T | A |  |  |
| TYPE/SIZE                                                |   | RESISTANCE                                               |   | TOLERANCE                                 |   | TCR                                                                  |   | PACKAGING                  |   | SPECIAL                                          |   |   |   |   |   |  |  |
| TNPW0402<br>TNPW0603<br>TNPW0805<br>TNPW1206<br>TNPW1210 |   | R = Decimal<br>K = Thousand<br>M = Million<br>(4 digits) |   | B = ± 0.1 %<br>D = ± 0.5 %<br>F = ± 1.0 % |   | H = ± 50 ppm/K<br>E = ± 25 ppm/K<br>X = ± 15 ppm/K<br>Y = ± 10 ppm/K |   | TP<br>TD<br>CN<br>TA<br>TC |   | Blank = Standard<br>0H = Single lot<br>date code |   |   |   |   |   |  |  |

Product Description: TNPW-1206 1.32K 0.5 % T-9 RT1

|                                                               |       |                                                                                |     |                                                       |  |
|---------------------------------------------------------------|-------|--------------------------------------------------------------------------------|-----|-------------------------------------------------------|--|
| TNPW-1206                                                     | 1.32K | 0.5 %                                                                          | T-9 | RT1                                                   |  |
| TYPE/SIZE                                                     |       | RESISTANCE                                                                     |     | TOLERANCE                                             |  |
| TNPW-0402<br>TNPW-0603<br>TNPW-0805<br>TNPW-1206<br>TNPW-1210 |       | Examples:<br>1K32 = 1320 Ω<br>99.68K = 99 680 Ω<br>360 = 360 Ω                 |     | ± 0.1 %<br>± 0.5 %<br>± 1.0 %                         |  |
|                                                               |       | TCR                                                                            |     | PACKAGING                                             |  |
|                                                               |       | T-2 = ± 50 ppm/K<br>T-9 = ± 25 ppm/K<br>T-10 = ± 15 ppm/K<br>T-13 = ± 10 ppm/K |     | TP1<br>RT7<br>R52<br>RT1<br>RT6                       |  |
|                                                               |       |                                                                                |     | SPECIAL                                               |  |
|                                                               |       |                                                                                |     | Blank = Standard<br>BV20545 =<br>Single lot date code |  |

## Notes

- The products can be ordered using either the PRODUCT DESCRIPTION or the PART NUMBER.



| PACKAGING                                    |                         |          |                                                               |       |       |               |
|----------------------------------------------|-------------------------|----------|---------------------------------------------------------------|-------|-------|---------------|
| TYPE                                         | CODE                    | QUANTITY | PACKAGING STYLE                                               | WIDTH | PITCH | REEL DIAMETER |
| TNPW0402                                     | TP1 = TP <sup>(1)</sup> | 1000     | Tape and reel<br>cardboard tape<br>acc. IEC 60286-3<br>Type I | 8 mm  | 2     | 180 mm/7"     |
| TNPW0402                                     | RT7 = TD                | 10 000   |                                                               | 8 mm  | 2     | 180 mm/7"     |
| TNPW0603<br>TNPW0805<br>TNPW1206<br>TNPW1210 | R52 = CN <sup>(1)</sup> | 1000     |                                                               | 8 mm  | 4     | 180 mm/7"     |
| TNPW0603<br>TNPW0805<br>TNPW1206<br>TNPW1210 | RT1 = TA                | 5000     |                                                               | 8 mm  | 4     | 180 mm/7"     |

**Note**

<sup>(1)</sup> 1000 pieces packaging quantity is only available for precision resistors with tolerance  $\pm 0.1$  %.

**DESCRIPTION**

The production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic body ( $\text{Al}_2\text{O}_3$ ) and conditioned to achieve the desired temperature coefficient. A special laser is used to achieve the target value by smoothly cutting an appropriate groove in the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final tin-lead (SnPb) on nickel plating. The result of the determined production is verified by an extensive testing procedure performed on 100 % of the individual resistors. Only accepted products are placed into the tape in accordance with **IEC 60286-3, Type I**. Resistance marking is not applied on TNPW0402.

**ASSEMBLY**

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1** <sup>(1)</sup>. Solderability is specified for 2 years after production. The permitted storage time is 20 years.

The terminations are plated with SnPb solder, controlled for a minimum lead Pb content of 6 % for compliance with the respective requirements of Bellcore, MIL and ESCC specifications.

The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions.


The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

**RELATED PRODUCTS**


For ordering TNPW with lead free terminations please refer to latest edition of data sheet TNPW e3, ([www.vishay.com/doc?28758](http://www.vishay.com/doc?28758)).

TNPS .... ESCC high-reliability thin film chip resistors are the premium choice for design and manufacture of equipment, where mature technology and proven reliability are of utmost importance.


([www.vishay.com/doc?28789](http://www.vishay.com/doc?28789))

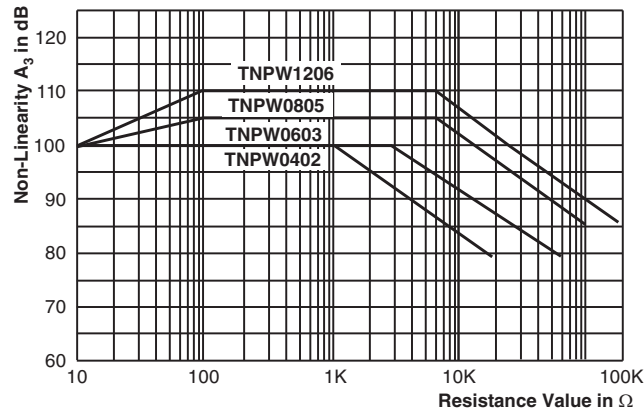


Non-Linearity

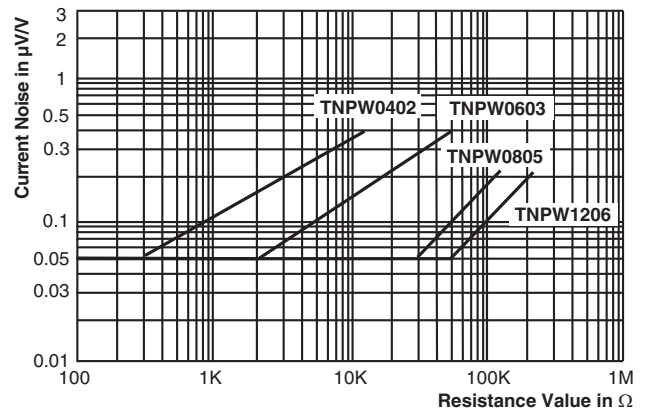


Current Noise

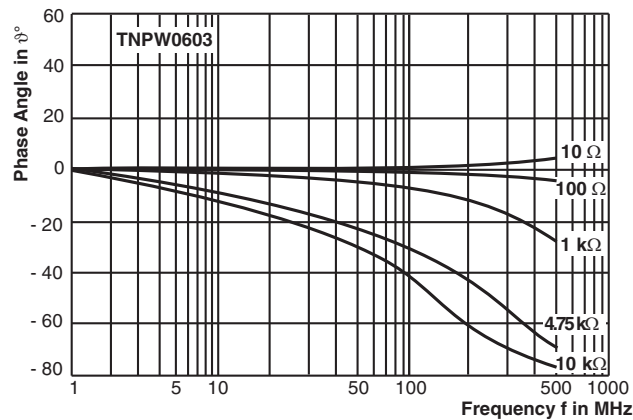


HF Performance

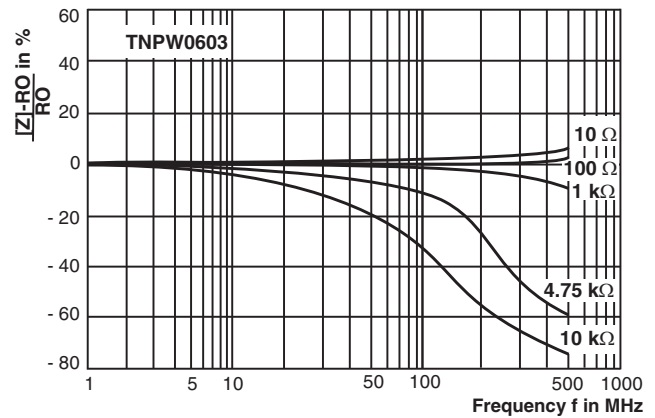


HF Performance

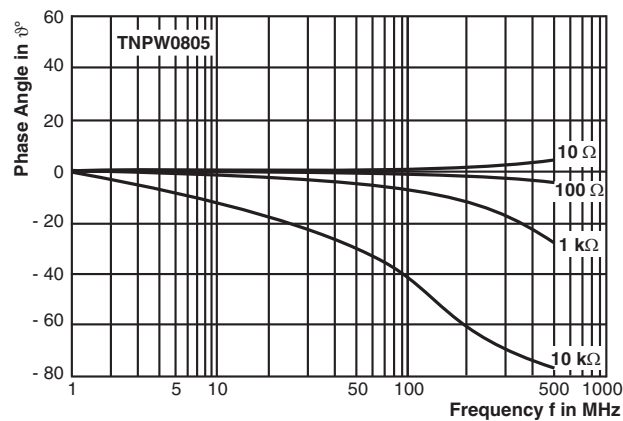

HF Performance

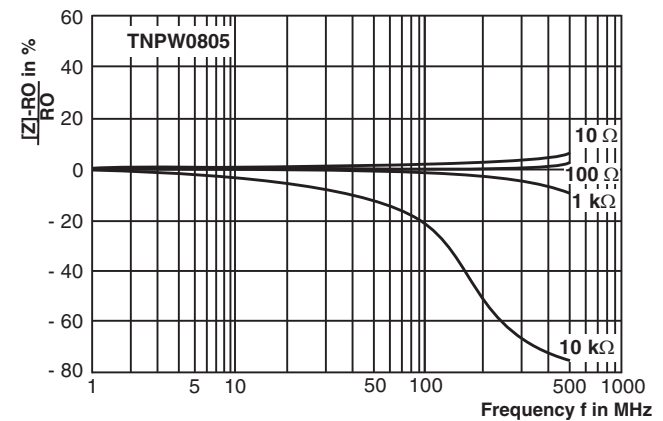


HF Performance

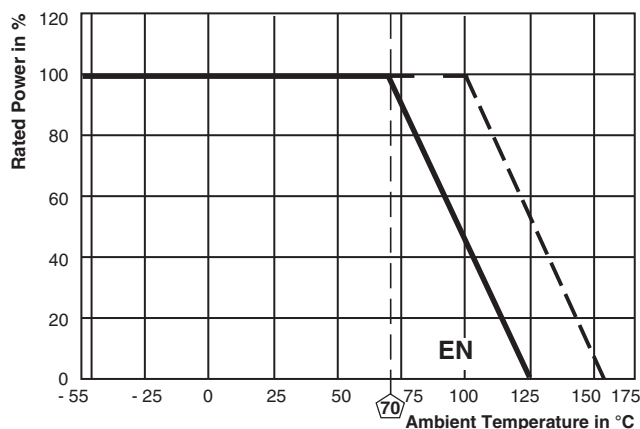


### Derating

#### Note


- The solid line is based on IEC/EN reference test conditions which is considered as standard mode. However, above that the maximum permissible film temperature is 155 °C (dashed line).

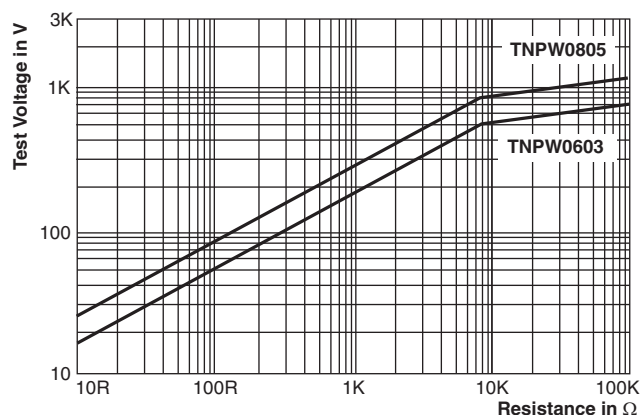

### Single-Pulse High Voltage Overload Test 1.2/50 $\mu$ s EN 140000 4.27

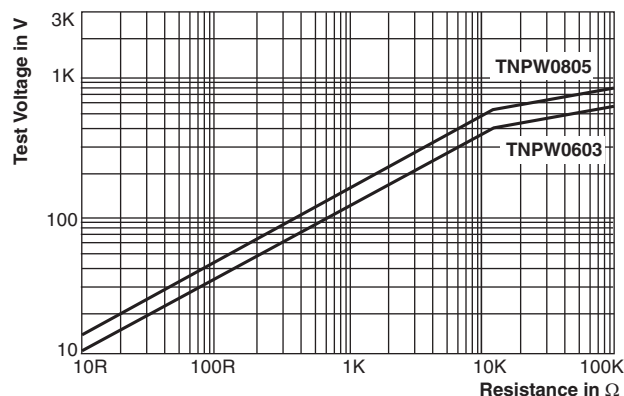


### Single-Pulse High Voltage Overload Test 10/700 $\mu$ s EN 140000 4.27

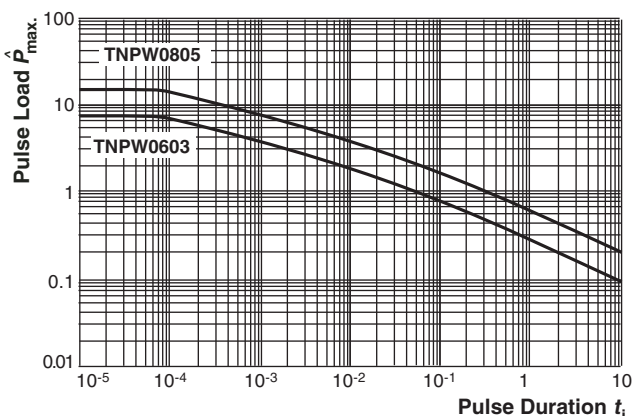


### Single Pulse

Maximum pulse load, single pulse;  
applicable if  $P \rightarrow 0$  and  $n \leq 1000$  and  $\hat{U} \leq \hat{U}_{max}$ ;  
for permissible resistance change equivalent to 8000 h  
operation in standard operation mode

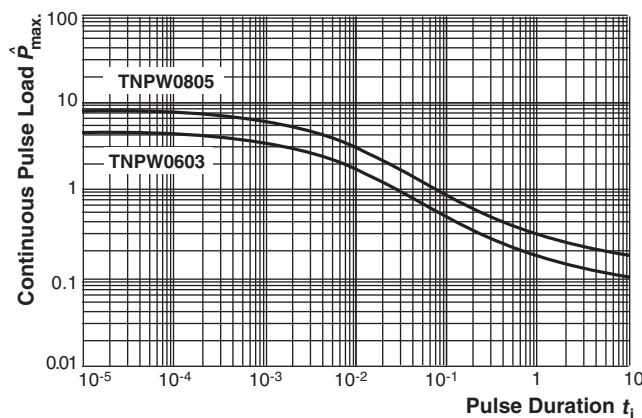

Maximum pulse load, continuous pulses;  
applicable if  $P \leq P(\vartheta_{amb})$  and  $\hat{U} \leq \hat{U}_{max}$ ;  
for permissible resistance change equivalent to 8000 h  
operation in standard operation mode

### Continuous Pulse

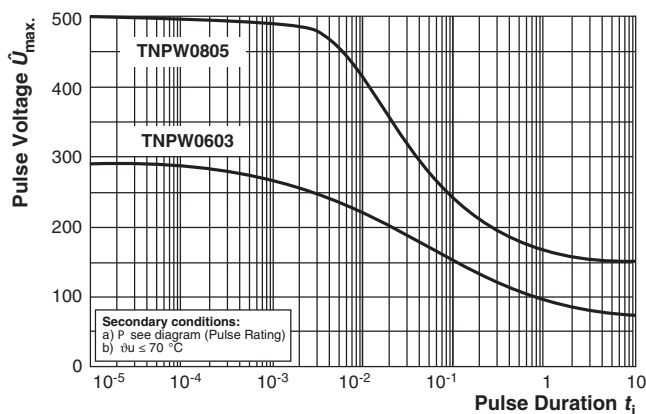

Maximum pulse voltage, single and continuous pulses;  
applicable if  $P \leq P_{max}$ ;  
for permissible resistance change equivalent to 8000 h  
operation in standard operation mode

### Pulse Voltage

**TEST AND REQUIREMENTS**

All tests are carried out in accordance with the following specifications:

IEC 60115-1, generic specification (includes tests)

EN 140400, sectional specification (includes schedule for qualification approval)

EN 140401-801, detail specification (includes schedule for conformance inspection)

The testing also covers most of the requirements specified by EIA/ECA-703 and JIS-C-5201-1. The tests are carried out under standard atmospheric conditions in accordance with IEC 60068-1, 5.3. A climate category is applied, defined by the lower category temperature (LCT), the upper category temperature (UCT), and the number of days of the damp heat, steady-state test (56).

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C


Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on boards in accordance with EN60115-1, 4.31 unless otherwise specified. The parameters stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN140401-801.


| TEST PROCEDURES AND REQUIREMENTS |                               |                                                  |                                                                                               |                                                |                                      |                                   |
|----------------------------------|-------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------|-----------------------------------|
| EN 60115-1<br>CLAUSE             | IEC 60068-2<br>TEST<br>METHOD | TEST                                             | PROCEDURE                                                                                     | REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ ) |                                      |                                   |
|                                  |                               |                                                  | Stability for<br>product type:                                                                |                                                |                                      |                                   |
|                                  |                               |                                                  | TNPW0402<br>TNPW0603<br>TNPW0805<br>TNPW1206<br>TNPW1210                                      | 10 $\Omega$ to < 100 $\Omega$                  | $\geq 100 \Omega$ to 3.01 M $\Omega$ | 10 $\Omega$ to 3.01 M $\Omega$    |
| 4.5                              | -                             | Resistance                                       | -                                                                                             | $\pm 0.1 \%$                                   |                                      | $\pm 1 \%$ ; $\pm 0.5 \%$         |
| 4.8.4.2                          | -                             | Temperature<br>coefficient                       | At (20/- 55/20) °C<br>and (20/125/20) °C                                                      | $\pm 25$ ppm/K; $\pm 15$ ppm/K; $\pm 10$ ppm/K |                                      | $\pm 50$ ppm/K;<br>$\pm 25$ ppm/K |
| 4.25.1                           | -                             | Endurance<br>at 70 °C                            | $U = \sqrt{P_{70} \times R}$<br>or $\leq U_{max.}$ ;<br>1.5 h on; 0.5 h off;<br>70 °C; 1000 h | $\pm (0.1 \% R + 0.02 \Omega)$                 | $\pm (0.05 \% R + 0.01 \Omega)$      | $\pm (0.25 \% R + 0.05 \Omega)$   |
| 4.25.3                           | -                             | Endurance<br>at upper<br>category<br>temperature | 125 °C; 1000 h                                                                                | $\pm (0.1 \% R + 0.02 \Omega)$                 | $\pm (0.05 \% R + 0.01 \Omega)$      | $\pm (0.5 \% R + 0.05 \Omega)$    |
| 4.13                             | -                             | Short time<br>overload                           | $U = 2.5 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{max.}$ ; 2 s                     | $\pm (0.05 \% R + 0.01 \Omega)$                | $\pm (0.02 \% R + 0.01 \Omega)$      | $\pm (0.1 \% R + 0.02 \Omega)$    |
| 4.24                             | 78 (Cab)                      | Damp heat,<br>steady state                       | (40 $\pm$ 2) °C;<br>(93 $\pm$ 3) % RH;<br>56 days                                             | $\pm (0.1 \% R + 0.02 \Omega)$                 | $\pm (0.05 \% R + 0.01 \Omega)$      | $\pm (0.5 \% R + 0.05 \Omega)$    |
| 4.19                             | 14 (Na)                       | Rapid change<br>of temperature                   | 30 min at - 55 °C;<br>30 min at 125 °C;<br>5 cycles                                           | $\pm (0.05 \% R + 0.01 \Omega)$                | $\pm (0.02 \% R + 0.01 \Omega)$      | $\pm (0.1 \% R + 0.02 \Omega)$    |
| 4.18.2                           | 58 (Td)                       | Resistance to<br>soldering heat                  | Solder bath method;<br>(260 $\pm$ 5) °C;<br>(10 $\pm$ 1) s                                    | $\pm (0.05 \% R + 0.01 \Omega)$                | $\pm (0.02 \% R + 0.01 \Omega)$      | $\pm (0.1 \% R + 0.02 \Omega)$    |
| 4.35                             | -                             | Flammability,<br>needle flame<br>test            | IEC 60695-11-5;<br>10 s                                                                       | No burning after 30 s                          |                                      |                                   |

## DIMENSIONS

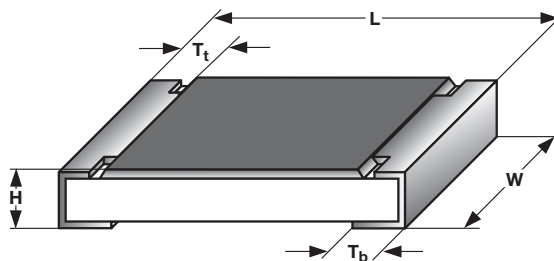

| DIMENSIONS AND MASS |             |            |             |                        |                        |              |
|---------------------|-------------|------------|-------------|------------------------|------------------------|--------------|
| TYPE                | H<br>(mm)   | L<br>(mm)  | W<br>(mm)   | T <sub>t</sub><br>(mm) | T <sub>b</sub><br>(mm) | MASS<br>(mg) |
| TNPW0402            | 0.35 ± 0.05 | 1.0 ± 0.05 | 0.5 ± 0.05  | 0.2 ± 0.10             | 0.2 ± 0.10             | 0.65         |
| TNPW0603            | 0.45 ± 0.10 | 1.6 ± 0.10 | 0.85 ± 0.10 | 0.3 ± 0.20             | 0.3 ± 0.20             | 2            |
| TNPW0805            | 0.45 ± 0.10 | 2.0 ± 0.15 | 1.25 ± 0.15 | 0.4 ± 0.20             | 0.4 ± 0.20             | 5.5          |
| TNPW1206            | 0.55 ± 0.10 | 3.2 ± 0.15 | 1.6 ± 0.15  | 0.5 ± 0.25             | 0.5 ± 0.25             | 10           |
| TNPW1210            | 0.60 ± 0.15 | 3.2 ± 0.15 | 2.45 ± 0.15 | 0.5 ± 0.25             | 0.5 ± 0.25             | 16           |

## SOLDER PAD DIMENSIONS



| SOLDER PAD DIMENSIONS |                  |           |           |                |           |           |
|-----------------------|------------------|-----------|-----------|----------------|-----------|-----------|
| TYPE                  | REFLOW SOLDERING |           |           | WAVE SOLDERING |           |           |
|                       | Y<br>(mm)        | X<br>(mm) | G<br>(mm) | Y<br>(mm)      | X<br>(mm) | G<br>(mm) |
| TNPW0402              | 0.4              | 0.6       | 0.5       | -              | -         | -         |
| TNPW0603              | 0.5              | 0.9       | 1.0       | 0.9            | 0.9       | 1.0       |
| TNPW0805              | 0.7              | 1.3       | 1.2       | 0.9            | 1.3       | 1.3       |
| TNPW1206              | 0.9              | 1.7       | 2.0       | 1.1            | 1.7       | 2.3       |
| TNPW1210              | 0.9              | 2.5       | 2.0       | 1.1            | 2.5       | 2.3       |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.