

SPECIFICATION FOR APPROVAL

REF :

PAGE: 1

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RB0914□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :

Marking :

" ● " : Start

● 101----100 uH (Inductance code)

A : 8.7±0.5 m/m

B : 12.0±1.0 m/m


C : 25.0±5 m/m

D : 18.0±5 m/m

E : 2.5 max. m/m

F : 5.0±0.8 m/m

W : 0.65 m/m

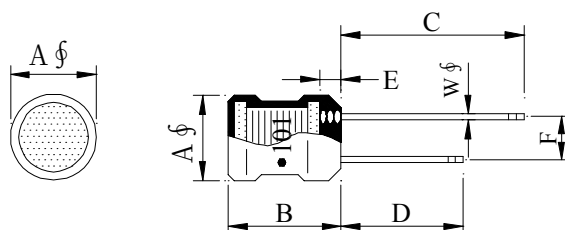


II . SCHEMATIC DIAGRAM :



III . MATERIALS :

- a . Core : Ferrite DR core
- b . Wire : Enaelled copper wire (Class F)
- c . Lead : Sn/Ag/Cu
- d . Tube : Shrinkable tube 125°C , 600V
- e . Remark : Products comply with RoHS' requirements

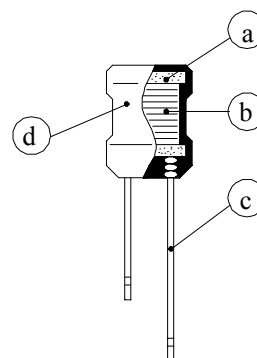

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 20°C max. at rated current.
- b . Storage temp. : -40°C ---- +105°C
- c . Operating temp. : -25°C---- +85°C

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RB0914□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Indutance (μ H)	Q min.	Test Freq. (MHz)		SRF (MHz) min.	RDC (Ω) max.	IDC (A) max.
			L	Q			
RB09143R3ML□-□□□	3.3 $\pm$ 20%	20	7.96		70.0	0.027	3.60
RB09144R7ML□-□□□	4.7 $\pm$ 20%	20	7.96		50.0	0.033	3.20
RB09146R8ML□-□□□	6.8 $\pm$ 20%	20	7.96		30.0	0.039	3.00
RB0914100KL□-□□□	10.0 $\pm$ 10%	50	2.52		20.0	0.048	2.70
RB0914120KL□-□□□	12.0 $\pm$ 10%	50	2.52		15.0	0.055	2.50
RB0914150KL□-□□□	15.0 $\pm$ 10%	50	2.52		10.0	0.060	2.40
RB0914180KL□-□□□	18.0 $\pm$ 10%	40	2.52		9.5	0.065	2.30
RB0914220KL□-□□□	22.0 $\pm$ 10%	40	2.52		9.0	0.090	1.90
RB0914270KL□-□□□	27.0 $\pm$ 10%	40	2.52		8.5	0.110	1.80
RB0914330KL□-□□□	33.0 $\pm$ 10%	40	2.52		8.0	0.120	1.70
RB0914390KL□-□□□	39.0 $\pm$ 10%	30	2.52		7.0	0.130	1.60
RB0914470KL□-□□□	47.0 $\pm$ 10%	30	2.52		6.0	0.140	1.50
RB0914560KL□-□□□	56.0 $\pm$ 10%	30	2.52		5.0	0.200	1.30
RB0914680KL□-□□□	68.0 $\pm$ 10%	30	2.52		4.5	0.210	1.20
RB0914820KL□-□□□	82.0 $\pm$ 10%	30	2.52		4.0	0.230	1.10
RB0914101KL□-□□□	100.0 $\pm$ 10%	30	0.796		3.5	0.280	1.00
RB0914121KL□-□□□	120.0 $\pm$ 10%	30	0.796		3.0	0.320	0.90
RB0914151KL□-□□□	150.0 $\pm$ 10%	30	0.796		2.8	0.370	0.80
RB0914181KL□-□□□	180.0 $\pm$ 10%	30	0.796		2.6	0.540	0.75
RB0914221KL□-□□□	220.0 $\pm$ 10%	30	0.796		2.4	0.600	0.70
RB0914271KL□-□□□	270.0 $\pm$ 10%	20	0.796		2.2	0.680	0.65
RB0914331KL□-□□□	330.0 $\pm$ 10%	20	0.796		2.0	0.760	0.60
RB0914391KL□-□□□	390.0 $\pm$ 10%	20	0.796		1.9	0.850	0.55
RB0914471KL□-□□□	470.0 $\pm$ 10%	20	0.796		1.8	1.300	0.50
RB0914561KL□-□□□	560.0 $\pm$ 10%	20	0.796		1.7	1.400	0.45
RB0914681KL□-□□□	680.0 $\pm$ 10%	20	0.796		1.6	1.600	0.40
RB0914821KL□-□□□	820.0 $\pm$ 10%	20	0.796		1.5	1.800	0.35
RB0914102KL□-□□□	1000.0 $\pm$ 10%	40	0.252		1.3	2.100	0.30

1). □ : Packafing information... ☒ Bulk

2). "-□□□":Reference code

AE-001A


SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RB0914□□□□L□-□□□
		ABC'S ITEM NO.	

VI . TAPED PACKAGE DIMENSIONS :

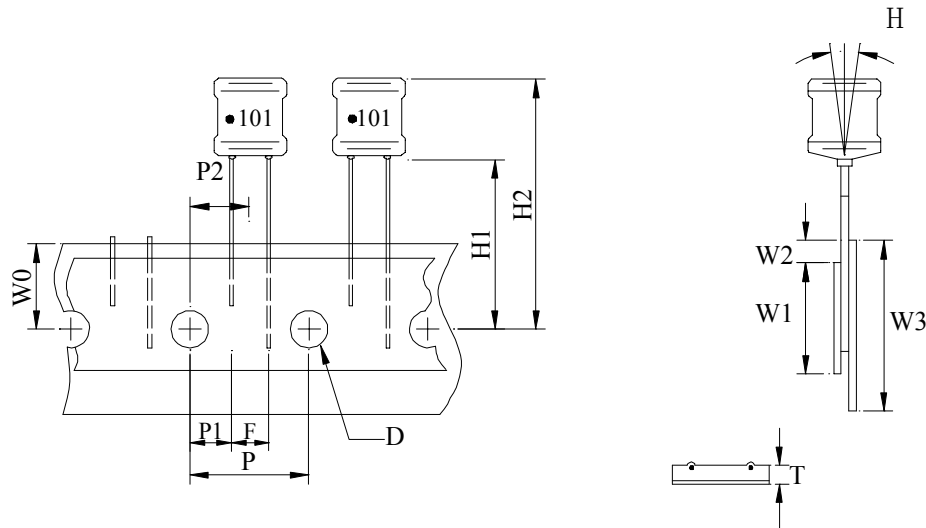

※ 500 PCS / REEL

ITEM	SYMBOL	SPECIFICATION			
		MILIMETER		INCH	
		SIZE	TOLERANCE	SIZE	TOLERANCE
TAPE FEED HOLE DIAMETER	D	4.00	±0.20	0.157	±0.008
COMPONENT LEAD PITCH	F	5.00	±0.50	0.200	±0.020
FRONT-TO-REAR DEFLECTION	H	2.00	MAX.	0.079	MAX.
FEED HOLE TO BOTTOM OF COMPONENT	H1	18.50	±0.80	0.728	±0.040
FEED HOLE TO OVERALL COMPONENT HEIGHT	H2	32.50	MAX.	1.280	MAX.
FEED HOLE PITCH	P	12.70	±0.30	0.500	±0.012
LEAD LOCATION	P1	3.85	±0.70	0.152	±0.028
CENTER OF COMPONENT LOCATION	P2	6.35	±1.30	0.250	±0.051
OVERALL TAPED PACKAGE THICKNESS	T	1.42	MAX.	0.056	MAX.
FEED HOLE LOCATION	W0	9.00	±0.50	0.354	±0.020
ADHESIVE TAPE WIDTH	W1	15.00	±0.50	0.598	±0.020
ADHESIVE TAPE POSITION	W2	4.00	MAX.	0.157	MAX.
TAPE WIDTH	W3	18.00	±0.50	0.709	±0.020

AE-001A


SPECIFICATION FOR APPROVAL

REF :

PAGE: 4

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RB0914□□□□L□-□□□
		ABC'S ITEM NO.	

VII . DWGING NUMBER EXPRESSION :

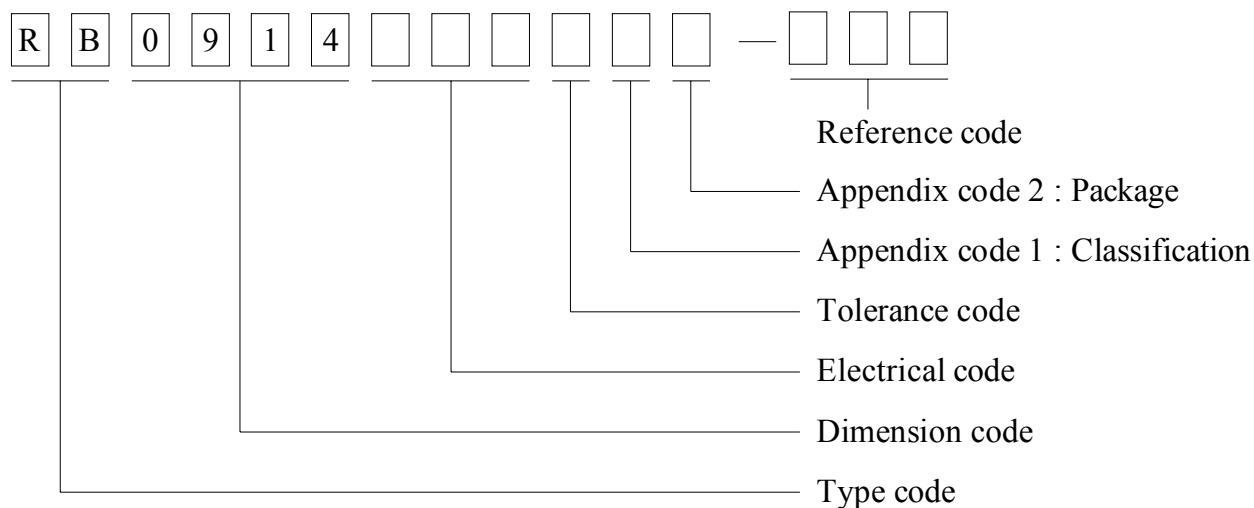

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	Box	200 pcs	
B	Bag	100 pcs	
C	T.B.D.	T.B.D.	
D	T / R (Reel Package)	500 pcs	

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RB0914□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component
JUNG SHING WIRE CO LTD E174837
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
EIAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	Polyamide	—	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	Nylon	—	MW28-C	130
UEY-2	—	Polyurethane	Polyamide	—	MW28-C	130

@ - May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.

LZ - Signifies magnd wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions


For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2E174837
September 8, 2000

AE-001A





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.