PRODUCT NUMBER	TYPE	TOP CAGE HOLE	PACKAGE
10122382-101LF	3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE	WITHOUT HOLE	TRAY
10122382-102LF	3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	TRAY
10122382-202LF	3 EMI SUPPRESSION PINS IN TOP CAGE & NO COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	TRAY
10122382-112LF	3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	Tape&Reel

△D

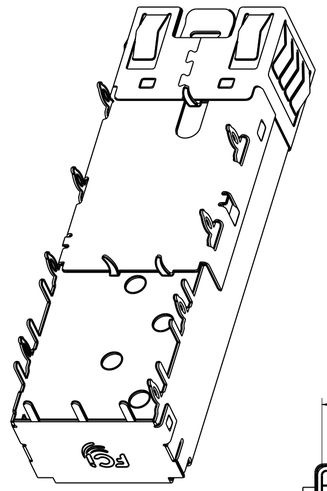

10122382-102LF
SFP+ 1X1 CAGE BASIC TYPE

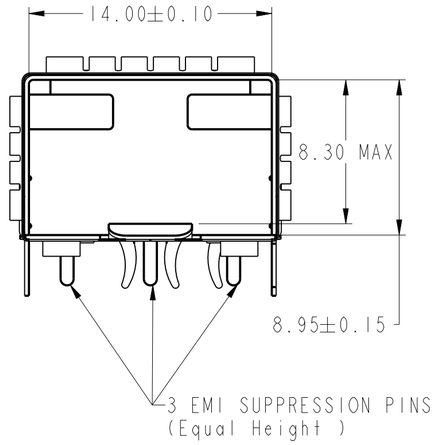

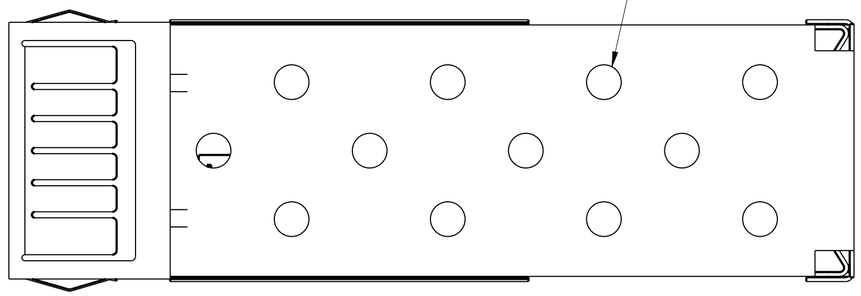

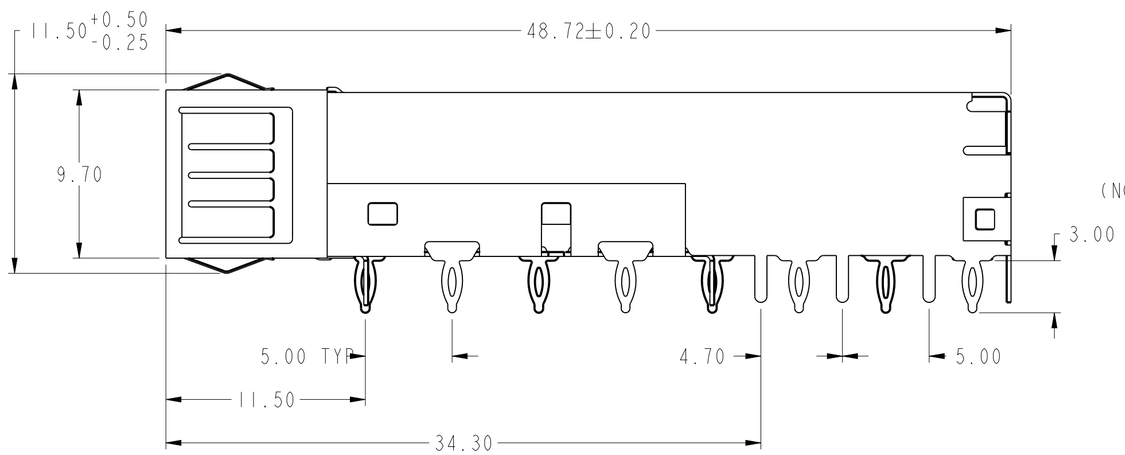

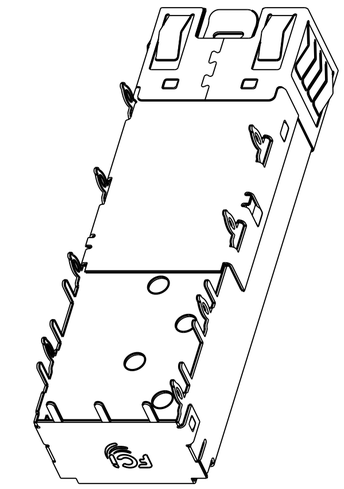

10122382-202LF
(NO COMPLIANT PINS IN BOTTOM CAGE)

NOTES:

1. MATERIAL:
   CAGE BODY: NICKEL SILVER ALLOY
   EMI SPRING: STAINLESS STEEL
   INSULATION TAPE:SILICON POLYIMIDE
2. DATUM AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.
3. PADS AND VIAS ARE CHASSIS GROUND, 11 PLACES.
4. THROUGH HOLES, PLATING OPTIONAL.
5. CROSS-HATCHED AREA DENOTES COMPONENT AND TRACE KEEP-OUT (EXCEPT CHASSIS GROUND).
6. THIS AREA DENOTES COMPONENT KEEP-OUT (TRACES ALLOWED).
7. PRODUCT SPECIFICATION: GS-12-1165
8. APPLICATION SPECIFICATION: GS-20-0384
9. PACKAGE PER GS-14-2344 AND GS-14-920
10. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

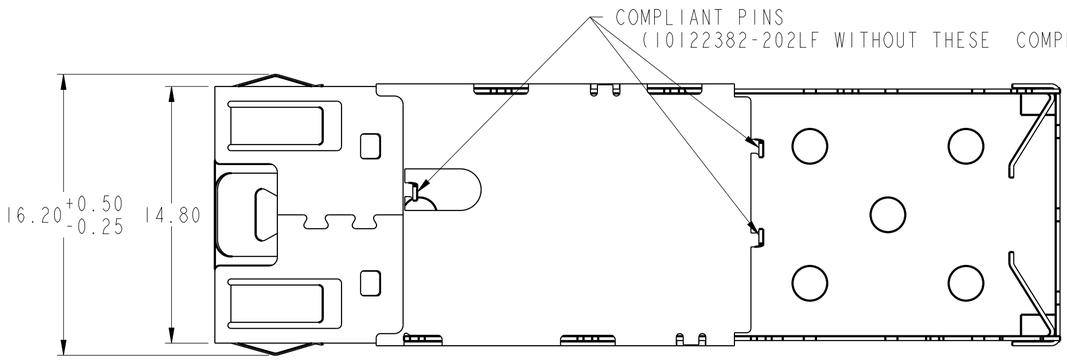

10122382-102LF
3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE

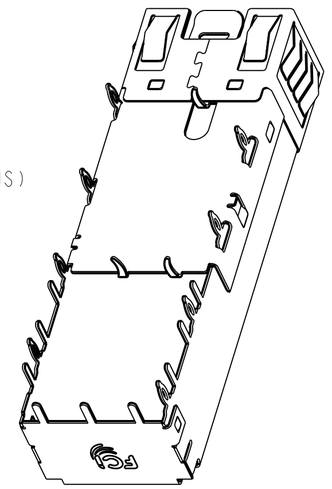

10122382-101LF
(NO TOP CAGE HOLES FOR BETTER EMI PERFORMANCE)

spec ref	RELEASE			dr	LhA	2016-02-12	projection
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LhA	2016-02-12	MM
				chr			size A2 / scale 4:1
				appr	Pei-Ming.Zheng	2016-02-12	ecn no NID-0370
surface -	linear	0.X	±0.25	Amphenol FCi	title: SFP+ 1X1 Cage EMI SPRING TYPE		product family SFP+ / rel level Released
ISO 1302		0.XX	±0.15				dwg no 10122382 / rev D
		0.XXX	±-				
	angular	0°	±2°		cat. no. -	Product - Customer Drw	sheet 1 of 6

© 2016 AFCi

PRODUCT NUMBER	TYPE	TOP CAGE HOLE	PACKAGE
10122382-302LF	2 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	TRAY
10122382-402LF	2 EMI SUPPRESSION PINS IN TOP CAGE & NO COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	TRAY

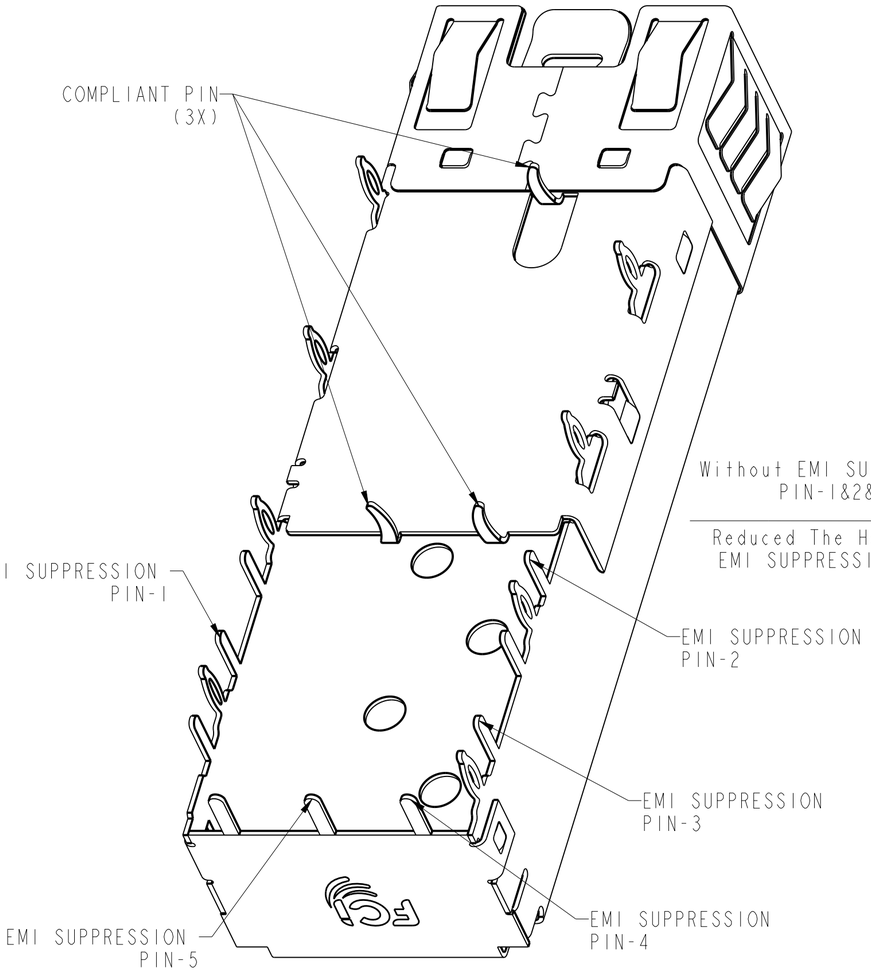

10122382-102LF

Without EMI SUPPRESSION
PIN-1&2&3&4

Reduced The Height of
EMI SUPPRESSION PIN-5

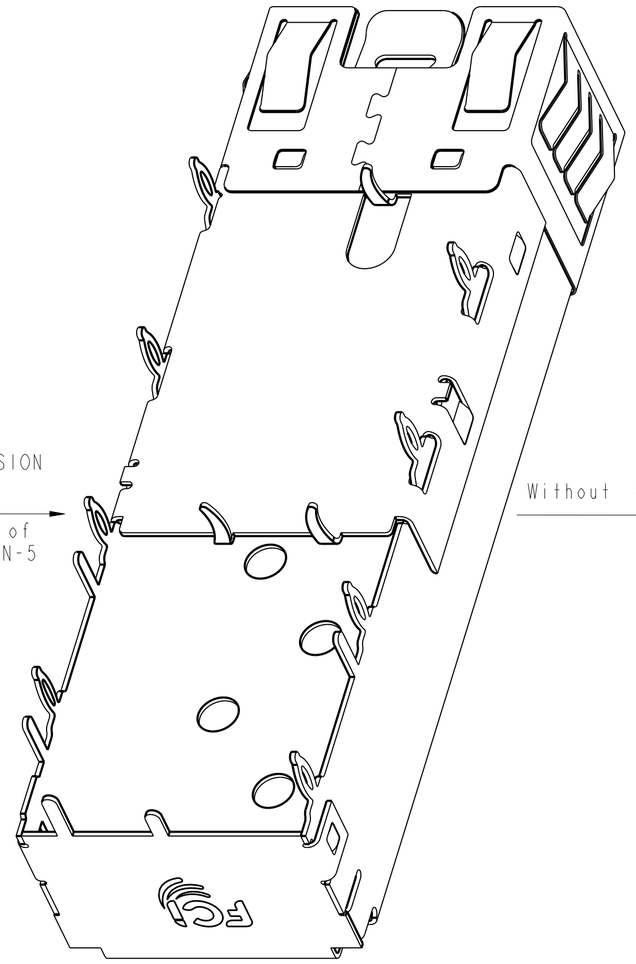

10122382-302LF

Without COMPLIANT PIN(3X)

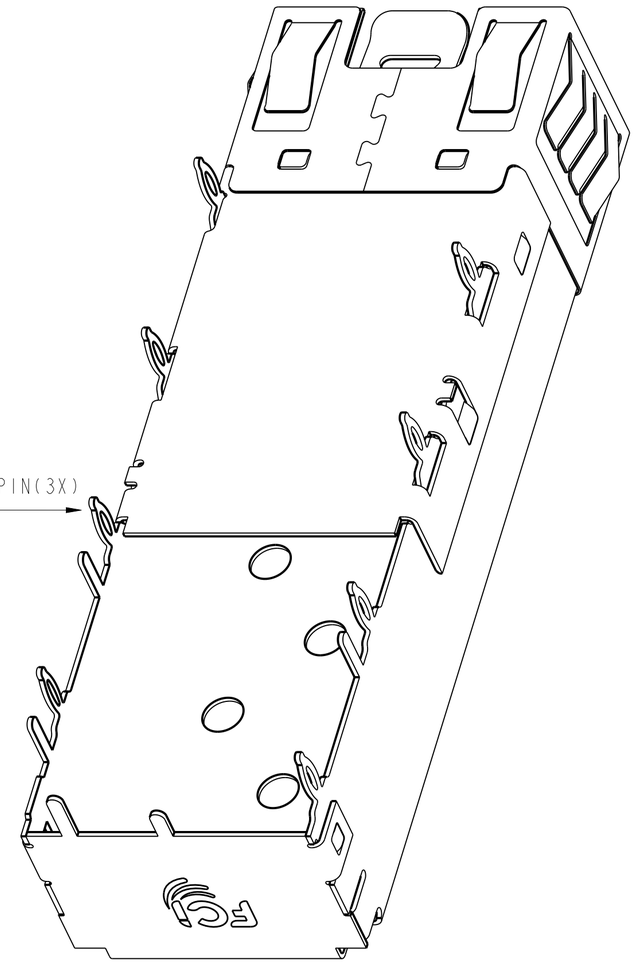

10122382-402LF

10122382-302LF/402LF WILL ALLOW FOR BELLY TO BELLY MOUNTING.

© 2016 AFCI

spec ref	RELEASE			dr	LinA	2016-02-16	projection
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LinA	2016-02-16	MM
ASME Y14.5 -				chr			size A2 / scale 5:1
				appr	Pei-Ming.Zheng	2016-02-16	ecn no NID-0579
surface -	linear	0.X	±0.25	Amphenol FCi	title: SFP+ 1X1 Cage EMI SPRING TYPE		product family SFP + / rel level Released
ISO 1302		0.XX	±0.15				dwg no 10122382 / rev D
		0.XXX	±-				
	angular	0°	±2°		cat. no. -	Product - Customer Drw	sheet 2 of 6

PRODUCT NUMBER	TYPE	TOP CAGE HOLE	PACKAGE
10122382-502LF	CAGE WITH INSULATION TAPE	WITH HOLE	TRAY



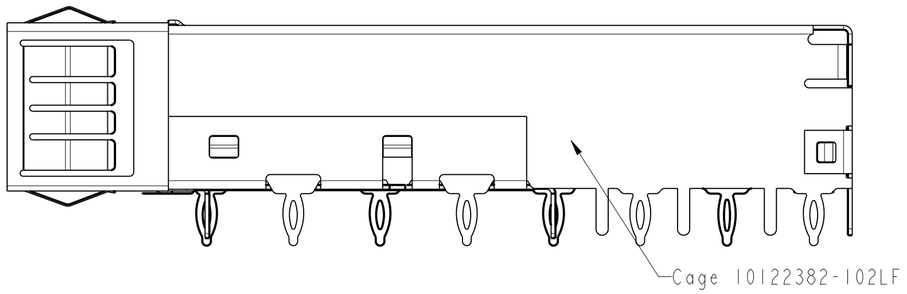

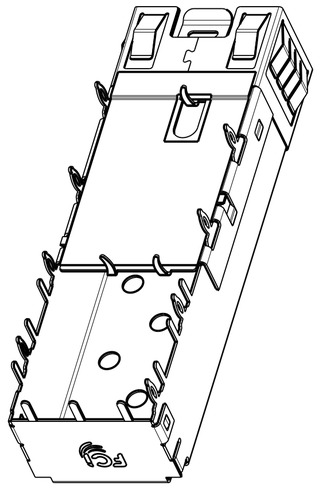

SCALE 5:2

10122382-502LF
(A MYLAR ON THE BOTTOM FOR INSULATION PROTECTION)

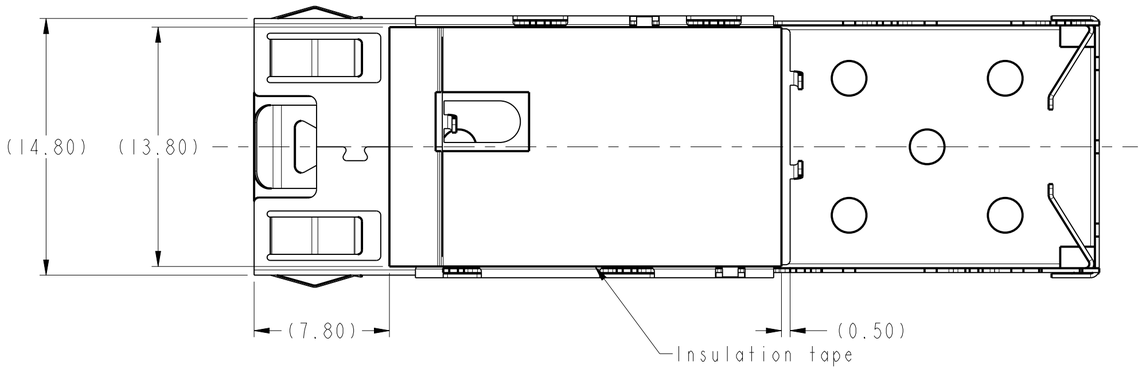

© 2016 AFCI

spec ref	RELEASE			dr	LinA	2016-02-18	projection
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LinA	2016-02-18	MM
				chr			size A2 / scale 4:1
surface ISO 1302	linear	0.X	±0.25	appr	Pei-Ming.Zheng	2016-02-18	ecn no NID-0570
		0.XX	±0.15				product family SFP + / rel level Released
		0.XXX	±-	Amphenol FCi	title: SFP+ 1X1 Cage EMI SPRING TYPE		dwg no 10122382 / rev D
	angular	0°	±2°		cat. no. -	Product - Customer Drw	sheet 3 of 6

Creo File - REV:E - 2016-02-12

PDS: Rev :D STATUS: Released Printed: Aug 18, 2016

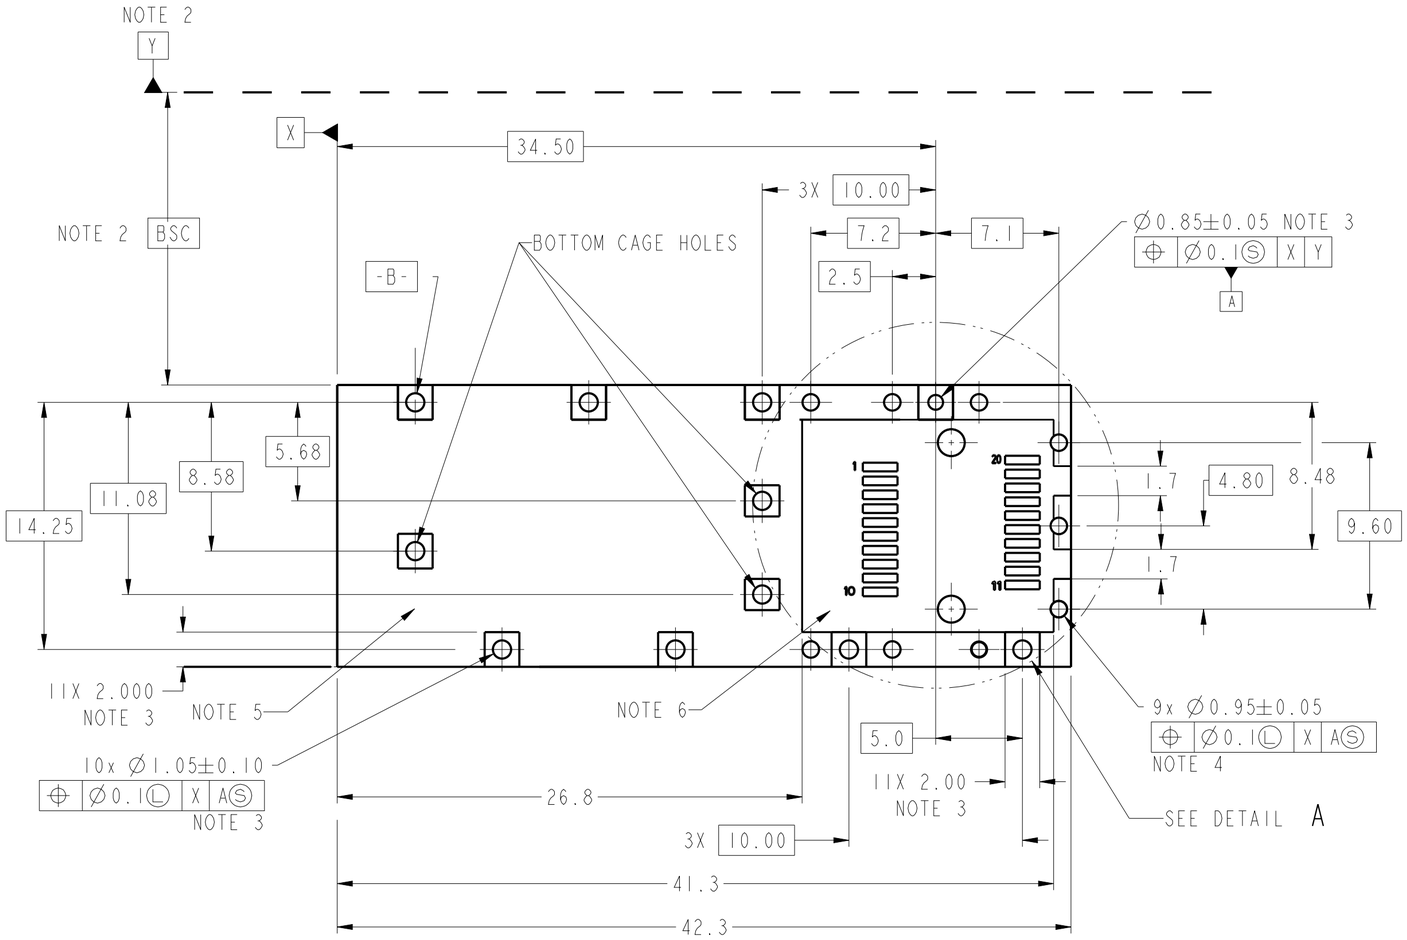

10122382-101LF/102LF/302LF/502LF
HOST BOARD MECHANICAL LAYOUT
SINGLE SIDED APPLICATIONS

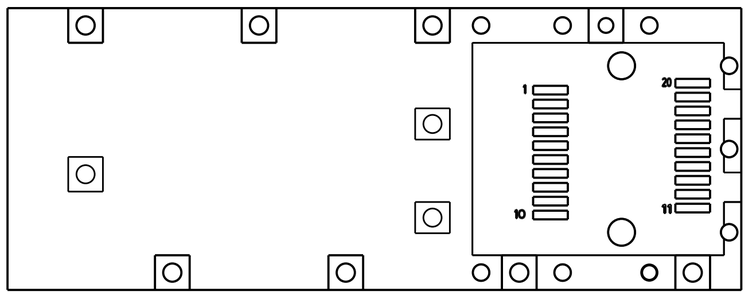

10122382-202LF
HOST BOARD MECHANICAL LAYOUT
SINGLE SIDED APPLICATIONS
(ONLY WITHOUT BOTTOM CAGE HOLES)

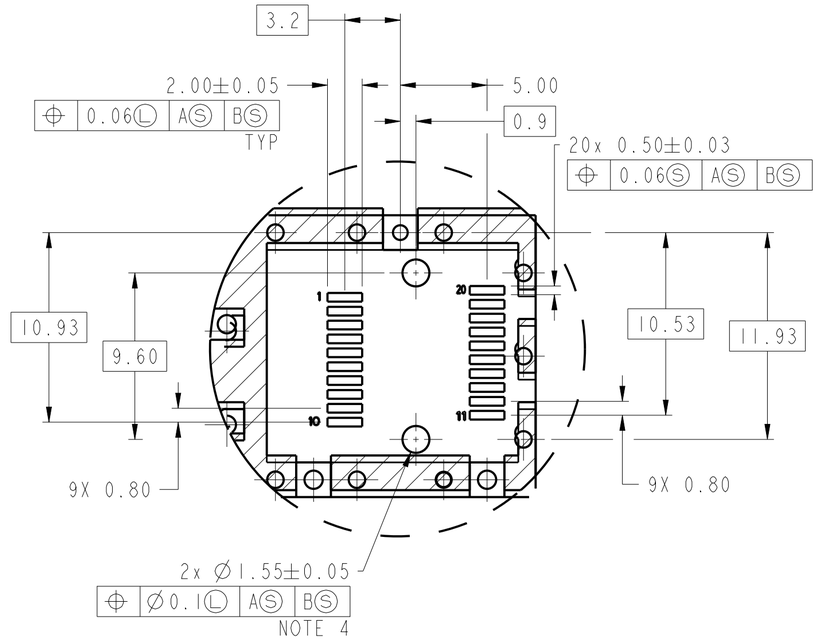

DETAIL A: HOST CONNECTOR LAYOUT
SCALE 4:1

NOTE:
SEE SHEET 4 FOR
HOST CONNECTOR LAYOUT

spec ref	RELEASE			dr	LinA	2016-02-18	projection MM
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LinA	2016-02-18	size A2 / scale 4:1
				chr			ecn no NX-0370
				appr	Pei-Ming.Zheng	2016-02-18	rel level Released
surface - ISO 1302	linear	0.X	±0.25	Amphenol FCi	title SFP+ 1X1 Cage EMI SPRING TYPE		dwg no 10122382 / rev D
		0.XX	±0.15				
		0.XXX	± -				
	angular	0°	±2°		cat. no. -	Product - Customer Drw	sheet 4 of 6

© 2016 AFCI

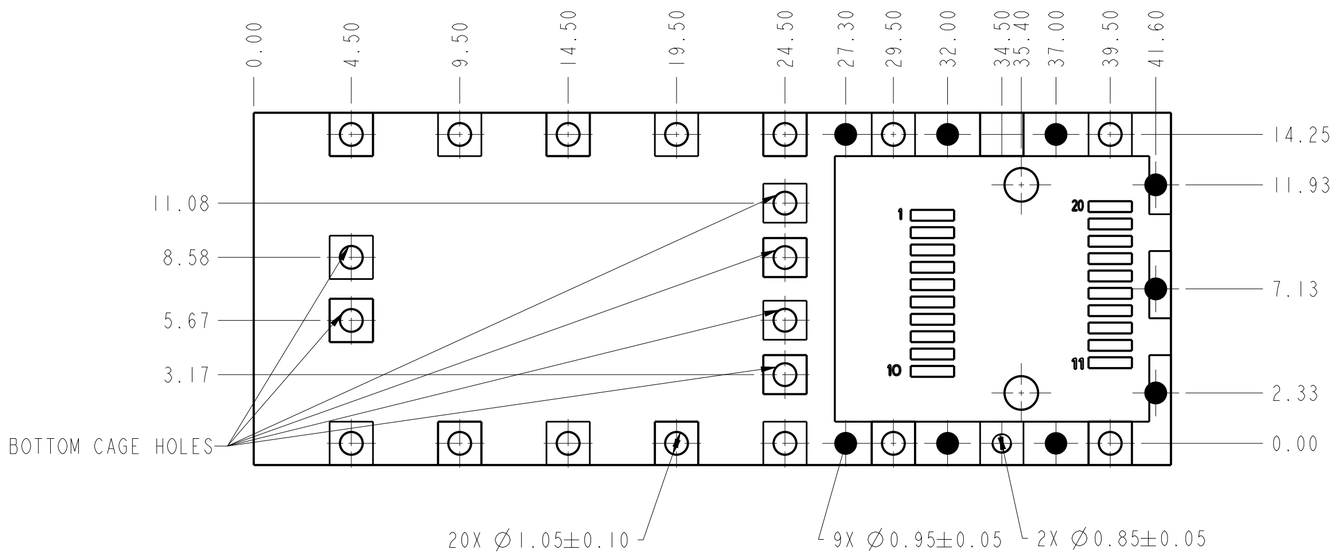

10122382-302LF
HOST BOARD MECHANICAL LAYOUT
BELLY TO BELLY APPLICATIONS

NOTE:
SEE SHEET 4 FOR
HOST CONNECTOR LAYOUT

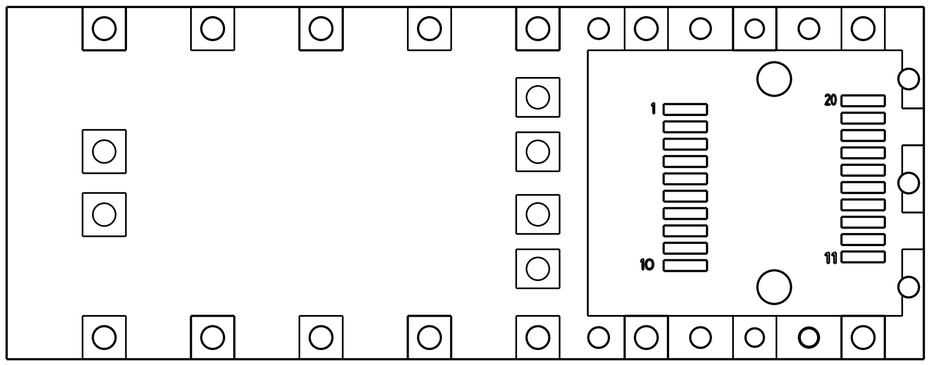

10122382-402LF
HOST BOARD MECHANICAL LAYOUT
BELLY TO BELLY APPLICATIONS
(ONLY WITHOUT BOTTOM CAGE HOLES)

NOTE:
SEE SHEET 4 FOR
HOST CONNECTOR LAYOUT

spec ref	RELEASE			dr	LinA	2016-02-16	projection	MM	size A2 / scale 1:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LinA	2016-02-16			ecn no NID-0879
				chr					
				appr	Pei-Ming.Zheng	2016-02-16	product family -		rel level Released
surface - ISO 1302	linear	0.X	±0.25	Amphenol FCi	title: SFP+ 1X1 Cage EMI SPRING TYPE			dwg no 10122382	rev D
		0.XX	±0.15						
		0.XXX	±-						
	angular	0°	±2°		cat. no. -		Product - Customer Drw		sheet 5 of 6

© 2016 AFCI

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING
(EMI SPRING FINGER)

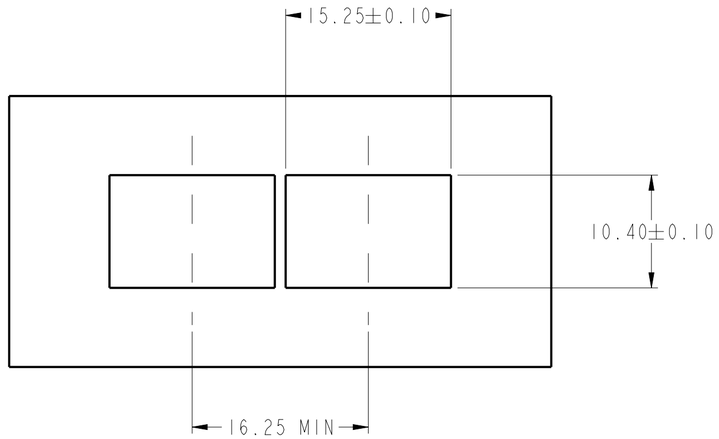

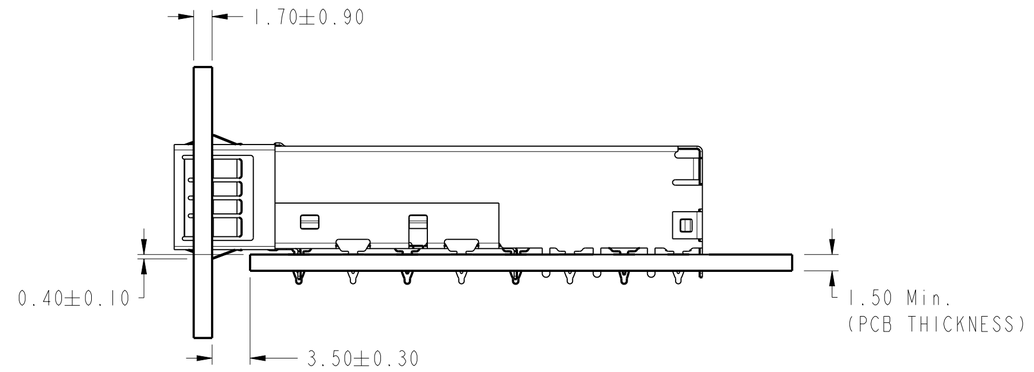

10122382-302LF/402LF
BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING
(EMI SPRING FINGER)

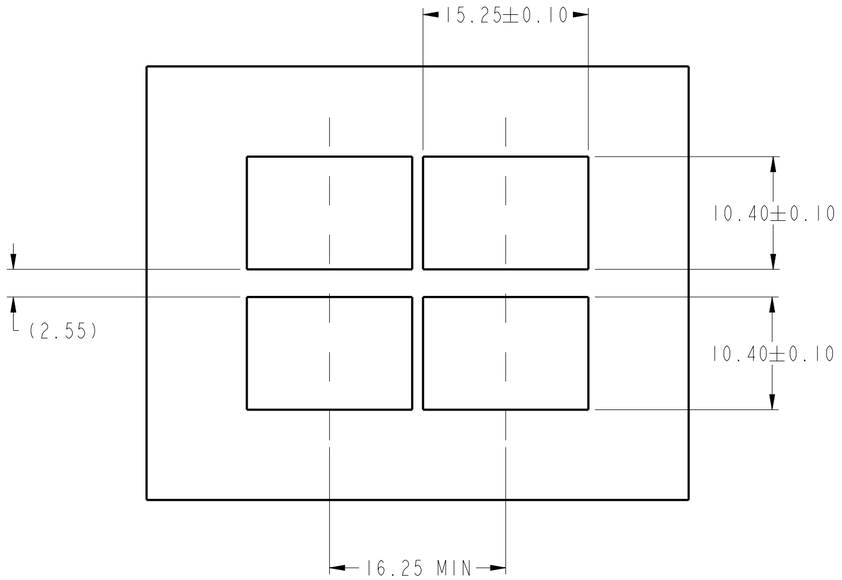

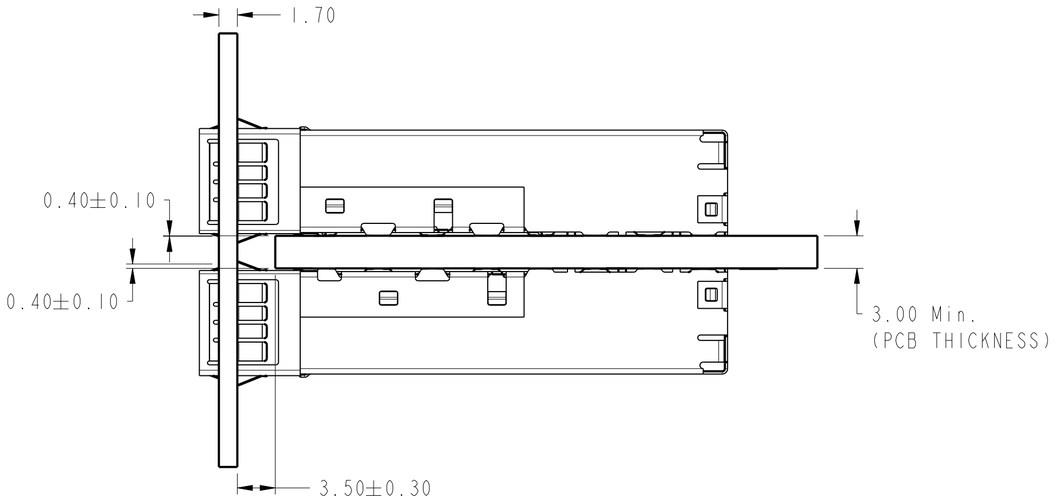

spec ref	RELEASE			dr	LinA	2019-02-19	projection
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LinA	2019-02-19	MM
ASME Y14.5 -				chr			size A2 / scale 1:1
				appr	Pei-Hling.Zheng	2019-02-19	ecn no NID-0879
surface -	linear	0.X	±0.25	product family	SFP +		rel level Released
ISO 1302		0.XX	±0.15	Amphenol FCi	title: SFP+ 1X1 Cage, EMI SPRING TYPE		dwg no 10122382 / rev D
		0.XXX	±-		cat. no. -	Product - Customer Drw	sheet 6 of 6
	angular	0°	±2°				

© 2016 AFCI

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.