



FEATURES:

- RoHS compliant
- Regulated output voltage
- Low ripple and noise
- High efficiency up to 70%
- Operating temperature -40°C to + 85°C
- Input / Output Isolation 1000 & 3000VDC
- Pin compatible with multiple manufacturers
- 7 pin SIP package



Models Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Max Capacitive Load (uF)	Efficiency (Full load) (%)
AM1DR-0503SZ	4.5-5.5	3.3	300	1000	220	57
AM1DR-0505SZ	4.5-5.5	5	200	1000	220	67
AM1DR-0507SZ	4.5-5.5	7.2	138	1000	220	65
AM1DR-0509SZ	4.5-5.5	9	111	1000	220	67
AM1DR-0512SZ	4.5-5.5	12	84	1000	220	70
AM1DR-0515SZ	4.5-5.5	15	67	1000	220	70
AM1DR-1203SZ	10.8-13.2	3.3	300	1000	220	57
AM1DR-1205SZ	10.8-13.2	5	200	1000	220	65
AM1DR-1207SZ	10.8-13.2	7.2	138	1000	220	65
AM1DR-1209SZ	10.8-13.2	9	111	1000	220	67
AM1DR-1212SZ	10.8-13.2	12	84	1000	220	70
AM1DR-1215SZ	10.8-13.2	15	67	1000	220	70
AM1DR-2403SZ	21.6-26.4	3.3	300	1000	220	60
AM1DR-2405SZ	21.6-26.4	5	200	1000	220	68
AM1DR-2407SZ	21.6-26.4	7.2	138	1000	220	65
AM1DR-2409SZ	21.6-26.4	9	111	1000	220	68
AM1DR-2412SZ	21.6-26.4	12	84	1000	220	70
AM1DR-2415SZ	21.6-26.4	15	67	1000	220	70
AM1DR-0503SH30Z	4.5-5.5	3.3	300	3000	220	57
AM1DR-0505SH30Z	4.5-5.5	5	200	3000	220	67
AM1DR-0507SH30Z	4.5-5.5	7.2	138	3000	220	65
AM1DR-0509SH30Z	4.5-5.5	9	111	3000	220	67
AM1DR-0512SH30Z	4.5-5.5	12	84	3000	220	70
AM1DR-0515SH30Z	4.5-5.5	15	67	3000	220	70
AM1DR-1203SH30Z	10.8-13.2	3.3	300	3000	220	57
AM1DR-1205SH30Z	10.8-13.2	5	200	3000	220	65
AM1DR-1207SH30Z	10.8-13.2	7.2	138	3000	220	65
AM1DR-1209SH30Z	10.8-13.2	9	111	3000	220	67
AM1DR-1212SH30Z	10.8-13.2	12	84	3000	220	70
AM1DR-1215SH30Z	10.8-13.2	15	67	3000	220	70
AM1DR-2403SH30Z	21.6-26.4	3.3	300	3000	220	60
AM1DR-2405SH30Z	21.6-26.4	5	200	3000	220	65
AM1DR-2407SH30Z	21.6-26.4	7.2	138	3000	220	65
AM1DR-2409SH30Z	21.6-26.4	9	111	3000	220	68
AM1DR-2412SH30Z	21.6-26.4	12	84	3000	220	70
AM1DR-2415SH30Z	21.6-26.4	15	67	3000	220	70

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5 12 24	4.5-5.5 10.8-13.2 21.6-26.4		VDC
Filter	Capacitor			
Turn on Transient process time			100	ms
Start up time		200		ms

Input Specifications (continued)

Parameters	Nominal	Typical	Maximum	Units
Absolute Maximum Rating	5 Vin 12 Vin 24 Vin	0-7 0-15 0-28		VDC
Peak Input Voltage time		100		ms

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3 sec		1000 & 3000	VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±2		%
Short Circuit protection		Momentary (1 sec)		
Line voltage regulation (Single)		±0.5		%
Load voltage regulation (Single)	0% to 100% load	±0.5		%
Load voltage regulation (Single) 3.3V output model	0% to 100% load	±1.0		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise	At 20MHz Bandwidth	60		mV p-p
Capacitive load			220	µF
Rising time		50		ms

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	125		KHz
Max Case temperature			+95	°C
Operating temperature	Full Load without Derating	-40 to +85		°C
Storage temperature		-55 to +125		°C
Derating		Not Required		
Cooling		Free air convection		
Humidity			95	%
Case material		Non conductive black plastic		
Weight		2.7		g
Dimensions (L x W x H)		0.76 x 0.28 x 0.37 inch	19.50 x 7.20 x 9.50 mm	
MTBF		>880 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)		

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified


Safety Specifications

Parameters	
Agency Approvals	CE
Safety Standards	EN 55022, Class B IEC61000-4-2 IEC61000-4-3 IEC61000-4-4 IEC61000-4-6 IEC61000-4-8


Pin Out Specifications

Pin	1000VDC	3000VDC
1	+ V Input	+ V Input
2	- V Input	- V Input
4	- V Output	No pin
5	No pin	- V Output
6	+ V Output	No pin
7	No pin	+ V Output

Dimensions

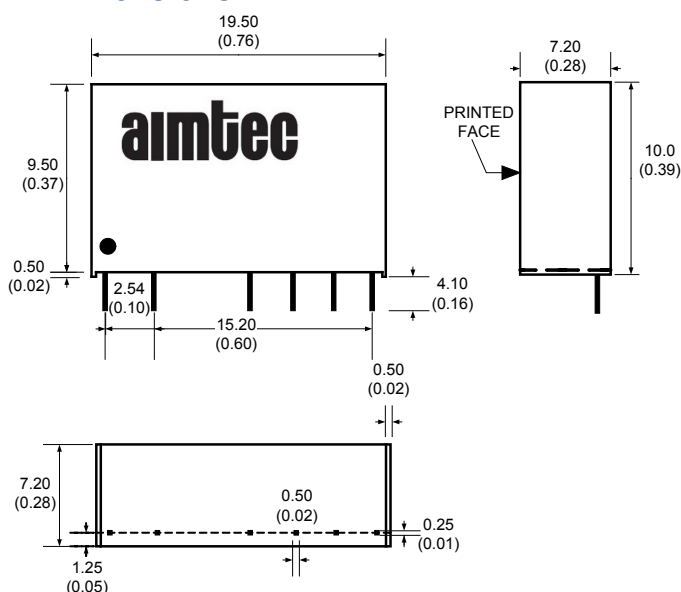

Radiated and Conducted Emissions Application circuit:

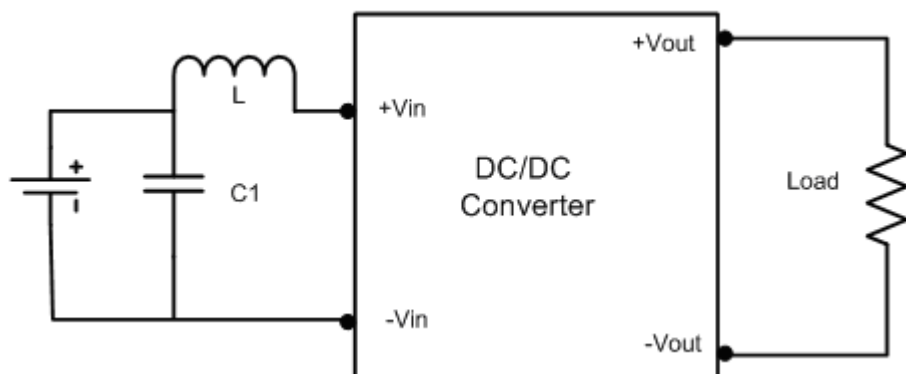

C1	L1
470μF/100V	12 μH

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.