



# 050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet  
(1000BASE-SX, 1000BASE-LX10, 1000BASE-EX,  
100BASE-FX), 28VDC,  
M38999 (Signal), M38999 (Power), M38999 (Fiber Optic)

REV	DESCRIPTION	DATE	APPROVED
A	Initial release	9/5/2014	MF
B	Per DCN52472	10/7/2014	MF
C	Per DCN52728	10/27/2014	MF
D	Per DCN54108	2/23/2015	MF
E	Per DCN56892	9/17/2015	MF
F	Per DCN56963	9/22/2015	MF
G	Per DCN57922	12/8/2015	MF
H	Per DCN58351	1/7/2016	MF

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

050-105

### Copper to Fiber Ethernet Media Converter

10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## 10/100/1000BASE-T to 1000BASE-SX, 1000BASE-LX10, or 100BASE-FX



The Glenair 050-105 is an Ethernet Copper to Fiber media converter that supports 10/100/1000BASE-T copper input/output and can be configured to support 1000BASE-SX, 1000BASE-LX10, 1000BASE-EX or 100BASE-FX protocols. It is designed for harsh environments and incorporates electronics in an environmentally sealed enclosure that incorporates three environmental M38999 connectors. The Glenair Ethernet media converter enables reliable communications over longer distances in harsh environment applications. It extends network link distances between switches, routers, and other Ethernet peripherals. It converts 10/100/1000BASE-T data from twisted pair copper cable to 1000BASE-SX/LX serial data transmitted over a pair of optical fibers. This allows legacy equipment running at 10/100/1000BASE-T to be connected to newer networks, and provides a smooth upgrade path.

### KEY FEATURES/BENEFITS


- 1310nm FP Lasers for 1000BASE-LX10
- 1310nm DFB Lasers for 1000BASE-EX
- InGaAs PIN PD for 1000BASE-LX10 & -EX
- 850nm Lasers for 1000BASE-SX
- GaAs PIN PD for 1000BASE-SX
- 1300nm LED for 100BASE-FX
- PIN PD for 100BASE-FX
- Wide Input Voltage Range: 18-36V
- Electrical Interface compliant with IEEE 802.3 (10/100/1000BASE-T)
- Optical Interface compliant with IEEE 802.3 (1000BASE-LX10 or 1000BASE-SX)

- -40°C to +85°C operating temperature range
- MIL-STD-810 Mechanical Shock and Vibration
- Up to 550 Meters over MMF (SX)
- Up to 10km over SMF (LX10)
- Up to 40km over SMF (EX)
- Magnetics on the electrical signal input side to support 10/100/1000BASE-T operation over 100m Cat 5E
- IP67 in mated condition
- M38999 Rugged connectors for Signal, Power & Fiber
- Panel Mount & Flange Mount Options


### APPLICATIONS

- Harsh Environment such as: Airborne, Tactical, Railway, Industrial, Oil and Gas and Shipboard applications

## How To Order

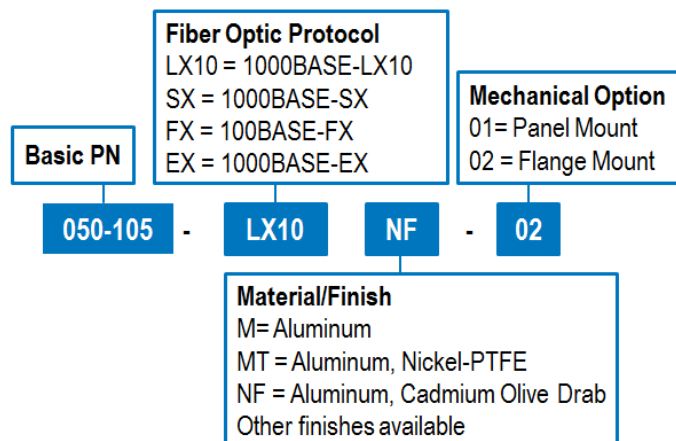

## Functional Block Diagram

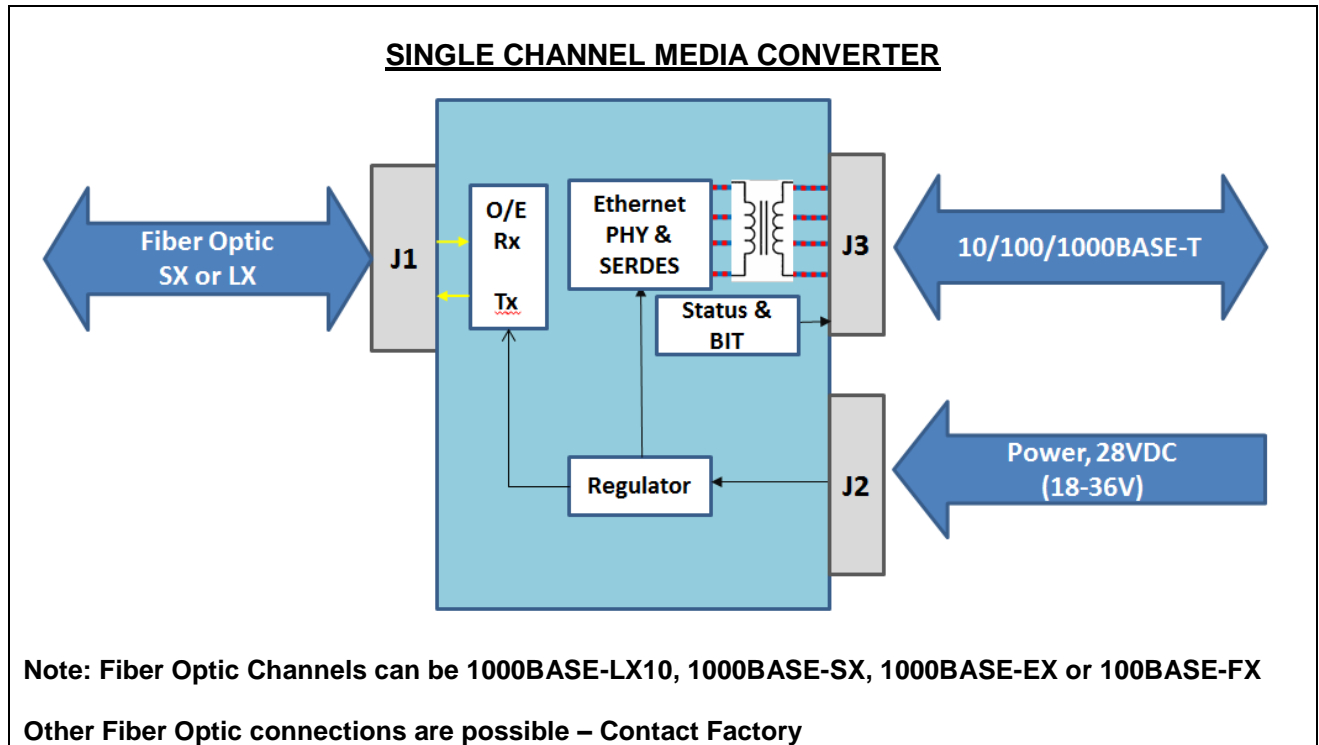




050-105

Copper to Fiber Ethernet Media Converter

10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Connectors

NAME	Insert Arrangement	Function	Media Converter Connector	Mating PLUG Connector
J1	 <p><b>D38999 Series III MIL-STD-1560 Arrangement 19-11 (Mating face - PIN insert shown)</b></p>	Fiber Optic Signal Connector	D38999 Series III type  180-091#S7-19-11SN (D38999/20WF11SN)  <u>SOCKET TERMINUS</u>  SX or FX CONFIGURATION: 181-001-126 (M29504/5-4239)  LX10 or EX CONFIGURATION: 181-001-125 (M29504/5-4237)	D38999 Series III type  180-091#06-19-11PN (D38999/26WF11PN type)  <u>PIN TERMINUS</u>  SX or FX CONFIGURATION: 181-002-126 (M29504/4-4210)  LX10 or EX CONFIGURATION: 181-002-125 (M29504/4-4208)
J2	 <p><b>D38999 Series III MIL-STD-1560 Arrangement 9-35 (Mating face - PIN insert shown)</b></p>	Power Connector	D38999 Series III type  233-105-00#09-35PN (D38999/20WA35PN)  <u>PIN CONTACTS</u>  850-002-22-360 (M39029/58-360)	D38999 Series III type  233-105-G6#09-35SN (D38999/26WA35SN)  <u>SOCKET CONTACTS</u>  850-002-22-348 (M39029/56-348)
J3	 <p><b>D38999 Series III MIL-STD-1560 Arrangement 11-35 (Mating face - PIN insert shown)</b></p>	Electrical Ethernet Signal Connector	D38999 Series III type  233-105-00#11-35PN (D38999/20WB35PN)  <u>PIN CONTACTS</u>  850-002-22-360 (M39029/58-360)	D38999 Series III type  233-105-G6#11-35SN (D38999/26WB35SN)  <u>SOCKET CONTACTS</u>  850-002-22-348 (M39029/56-348)

Note: # = Environmental Class (Material/Finish)

©2014 Glennair, Inc.

REV: H



GLENAIR, INC.

US Cage Code 06324

Printed in USA

1211 AIR WAY · GLENDALE, CA 91201-2497

TEL: 818-247-6000

FAX: 818-500-9912

[www.glenair.com](http://www.glenair.com)

PAGE 4 of 16

E-mail: [sales@glenair.com](mailto:sales@glenair.com)

050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Ratings and Specifications – LX10 VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		70	110	mA	@28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-8.5	-4	-1	dBm	1310nm Fabry-Perot
Optical Wavelength	λ <sub>OUT</sub>	1280	1310	1345	nm	
Spectral Width	Δλ			2.75	nm	

### OPTICAL CHARACTERISTICS – RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity ( Input Power Range)	P <sub>IN,OP</sub>	-20		0	dBm	
Min. Sensitivity, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN,MIN</sub>		-22	-20	dBm	PIN PD, LX10 source
Overload, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN,MAX</sub>	-1			dBm	
Optical Wavelength	λ <sub>IN</sub>	1270		1600	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Gigabit Ethernet, IEEE 802.3z, 1000BASE-LX10	Single Mode Fiber (9/125μm)	10km	



050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Ratings and Specifications – EX VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		70	110	mA	@28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-1	+1	+3	dBm	1310nm DFB
Optical Wavelength	λ <sub>OUT</sub>	1290	1310	1330	nm	
Spectral Width	Δλ			1	nm	

### OPTICAL CHARACTERISTICS – RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity ( Input Power Range)	P <sub>IN,OP</sub>	-20		0	dBm	
Min. Sensitivity, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN,MIN</sub>		-22	-20	dBm	PIN PD
Overload, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN,MAX</sub>	-1			dBm	
Optical Wavelength	λ <sub>IN</sub>	1270		1600	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Derived from Gigabit Ethernet, IEEE 802.3z	Single Mode Fiber (9/125μm)	40km**	** 19dB optical Loss budget, 0.35dB/km loss assumed



050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Ratings and Specifications – SX VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	1 second maximum

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		70	110	mA	@28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-7		-1	dBm	VCSEL, 50/125µm MM
Optical Wavelength	λ <sub>OUT</sub>	830	850	860	nm	
Spectral Width	Δλ			0.85	nm	

### OPTICAL CHARACTERISTICS - RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity (Input Power Range)	P <sub>IN_OP</sub>	-17		-2	dBm	
Min. Sensitivity, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN_MIN</sub>		-22	-17	dBm	PIN PD, 50/125µm MM
Overload, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN_MAX</sub>	-2	-1		dBm	
Optical Wavelength	λ <sub>IN</sub>	770	850	860	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Gigabit Ethernet, IEEE 802.3z, 1000BASE-SX	OM3 MMF (50/125µm) OM1 MMF (62.5/125µm)	550m 275m	850nm VCSEL



050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Ratings and Specifications – FX VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	1 second maximum

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		70	110	mA	@28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-19		-14	dBm	1300nm LED (IEC 9314-3)
Optical Wavelength	λ <sub>OUT</sub>	1260	1310	1380	nm	
Spectral Width	Δλ		147		nm	

### OPTICAL CHARACTERISTICS - RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Sensitivity, BER 10 <sup>-10</sup> , PRBS 2 <sup>7</sup> -1	P <sub>IN</sub>			-32	dBm	PIN PD
Overload, BER 10 <sup>-10</sup> , PRBS 2 <sup>7</sup> -1	P <sub>IN</sub>	-14			dBm	
Optical Wavelength	λ <sub>IN</sub>	1270	1310	1380	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Fast Ethernet, IEEE 802.3u, 100BASE-T	TIA/EIA-568-B Cat 5E	100m	
Fast Ethernet, IEEE 802.3u, 100BASE-FX, IEC 9314-3	MMF (50/125μm) & (62.5/125μm)	2km	





050-105

Copper to Fiber Ethernet Media Converter

10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Ratings and Specifications - (continued)

### COMPLIANCE SPECIFICATIONS

CHARACTERISTIC	Standard	Condition	Notes
Mechanical Shock	MIL-STD-810G	40g	6-9 ms pulses
Mechanical Vibration	MIL-STD-810G	30 grms	
ESD	MIL-STD-883	Class II	2200V HBM
Conducted Emissions, Power Leads, 30 Hz to 10 kHz	MIL-STD-461F	CE101	
Conducted Emissions, Power Leads, 10 kHz to 10 MHz	MIL-STD-461F	CE102	
Conducted Susceptibility, Power Leads, 30 Hz to 150KHz	MIL-STD-461F	CS101	
Conducted Susceptibility, Transients, Power Leads	MIL-STD-461F	CS106	
Conducted Susceptibility, Structure Current, 60 Hz to 100 kHz	MIL-STD-461F	CS109	
Conducted Susceptibility, Bulk Cable Injection, 10 kHz to 200 MHz	MIL-STD-461F	CS114	
Radiated Susceptibility, Magnetic Field, 30 Hz to 100 kHz	MIL-STD-461F	RS101	
Radiated Susceptibility, Electric Field, 2 MHz to 18 GHz	MIL-STD-461F	RS103	
Radiated Emissions, Magnetic Field, 30 Hz to 100 kHz	MIL-STD-461F	RE101	
Radiated Emissions, Electric Field, 10 kHz to 18 GHz	MIL-STD-461F	RE102	
Mating Durability	MIL-DTL-38999/20	500 Cycles	
Flame Resistance	EIA364-104		30 seconds
Damp Heat	MIL-STD-810G		120 hours
Aircraft Electrical Power Characteristics	MIL-STD-704F		28V DC Systems
Military Vehicle Electrical Power Characteristics	MIL-STD-1275		28V DC Systems
Eye Safety	CDRH and IEC-825	Class 1 Laser Product	



050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## Ratings and Specifications - (continued)

### Material/Finish

Item	Material/Finish
Housing & Connector Shell	Aluminum
Plating Finish: M	Nickel
Plating Finish: MT	Nickel PTFE
Plating Finish: NF	Olive Drab Cadmium
Contacts	Copper alloy, 50 µInch gold plated
D38999 Inserts	Thermoplastics
Interfacial Seals, 38999 only	Elastomer, Fluorosilicon
Optical Ferrules & Sleeves	Zirconia, Ceramic
Insulators	Liquid crystal polymer (LCP)
Contact retention clip	Beryllium copper alloy
Seal, O-rings	Fluorosilicone rubber
Seal	Silicone elastomer
Spring	Nickel-plated beryllium copper
PC tail contacts	Copper alloy/gold plated
PCB flex	FR4 & Polyimide
Encapsulant	HYSOL
Solder type	RoHS compliant Sn95/Sb5 (232°C melting temp) & RoHS compliant Sn96.5/Ag3.0/Cu0.5 (217° melting)




050-105

Copper to Fiber Ethernet Media Converter  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



## OUTLINE DRAWING

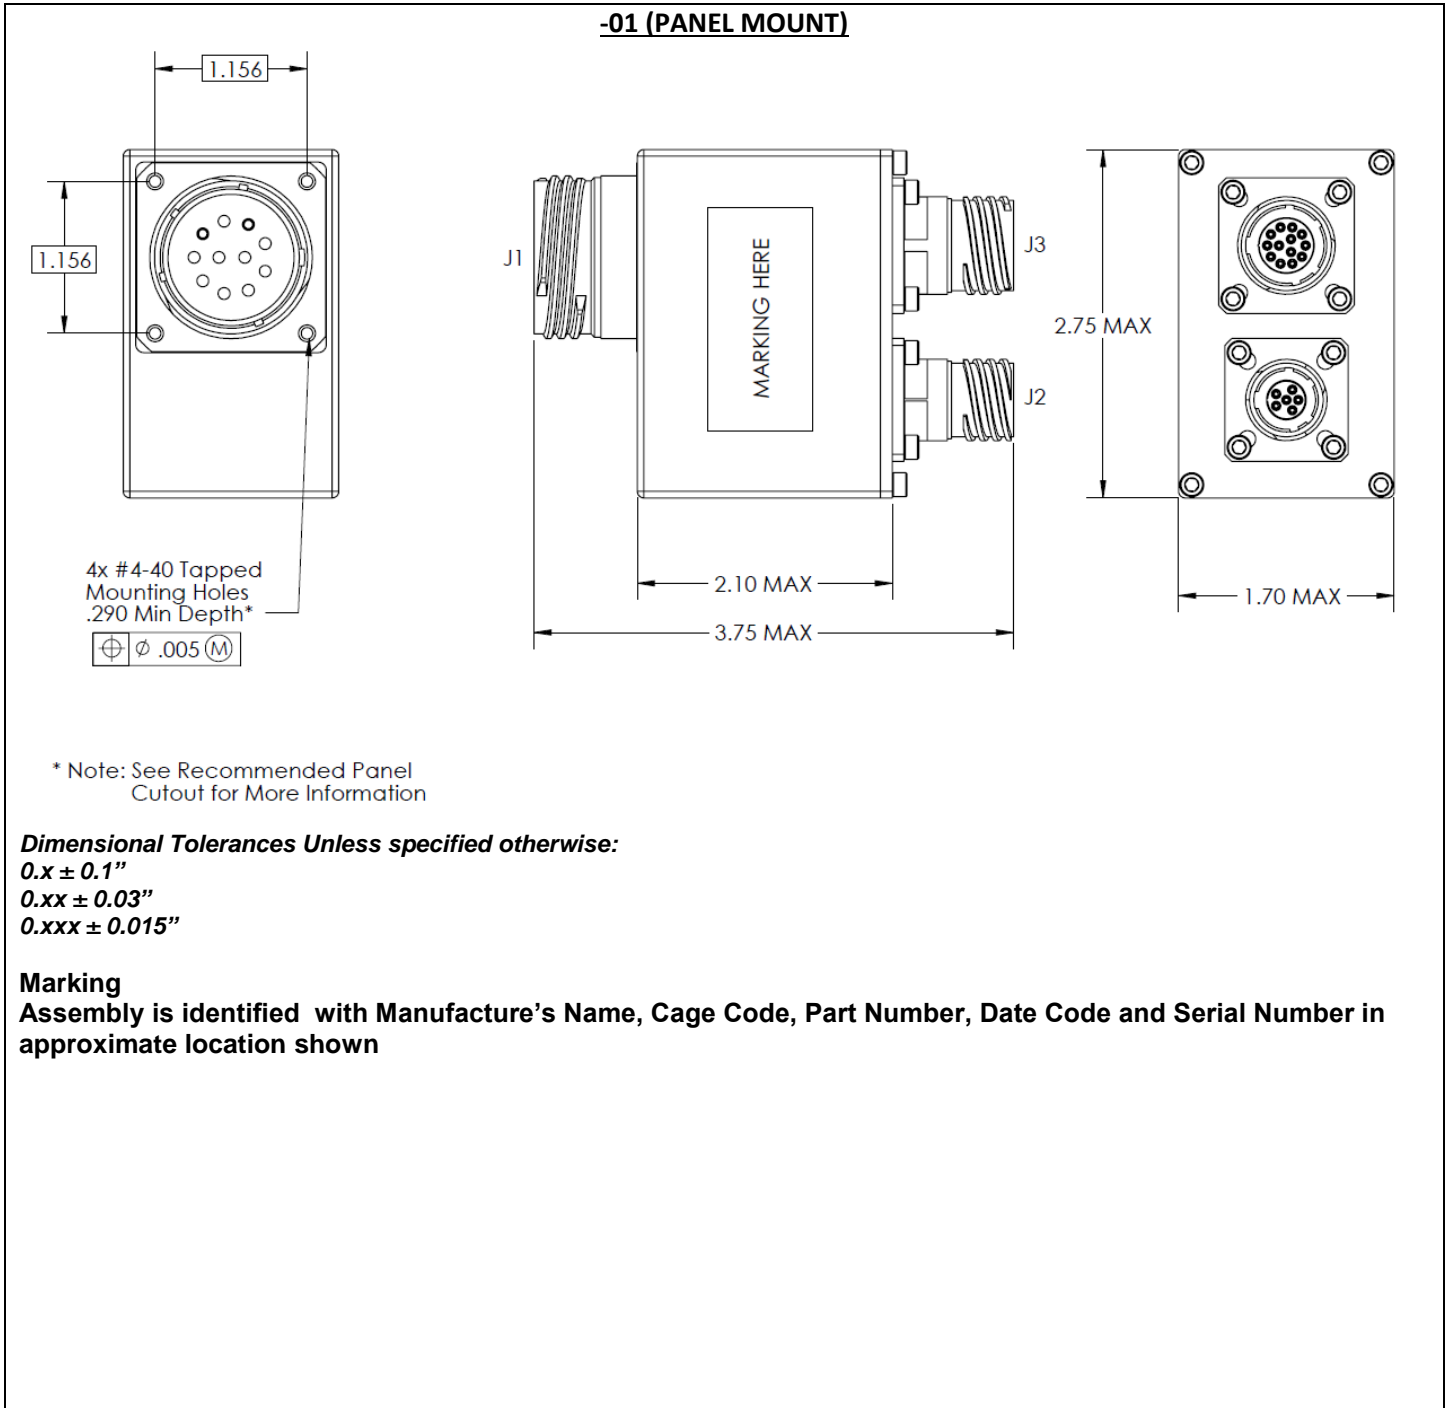

\* Note: See Recommended Panel Cutout for More Information

**Dimensional Tolerances Unless specified otherwise:**

0.x ± 0.1"

0.xx ± 0.03"

0.xxx ± 0.015"

**Marking**

Assembly is identified with Manufacturer's Name, Cage Code, Part Number, Date Code and Serial Number in approximate location shown




050-105

Copper to Fiber Ethernet Media Converter

10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



OUTLINE DRAWING (Continued)

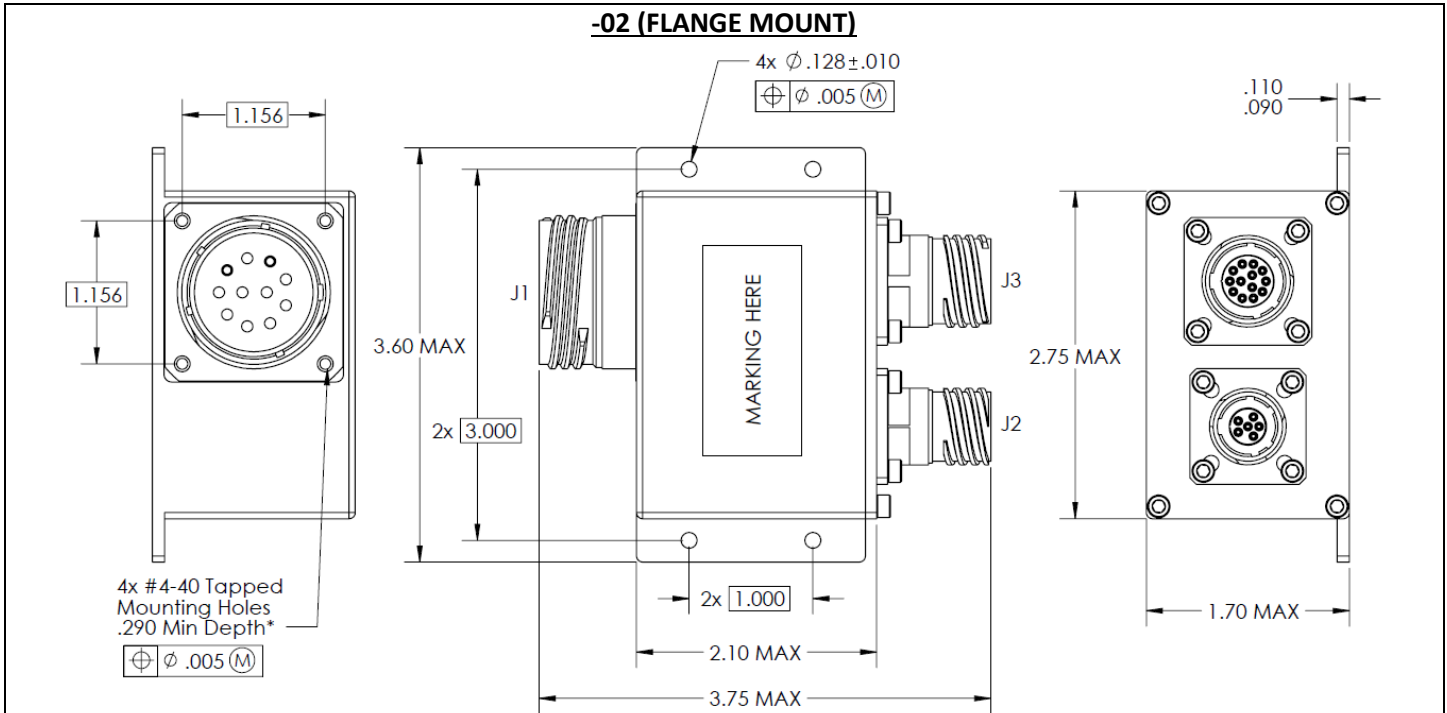

\* Note: See Recommended Panel Cutout for More Information

**Dimensional Tolerances Unless specified otherwise:**

- 0.x ± 0.1"
- 0.xx ± 0.03"
- 0.xxx ± 0.015"

**Marking:**

Assembly is identified with Manufacturer's Name, Cage Code, Part Number, Date Code and Serial Number in approximate location shown

**Weight:**



Mechanical Configuration	Weight (lbs)
-01 (Panel Mount)	0.553 nominal
-02 (Flange Mount)	0.553 nominal

Connectors will be covered with protective caps at time of shipment

Please contact Glenair for other configurations

**PANEL CUT OUT (Continued)**

**RECOMMENDED PANEL CUT OUT – J1**

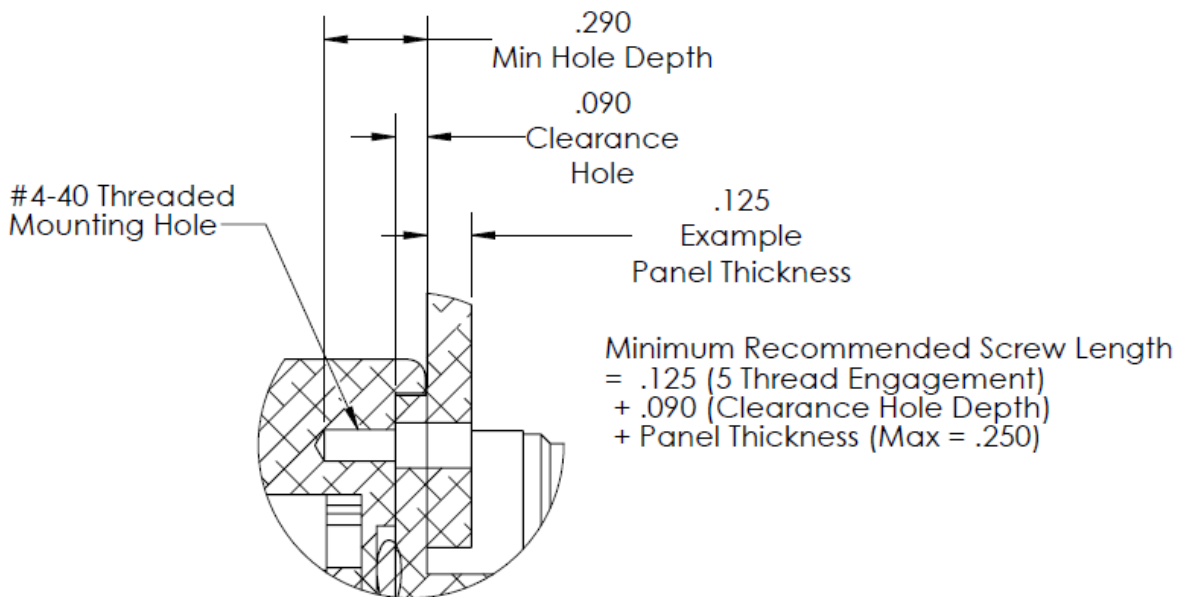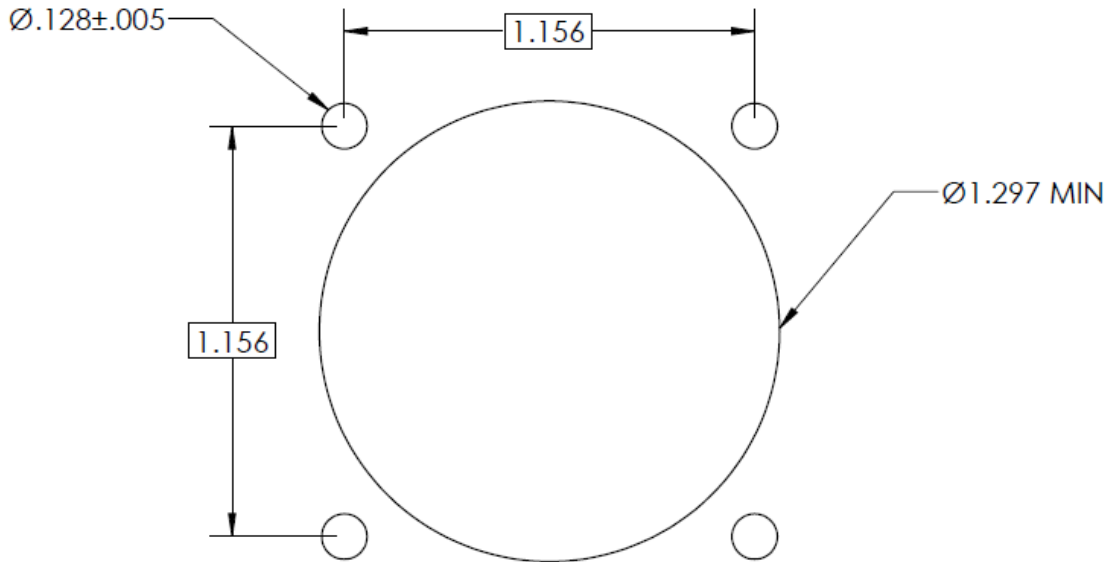

050-105


Copper to Fiber Ethernet Media Converter

10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10, EX, FX)



**PANEL CUT OUT**


**RECOMMENDED PANEL CUT OUT – FLANGE MOUNT**

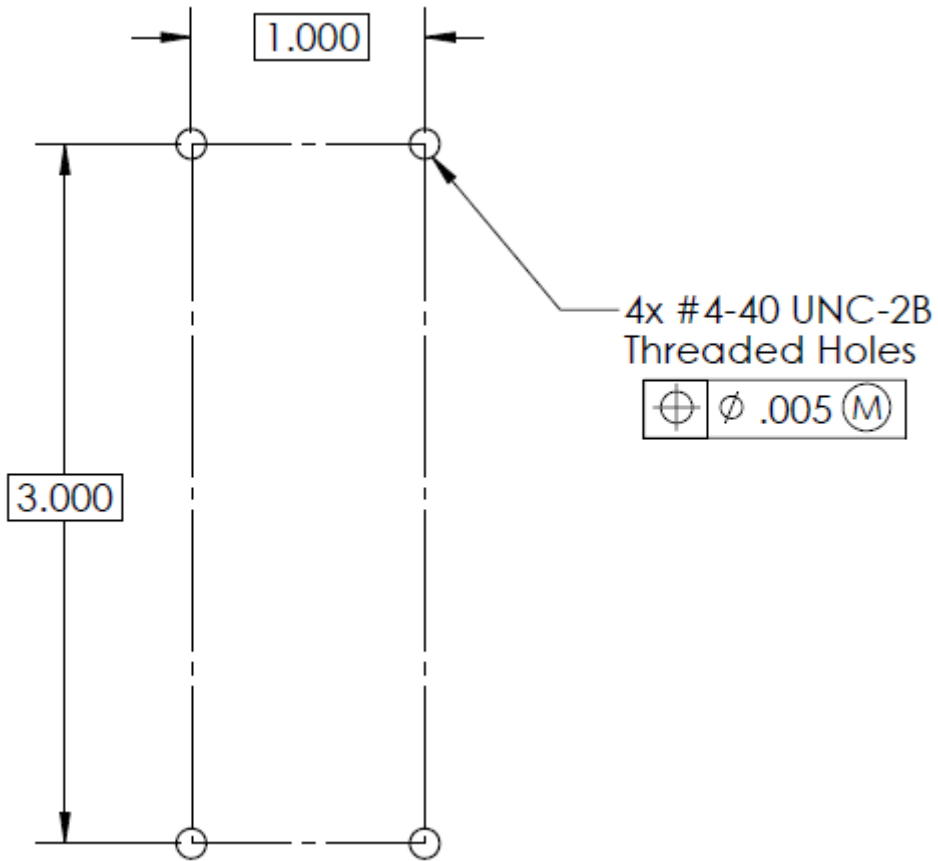

## Input/Output Definition

### J1 PIN FUNCTION ASSIGNMENTS (FIBER OPTIC)

PIN	NAME	DESCRIPTION	NOTES
A	NC	No connect	
B	NC	No connect	
C	NC	No connect	
D	NC	No connect	
E	NC	No connect	
F	RX	Optical Receive	1
G	NC	No connect	
H	TX	Optical Transmit	1
J	NC	No connect	
K	NC	No connect	
L	NC	No connect	




**D38999  
19-11**  
(Mating face - PIN insert shown)

#### Notes

1. 1000BASE-SX, 1000BASE-LX10, 1000BASE-EX or 100BASE-FX

### J2 PIN FUNCTION ASSIGNMENTS (POWER)

PIN	NAME	DESCRIPTION	NOTES
1	NC	No connect	
2	NC	No connect	
3	NC	No connect	
4	NC	No connect	
5	VCC	Supply Voltage (DC)	
6	GND	Supply Return	




**D38999  
9-35**  
(Mating face - PIN insert shown)

## Input/Output Definition (continued)

### J3 PIN FUNCTION ASSIGNMENTS (ELECTRICAL ETHERNET DATA)

PIN	NAME	DESCRIPTION	NOTES
1	NC	No connect, Factory Use	
2	MDA+		1
3	MDA-		1
4	MDB+		1
5	MDB-		1
6	NC	No connect, Factory Use	
7	MDC-		1
8	MDC+		1
9	MDD-		1
10	MDD+		1
11	NC	No connect, Factory Use	
12	NC	No connect, Factory Use	
13	NC	No connect, Factory Use	

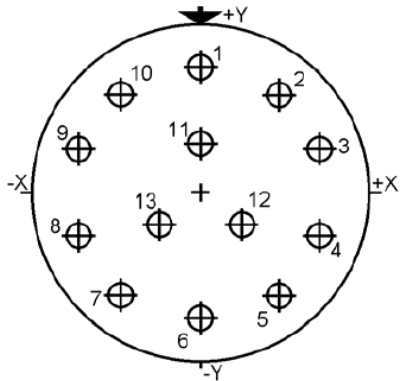

**D38999 Series III**  
**MIL-STD-1560 Arrangement**  
**11-35**  
**(Mating face - PIN insert shown)**

#### Notes

1. IEEE 802.3 10/100/1000BASE-T





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.