

SB70 LC

2-Port Serial to Ethernet Server

100 Version with RJ-45 | 200 Version with 10-pin header



DATASHEET

Key Points

- Serial to Ethernet server
- SSL and SSH data encryption to protect from unauthorized monitoring
- 3.3V tolerant input and TTL serial device support
- Works out of the box - no programming is required
- Board level product
- Customize with development kit

Features

- SSH, SSL, HTTPS, certificate support
- 10/100Mbps Ethernet
- TCP/UDP/Telnet modes
- DHCP/Static IP modes
- Web based configuration
- 32-bit performance
- RS-232 and RS-422/485 ready (require external level shifter)


Optional

The following options are available with the optional development kit:


- Customize any aspect of operation including web pages, data filtering, or custom network applications
- Additional baud rates
- SD/MMC Card interface with included flash file system
- Up to 15 Digital I/O
- I²C and SPI peripheral interface
- External timer input

The following optional software modules are not included with kit and are sold separately

- Embedded SSL & SSH Security Suite (Module License Version)
- SNMP

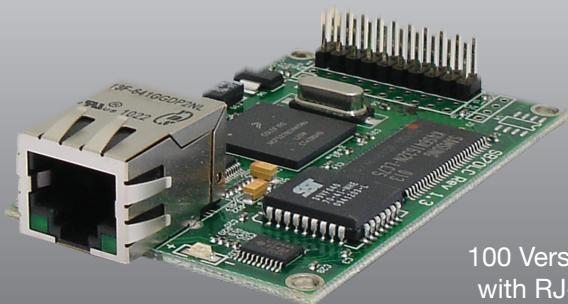

100 Version
with RJ-45

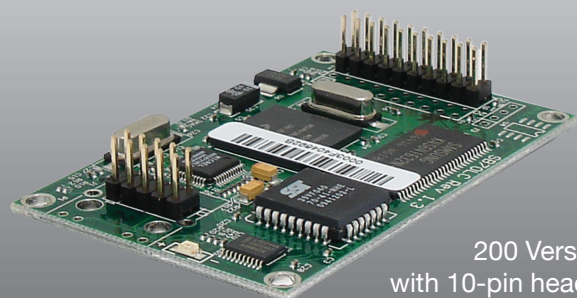

200 Version
with 10-pin header

Factory Application Specifications

Serial Port Baud Rate

Factory application supports up to 230,000 baud. Custom rates available with development kit.

Serial Protocols Supported

2 TTL

Serial Configurations

The UARTs can be configured in the following way:

- Two TTL ports
- Add external level shifter for RS-232
- Add external level shifter for RS-422/485 (up to two ports)

Note: UART 0/1 also provides RTS/CTS hardware handshaking signals.

Hardware Specifications

Processor & Memory

32-bit Freescale ColdFire 5270 running at 147.5MHz with 512KB of flash and 8MB SDRAM.

Network Interface

10/100 BaseT with RJ-45 connector (100 Version)

10-pin header (200 Version)

Data I/O Interface

- Up to two TTL ports
- Up to 15 digital I/O
- Up to one timer input
- Up to one I²C and SPI peripheral interface

LEDs

Link, Speed/Data, Power

Physical Characteristics

Dimensions (inches): 2.70" x 1.75"

Weight: 1 oz.

Mounting Holes: 4 x 0.125" dia.

Power

DC Input Voltage: 3.3V @ 250mA typical

Environmental Operating Temperature

-40° to 85° C

RoHS Compliance

The Restriction of Hazardous Substances guidelines ensure that electronics are manufactured with fewer environment harming materials.

Connector Interface Pinout and Signal Description

The SB70 LC (100 and 200 version) board has one dual in-line 20 pin header (JP1) which enables you to quickly and easily connect to a NetBurner SB70 LC Adapter Board, or a board that you create on your own. The SB70 LC 200 version board has a 10-pin header (JP2) instead of the RJ-45 jack. Tables 1 and 2 provide descriptions of pin function for the JP1 header and JP2, respectively.

Table 1: Multi-function I/O Connector (JP1) Pinout and Signal Descriptions ^(1, 2)

Pin	CPU Pin	Function 1	Function 2	General Purpose I/O	Description	Max Voltage
1		VCC3V	-	-	Input Voltage 3.3VDC	3.3VDC
2		VCC3V	-	-	Input Voltage 3.3VDC	3.3VDC
3	A6	SPI_CS0	-	PQSPI3	SPI Chip Select 0	3.3VDC
4	A5	SPI_DOUT	-	PQSPI0	SPI Data Out	3.3VDC
5	G3	UART0_RTS	-	PUARTL2	UART 0 Request To Send ¹	3.3VDC
6	B5	SPI_DIN	I2C_SDA	PQSPI1	SPI Data Input or I ² C Serial Data	3.3VDC
7	C5	SPI_CLK	I2C_SCL	PQSPI2	SPI Clock or I ² C Clock	3.3VDC
8	B8	UART1_CTS	-	PUARTL7	UART 1 or UART 2 Clear To Send ¹	3.3VDC
9	C8	UART1_RTS	-	PUARTL6	UART 1 or UART 2 Request To Send ¹	3.3VDC
10	F1	UART0_TX	-	PUARTL1	UART 0 Transmit	3.3VDC
11	F2	UART0_RX	-	PUARTL0	UART 0 Receive	3.3VDC
12	D9	UART1_TX	-	PUARTL5	UART 1 Transmit	3.3VDC
13	D8	UART1_RX	-	PUARTL4	UART 1 Receive	3.3VDC
14	F3	UART0_CTS	-	PUARTL3	UART 0 Clear To Send ¹	3.3VDC
15	H14	T3IN	-	PTIMER7	Timer Input 3 or UART 2 Clear To Send ¹	3.3VDC
16	J12	I2C_SDA	-	PFECI2C0	I ² C Serial Data ³	3.3VDC
17	J11	I2C_SCL	-	PFECI2C1	I ² C Serial Clock ³	3.3VDC
18	N13	RESET	-	-	Processor Reset Input ¹	3.3VDC
19		GND	-	-	Ground	-
20		GND	-	-	Ground	-

Note:

- Active low signals, such as RESET, are indicated with an overbar.
- All UART signals are TTL Level, external level shifters may be added for RS-232 or RS-422/485 operation.
- If using I²C, pull-up resistors must be added to open drain SDA/SCL signals.

Table 2: Ethernet Jack Header (JP2) Pinout and Signal Descriptions ⁽¹⁾

Pin	Signal	Description
1	TX-	Transmit -
2	TX+	Transmit +
3	LDLED	Link/Data LED
4	RX+	Receive +
5	RX-	Receive -
6	VCC ²	2.5V
7	SLED	Speed LED
8	NC	No Connect
9	NC	No Connect
10	GND	Ground

Note:

- Optional 0.1" dual row 10-pin header
- Ethernet magnetics center tap voltage provided by NetBurner device

Connector Diagram

Figure 1: Connector Diagram for JP1 (100 version)


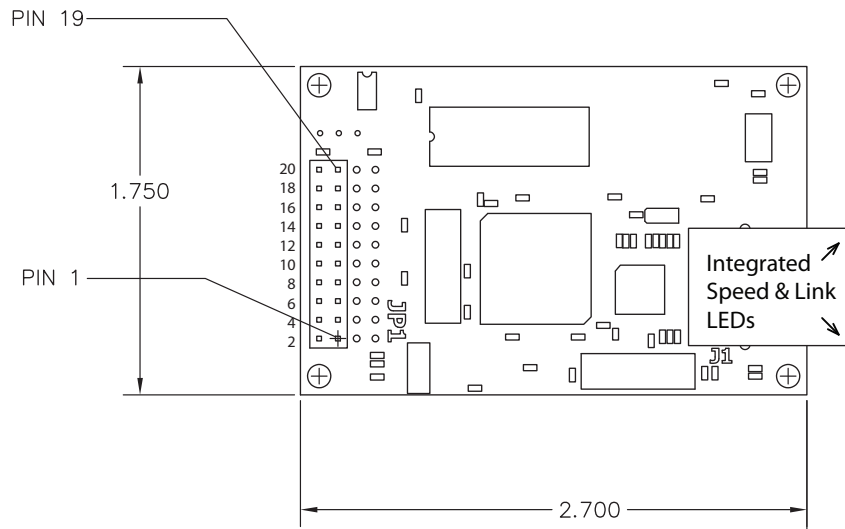


Figure 2: Connector Diagram for JP1 and JP2 (200 version)

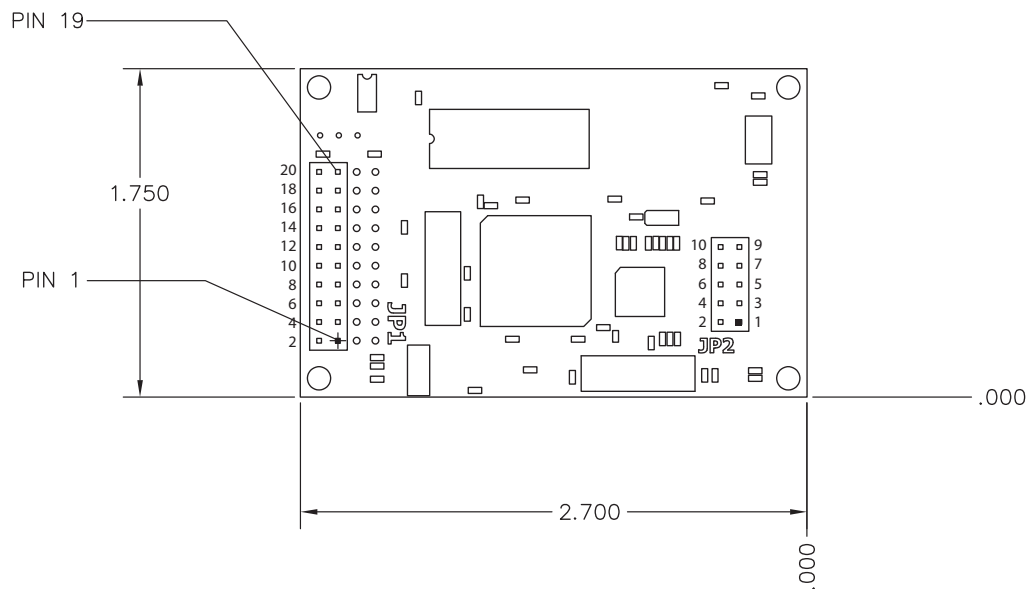

Part Numbers

SB70 LC 2-Port Serial to Ethernet Server (100 Version, with RJ-45)

Part Number: SB70LC-100IR

SB70 LC 2-Port Serial to Ethernet Server (200 Version, with 10-pin header)

Part Number: SB70LC-200IR

SB70 LC Development Kit

Part Number: NNDK-SB70LC-KIT

Kit includes all the hardware and software you need to customize the included platform hardware. See NetBurner Store product page for package contents.

Embedded SSL & SSH Security Suite (Module License Version)

Part Number: NBLIC-SSL-MODULE

Only required if you are using a development kit (SSH/SSL functionality is included in the pre-programmed application).

SNMP V1 (Module License Version)

Part Number: NBLIC-SNMP

Available as an option if you are using a development kit.

Ordering Information

E-mail: sales@netburner.com

Online Store: www.NetBurner.com

Telephone: 1-800-695-6828



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.