



**SSRD Series**

**Dual AC Output “Hockey Puck” Solid State Relay With Paired SCR Outputs**

**CULUS** File E29244

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

**Features**

- Two independent AC output solid state relays in one standard package.
- Inverse parallel SCR outputs.
- 25A rms & 40A rms versions available.
- Zero voltage and random voltage turn-on versions.
- 4000V rms optical isolation.
- Quick connect style terminals.

**Engineering Data**

- Form:** 2 Form A (2 SPST-NO).
- Duty:** Continuous.
- Isolation:** 4000V rms input-to-output;  
2500V rms input or output to ground.
- Temperature Range:**  
**Storage:** -30°C to +100°C  
**Operating:** -30°C to + 80°C
- Case Material:** Plastic, UL rated 94V-0.
- Case and Mounting:** Refer to outline dimension.
- Termination:** Refer to outline dimension.
- Approximate Weight:** 3.17 oz (90g)

**Ordering Information**

	Typical Part Number	SSR	-240	D	25	R
<b>1. Basic Series:</b> SSRD = Dual output SSR - 2 SPST - NO						
<b>2. Line Voltage:</b> 240 = 24 - 280VAC						
<b>3. Input Type &amp; Voltage:</b> D = 4 - 15VDC DE = 18 - 32VDC						
<b>4. Maximum Switching Rating/Output:</b> 25 = .1 - 25A rms @ 25°C, mounted to heatsink 40 = .1 - 40A rms @ 25°C, mounted to heatsink						
<b>5. Options:</b> Blank = Zero voltage turn-on (both outputs) R = Random voltage turn-on (both outputs)						

Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.

SSRD-240D25      SSRD-240D40

**Input Specifications**

Parameter	Units	SSRD-240D25 SSRD-240D25R SSRD-240D40 SSRD-240D40R	SSRD-240DE25 SSRD-240DE25R SSRD-240DE40 SSRD-240DE40R
Control Voltage Range V <sub>IN</sub>	VDC	4 - 15	18 - 32
Must Operate Voltage V <sub>IN(OP)</sub> (Min.)	VDC	4.0	18
Must Release Voltage V <sub>IN(REL)</sub> (Min.)	VDC	1	1
Input Current	mA DC	3 - 40	3 - 40
Input Current (Typical)	mA DC	15 @ 8 Vdc	20 @ 24 Vdc
Input Resistance	Ohms	375	800



**SSRD Series** (Continued)

**Output Specifications (@ 25° C, unless otherwise specified)**


Parameter	Conditions	Units	25A Models	40A Models
Load Voltage Range $V_L$	$f = 47 - 63 \text{ Hz.}$	V rms	24 - 280	
Peak Voltage (Min.)	$t = 1 \text{ Min.}$	V peak	600	
Load Current Range $I_L^*$	Resistive	A rms	.1 - 25	.1 - 40
Single Cycle Surge Current (Max.)		A peak	300	800
Leakage Current (Off-State) (Max.)	$V_L = 280\text{V rms}$	mA rms	5.0	
On-State Voltage Drop (Max.)	$I_L = \text{Max.}$	V peak	1.6	1.8
Static dv/dt (Off-State) (Min.)		V/ $\mu\text{s}$	300	500
Thermal Resistance, Junction to Baseplate ( $R_{\theta-jc}$ ) (Max.)	Both sections On	°C/W	2.35	.86
Turn-On Time (Max.)	$f = 60 / 50 \text{ Hz.}$	ms	8.3 / 10 for Zero Voltage Turn-On Models 0.1 for Random Voltage Turn-On Models	
Turn-Off Time (Max.)	$f = 60 / 50 \text{ Hz.}$	ms	10 for Zero & 8.3 for Random Voltage turn ON	
I <sup>2</sup> T Rating	$t = 8.3 \text{ ms}$	A <sup>2</sup> Sec.	510	3745
Load Power Factor Rating	$I_L = \text{Max.}$		0.5 - 1.0	

\* See Derating curve

**Electrical Characteristics (Thermal Derating Curves)**

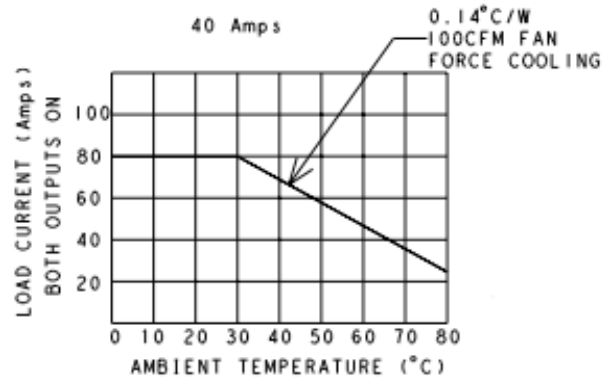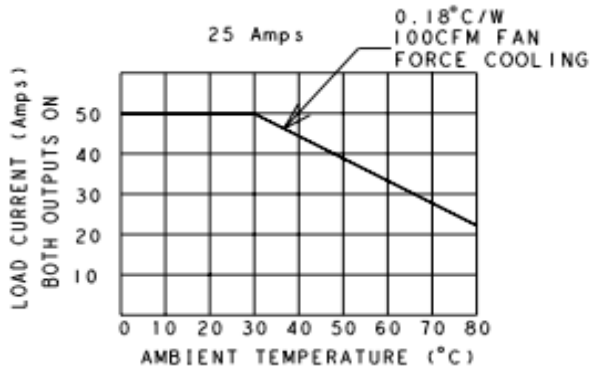

**Operating Diagram**

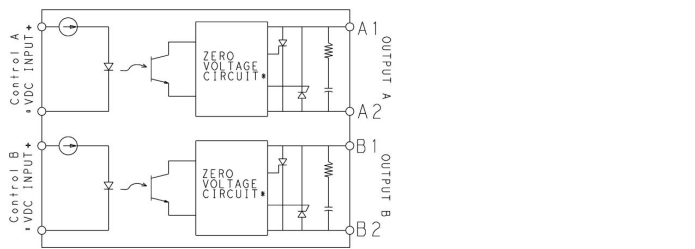


Random Turn-on units have a Random Turn-on circuit instead of zero voltage circuit

**Heatsink Recommendations**

- We recommend that solid state relay modules be mounted to a heatsink sufficient to maintain the module's base temperature at less than 85°C under worst case ambient temperature and load conditions.
- The heatsink mounting surface should be a smooth (30-40 micro-inch finish), flat (30-40 micro-inch flatness across mating area), un-painted surface which is clean and free of oxidation.
- An even coating of thermal compound (Dow Corning DC340 or equivalent) should be applied to both the heatsink and module mounting surfaces and spread to a uniform depth of .002" to eliminate all air pockets.
- The module should be mounted to the heatsink using two #10 screws.

**Outline Dimensions**

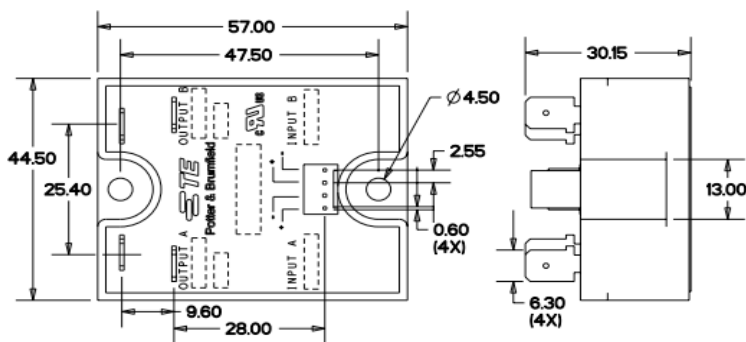

DIMENSION IN mm

Input Terminal Connectors are available from several different manufacturers.

TE P/N: 103976-3 or 640440-4  
Methode P/N: 1300-004-422

Consult your local distributor for these or equivalent connectors.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.