

Kingbright®

LED LIGHT BARS

KB-A100SRW,-B100SRW,-C100SRW,-D100SRW,-E100SRW,
-F100SRW,-G100SRW,-H100SRW
KB-2300EW,-2350EW,-2655EW,-2600EW,-2620EW,-2635EW,-2670EW
-2685EW,-2500SGD,-2550SGD,-2855SGD,-2800SGD,-2820SGD,
-2835SGD,-2870SGD,-2885SGD,-2400YW,-2450YW,-2755YW,
-2700YW,-2720YW,-2735YW,-2770YW,-2785YW

Features

- UNIFORM LIGHT EMITTING AREA.
- LOW CURRENT OPERATION.
- EASILY MOUNTED ON P.C. BOARDS.
- FLUSH MOUNTABLE.
- EXCELLENT ON/OFF CONTRAST.
- CAN BE USED WITH PANELS AND LEGEND MOUNTS.
- CATEGORIZED FOR LUMINOUS INTENSITY, YELLOW AND GREEN CATEGORIZED FOR COLOR.

Description










The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.


The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

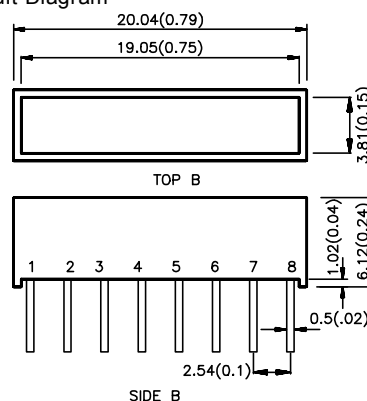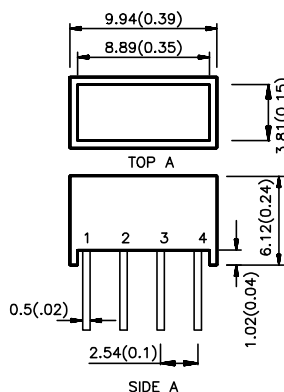

A : KB-A100SRW
B : KB-B100SRW
C : KB-C100SRW
D : KB-D100SRW



Package Dimensions & Internal Circuit Diagram

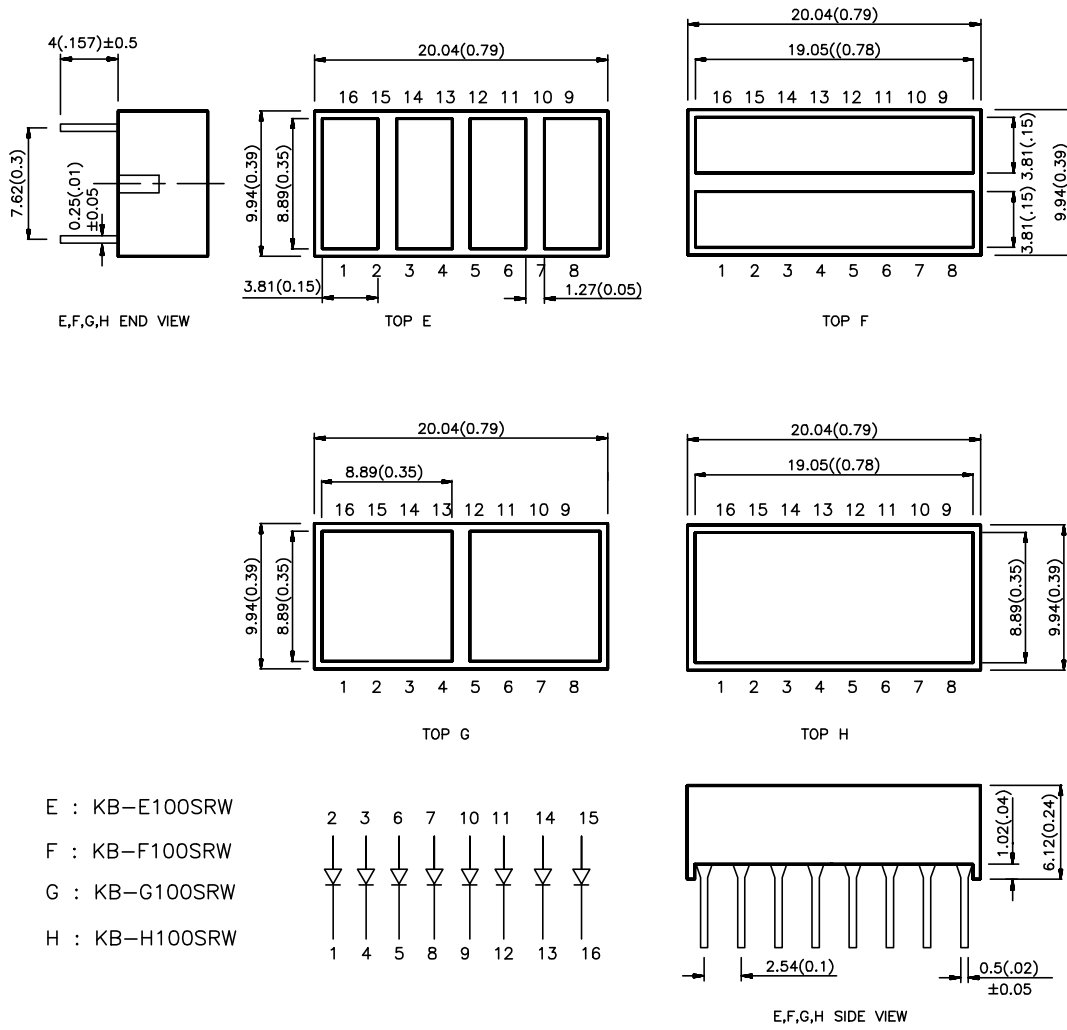

Notes :

1. All dimensions are in millimeters (inches), Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
2. Specifications are subjected to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20 mA		Size of Light Emitting Areas
			Min.	Typ.	Package Outline
KB-2300EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	10	25	
KB-A100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	40	75	
KB-2400YW	YELLOW (GaAsP/GaP)	White Diffused	8	18	
KB-2500SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	10	25	
KB-2350EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	20	50	
KB-B100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	30	80	
KB-2450YW	YELLOW (GaAsP/GaP)	White Diffused	15	38	
KB-2550SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	20	50	
KB-2655EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	20	45	
KB-C100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	30	80	
KB-2755YW	YELLOW (GaAsP/GaP)	White Diffused	15	35	
KB-2855SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	20	50	
KB-2600EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	10	25	
KB-D100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	45	75	
KB-2700YW	YELLOW (GaAsP/GaP)	White Diffused	8	18	
KB-2800SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	10	25	
KB-2620EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	10	25	
KB-E100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	40	75	
KB-2720YW	YELLOW (GaAsP/GaP)	White Diffused	8	18	
KB-2820SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	10	25	
KB-2635EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	20	50	
KB-F100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	30	80	
KB-2735YW	YELLOW (GaAsP/GaP)	White Diffused	15	38	
KB-2835SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	20	50	
KB-2670EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	20	45	
KB-G100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	30	80	
KB-2770YW	YELLOW (GaAsP/GaP)	White Diffused	15	35	
KB-2870SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	20	50	
KB-2685EW	HIGH EFFICIENCY RED (GaAsP/GaP)	White Diffused	25	80	
KB-H100SRW	SUPER BRIGHT RED (GaAlAs)	White Diffused	40	150	
KB-2785YW	YELLOW (GaAsP/GaP)	White Diffused	25	70	
KB-2885SGD	SUPER BRIGHT GREEN (GaP)	Green Diffused	30	100	

Electrical Maximum Ratings at T_A=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	High Efficiency Red Super Bright Green Yellow Super Bright Red	625 565 590 660		nm	IF=20mA
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	High Efficiency Red Super Bright Green Yellow Super Bright Red	45 30 35 20		nm	IF=20mA
C	Capacitance	High Efficiency Red Super Bright Green Yellow Super Bright Red	12 45 10 95		pF	VR=0V;f=1MHz
V _F	Forward Voltage	High Efficiency Red Super Bright Green Yellow Super Bright Red	2.0 2.2 2.1 1.85	2.5 2.5 2.5 2.5	V	IF=20mA
I _R	Reverse Current	All	10		uA	VR = 5V

Absolute Maximum Ratings at T_A=25°C


Parameter	High Efficiency Red	Yellow	Super Bright Red	Super Bright Green	Units
Power dissipation	105	105	100	105	mW
DC Forward Current	30	30	30	25	mA
Peak Forward Current [1]	150	150	150	150	mA
Reverse Voltage	5	5	5	5	V
Operating/Storage Temperature	-40°C To +85 °C				
Lead Soldering Temperature [2]	260 °C For 5 Seconds				

Notes:


- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 4mm below package base.

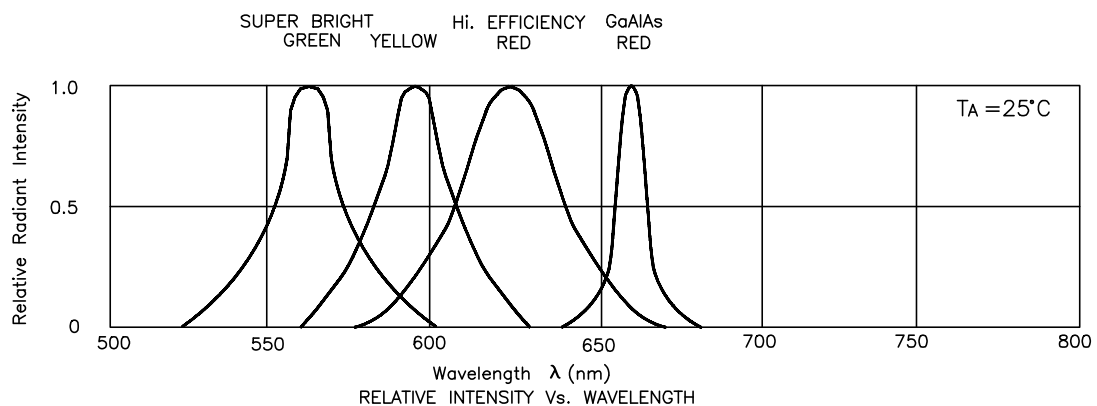


High Efficiency Red




FORWARD CURRENT Vs. FORWARD VOLTAGE

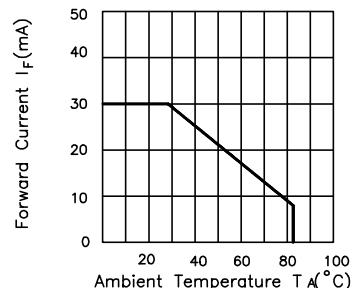

FORWARD CURRENT DERATING CURVE

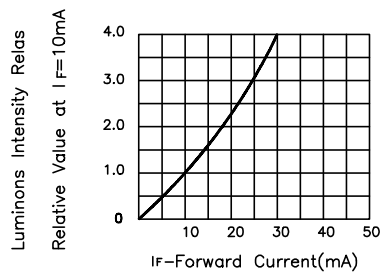


LUMINOUS INTENSITY Vs. FORWARD CURRENT

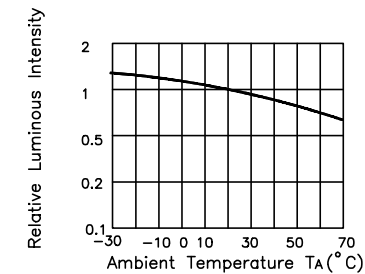


LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE


Yellow




FORWARD CURRENT Vs. FORWARD VOLTAGE

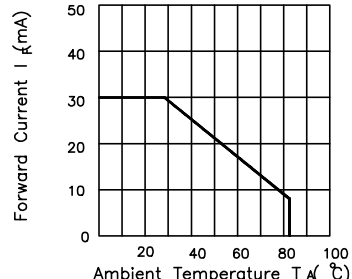

FORWARD CURRENT DERATING CURVE

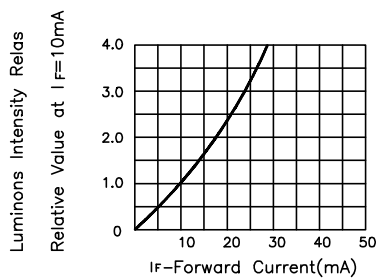


LUMINOUS INTENSITY Vs. FORWARD CURRENT

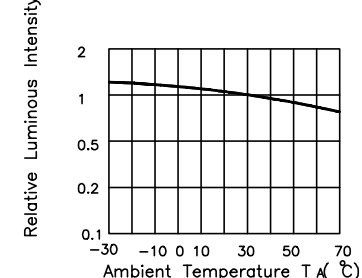


LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE


Super Bright Green




FORWARD CURRENT Vs. FORWARD VOLTAGE

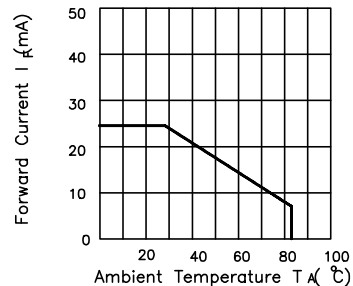

FORWARD CURRENT DERATING CURVE

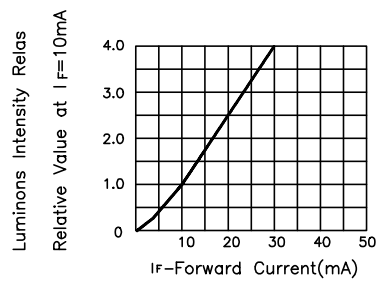


LUMINOUS INTENSITY Vs. FORWARD CURRENT

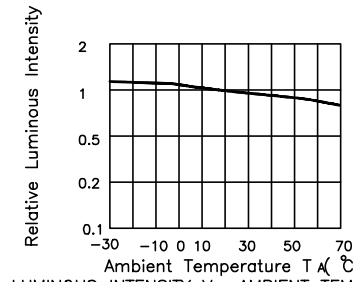


LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE


Super Bright Red




FORWARD CURRENT Vs. FORWARD VOLTAGE

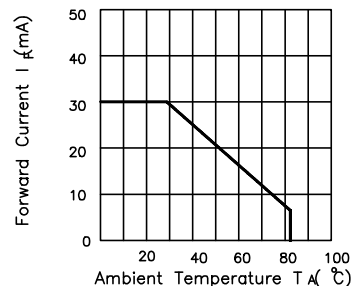

FORWARD CURRENT DERATING CURVE

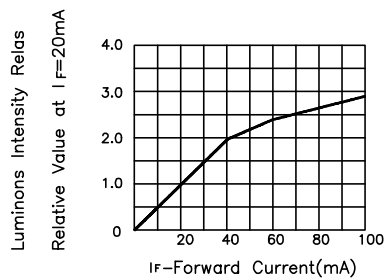

LUMINOUS INTENSITY Vs. FORWARD CURRENT

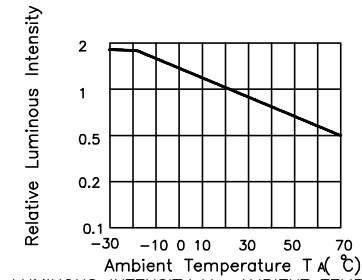

LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.