



# 40 Printed and Unprinted Antistatic Utility Tape

## Data Sheet

3M™ 40 Printed and Unprinted Antistatic Utility Tapes represent a breakthrough in PSA tape technology. This new tape, which generates less than 50 volts on unwind and removal from stainless steel, helps prevent ESD damage to sensitive electronic components in manufacturing environments. Triboelectric charge may vary with your application and environment.

### Patented Technology


3M antistatic utility tape is a transparent polyester film tape with acrylic adhesive. Made with a proprietary technology, the tape generates extremely low levels of triboelectric charge when it is unwound from the roll and also when removed from most surfaces on which it is placed. This makes the tape an excellent choice for use near electronic components and assemblies. The tape is supplied on 36 yard and 72 yard rolls on 1" and 3" cores.

### Superior Performance

3M antistatic utility tape can be used at static-safeguard workstations as part of your total static control program. It generates very low levels of static charge even in dry conditions of 10% RH. The tape is supplied on a paper core; antistatic plastic cores are available to minimize particulate contamination in clean work areas.

### 40 Printed for Protection

The tape is printed on the adhesive side with the 3M logo and the ESD Protective Symbol. This reminds workers that 40 tape is the only utility tape you allow in static-safeguarded areas.

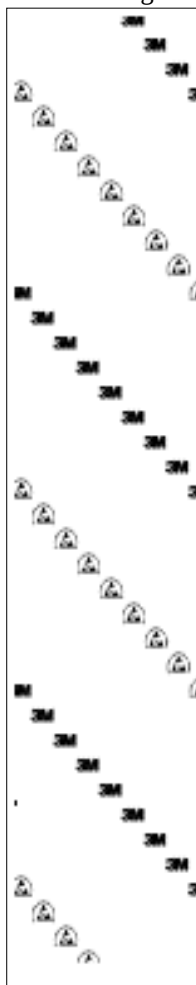

### Applications

- Office/Clean Room/Work Station
  - Holding notes of work orders
  - Holding obstruction down
  - Third hand, general purpose
- Manufacturing
  - Close static shielding bags
  - Conformal coating/maskins
  - Holding and sealing supplies
- Packaging
  - Box, bag and container sealing/holding DIP Tubes
- Removing Contaminants
- Label Stock

Call 1-800-328-1368 for more information or the name of your nearest 3M ELPD Division authorized distributor.

### Typical Properties

| Property/Unit of Measure                    | Test Method          | Typical Value   |
|---------------------------------------------|----------------------|-----------------|
| <b>ELECTRICAL PROPERTIES</b>                |                      |                 |
| <b>Static charge generation:</b>            |                      |                 |
| Removal from roll, 10% RH, volts            | 3M                   | 20              |
| Removal from roll, 50% RH, volts            | 3M                   | 5               |
| Removal from stainless steel, 10% RH, volts | 3M                   | 50              |
| Removal from stainless steel, 50% RH, volts | 3M                   | 5               |
| <b>Surface resistance:</b>                  |                      |                 |
| Adhesive @ 50% RH, $\Omega$                 | ESD Assoc. STD 11.11 | $5 \times 10^6$ |
| Adhesive @ 10% RH, $\Omega$                 | ESD Assoc. STD 11.11 | $5 \times 10^6$ |
| <b>TAPE PROPERTIES</b>                      |                      |                 |
| Adhesion to steel, oz./inch                 | ASTM D 1000          | 15              |
| Unwind force from roll, oz./inch            | ASTM D 1000          | 24              |
| Thickness, mils                             | ASTM D 1000          | 2.2             |
| Break strength, lb./inch                    | ASTM D 1000          | 20              |
| Slit width, inch                            | ASTM D 1000          | $\pm 1/64$      |
| <b>Non - outgassing</b>                     |                      |                 |
| TML                                         | ASTM E 595           | <1.0%           |
| CVCM                                        | ASTM E 595           | <0.1%           |

3M is a trademark of 3M

## Important Notice

All statements, technical information, and recommendations related to Seller's products are based on information believed to be reliable, but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use.

Any statements or recommendations of the Seller which are not contained in the Seller's current publications shall have no force or effect unless contained in an agreement signed by an authorized office of Seller. The statements contained herein are made in lieu of all warranties, express or implied,

including but not limited to the implied warranties of merchantability and fitness for a particular purpose which warranties are hereby expressly disclaimed.

SELLER SHALL NOT BE LIABLE TO THE USER OR ANY OTHER PERSON UNDER ANY LEGAL THEORY, INCLUDING BUT NOT LIMITED TO NEGLIGENCE OR STRICT LIABILITY, FOR ANY INJURY OR FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES SUSTAINED OR INCURRED BY REASON OF THE USE OF ANY OF THE SELLER'S PRODUCTS THAT WERE DEFECTIVE.



Electrical Products Division  
6801 River Place Blvd.  
Austin, TX 78726-9000  
800 676 8381  
<http://www.3M.com/elpd>

© 3M 1998  
78-8124-4849-2(A)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.