

GENERAL DESCRIPTION

The SGM4890 is a 1.1-W, fully integrated, audio power amplifier. It is designed to maximize audio performance in portable applications such as mobile phone. The portable application requires audio power amplifier has minimum of external components and can operate from a single 2.5V to 5.5V power supply. SGM4890 is capable of delivering 1.1W of continuous output power with less than 1% distortion (THD + N) when it drives an 8Ω speaker from a 5.0V power supply.

The SGM4890 features a low-power consumption shutdown mode, which is achieved by driving the shutdown pin with a logic low. Additionally, the SGM4890 features an internal thermal shutdown protection mechanism.

The SGM4890 does not require output coupling capacitors or bootstrap capacitors, and therefore is ideally suited for mobile phone and other low voltage applications where minimal power consumption is a primary requirement.

For maximum flexibility, the SGM4890 provides an externally controlled gain (with resistors), as well as an externally controlled turn-on time (with the bypass capacitor). When using a 1μF bypass capacitor, it offers 110ms wake up time when V₊ is equal to 5.0V.

The SGM4890 is available in CSP-9 and MSOP-8 packages. It operates over an ambient temperature range of -40°C to +85°C.



APPLICATIONS

Portable Systems
MP3 Players
Mobile Phone
PDAs
GPS

FEATURES

- Ideal for Notebook Computers, PDAs, and Other Small Portable Audio Devices
- 1.1W to 8-Ω BTL Load from 5V Supply at THD =1% (Typical)
- Excellent PSRR: Direct Connection to the Battery
- Fast Turn On Time
- Unity Gain Stable
- 2.5V to 5.5V Operation
- Shutdown Current: 0.01μA Typical
- Shutdown Pin is Compatible with 1.8V Logic
- -40°C to +85°C Operating Temperature Range
- Small Packaging

PIN CONFIGURATIONS (Top View)

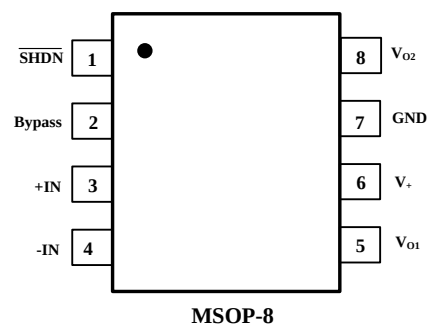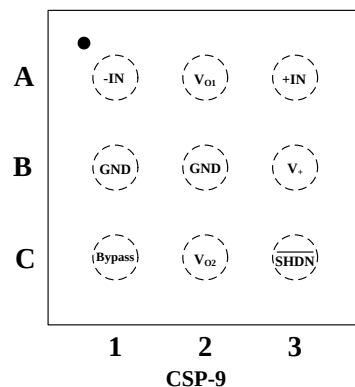

ELECTRICAL CHARACTERISTICS : TA = 25°C

PARAMETER	SYMBOL	CONDITIONS		SGM4890			UNITS
				MIN	TYP	MAX	
Quiescent Power Supply Current	I _Q	V _{IN} = 0V, I _O = 0A,	V ₊ = +5V, No Load		4	8	mA
			V ₊ = +5V, 8 Ω Load		6	10	
			V ₊ = +3.6V, No Load		3.7		
			V ₊ = +3.6V, 8 Ω Load		5.7		
			V ₊ = +3.0V, No Load		3.5	7	
			V ₊ = +3.0V, 8 Ω Load		5.5	9	
			V ₊ = +2.6V, No Load		3.3		
			V ₊ = +2.6V, 8 Ω Load		5.3		
Shutdown Current	I _{SD}	V _{SHUTDOWN} = 0V,			0.01	4.0	μA
Shutdown Voltage Input High	V _{SDIH}			1.2			V
Shutdown Voltage Input Low	V _{SDIL}					0.4	V
Output Offset Voltage	V _{OS}				1	50	mV
Output Power (8 Ω)	P _O	f = 1 kHz, THD+N=1%	V ₊ = +5V		1.10		W
			V ₊ = +3.6V		0.58		
			V ₊ = +3.0V		0.40		
			V ₊ = +2.6V		0.30		
Total Harmonic Distortion + Noise	THD+N	P _O = 0.4Wrms, f = 1kHz			0.01		%
Power Supply Rejection Ratio	PSRR	f = 217Hz	V ₊ = +5V		-66		dB
			V ₊ = +3.6V		-63		
			V ₊ = +3.0V		-63		
			V ₊ = +2.6V		-62		
		f = 1kHz	V ₊ = +5V		-72		
			V ₊ = +3.6V		-68		
			V ₊ = +3.0V		-66		
			V ₊ = +2.6V		-64		
Wake –up Time	T _{WU}	C _{BYPASS} = 1μF	V ₊ = +5V		110		ms
			V ₊ = +3.6V		110		
			V ₊ = +3.0V		100		
			V ₊ = +2.6V		100		
Shut Down Time	T _{SDT}	8 Ω Load	V ₊ = +5V		10		μs
			V ₊ = +3.6V		16		
			V ₊ = +3.0V		17.8		
			V ₊ = +2.6V		17.8		

Specifications subject to changes without notice.

PACKAGE/ORDERING INFORMATION

MODEL	ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	MARKING INFORMATION
SGM4890	SGM4890YG/TR	CSP-9	Tape and Reel, 3000	4890YG
	SGM4890YMS/TR	MSOP-8	Tape and Reel, 3000	SGM4890YMS

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	6V
Input Voltage	(-V _S) - 0.3 V to (+V _S) +0.3V
Storage Temperature Range	-65°C to +150°C
Junction Temperature	150°C
Operating Temperature Range	-40°C to +85°C
Lead Temperature Range (Soldering 10 sec)	260°C

NOTES


1. Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION







This integrated circuit can be damaged by ESD. SG Micro-electronics recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

TYPICAL APPLICATION

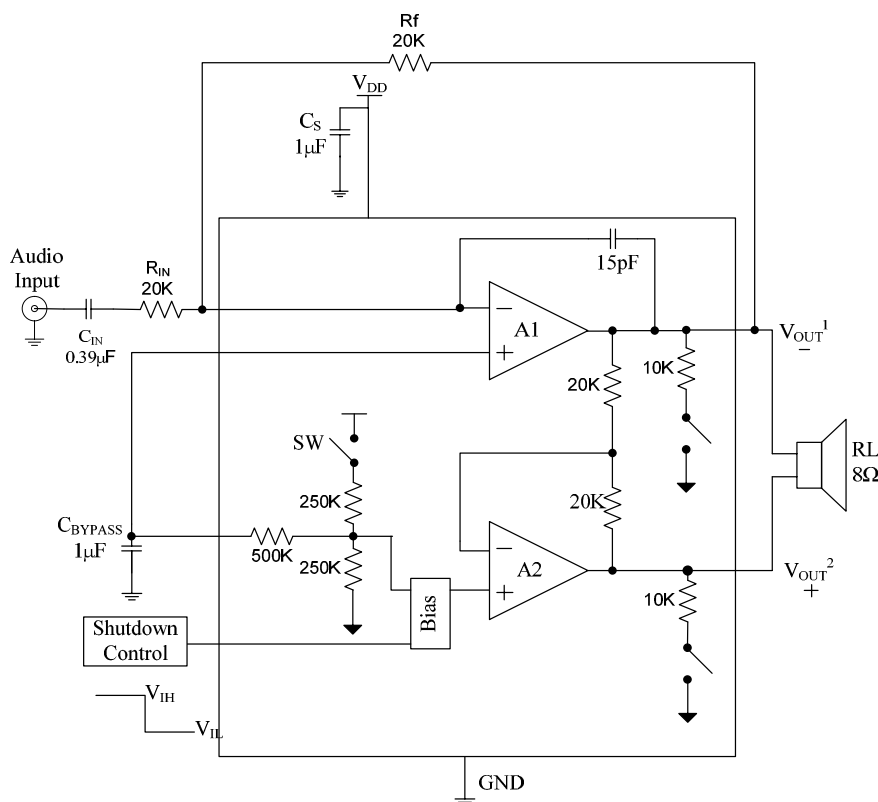


TYPICAL PERFORMANCE CHARACTERISTICS

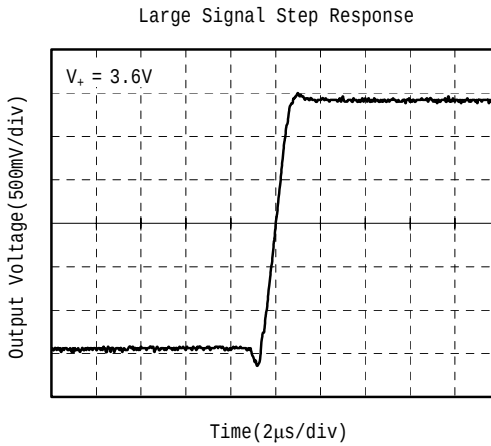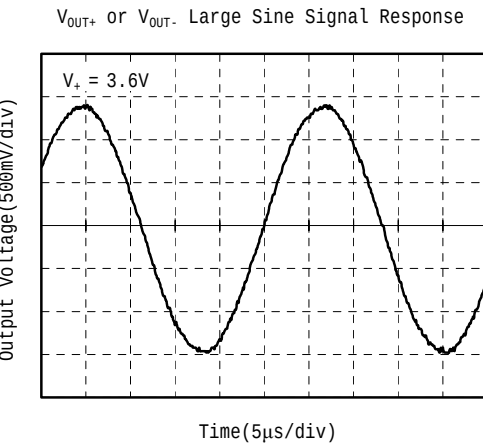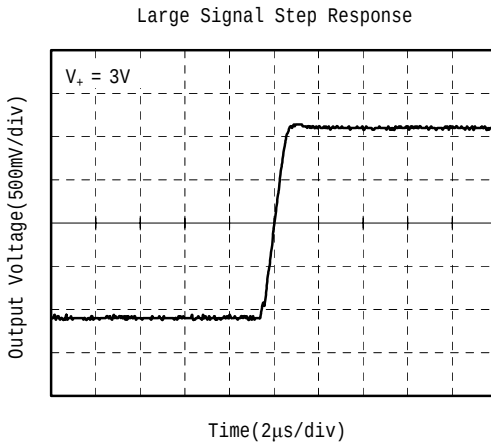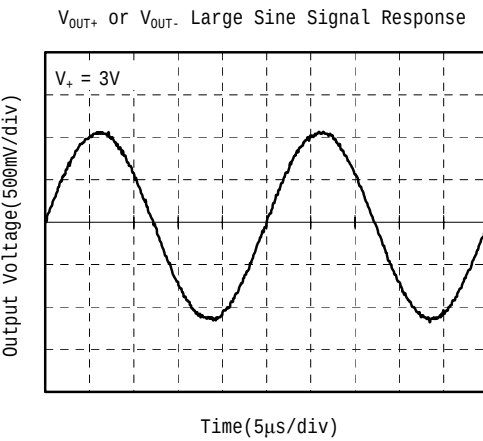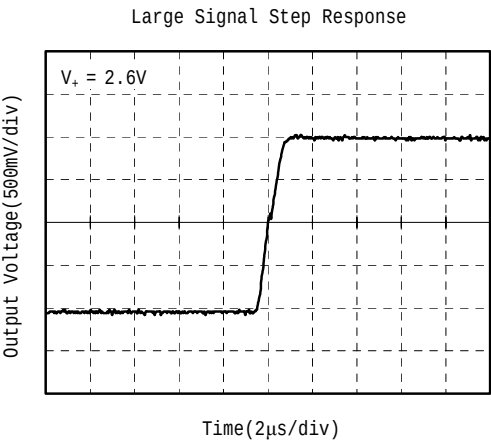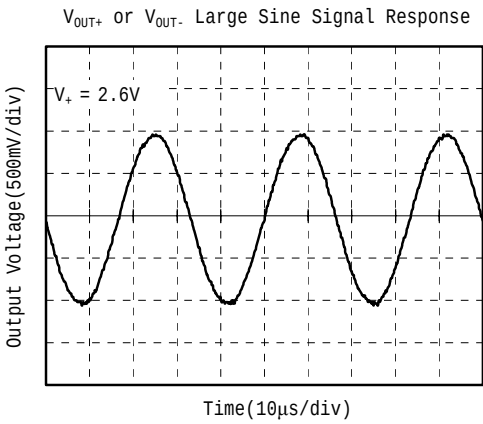


TYPICAL PERFORMANCE CHARACTERISTICS


V_{OUT+} or V_{OUT-} Large Sine Signal Response

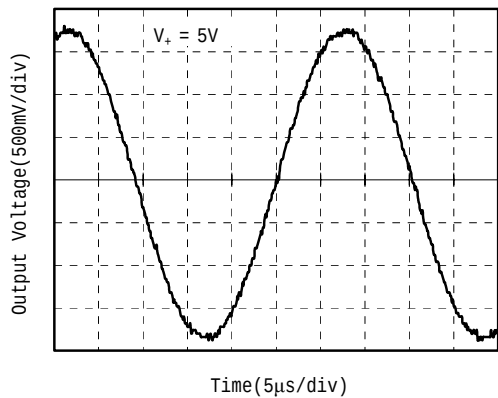


Large Signal Step Response

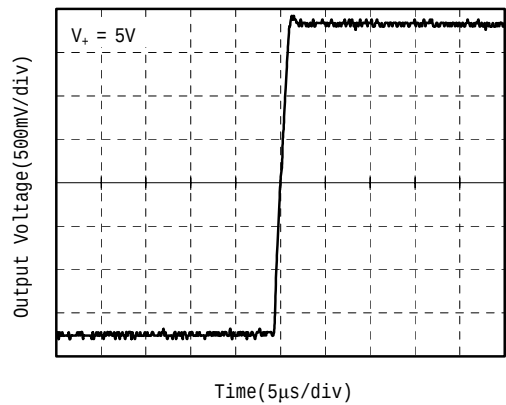


Small Signal Frequency Response

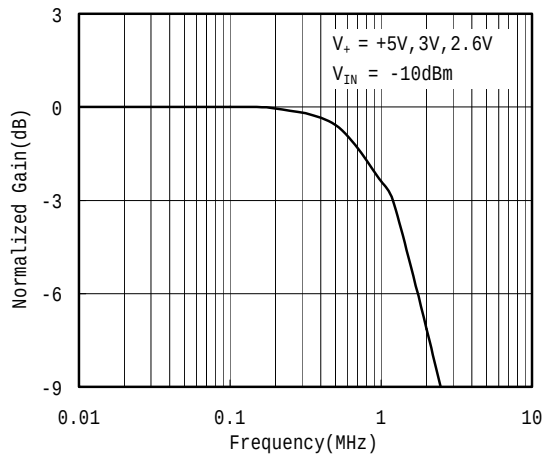


Quiescent Current vs.Temperature

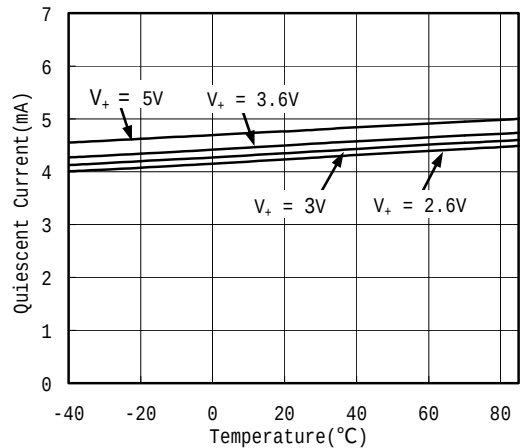






Output Offset Voltage vs.Temperature

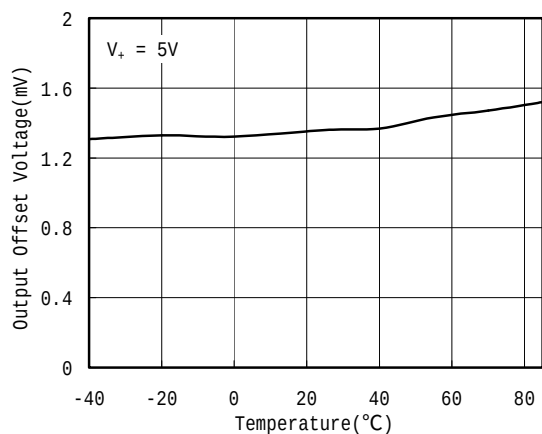

Supply Current vs.Shutdown Voltage

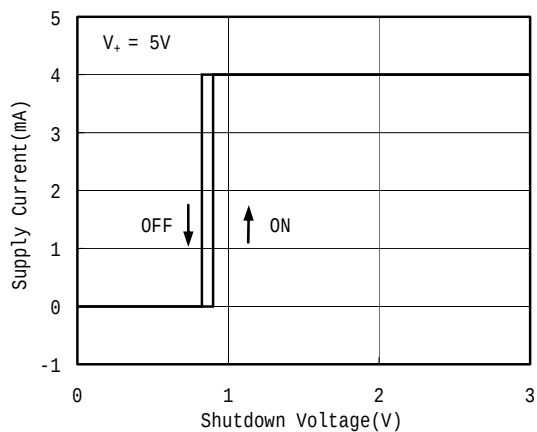


TYPICAL PERFORMANCE CHARACTERISTICS

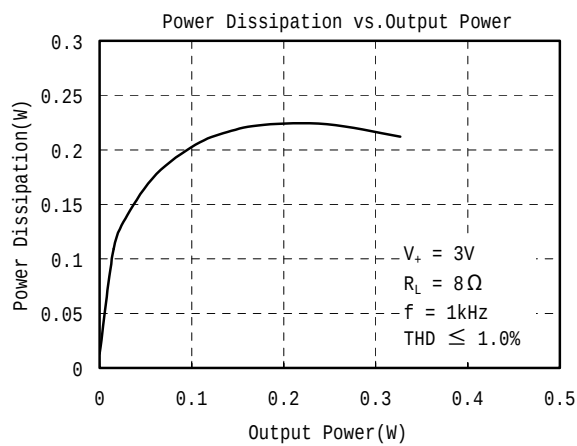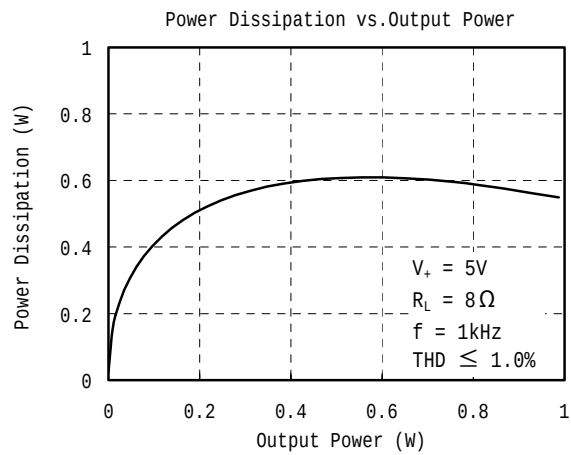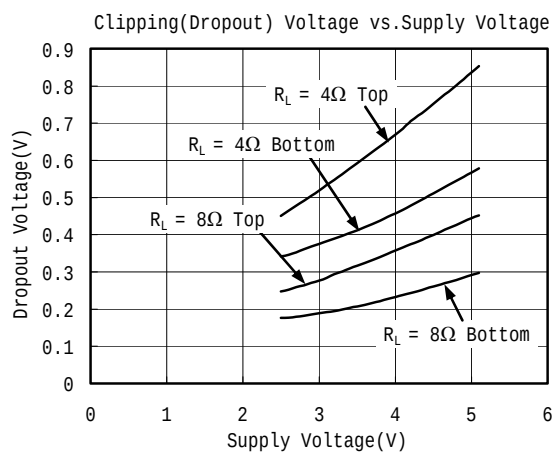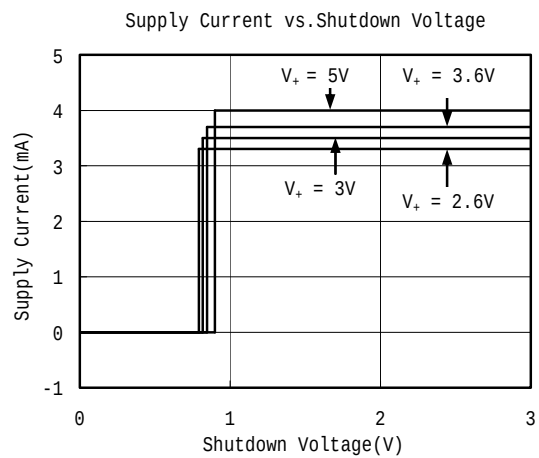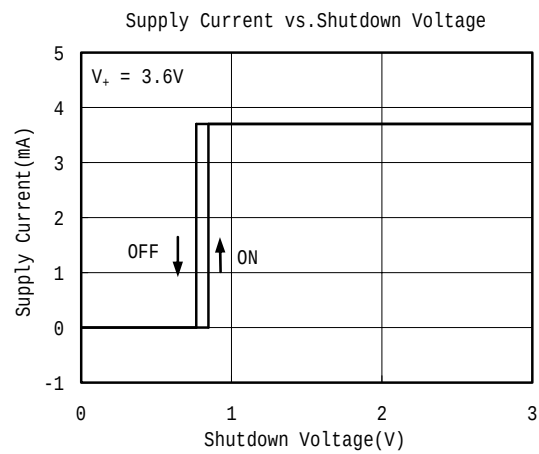

PACKAGE OUTLINE DIMENSIONS


MSOP-8

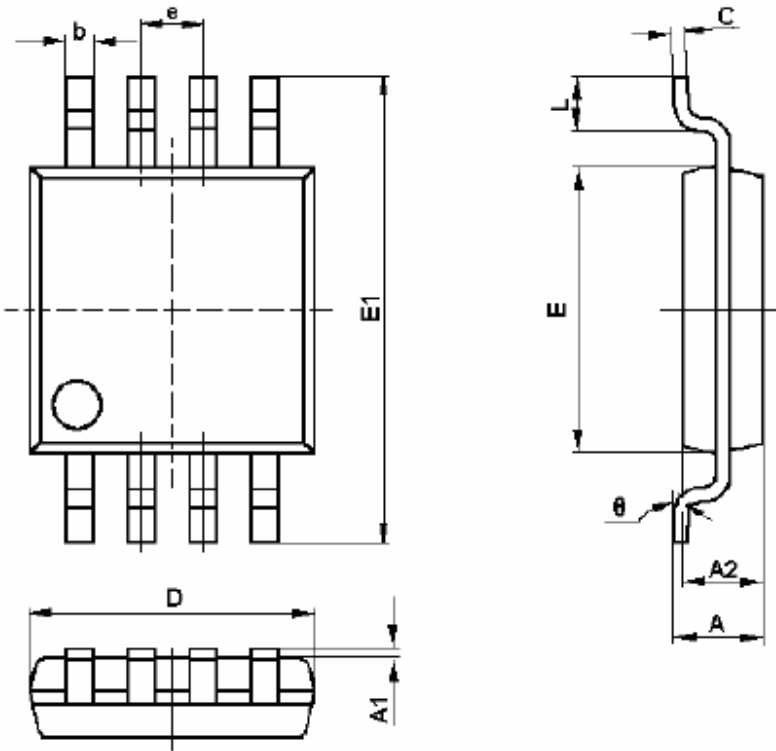

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.200	0.031	0.047
A1	0.000	0.200	0.000	0.008
A2	0.760	0.970	0.030	0.038
b	0.30 TYP		0.012 TYP	
c	0.15 TYP		0.006 TYP	
D	2.900	3.100	0.114	0.122
e	0.65 TYP		0.026 TYP	
E	2.900	3.100	0.114	0.122
E1	4.700	5.100	0.185	0.201
L	0.410	0.650	0.016	0.026
θ	0°	6°	0°	6°

PACKAGE OUTLINE DIMENSIONS

CSP-9

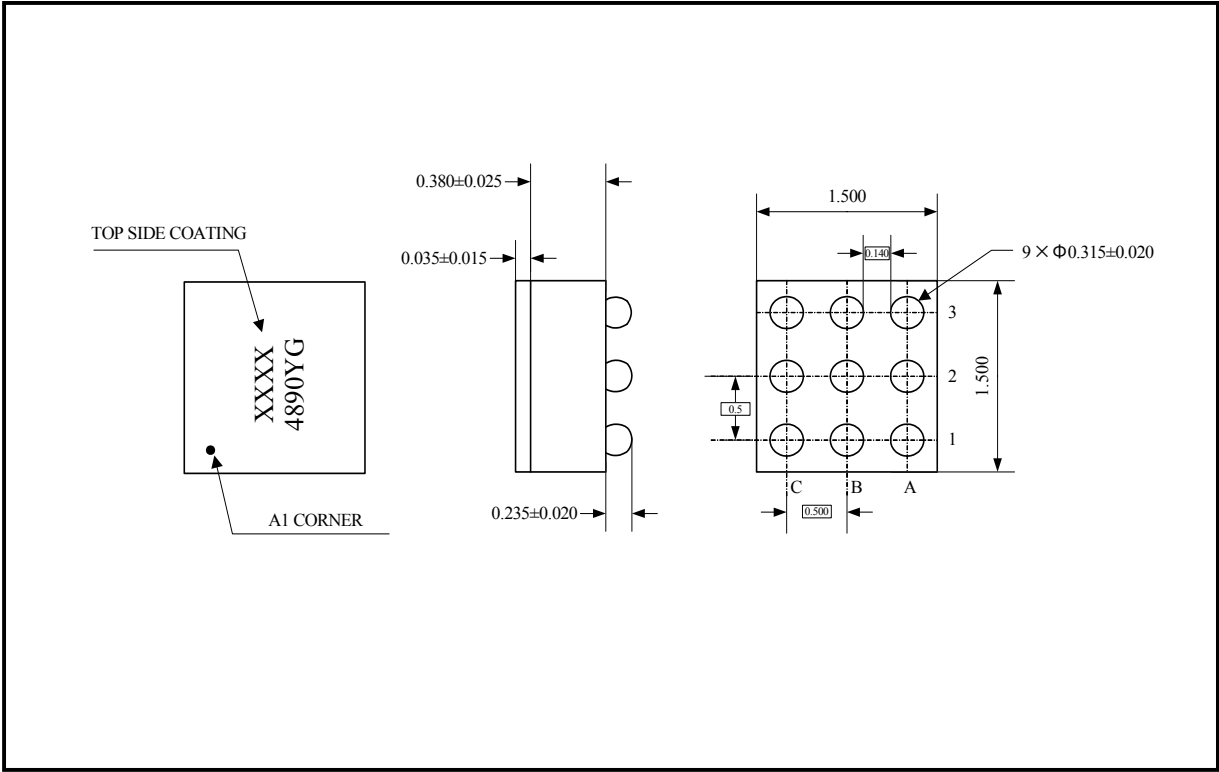

Note: All linear dimensions are in millimeters.

REVISION HISTORY

Location	Page
09/2007—Preliminary Datasheet	
11/2007—Data Sheet REV.A	

SG Microelectronics Co., Ltd

A2608, NO.72 North Road
Xisanhuan, Haidian District,
Beijing, China 100037
Tel: 86-10-51798160/80
Fax: 86-10-51798180-803
www.sg-micro.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.