

# TL081, TL081A, TL081B, TL082, TL082A, TL082B TL084, TL084A, TL084B JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

- Low Power Consumption
- Wide Common-Mode and Differential Voltage Ranges
- Low Input Bias and Offset Currents
- Output Short-Circuit Protection
- Low Total Harmonic Distortion . . . 0.003% Typ
- High Input Impedance . . . JFET-Input Stage
- Latch-Up-Free Operation
- High Slew Rate . . . 13 V/ $\mu$ s Typ
- Common-Mode Input Voltage Range Includes  $V_{CC+}$

## description/ordering information

The TL08x JFET-input operational amplifier family is designed to offer a wider selection than any previously developed operational amplifier family. Each of these JFET-input operational amplifiers incorporates well-matched, high-voltage JFET and bipolar transistors in a monolithic integrated circuit. The devices feature high slew rates, low input bias and offset currents, and low offset-voltage temperature coefficient. Offset adjustment and external compensation options are available within the TL08x family.

The C-suffix devices are characterized for operation from 0°C to 70°C. The I-suffix devices are characterized for operation from –40°C to 85°C. The Q-suffix devices are characterized for operation from –40°C to 125°C. The M-suffix devices are characterized for operation over the full military temperature range of –55°C to 125°C.

## ORDERING INFORMATION

| $T_J$       | $V_{IOmax}$<br>AT 25°C | PACKAGE†   |              | ORDERABLE<br>PART NUMBER | TOP-SIDE<br>MARKING |
|-------------|------------------------|------------|--------------|--------------------------|---------------------|
| 0°C to 70°C | 15 mV                  | PDIP (P)   | Tube of 50   | TL081CP                  | TL081CP             |
|             |                        |            | Tube of 50   | TL082CP                  | TL082CP             |
|             |                        | PDIP (N)   | Tube of 25   | TL084CN                  | TL084CN             |
|             |                        | SOIC (D)   | Tube of 75   | TL081CD                  | TL081C              |
|             |                        |            | Reel of 2500 | TL081CDR                 |                     |
|             |                        |            | Tube of 75   | TL082CD                  | TL082C              |
|             |                        |            | Reel of 2500 | TL082CDR                 |                     |
|             |                        |            | Tube of 50   | TL084CD                  | TL084C              |
|             |                        |            | Reel of 2500 | TL084CDR                 |                     |
|             |                        | SOP (PS)   | Reel of 2000 | TL081CPSR                | T081                |
|             |                        |            | Reel of 2000 | TL082CPSR                | T082                |
|             |                        | SOP (NS)   | Reel of 2000 | TL084CNSR                | TL084               |
|             |                        | TSSOP (PW) | Tube of 150  | TL082CPW                 | T082                |
|             |                        |            | Reel of 2000 | TL082CPWR                |                     |
|             |                        |            | Tube of 90   | TL084CPW                 | T084                |
|             |                        |            | Reel of 2000 | TL084CPWR                |                     |

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2004, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

**TL081, TL081A, TL081B, TL082, TL082A, TL082B**  
**TL084, TL084A, TL084B**  
**JFET-INPUT OPERATIONAL AMPLIFIERS**

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

**description/ordering information (continued)**

**ORDERING INFORMATION**


| $T_J$          | $V_{IOmax}$<br>AT 25°C | PACKAGE†   |              | ORDERABLE<br>PART NUMBER | TOP-SIDE<br>MARKING |
|----------------|------------------------|------------|--------------|--------------------------|---------------------|
| 0°C to 70°C    | 6 mV                   | PDIP (P)   | Tube of 50   | TL081ACP                 | TL081ACP            |
|                |                        |            | Tube of 50   | TL082ACP                 | TL082ACP            |
|                |                        | PDIP (N)   | Tube of 25   | TL084ACN                 | TL084ACN            |
|                |                        | SOIC (D)   | Tube of 75   | TL081ACD                 | 081AC               |
|                |                        |            | Reel of 2500 | TL081ACDR                |                     |
|                |                        |            | Tube of 75   | TL082ACD                 | 082AC               |
|                |                        |            | Reel of 2500 | TL082ACDR                |                     |
|                |                        |            | Tube of 50   | TL084ACD                 | TL084AC             |
|                |                        |            | Reel of 2500 | TL084ACDR                |                     |
|                |                        | SOP (PS)   | Reel of 2000 | TL082ACPSR               | T082A               |
|                |                        | SOP (NS)   | Reel of 2000 | TL084ACNSR               | TL084A              |
|                | 3 mV                   | PDIP (P)   | Tube of 50   | TL081BCP                 | TL081BCP            |
|                |                        |            | Tube of 50   | TL082BCP                 | TL082BCP            |
|                |                        | PDIP (N)   | Tube of 25   | TL084BCN                 | TL084BCN            |
|                |                        | SOIC (D)   | Tube of 75   | TL081BCD                 | 081BC               |
|                |                        |            | Reel of 2500 | TL081BCDR                |                     |
|                |                        |            | Tube of 75   | TL082BCD                 | 082BC               |
|                |                        |            | Reel of 2500 | TL082BCDR                |                     |
|                |                        |            | Tube of 50   | TL084BCD                 | TL084BC             |
|                |                        |            | Reel of 2500 | TL084BCDR                |                     |
| –40°C to 85°C  | 6 mV                   | PDIP (P)   | Tube of 50   | TL081IP                  | TL081IP             |
|                |                        |            | Tube of 50   | TL082IP                  | TL082IP             |
|                |                        | PDIP (N)   | Tube of 25   | TL084IN                  | TL081IN             |
|                |                        | SOIC (D)   | Tube of 75   | TL081ID                  | TL081I              |
|                |                        |            | Reel of 2500 | TL081IDR                 |                     |
|                |                        |            | Tube of 75   | TL082ID                  | TL082I              |
|                |                        |            | Reel of 2500 | TL082IDR                 |                     |
|                |                        |            | Tube of 50   | TL084ID                  | TL084I              |
|                |                        |            | Reel of 2500 | TL084IDR                 |                     |
|                |                        | TSSOP (PW) | Reel of 2000 | TL082IPWR                | Z082                |
| –40°C to 125°C | 9 mV                   | SOIC (D)   | Tube of 50   | TL084QD                  | TL084QD             |
|                |                        |            | Reel of 2500 | TL084QDR                 |                     |
| –55°C to 125°C | 9 mV                   | CDIP (J)   | Tube of 25   | TL084MJ                  | TL084MJ             |
|                |                        | LCCC (FK)  | Reel of 55   | TL084FK                  | TL084FK             |
|                | 6 mV                   | CDIP (JG)  | Tube of 50   | TL082MJG                 | TL082MJG            |
|                |                        | LCCC (FK)  | Tube of 55   | TL082MFK                 | TL082MFK            |

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

# TL081, TL081A, TL081B, TL082, TL082A, TL082B TL084, TL084A, TL084B JFET-INPUT OPERATIONAL AMPLIFIERS


SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

**TL081, TL081A, TL081B**  
D, P, OR PS PACKAGE  
(TOP VIEW)

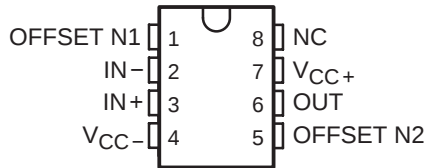


NC – No internal connection


**TL082, TL082A, TL082B**  
D, JG, P, PS, OR PW PACKAGE  
(TOP VIEW)



**TL084, TL084A, TL084B**  
D, J, N, NS, OR PW PACKAGE  
(TOP VIEW)




**TL082M . . . FK PACKAGE**  
(TOP VIEW)

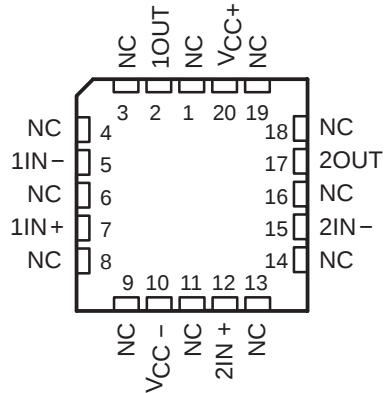



NC – No internal connection

**TL084M . . . FK PACKAGE**  
(TOP VIEW)

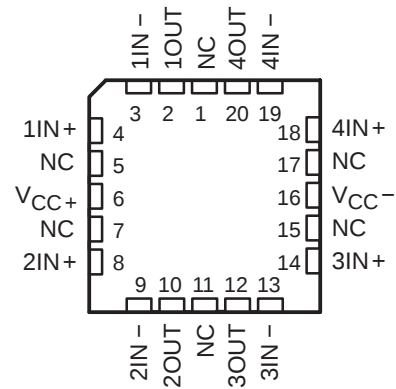

NC – No internal connection


## symbols

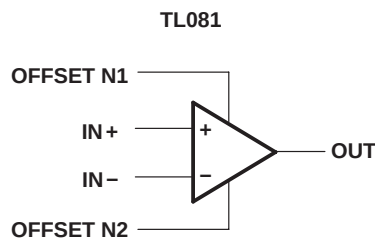

# TL081, TL081A, TL081B, TL082, TL082A, TL082B TL084, TL084A, TL084B JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

## schematic (each amplifier)

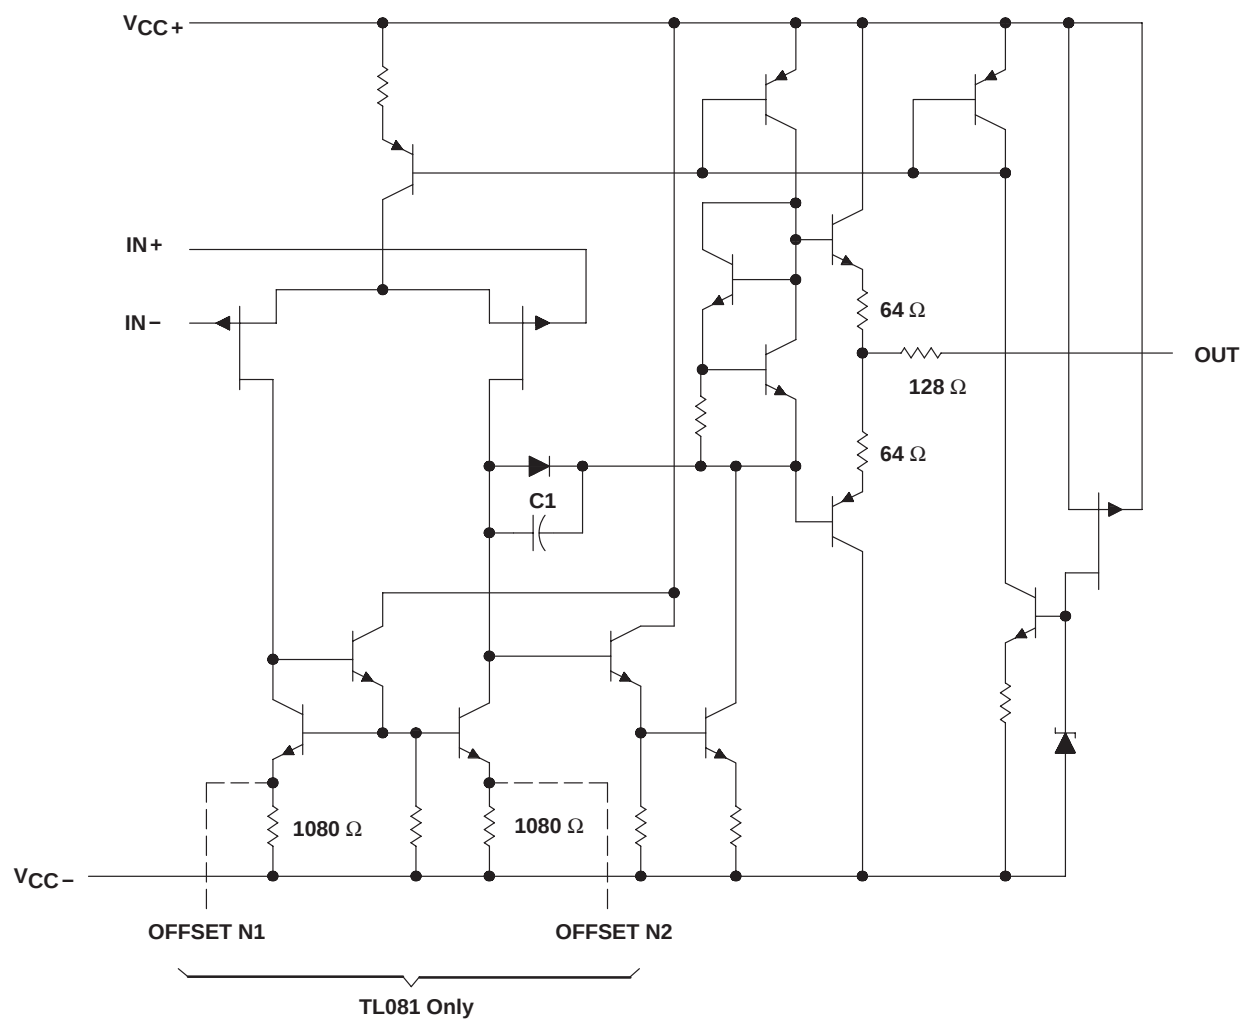

Component values shown are nominal.

**TL081, TL081A, TL081B, TL082, TL082A, TL082B  
TL084, TL084A, TL084B  
JFET-INPUT OPERATIONAL AMPLIFIERS**

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>**

|                                                                 |                     | TL08_C<br>TL08_AC<br>TL08_BC | TL08_I     | TL084Q     | TL08_M     | UNIT |
|-----------------------------------------------------------------|---------------------|------------------------------|------------|------------|------------|------|
| Supply voltage, $V_{CC+}$ (see Note 1)                          |                     | 18                           | 18         | 18         | 18         | V    |
| Supply voltage $V_{CC-}$ (see Note 1)                           |                     | –18                          | –18        | –18        | –18        | V    |
| Differential input voltage, $V_{ID}$ (see Note 2)               |                     | $\pm 30$                     | $\pm 30$   | $\pm 30$   | $\pm 30$   | V    |
| Input voltage, $V_I$ (see Notes 1 and 3)                        |                     | $\pm 15$                     | $\pm 15$   | $\pm 15$   | $\pm 15$   | V    |
| Duration of output short circuit (see Note 4)                   |                     | Unlimited                    | Unlimited  | Unlimited  | Unlimited  |      |
| Continuous total power dissipation                              |                     | See Dissipation Rating Table |            |            |            |      |
| Operating free-air temperature range, $T_A$                     |                     | 0 to 70                      | –40 to 85  | –40 to 125 | –55 to 125 | °C   |
| Package thermal impedance, $\theta_{JA}$<br>(see Notes 5 and 6) | D package (8-pin)   | 97                           | 97         |            |            | °C/W |
|                                                                 | D package (14-pin)  | 86                           | 86         |            |            |      |
|                                                                 | N package (14-pin)  | 76                           | 76         |            |            |      |
|                                                                 | NS package (14-pin) | 80                           |            |            |            |      |
|                                                                 | P package (8-pin)   | 85                           | 85         |            |            |      |
|                                                                 | PS package (8-pin)  | 95                           | 95         |            |            |      |
|                                                                 | PW package (8-pin)  | 149                          |            |            |            |      |
|                                                                 | PW package (14-pin) | 113                          | 113        |            |            |      |
| Operating virtual junction temperature                          |                     | 150                          | 150        | 150        | 150        | °C   |
| Case temperature for 60 seconds, $T_C$                          | FK package          |                              |            |            | 260        | °C   |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds    | J or JG package     |                              |            |            | 300        | °C   |
| Storage temperature range, $T_{stg}$                            |                     | –65 to 150                   | –65 to 150 | –65 to 150 | –65 to 150 | °C   |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .

2. Differential voltages are at  $IN+$  with respect to  $IN-$ .

3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.

4. The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

5. Maximum power dissipation is a function of  $T_J(\max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

6. The package thermal impedance is calculated in accordance with JESD 51-7.

**DISSIPATION RATING TABLE**

| PACKAGE    | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING<br>FACTOR | DERATE<br>ABOVE $T_A$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|------------|---------------------------------------------|--------------------|-----------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D (14 pin) | 680 mW                                      | 7.6 mW/°C          | 60°C                  | 604 mW                                   | 490 mW                                   | 186 mW                                    |
| FK         | 680 mW                                      | 11.0 mW/°C         | 88°C                  | 680 mW                                   | 680 mW                                   | 273 mW                                    |
| J          | 680 mW                                      | 11.0 mW/°C         | 88°C                  | 680 mW                                   | 680 mW                                   | 273 mW                                    |
| JG         | 680 mW                                      | 8.4 mW/°C          | 69°C                  | 672 mW                                   | 546 mW                                   | 210 mW                                    |



**TL081, TL081A, TL081B, TL082, TL082A, TL082B**  
**TL084, TL084A, TL084B**  
**JFET-INPUT OPERATIONAL AMPLIFIERS**

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

electrical characteristics,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)

| PARAMETER                        | TEST CONDITIONS                                                                                  | T <sub>A</sub> <sup>†</sup> | TL081C<br>TL082C<br>TL084C |                  |     | TL081AC<br>TL082AC<br>TL084AC |                  |     | TL081BC<br>TL082BC<br>TL084BC |                  |     | TL081I<br>TL082I<br>TL084I |                  |     | UNIT  |
|----------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------|----------------------------|------------------|-----|-------------------------------|------------------|-----|-------------------------------|------------------|-----|----------------------------|------------------|-----|-------|
|                                  |                                                                                                  |                             | MIN                        | TYP              | MAX | MIN                           | TYP              | MAX | MIN                           | TYP              | MAX | MIN                        | TYP              | MAX |       |
| V <sub>IO</sub>                  | Input offset voltage<br>V <sub>O</sub> = 0                                                       | 25°C<br>Full range          | 3                          | 15               | 20  | 3                             | 3                | 6   | 2                             | 2                | 3   | 3                          | 3                | 6   | mV    |
| α <sub>VIO</sub>                 | Temperature coefficient of input offset voltage<br>V <sub>O</sub> = 0                            | Full range                  |                            | 18               |     |                               | 18               |     |                               | 18               |     |                            | 18               |     | μV/°C |
| I <sub>IO</sub>                  | Input offset current <sup>‡</sup><br>V <sub>O</sub> = 0                                          | 25°C<br>Full range          | 5                          | 200              |     | 5                             | 5                | 100 | 5                             | 5                | 100 | 5                          | 5                | 100 | pA    |
| I <sub>IB</sub>                  | Input bias current <sup>‡</sup><br>V <sub>O</sub> = 0                                            | 25°C<br>Full range          | 30                         | 400              | 10  | 30                            | 30               | 200 | 30                            | 30               | 200 | 30                         | 30               | 200 | nA    |
| V <sub>ICR</sub>                 | Common-mode input voltage range                                                                  | 25°C                        | ±11                        | -12 to 15        |     | ±11                           | -12 to 15        |     | ±11                           | -12 to 15        |     | ±11                        | -12 to 15        |     | V     |
| V <sub>OM</sub>                  | Maximum peak output voltage swing                                                                | 25°C                        | ±12                        | ±13.5            |     | ±12                           | ±13.5            |     | ±12                           | ±13.5            |     | ±12                        | ±13.5            |     | V     |
|                                  |                                                                                                  | Full range                  | ±12                        | ±12              |     | ±12                           | ±12              |     | ±12                           | ±12              |     | ±12                        | ±12              |     |       |
|                                  |                                                                                                  |                             | ±10                        | ±12              |     | ±10                           | ±12              |     | ±10                           | ±12              |     | ±10                        | ±12              |     |       |
| A <sub>VD</sub>                  | Large-signal differential voltage amplification<br>V <sub>O</sub> = ±10 V, R <sub>L</sub> ≥ 2 kΩ | 25°C                        | 25                         | 200              |     | 50                            | 200              |     | 50                            | 200              |     | 50                         | 200              |     | V/mV  |
|                                  | V <sub>O</sub> = ±10 V, R <sub>L</sub> ≥ 2 kΩ                                                    | Full range                  | 15                         |                  |     | 25                            |                  |     | 25                            |                  |     | 25                         |                  |     |       |
| B <sub>1</sub>                   | Unity-gain bandwidth                                                                             | 25°C                        |                            | 3                |     |                               | 3                |     |                               | 3                |     |                            | 3                |     | MHz   |
| r <sub>i</sub>                   | Input resistance                                                                                 | 25°C                        |                            | 10 <sup>12</sup> |     |                               | 10 <sup>12</sup> |     |                               | 10 <sup>12</sup> |     |                            | 10 <sup>12</sup> |     | Ω     |
| CMRR                             | Common-mode rejection ratio                                                                      | 25°C                        | 70                         | 86               |     | 75                            | 86               |     | 75                            | 86               |     | 75                         | 86               |     | dB    |
| KSVR                             | Supply-voltage rejection ratio<br>(ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> )                         | 25°C                        | 70                         | 86               |     | 80                            | 86               |     | 80                            | 86               |     | 80                         | 86               |     | dB    |
| I <sub>CC</sub>                  | Supply current (per amplifier)                                                                   | 25°C                        |                            | 1.4              | 2.8 |                               | 1.4              | 2.8 |                               | 1.4              | 2.8 |                            | 1.4              | 2.8 | mA    |
| V <sub>O1</sub> /V <sub>O2</sub> | Crosstalk attenuation<br>A <sub>VD</sub> = 100                                                   | 25°C                        |                            | 120              |     |                               | 120              |     |                               | 120              |     |                            | 120              |     | dB    |

<sup>†</sup> All characteristics are measured under open-loop conditions with zero common-mode voltage, unless otherwise specified. Full range for T<sub>A</sub> is 0°C to 70°C for TL08\_C, TL08\_AC, TL08\_BC and -40°C to 85°C for TL08\_I.

<sup>‡</sup> Input bias currents of an FET-input operational amplifier are normal junction reverse currents, which are temperature sensitive, as shown in Figure 17. Pulse techniques must be used that maintain the junction temperature as close to the ambient temperature as possible.

**TL081, TL081A, TL081B, TL082, TL082A, TL082B**  
**TL084, TL084A, TL084B**  
**JFET-INPUT OPERATIONAL AMPLIFIERS**

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

**electrical characteristics,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS <sup>†</sup>                                             | $T_A$      | TL081M, TL082M |            |     | TL084Q, TL084M |            |     | UNIT                         |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------|----------------|------------|-----|----------------|------------|-----|------------------------------|
|                                                                               |                                                                          |            | MIN            | TYP        | MAX | MIN            | TYP        | MAX |                              |
| $V_{IO}$ Input offset voltage                                                 | $V_O = 0, R_S = 50\ \Omega$                                              | 25°C       |                | 3          | 6   |                | 3          | 9   | mV                           |
|                                                                               |                                                                          | Full range |                |            | 9   |                |            | 15  |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                | $V_O = 0, R_S = 50\ \Omega$                                              | Full range |                | 18         |     |                | 18         |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current <sup>‡</sup>                                    | $V_O = 0$                                                                | 25°C       |                | 5          | 100 |                | 5          | 100 | pA                           |
|                                                                               |                                                                          | 125°C      |                |            | 20  |                |            | 20  | nA                           |
| $I_{IB}$ Input bias current <sup>‡</sup>                                      | $V_O = 0$                                                                | 25°C       |                | 30         | 200 |                | 30         | 200 | pA                           |
|                                                                               |                                                                          | 125°C      |                |            | 50  |                |            | 50  | nA                           |
| $V_{ICR}$ Common-mode input voltage range                                     |                                                                          | 25°C       | $\pm 11$       | –12 to 15  |     | $\pm 11$       | –12 to 15  |     | V                            |
| $V_{OM}$ Maximum peak output voltage swing                                    | $R_L = 10\text{ k}\Omega$                                                | 25°C       | $\pm 12$       | $\pm 13.5$ |     | $\pm 12$       | $\pm 13.5$ |     | V                            |
|                                                                               | $R_L \geq 10\text{ k}\Omega$                                             | Full range | $\pm 12$       |            |     | $\pm 12$       |            |     |                              |
|                                                                               | $R_L \geq 2\text{ k}\Omega$                                              |            | $\pm 10$       | $\pm 12$   |     | $\pm 10$       | $\pm 12$   |     |                              |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10\text{ V}, R_L \geq 2\text{ k}\Omega$                       | 25°C       | 25             | 200        |     | 25             | 200        |     | V/mV                         |
|                                                                               | $V_O = \pm 10\text{ V}, R_L \geq 2\text{ k}\Omega$                       | Full range | 15             |            |     | 15             |            |     |                              |
| $B_1$ Unity-gain bandwidth                                                    |                                                                          | 25°C       |                | 3          |     |                | 3          |     | MHz                          |
| $r_i$ Input resistance                                                        |                                                                          | 25°C       |                | $10^{12}$  |     |                | $10^{12}$  |     | $\Omega$                     |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50\ \Omega$                         | 25°C       | 80             | 86         |     | 80             | 86         |     | dB                           |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC} = \pm 15\text{ V to } \pm 9\text{ V}, V_O = 0, R_S = 50\ \Omega$ | 25°C       | 80             | 86         |     | 80             | 86         |     | dB                           |
| $I_{CC}$ Supply current (per amplifier)                                       | $V_O = 0, \text{ No load}$                                               | 25°C       |                | 1.4        | 2.8 |                | 1.4        | 2.8 | mA                           |
| $V_{O1}/V_{O2}$ Crosstalk attenuation                                         | $A_{VD} = 100$                                                           | 25°C       |                | 120        |     |                | 120        |     | dB                           |

<sup>†</sup> All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified.

<sup>‡</sup> Input bias currents of a FET-input operational amplifier are normal junction reverse currents, which are temperature sensitive, as shown in Figure 17. Pulse techniques must be used that maintain the junction temperatures as close to the ambient temperature as possible.

**operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}, T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER      |                                | TEST CONDITIONS                                                                      |                        |                          |                        | MIN   | TYP | MAX | UNIT   |
|----------------|--------------------------------|--------------------------------------------------------------------------------------|------------------------|--------------------------|------------------------|-------|-----|-----|--------|
| SR             | Slew rate at unity gain        | V <sub>I</sub> = 10 V,                                                               | R <sub>L</sub> = 2 kΩ, | C <sub>L</sub> = 100 pF, | See Figure 1           | 8*    | 13  |     | V/μs   |
|                |                                | V <sub>I</sub> = 10 V,<br>T <sub>A</sub> = − 55°C to 125°C,                          | R <sub>L</sub> = 2 kΩ, | C <sub>L</sub> = 100 pF, | See Figure 1           | 5*    |     |     |        |
| t <sub>r</sub> | Rise time                      | V <sub>I</sub> = 20 mV, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figure 1 |                        |                          |                        | 0.05  |     |     | μs     |
|                | Overshoot factor               |                                                                                      |                        |                          |                        | 20    |     |     | %      |
| V <sub>n</sub> | Equivalent input noise voltage | R <sub>S</sub> = 20 Ω                                                                | f = 1 kHz              |                          |                        | 18    |     |     | nV/√Hz |
|                |                                |                                                                                      | f = 10 Hz to 10 kHz    |                          |                        | 4     |     |     | μV     |
| I <sub>n</sub> | Equivalent input noise current | R <sub>S</sub> = 20 Ω,                                                               | f = 1 kHz              |                          |                        | 0.01  |     |     | pA/√Hz |
| THD            | Total harmonic distortion      | V <sub>Irms</sub> = 6 V,<br>f = 1 kHz                                                | A <sub>VD</sub> = 1,   | R <sub>S</sub> ≤ 1 kΩ,   | R <sub>L</sub> ≥ 2 kΩ, | 0.003 |     |     | %      |

\*On products compliant to MIL-PRF-38535, this parameter is not production tested.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TL081, TL081A, TL081B, TL082, TL082A, TL082B**  
**TL084, TL084A, TL084B**  
**JFET-INPUT OPERATIONAL AMPLIFIERS**

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER |                                | TEST CONDITIONS                                        |                                     |                               |                               | MIN | TYP   | MAX | UNIT                         |
|-----------|--------------------------------|--------------------------------------------------------|-------------------------------------|-------------------------------|-------------------------------|-----|-------|-----|------------------------------|
| SR        | Slew rate at unity gain        | $V_I = 10\text{ V}$ ,                                  | $R_L = 2\text{ k}\Omega$ ,          | $C_L = 100\text{ pF}$ ,       | See Figure 1                  | 8   | 13    |     | $\text{V}/\mu\text{s}$       |
| $t_r$     | Rise time                      | $V_I = 20\text{ mV}$ ,                                 | $R_L = 2\text{ k}\Omega$ ,          | $C_L = 100\text{ pF}$ ,       | See Figure 1                  |     | 0.05  |     | $\mu\text{s}$                |
|           | Overshoot factor               |                                                        |                                     |                               |                               |     | 20    |     | %                            |
| $V_n$     | Equivalent input noise voltage | $R_S = 20\text{ }\Omega$                               | $f = 1\text{ kHz}$                  |                               |                               |     | 18    |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|           |                                |                                                        | $f = 10\text{ Hz to }10\text{ kHz}$ |                               |                               |     | 4     |     | $\mu\text{V}$                |
| $I_n$     | Equivalent input noise current | $R_S = 20\text{ }\Omega$ ,                             | $f = 1\text{ kHz}$                  |                               |                               |     | 0.01  |     | $\text{pA}/\sqrt{\text{Hz}}$ |
| THD       | Total harmonic distortion      | $V_{I\text{rms}} = 6\text{ V}$ ,<br>$f = 1\text{ kHz}$ | $A_{VD} = 1$ ,                      | $R_S \leq 1\text{ k}\Omega$ , | $R_L \geq 2\text{ k}\Omega$ , |     | 0.003 |     | %                            |

PARAMETER MEASUREMENT INFORMATION

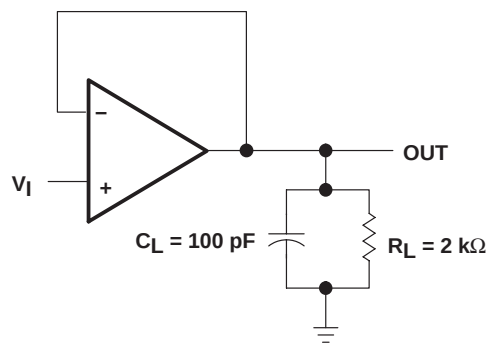


Figure 1

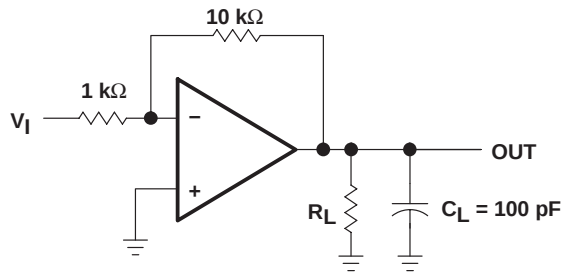


Figure 2

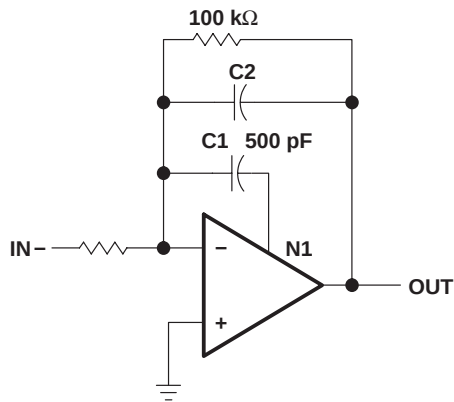


Figure 3

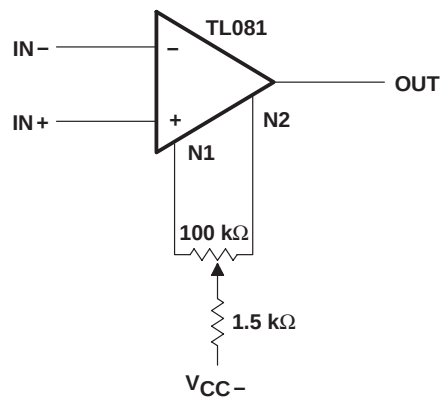


Figure 4

## TYPICAL CHARACTERISTICS

Table of Graphs

|                                    |                                                 | FIGURE  |
|------------------------------------|-------------------------------------------------|---------|
| $V_{OM}$                           | Maximum peak output voltage                     | 5, 6, 7 |
|                                    | vs Frequency                                    | 8       |
|                                    | vs Load resistance                              | 9       |
|                                    | vs Supply voltage                               | 10      |
| $A_{VD}$                           | Large-signal differential voltage amplification | 11      |
|                                    | vs Frequency                                    | 12      |
| Differential voltage amplification |                                                 | 13      |
| $P_D$                              | Total power dissipation                         | 14      |
| $I_{CC}$                           | Supply current                                  | 15      |
|                                    | vs Supply voltage                               | 16      |
| $I_{IB}$                           | Input bias current                              | 17      |
| Large-signal pulse response        |                                                 | 18      |
| $V_O$                              | Output voltage                                  | 19      |
| CMRR                               | Common-mode rejection ratio                     | 20      |
| $V_n$                              | Equivalent input noise voltage                  | 21      |
| THD                                | Total harmonic distortion                       | 22      |

MAXIMUM PEAK OUTPUT VOLTAGE  
 vs  
 FREQUENCY

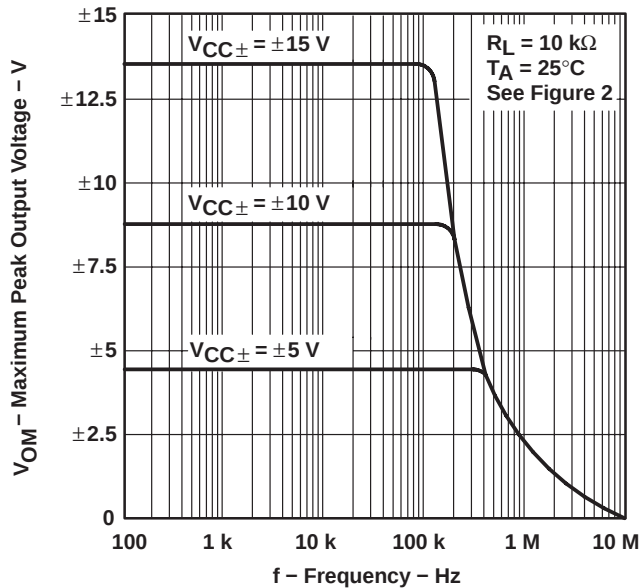


Figure 5

MAXIMUM PEAK OUTPUT VOLTAGE  
 vs  
 FREQUENCY

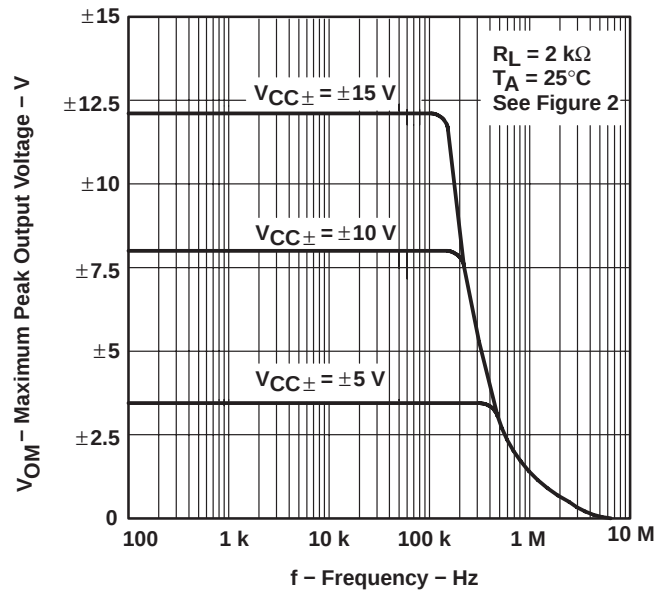


Figure 6

# TL081, TL081A, TL081B, TL082, TL082A, TL082B TL084, TL084A, TL084B JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

## TYPICAL CHARACTERISTICS†

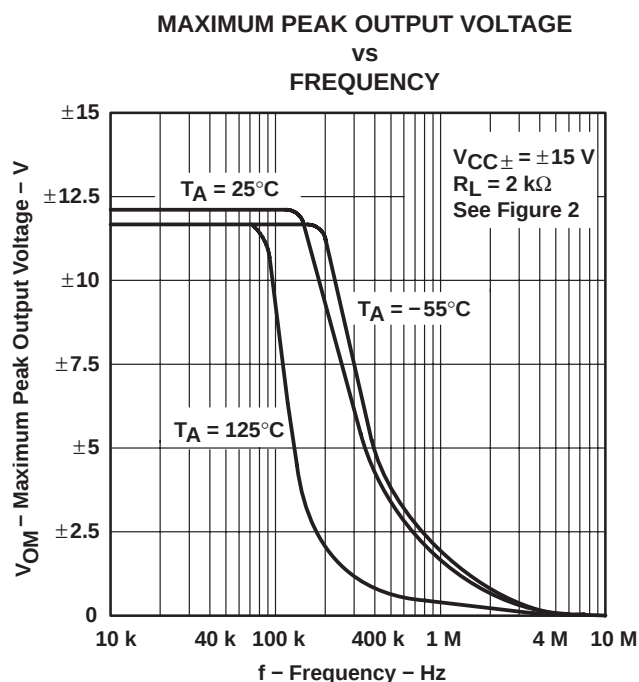


Figure 7

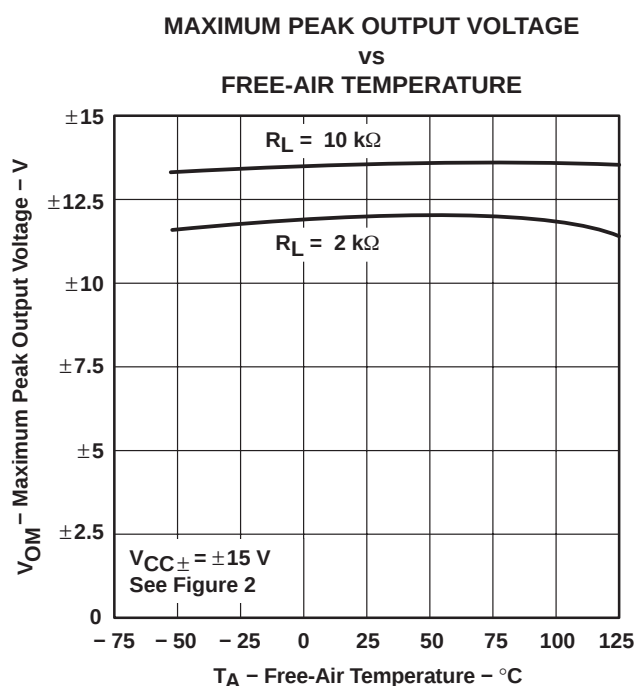


Figure 8

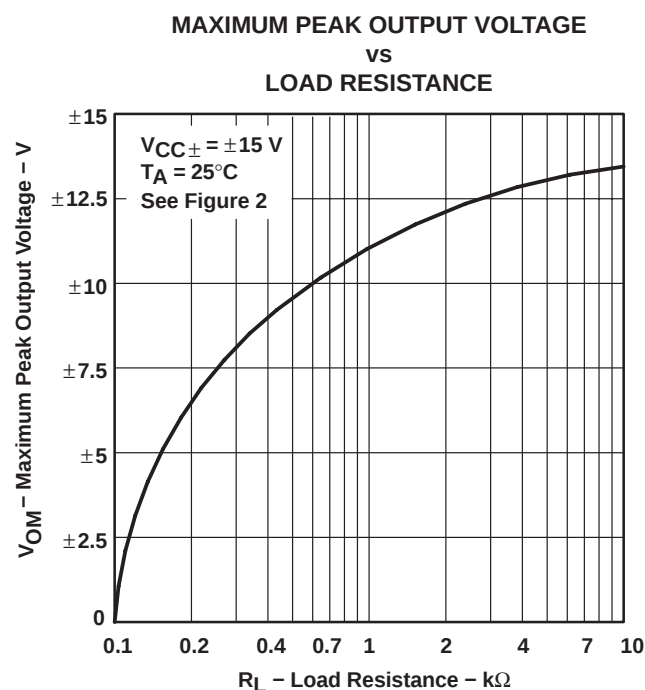


Figure 9

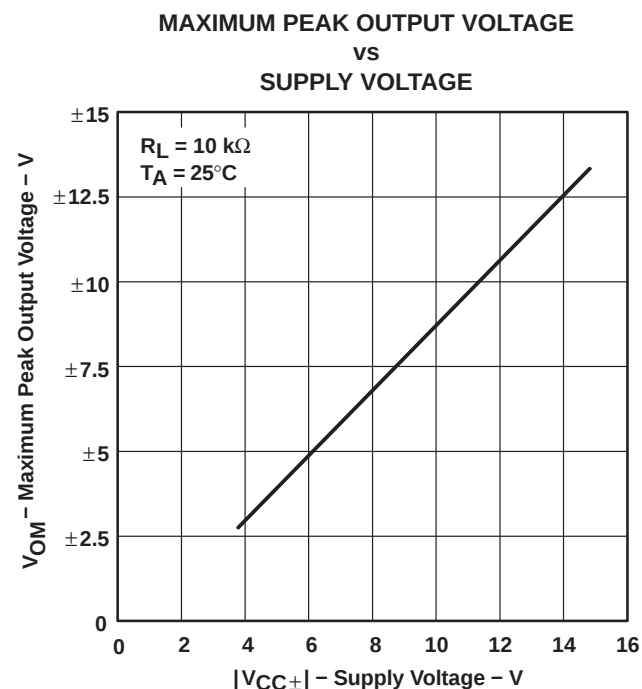


Figure 10

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TYPICAL CHARACTERISTICS†

## LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION VS FREE-AIR TEMPERATURE

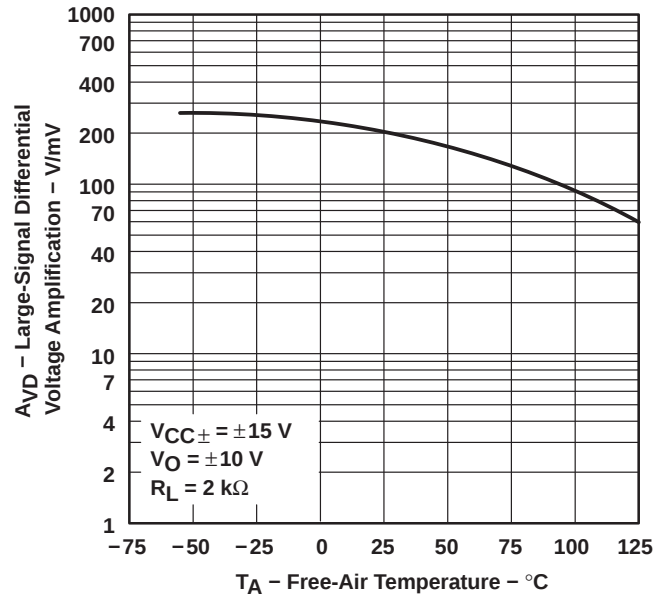


Figure 11

## LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION VS FREQUENCY

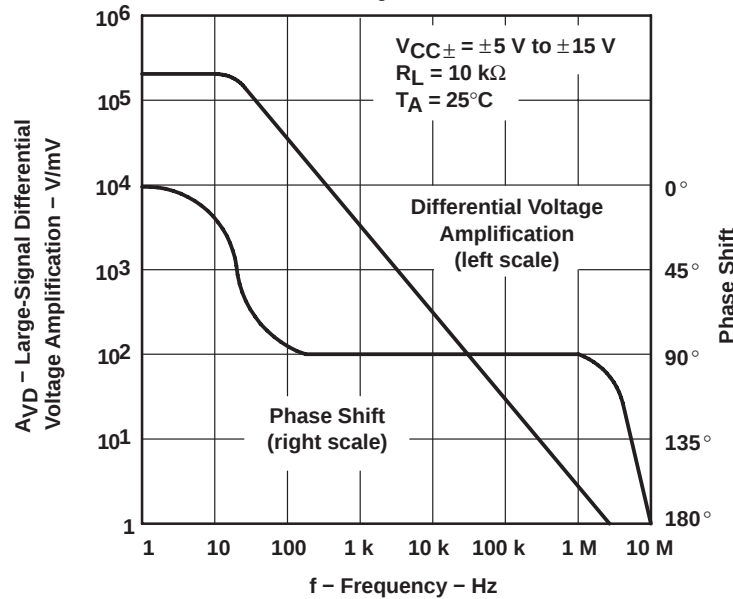


Figure 12

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL081, TL081A, TL081B, TL082, TL082A, TL082B TL084, TL084A, TL084B JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

## TYPICAL CHARACTERISTICS†

DIFFERENTIAL VOLTAGE AMPLIFICATION  
vs  
FREQUENCY WITH FEED-FORWARD COMPENSATION

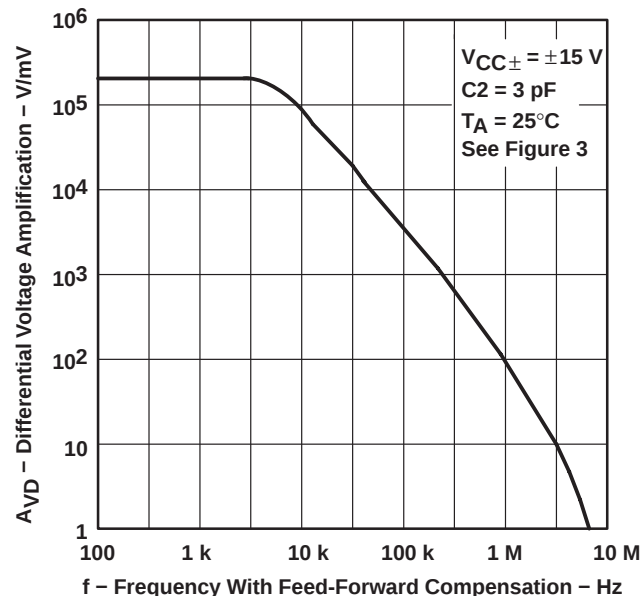


Figure 13

TOTAL POWER DISSIPATION  
vs  
FREE-AIR TEMPERATURE

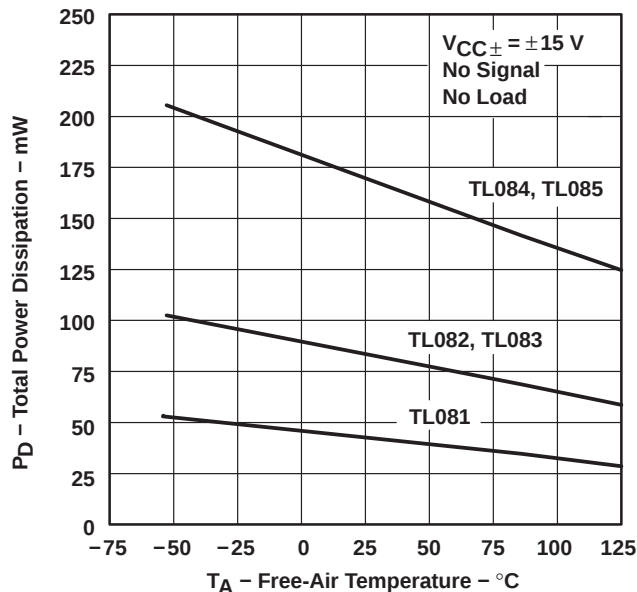


Figure 14

SUPPLY CURRENT PER AMPLIFIER  
vs  
FREE-AIR TEMPERATURE

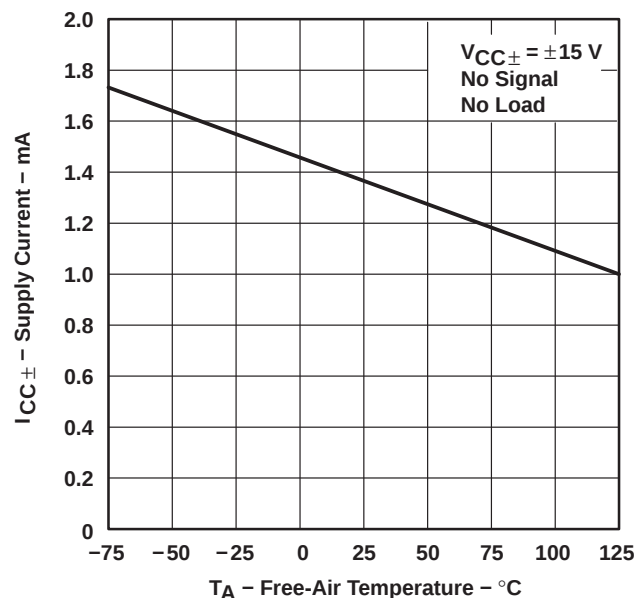


Figure 15

SUPPLY CURRENT  
vs  
SUPPLY VOLTAGE

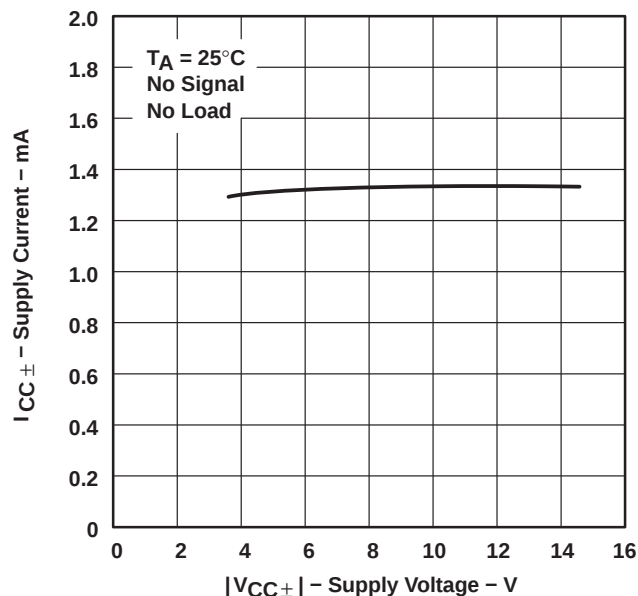


Figure 16

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

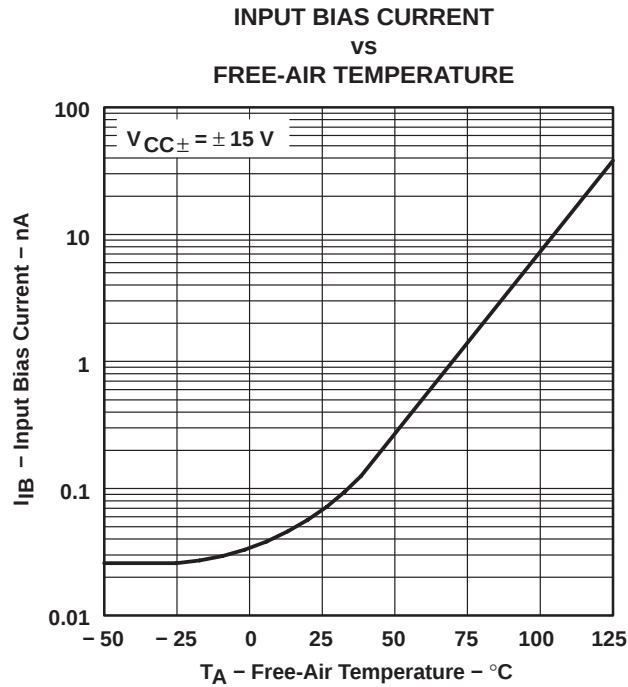


Figure 17

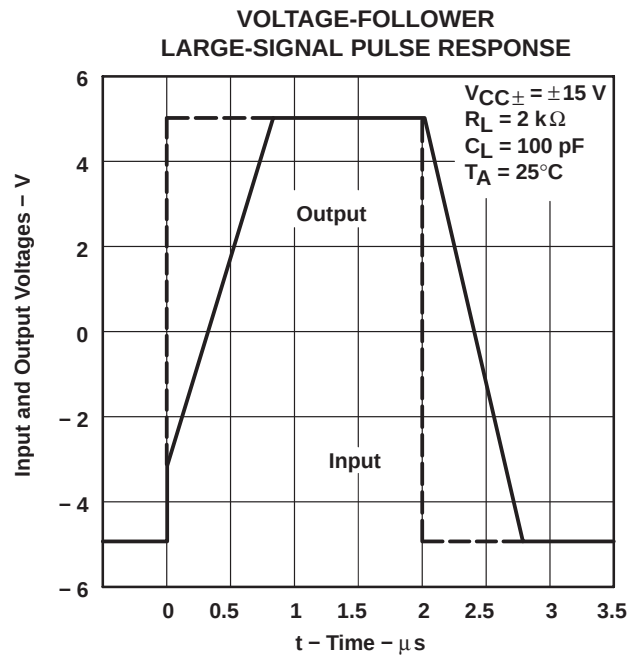


Figure 18

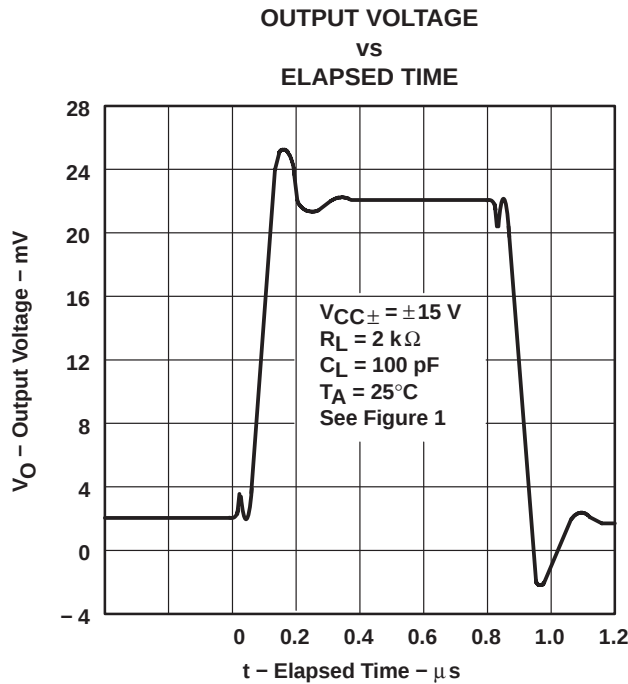


Figure 19

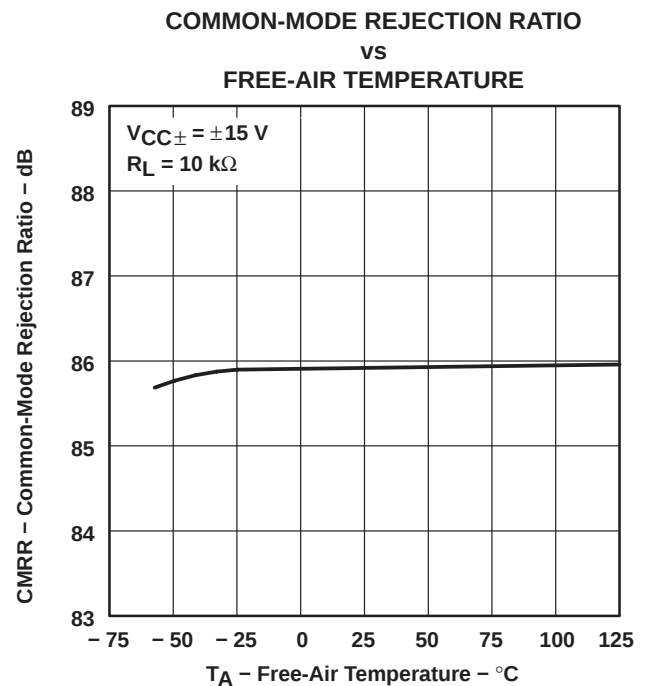


Figure 20

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL081, TL081A, TL081B, TL082, TL082A, TL082B TL084, TL084A, TL084B JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS081G – FEBRUARY 1977 – REVISED SEPTEMBER 2004

## TYPICAL CHARACTERISTICS†

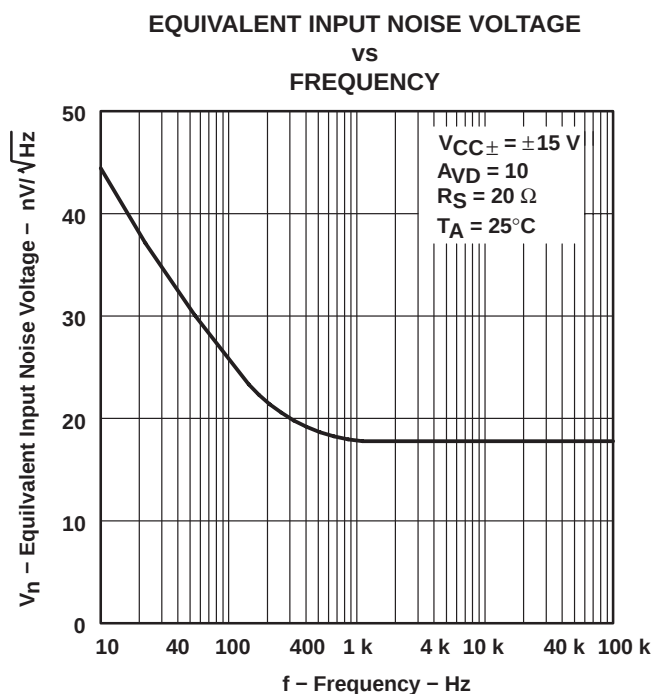


Figure 21

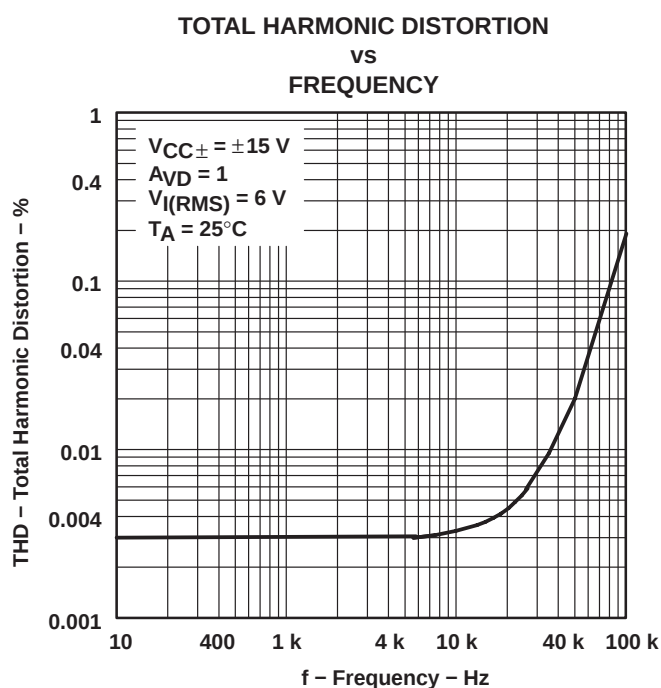


Figure 22

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## APPLICATION INFORMATION

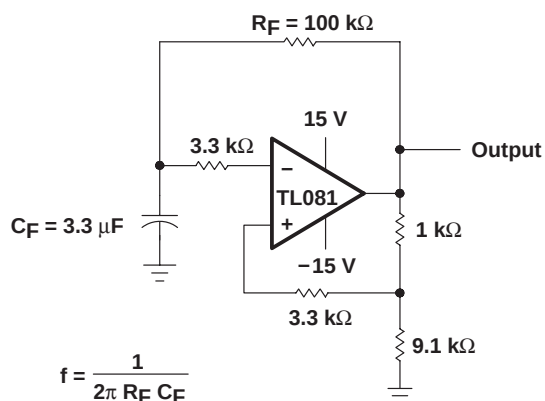


Figure 23

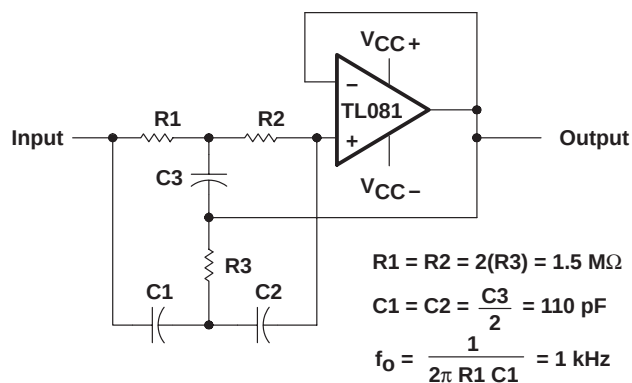


Figure 24

## APPLICATION INFORMATION


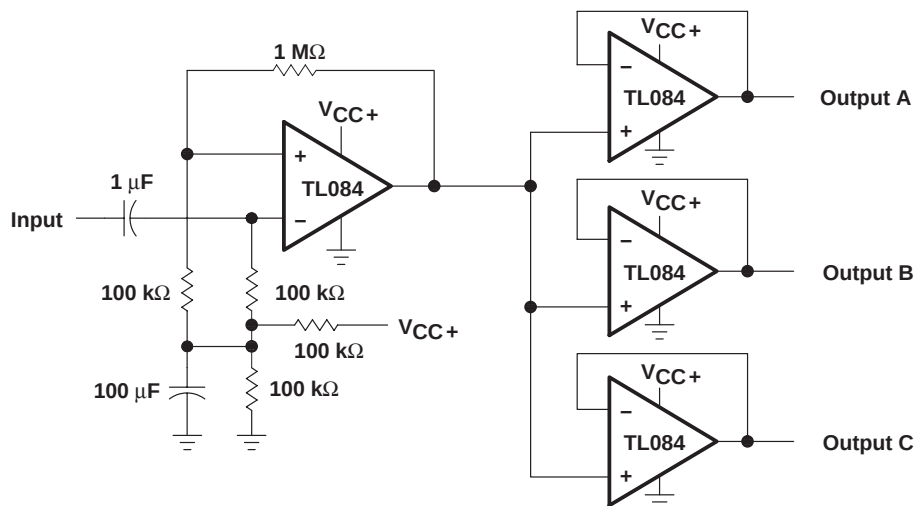



Figure 25. Audio-Distribution Amplifier

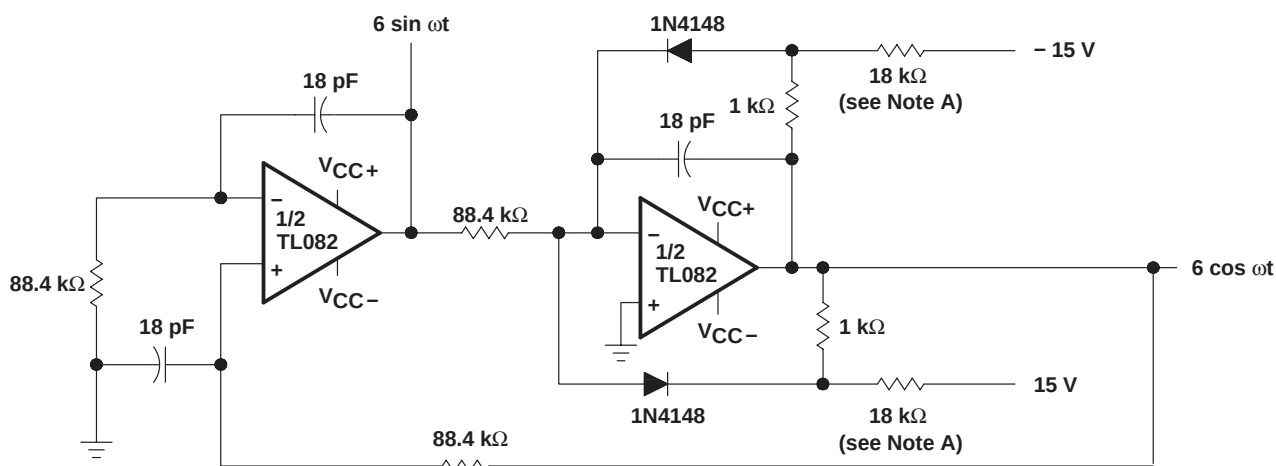

NOTE A: These resistor values may be adjusted for a symmetrical output.

Figure 26. 100-KHz Quadrature Oscillator

## APPLICATION INFORMATION

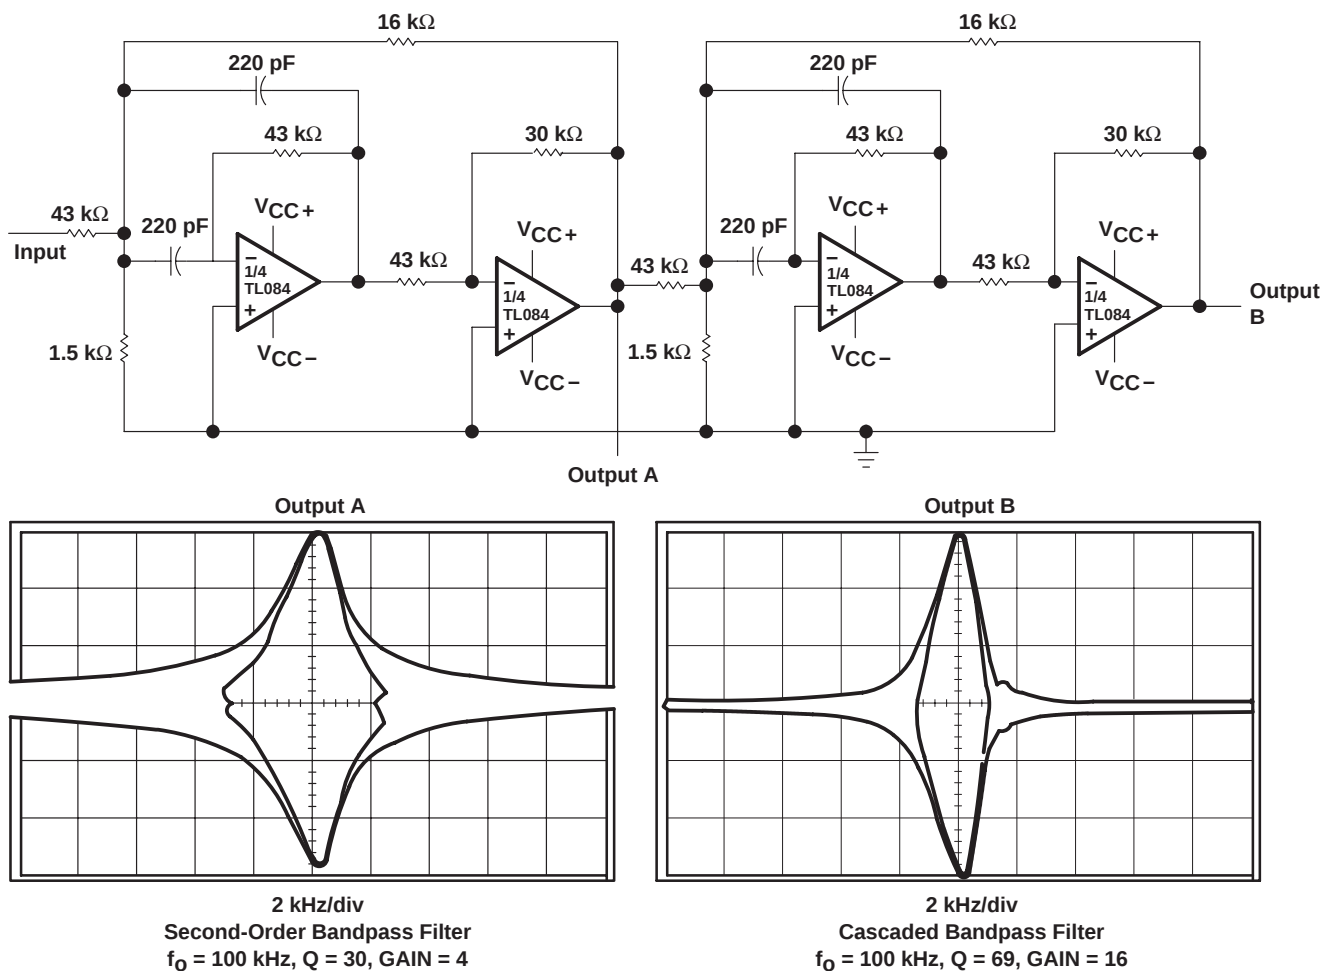

### Figure 27. Positive-Feedback Bandpass Filter

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)         | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|----------------------------------|-------------------------|
| 5962-9851501Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              | -55 to 125   | 5962-9851501Q2A<br>TL082MFKB     | <a href="#">Samples</a> |
| 5962-9851501QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | 9851501QPA<br>TL082M             | <a href="#">Samples</a> |
| 5962-9851503Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              | -55 to 125   | 5962-9851503Q2A<br>TL084<br>MFKB | <a href="#">Samples</a> |
| 5962-9851503QCA  | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | Call TI          | Call TI              | -55 to 125   | 5962-9851503QC<br>A<br>TL084MJB  | <a href="#">Samples</a> |
| TL081ACD         | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081AC                            | <a href="#">Samples</a> |
| TL081ACDE4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081AC                            | <a href="#">Samples</a> |
| TL081ACDG4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081AC                            | <a href="#">Samples</a> |
| TL081ACDR        | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081AC                            | <a href="#">Samples</a> |
| TL081ACDRE4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081AC                            | <a href="#">Samples</a> |
| TL081ACDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081AC                            | <a href="#">Samples</a> |
| TL081ACJG        | OBSOLETE      | CDIP         | JG                 | 8    |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                                  |                         |
| TL081ACP         | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL081ACP                         | <a href="#">Samples</a> |
| TL081ACPE4       | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL081ACP                         | <a href="#">Samples</a> |
| TL081BCD         | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081BC                            | <a href="#">Samples</a> |
| TL081BCDE4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081BC                            | <a href="#">Samples</a> |
| TL081BCDG4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081BC                            | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TL081BCDR        | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081BC                    | <a href="#">Samples</a> |
| TL081BCDRE4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081BC                    | <a href="#">Samples</a> |
| TL081BCDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 081BC                    | <a href="#">Samples</a> |
| TL081BCP         | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL081BCP                 | <a href="#">Samples</a> |
| TL081BCPE4       | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL081BCP                 | <a href="#">Samples</a> |
| TL081CD          | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL081C                   | <a href="#">Samples</a> |
| TL081CDE4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL081C                   | <a href="#">Samples</a> |
| TL081CDG4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL081C                   | <a href="#">Samples</a> |
| TL081CDR         | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL081C                   | <a href="#">Samples</a> |
| TL081CDRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL081C                   | <a href="#">Samples</a> |
| TL081CDRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL081C                   | <a href="#">Samples</a> |
| TL081CP          | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL081CP                  | <a href="#">Samples</a> |
| TL081CPE4        | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL081CP                  | <a href="#">Samples</a> |
| TL081CPSR        | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T081                     | <a href="#">Samples</a> |
| TL081CPSRE4      | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T081                     | <a href="#">Samples</a> |
| TL081CPSRG4      | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T081                     | <a href="#">Samples</a> |
| TL081CPWLE       | OBSOLETE      | TSSOP        | PW                 | 8    |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| TL081ID          | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL081I                   | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TL081IDE4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL081I                   | <a href="#">Samples</a> |
| TL081IDG4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL081I                   | <a href="#">Samples</a> |
| TL081IDR         | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL081I                   | <a href="#">Samples</a> |
| TL081IDRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL081I                   | <a href="#">Samples</a> |
| TL081IDRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL081I                   | <a href="#">Samples</a> |
| TL081IP          | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TL081IP                  | <a href="#">Samples</a> |
| TL081IPE4        | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TL081IP                  | <a href="#">Samples</a> |
| TL081MFKB        | OBSOLETE      | LCCC         | FK                 | 20   |             | TBD                        | Call TI          | Call TI              | -55 to 125   |                          |                         |
| TL081MJG         | OBSOLETE      | CDIP         | JG                 | 8    |             | TBD                        | Call TI          | Call TI              | -55 to 125   |                          |                         |
| TL081MJGB        | OBSOLETE      | CDIP         | JG                 | 8    |             | TBD                        | Call TI          | Call TI              | -55 to 125   |                          |                         |
| TL082ACD         | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082AC                    | <a href="#">Samples</a> |
| TL082ACDE4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082AC                    | <a href="#">Samples</a> |
| TL082ACDG4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082AC                    | <a href="#">Samples</a> |
| TL082ACDR        | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082AC                    | <a href="#">Samples</a> |
| TL082ACDRE4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082AC                    | <a href="#">Samples</a> |
| TL082ACDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082AC                    | <a href="#">Samples</a> |
| TL082ACP         | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL082ACP                 | <a href="#">Samples</a> |
| TL082ACPE4       | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL082ACP                 | <a href="#">Samples</a> |
| TL082ACPSR       | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082A                    | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TL082ACPSRE4     | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082A                    | <a href="#">Samples</a> |
| TL082ACPSRG4     | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082A                    | <a href="#">Samples</a> |
| TL082BCD         | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082BC                    | <a href="#">Samples</a> |
| TL082BCDE4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082BC                    | <a href="#">Samples</a> |
| TL082BCDG4       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082BC                    | <a href="#">Samples</a> |
| TL082BCDR        | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082BC                    | <a href="#">Samples</a> |
| TL082BCDRE4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082BC                    | <a href="#">Samples</a> |
| TL082BCDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | 082BC                    | <a href="#">Samples</a> |
| TL082BCP         | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL082BCP                 | <a href="#">Samples</a> |
| TL082BCPE4       | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL082BCP                 | <a href="#">Samples</a> |
| TL082CD          | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL082C                   | <a href="#">Samples</a> |
| TL082CDE4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL082C                   | <a href="#">Samples</a> |
| TL082CDG4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL082C                   | <a href="#">Samples</a> |
| TL082CDR         | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL082C                   | <a href="#">Samples</a> |
| TL082CDRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL082C                   | <a href="#">Samples</a> |
| TL082CDRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL082C                   | <a href="#">Samples</a> |
| TL082CJG         | OBSOLETE      | CDIP         | JG                 | 8    |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| TL082CP          | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL082CP                  | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TL082CPE4        | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL082CP                  | <a href="#">Samples</a> |
| TL082CPSR        | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPSRG4      | ACTIVE        | SO           | PS                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPW         | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPWE4       | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPWG4       | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPWLE       | OBSOLETE      | TSSOP        | PW                 | 8    |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| TL082CPWR        | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPWRE4      | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082CPWRG4      | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T082                     | <a href="#">Samples</a> |
| TL082ID          | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL082I                   | <a href="#">Samples</a> |
| TL082IDE4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL082I                   | <a href="#">Samples</a> |
| TL082IDG4        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL082I                   | <a href="#">Samples</a> |
| TL082IDR         | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL082I                   | <a href="#">Samples</a> |
| TL082IDRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL082I                   | <a href="#">Samples</a> |
| TL082IDRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL082I                   | <a href="#">Samples</a> |
| TL082IJG         | OBSOLETE      | CDIP         | JG                 | 8    |             | TBD                        | Call TI          | Call TI              | -40 to 85    |                          |                         |
| TL082IP          | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TL082IP                  | <a href="#">Samples</a> |
| TL082IPE4        | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TL082IP                  | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)         | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|----------------------------------|-------------------------|
| TL082IPWR        | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | Z082                             | <a href="#">Samples</a> |
| TL082IPWRE4      | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | Z082                             | <a href="#">Samples</a> |
| TL082IPWRG4      | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | Z082                             | <a href="#">Samples</a> |
| TL082MFK         | OBSOLETE      | LCCC         | FK                 | 20   |             | TBD                        | Call TI          | Call TI              | -55 to 125   |                                  |                         |
| TL082MFKB        | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   | -55 to 125   | 5962-<br>9851501Q2A<br>TL082MFKB | <a href="#">Samples</a> |
| TL082MJG         | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | TL082MJG                         | <a href="#">Samples</a> |
| TL082MJGB        | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | 9851501QPA<br>TL082M             | <a href="#">Samples</a> |
| TL084ACD         | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084AC                          | <a href="#">Samples</a> |
| TL084ACDE4       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084AC                          | <a href="#">Samples</a> |
| TL084ACDG4       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084AC                          | <a href="#">Samples</a> |
| TL084ACDR        | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084AC                          | <a href="#">Samples</a> |
| TL084ACDRE4      | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084AC                          | <a href="#">Samples</a> |
| TL084ACDRG4      | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084AC                          | <a href="#">Samples</a> |
| TL084ACN         | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL084ACN                         | <a href="#">Samples</a> |
| TL084ACNE4       | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL084ACN                         | <a href="#">Samples</a> |
| TL084ACNSR       | ACTIVE        | SO           | NS                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084A                           | <a href="#">Samples</a> |
| TL084ACNSRE4     | ACTIVE        | SO           | NS                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084A                           | <a href="#">Samples</a> |
| TL084ACNSRG4     | ACTIVE        | SO           | NS                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084A                           | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TL084BCD         | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084BC                  | <a href="#">Samples</a> |
| TL084BCDE4       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084BC                  | <a href="#">Samples</a> |
| TL084BCDG4       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084BC                  | <a href="#">Samples</a> |
| TL084BCDR        | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084BC                  | <a href="#">Samples</a> |
| TL084BCDRE4      | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084BC                  | <a href="#">Samples</a> |
| TL084BCDRG4      | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084BC                  | <a href="#">Samples</a> |
| TL084BCN         | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL084BCN                 | <a href="#">Samples</a> |
| TL084BCNE4       | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL084BCN                 | <a href="#">Samples</a> |
| TL084CD          | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084C                   | <a href="#">Samples</a> |
| TL084CDE4        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084C                   | <a href="#">Samples</a> |
| TL084CDG4        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084C                   | <a href="#">Samples</a> |
| TL084CDR         | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084C                   | <a href="#">Samples</a> |
| TL084CDRE4       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084C                   | <a href="#">Samples</a> |
| TL084CDRG4       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084C                   | <a href="#">Samples</a> |
| TL084CJ          | OBSOLETE      | CDIP         | J                  | 14   |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| TL084CN          | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL084CN                  | <a href="#">Samples</a> |
| TL084CNE4        | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | TL084CN                  | <a href="#">Samples</a> |
| TL084CNSLE       | OBSOLETE      | SO           | NS                 | 14   |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| TL084CNSR        | ACTIVE        | SO           | NS                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084                    | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TL084CNSRG4      | ACTIVE        | SO           | NS                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TL084                    | <a href="#">Samples</a> |
| TL084CPW         | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T084                     | <a href="#">Samples</a> |
| TL084CPWE4       | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T084                     | <a href="#">Samples</a> |
| TL084CPWG4       | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T084                     | <a href="#">Samples</a> |
| TL084CPWLE       | OBSOLETE      | TSSOP        | PW                 | 14   |             | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| TL084CPWR        | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T084                     | <a href="#">Samples</a> |
| TL084CPWRE4      | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T084                     | <a href="#">Samples</a> |
| TL084CPWRG4      | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | T084                     | <a href="#">Samples</a> |
| TL084ID          | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL084I                   | <a href="#">Samples</a> |
| TL084IDE4        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL084I                   | <a href="#">Samples</a> |
| TL084IDG4        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL084I                   | <a href="#">Samples</a> |
| TL084IDR         | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL084I                   | <a href="#">Samples</a> |
| TL084IDRE4       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL084I                   | <a href="#">Samples</a> |
| TL084IDRG4       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TL084I                   | <a href="#">Samples</a> |
| TL084IJ          | OBSOLETE      | CDIP         | J                  | 14   |             | TBD                        | Call TI          | Call TI              | -40 to 85    |                          |                         |
| TL084IN          | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TL084IN                  | <a href="#">Samples</a> |
| TL084INE4        | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TL084IN                  | <a href="#">Samples</a> |
| TL084MFK         | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   | -55 to 125   | TL084MFK                 | <a href="#">Samples</a> |
| TL084MFKB        | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   | -55 to 125   | 5962-<br>9851503Q2A      | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)        | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|---------------------------------|-------------------------|
|                  |               |              |                    |      |             |                            |                  |                      |              | TL084<br>MFKB                   |                         |
| TL084MJ          | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | TL084MJ                         | <a href="#">Samples</a> |
| TL084MJB         | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | 5962-9851503QC<br>A<br>TL084MJB | <a href="#">Samples</a> |
| TL084QD          | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | TL084Q                          | <a href="#">Samples</a> |
| TL084QDG4        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | TL084Q                          | <a href="#">Samples</a> |
| TL084QDR         | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | TL084Q                          | <a href="#">Samples</a> |
| TL084QDRG4       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | TL084Q                          | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

---

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TL082, TL082M, TL084, TL084M :**

- Catalog: [TL082](#), [TL084](#)
- Automotive: [TL082-Q1](#), [TL082-Q1](#)
- Military: [TL082M](#), [TL084M](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military - QML certified for Military and Defense Applications

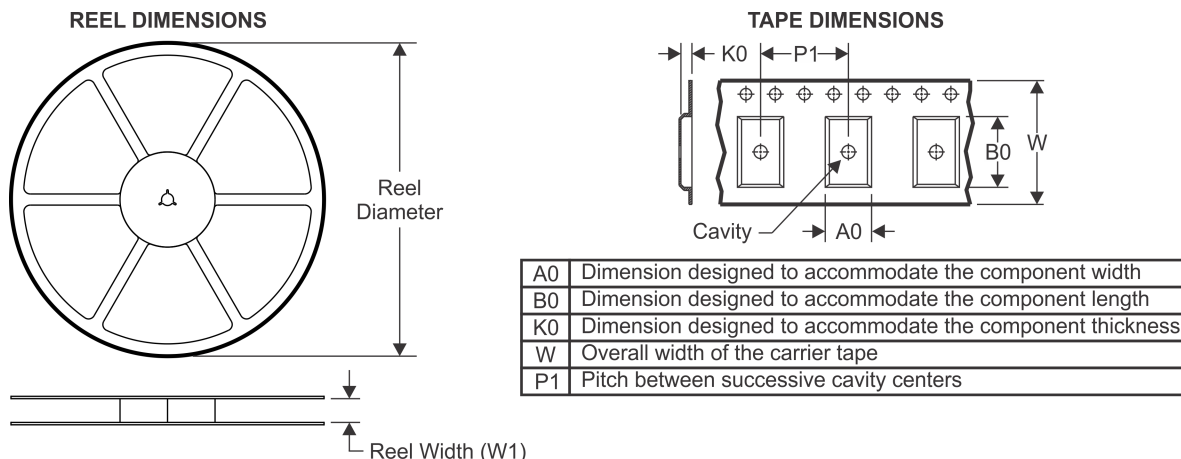
**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TL081ACDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL081BCDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL081CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL081CPSR  | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.2     | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| TL081IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL082ACDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL082ACDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL082ACPSR | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.2     | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| TL082BCDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL082CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL082CPSR  | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.2     | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| TL082IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL082IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TL084ACDR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TL084ACDR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TL084ACNSR | SO           | NS              | 14   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |
| TL084BCDR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TL084CDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TL084CDRG4 | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TL084CNSR  | SO           | NS              | 14   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |
| TL084CPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TL084IDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TL084QDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TL084QDRG4 | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
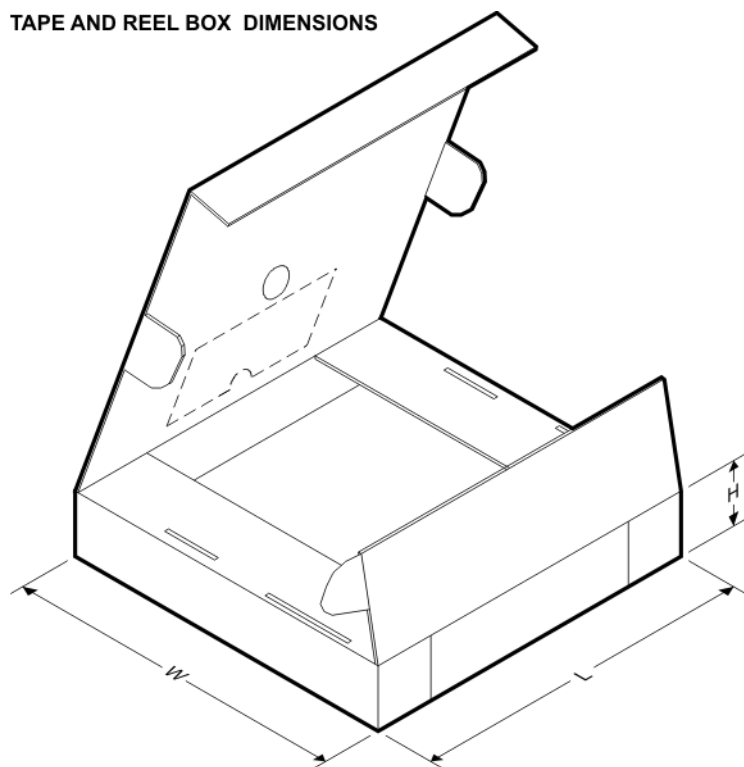
## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TL081ACDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL081BCDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL081CDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL081CPSR  | SO           | PS              | 8    | 2000 | 367.0       | 367.0      | 38.0        |
| TL081IDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL082ACDR  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| TL082ACDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL082ACPSR | SO           | PS              | 8    | 2000 | 367.0       | 367.0      | 38.0        |
| TL082BCDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL082CDR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| TL082CPSR  | SO           | PS              | 8    | 2000 | 367.0       | 367.0      | 38.0        |

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TL082IDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TL082IDR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| TL084ACDR  | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| TL084ACDR  | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TL084ACNSR | SO           | NS              | 14   | 2000 | 367.0       | 367.0      | 38.0        |
| TL084BCDR  | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TL084CDR   | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TL084CDRG4 | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TL084CNSR  | SO           | NS              | 14   | 2000 | 367.0       | 367.0      | 38.0        |
| TL084CPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| TL084IDR   | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TL084QDR   | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| TL084QDRG4 | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |

## JG (R-GDIP-T8)

## CERAMIC DUAL-IN-LINE

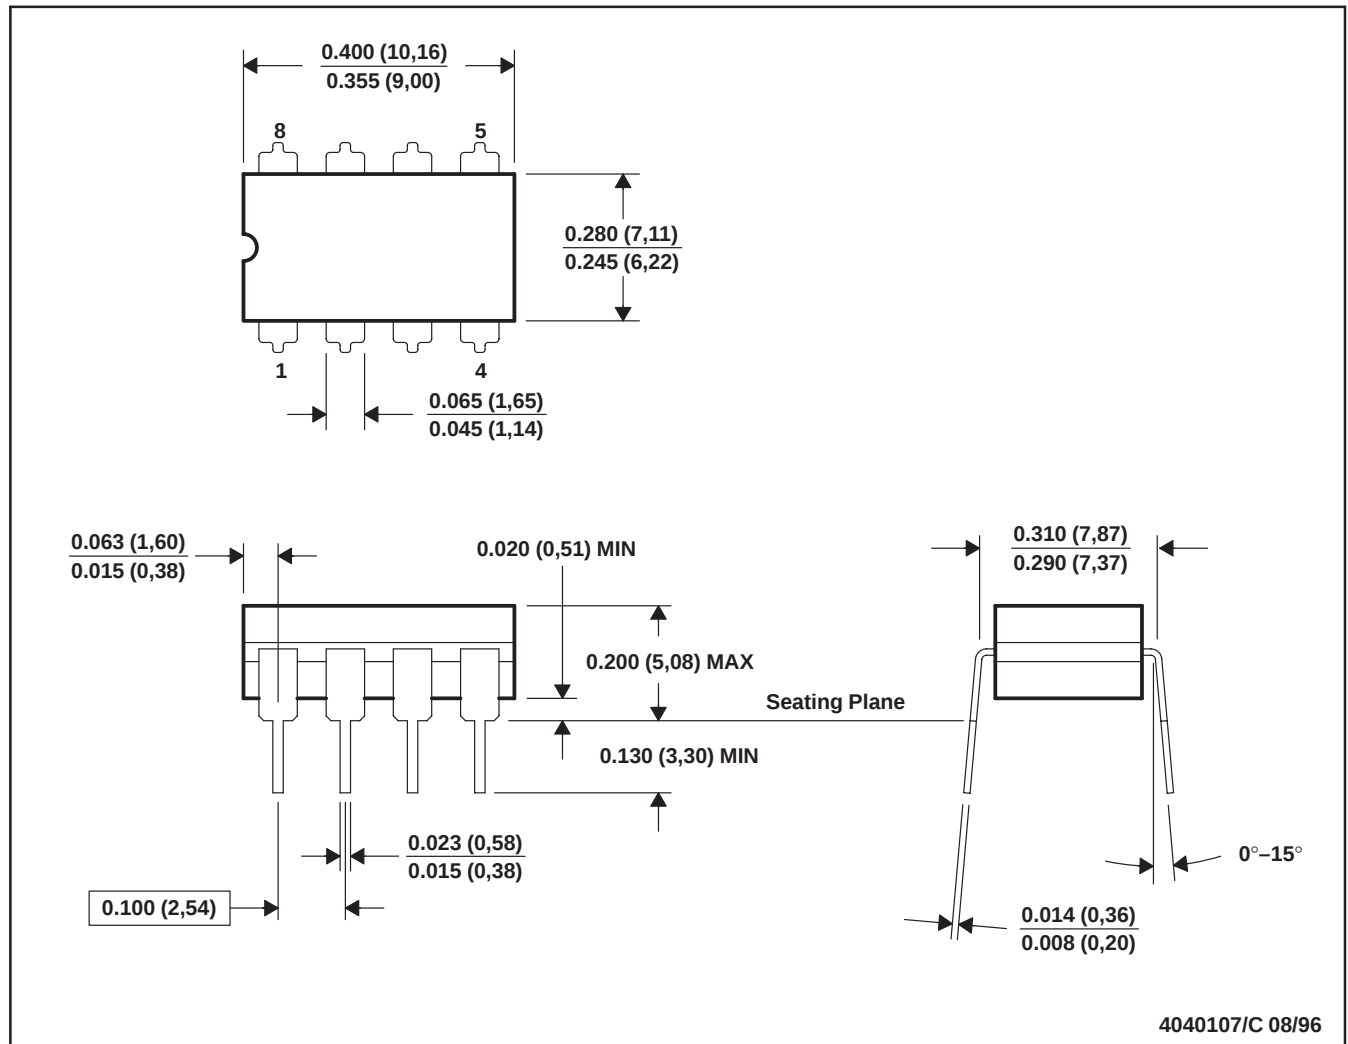


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification.
  - E. Falls within MIL STD 1835 GDIP1-T8


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

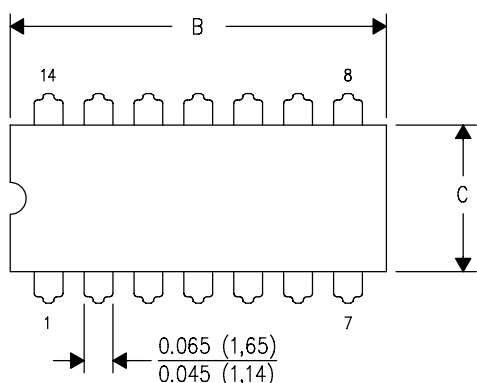

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

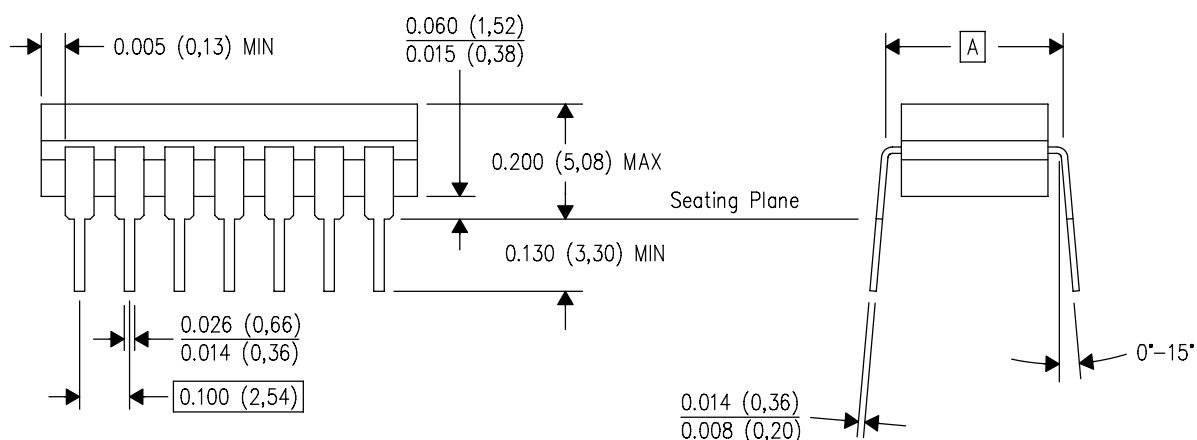


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

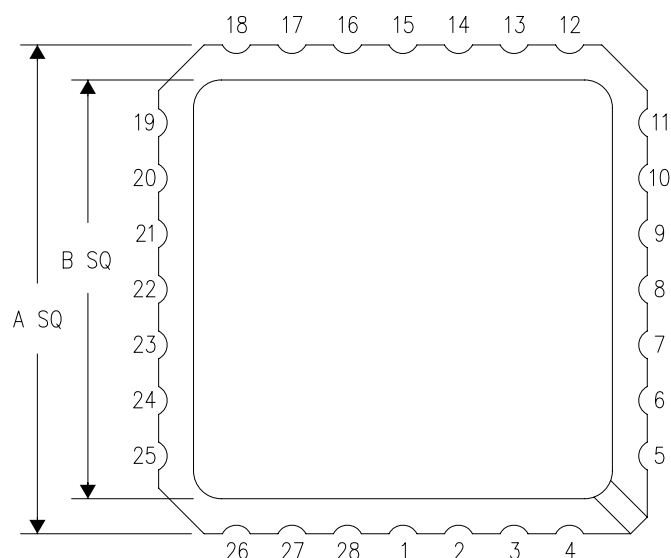

| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |



4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE



| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |



4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)


PLASTIC SMALL OUTLINE

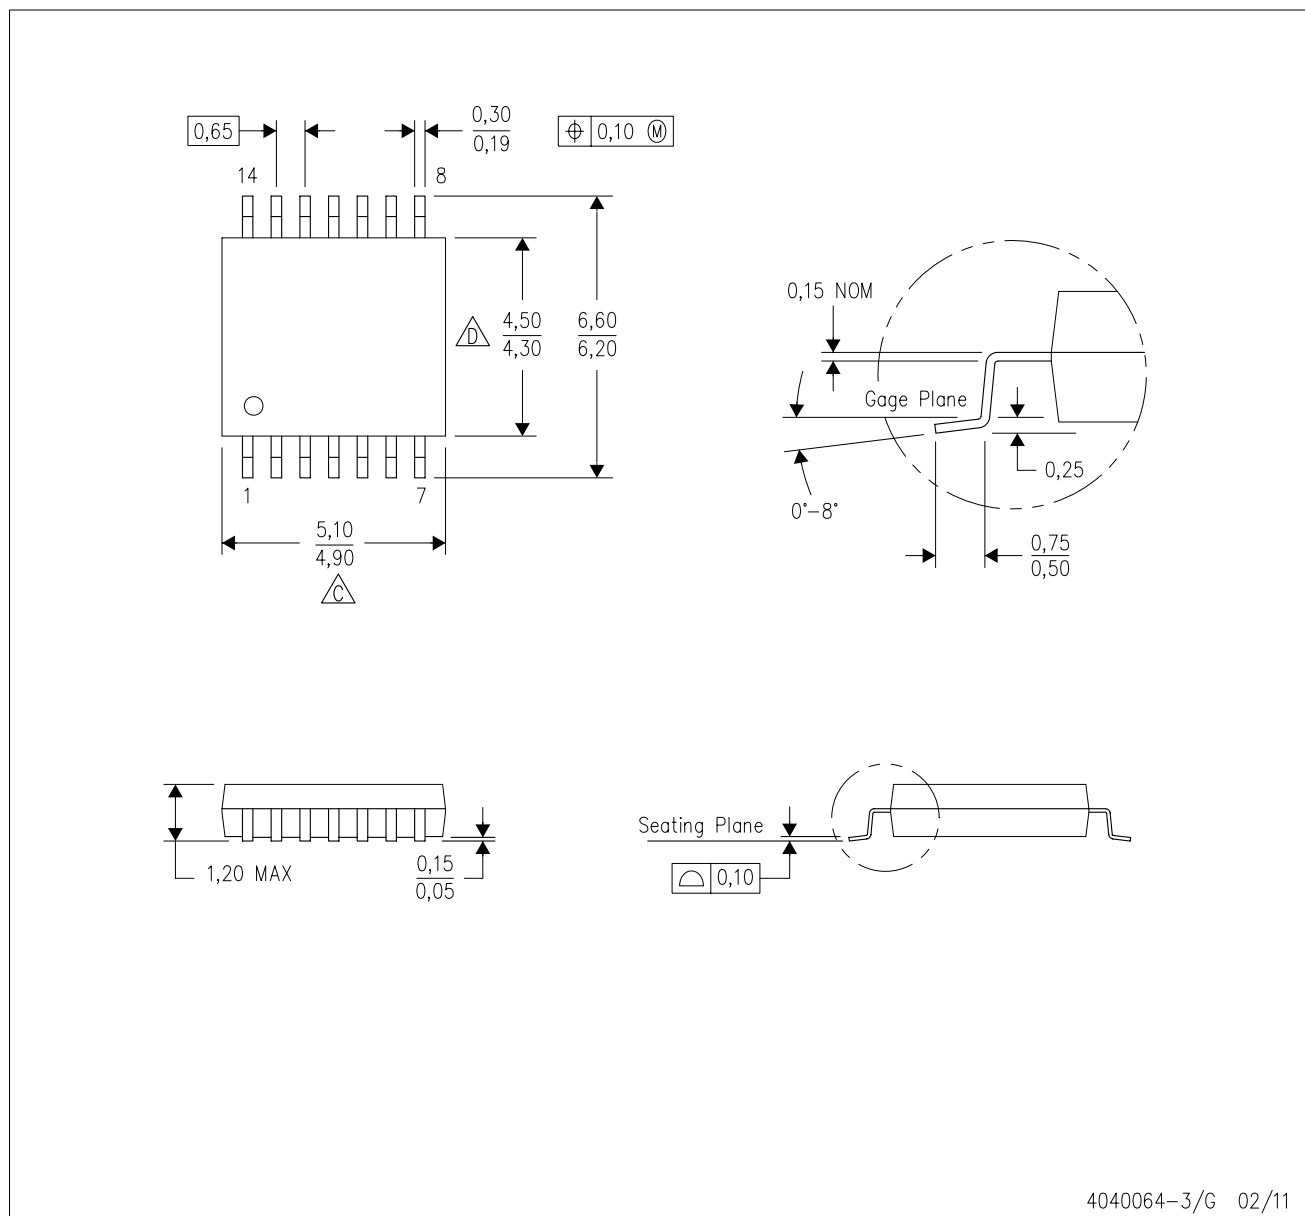

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

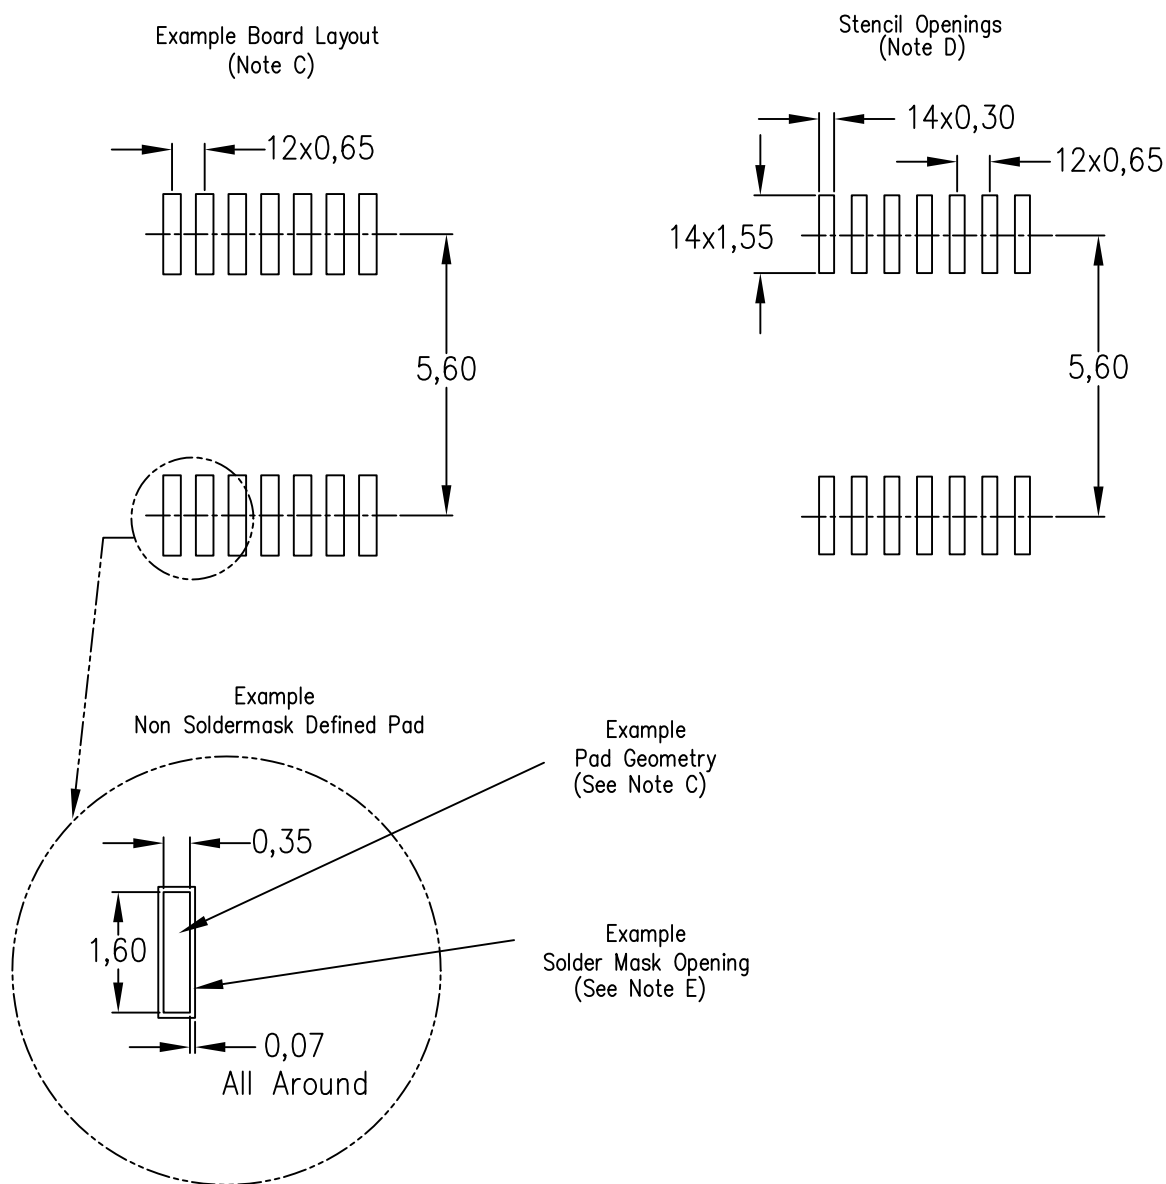


4211284-2/F 12/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

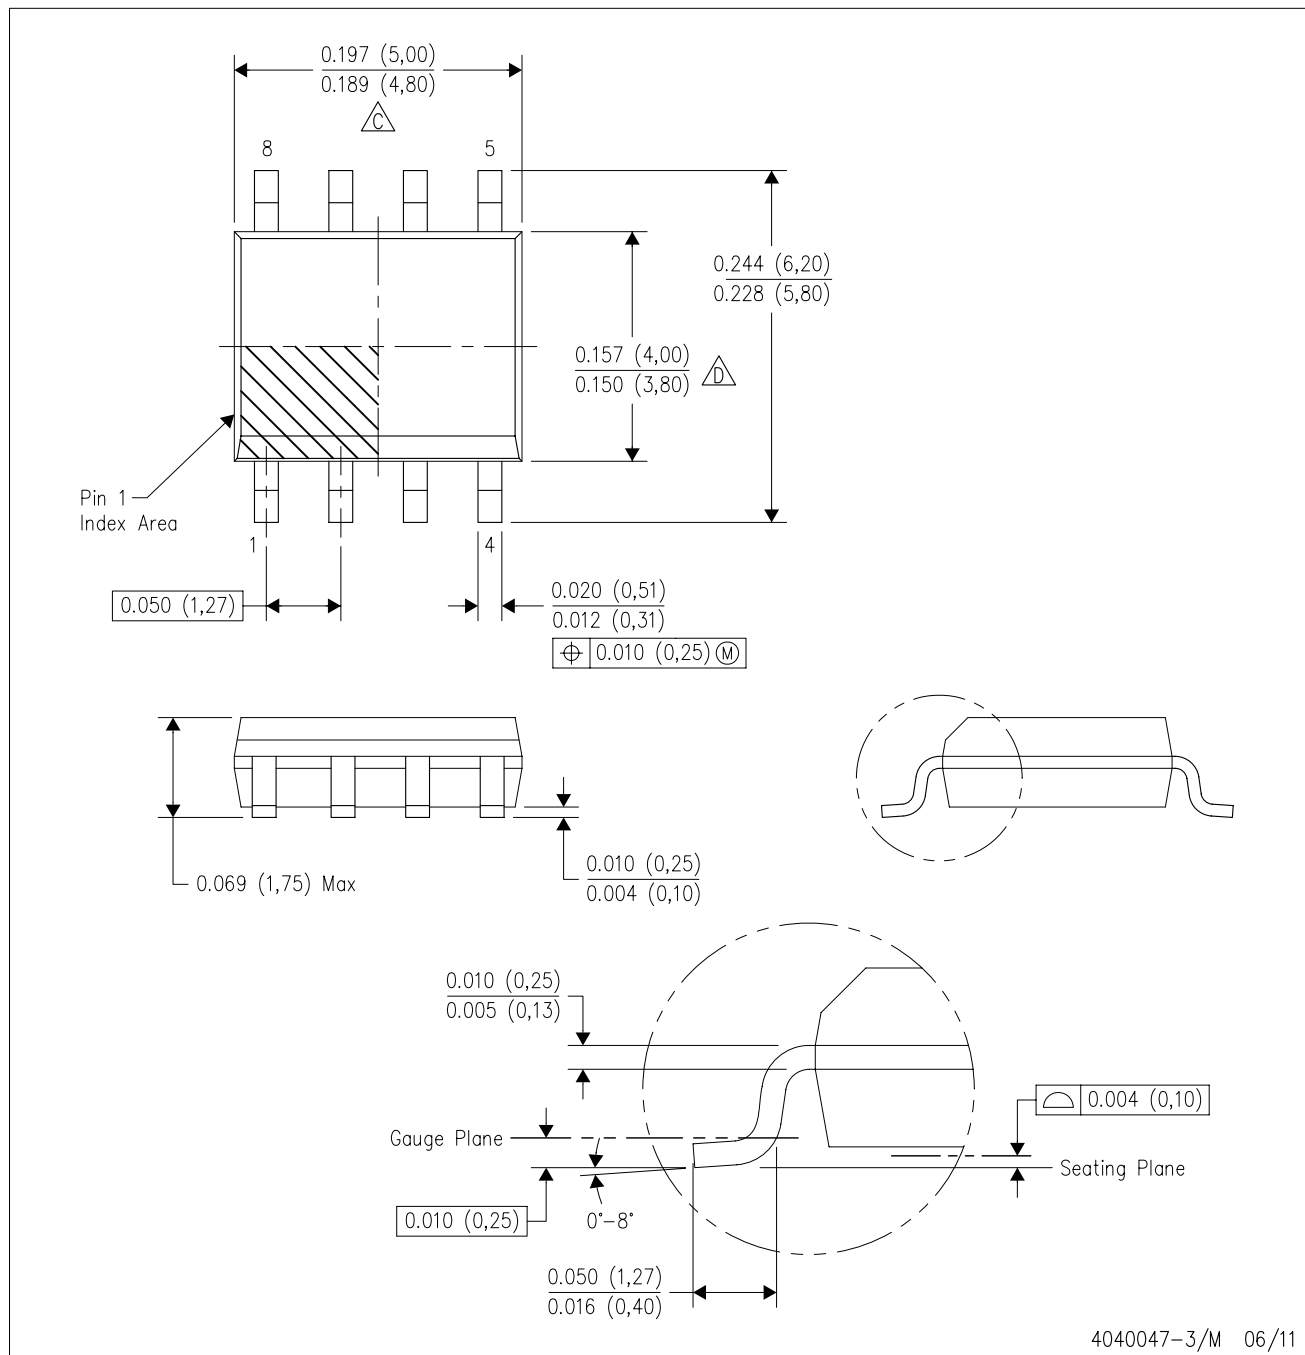


## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

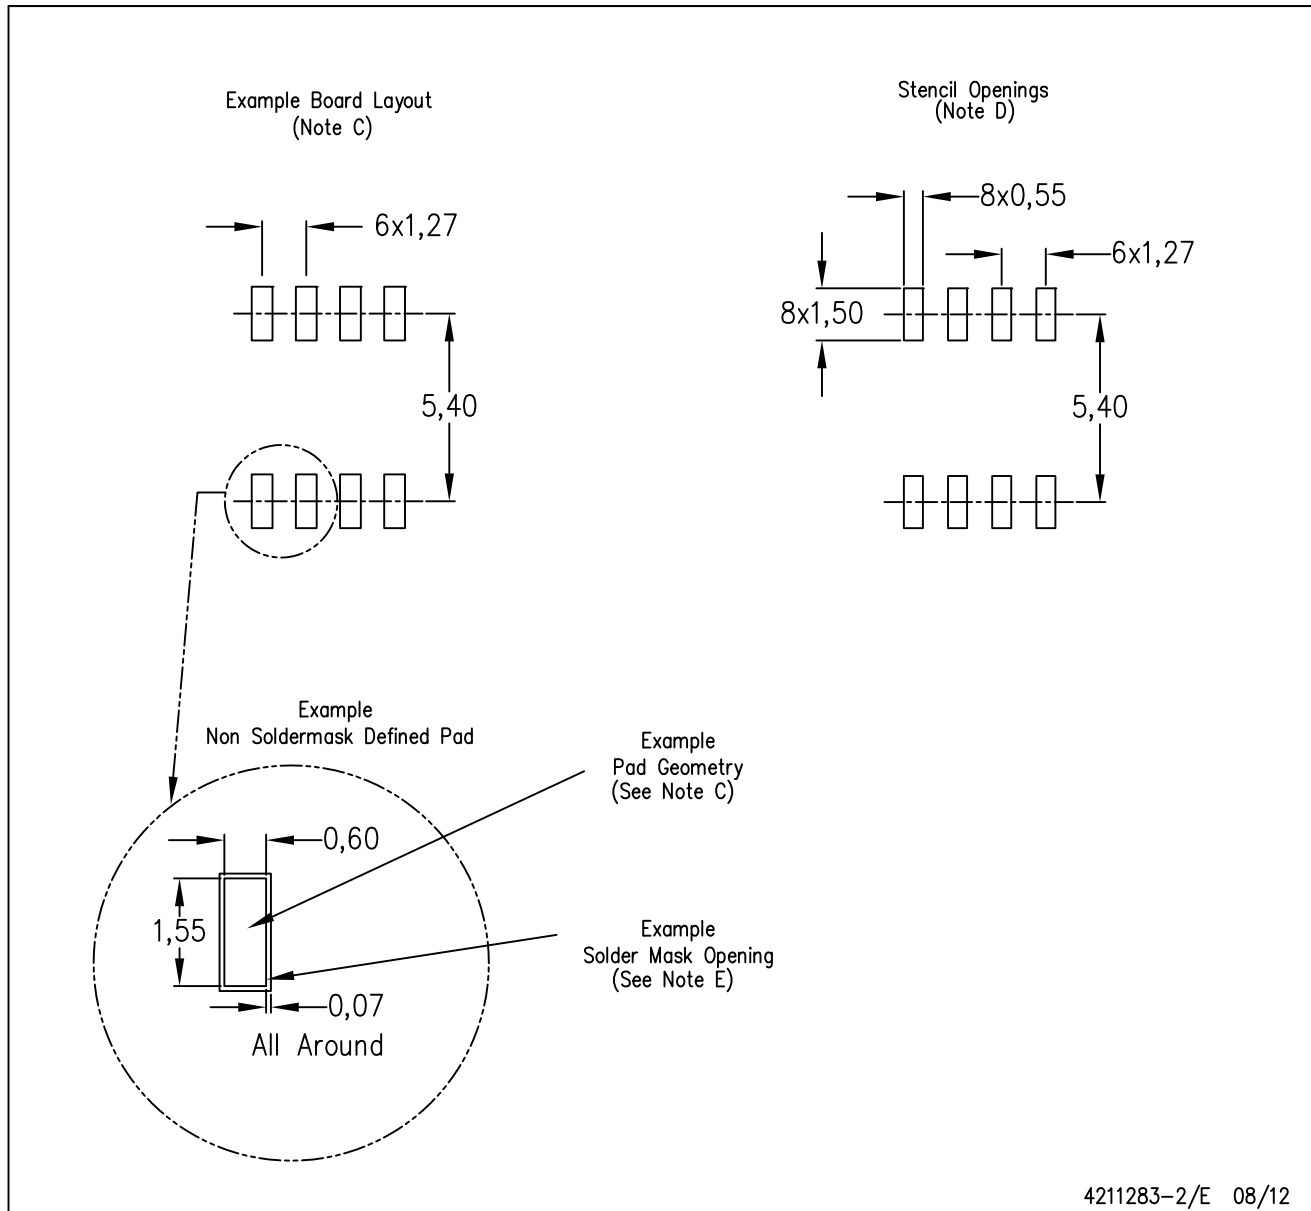


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

# MECHANICAL DATA

PS (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

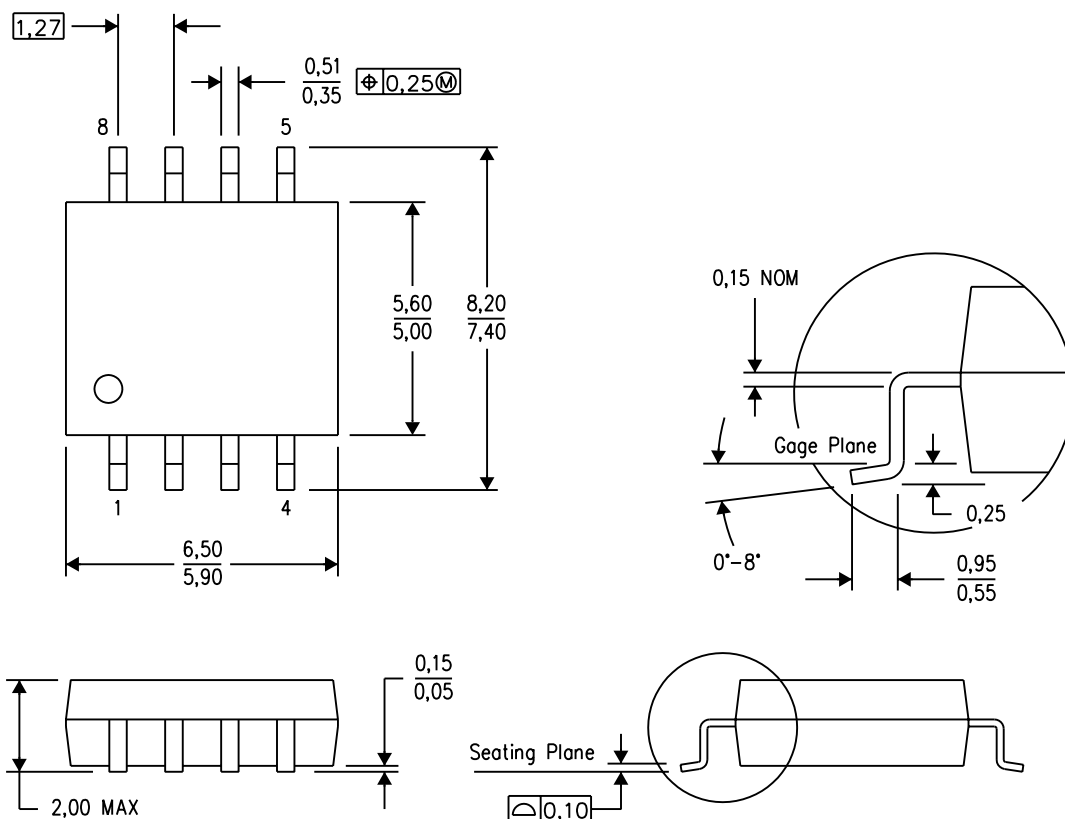


4040063/C 03/03

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## PS (R-PDSO-G8)

## PLASTIC SMALL OUTLINE

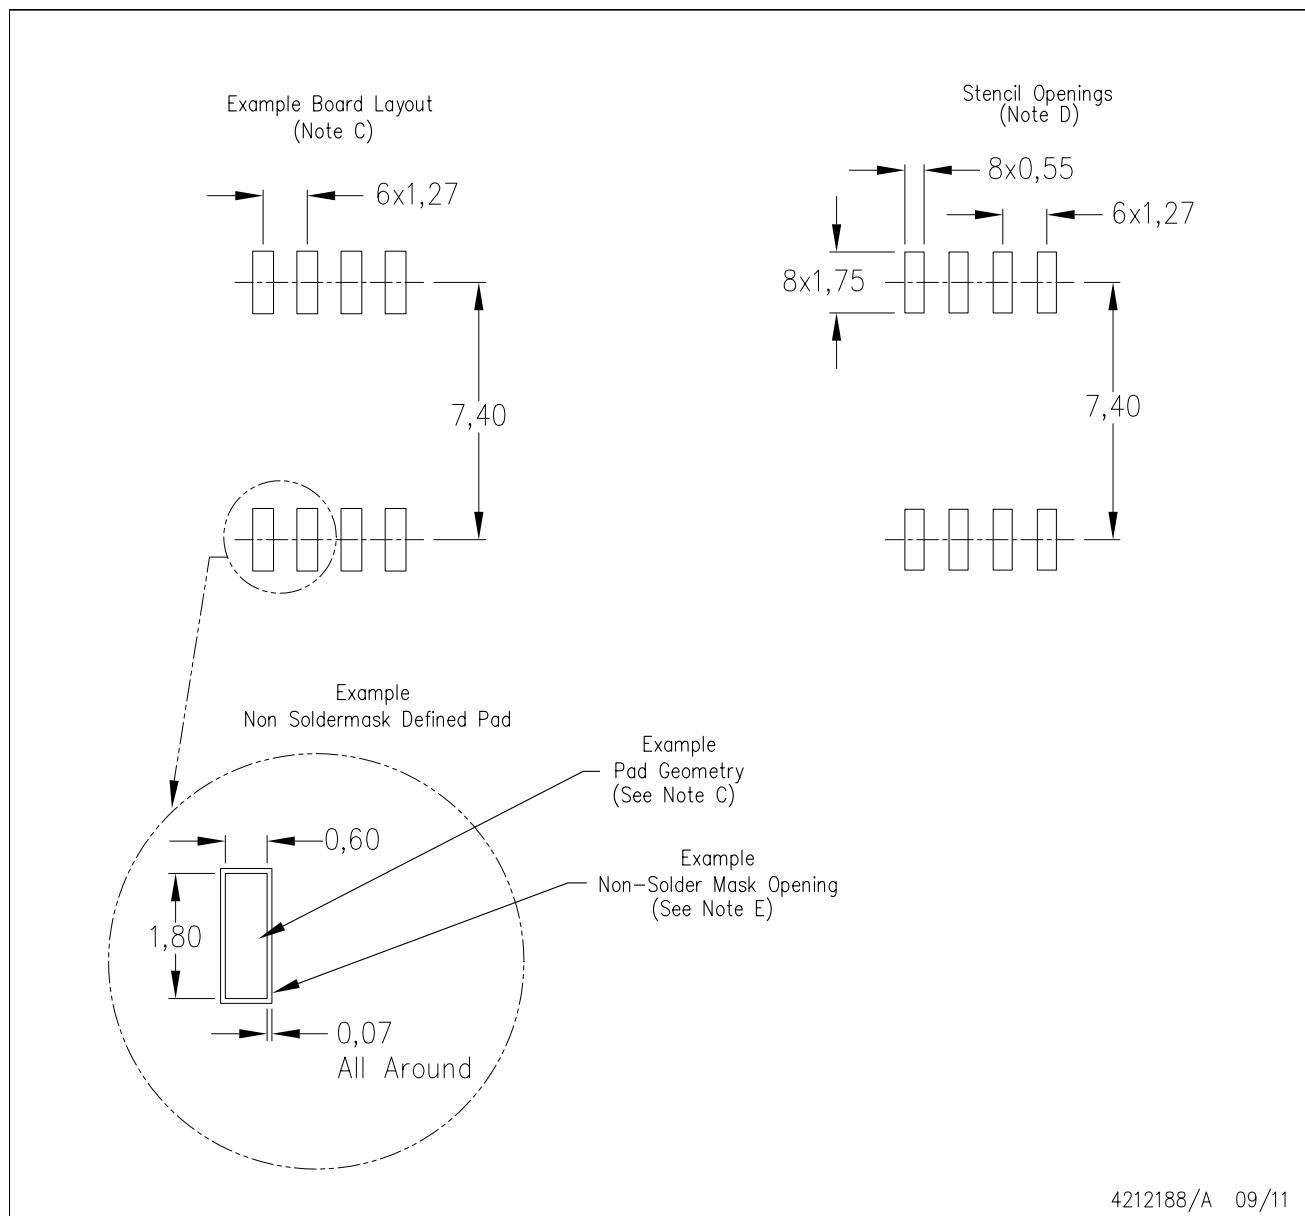

NOTES:


- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE


14-PINS SHOWN

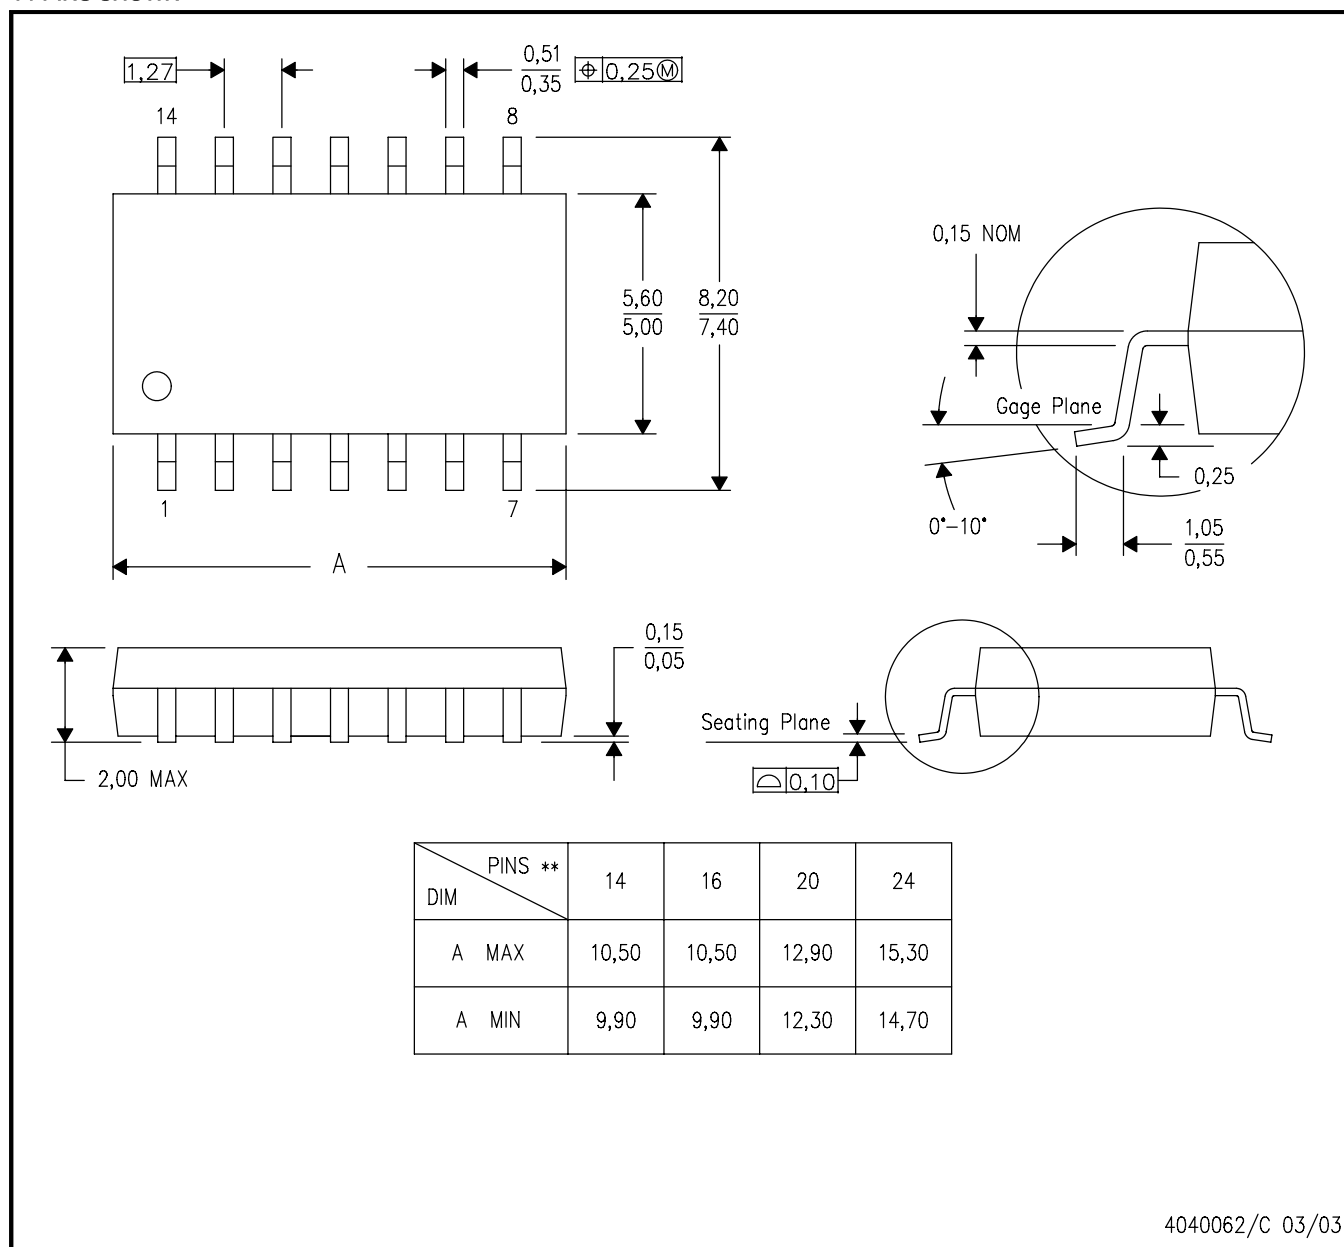

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

PW (R-PDSO-G8)

PLASTIC SMALL OUTLINE

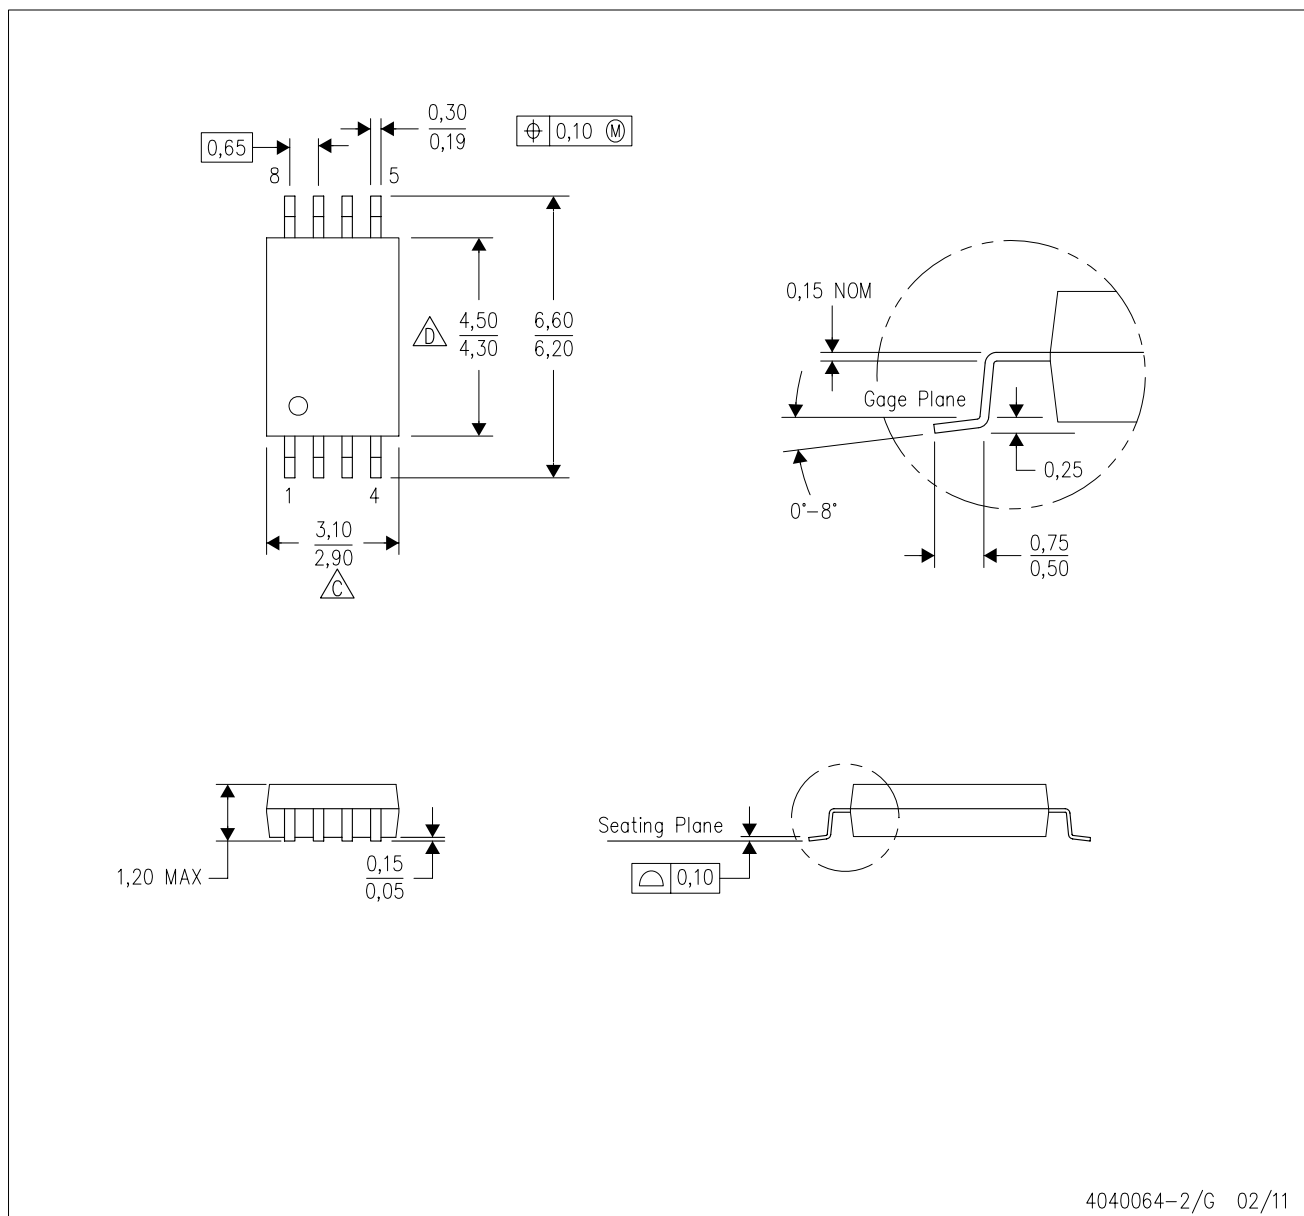

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.