

DC/DC Product Specification

Embedded Power for
Business-Critical Continuity

- Half brick fully regulated DCDC converter.

AVE450B-48S28 Half brick

Input voltage: 36-75V
Single Output: 28V
Rated O/P power: 450W

Special Features

- 2:1 Wide input range
- Extra wide trim range
 - 14V - 33V for 28Vo
- Optimised for High density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super High efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium Substrate design

Safety

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Rev 05/07/2012
AVE series
Page 1 of 2

Product Description

The AVE450B-48S28 is the latest high efficiency half brick. It operates from a wide input range of 36Vdc to 75Vdc and provides a regulated output voltage of 28Vdc. The output is rated to a power level up to 450Watts. Its protection features include Non latching OCP, OTP and OVP. It also has an enable pin on the primary side of the converter. The unit is of an Aluminium Substrate design that is optimised for either contact-cooled applications or forced airflow applications.

Specifications

Feature	
Output power:	450W
Efficiency:	94.5% at half load
Functions:	Remote control, trim function, Sense; Input LVP, output OVP and OCP, OTP
Isolation:	Basic Insulation
Safety	
UL:	UL60950
TUV/CE:	IEC/EN60950
Input specification	
Input range	36Vdc to 75Vdc
Input Surge	100V for 100mSec
Control specification	
Enable	TTL compatible Positive or Negative enable
Output specification	
Output Voltage	28V dc
Trim range	-50% to+18%Vout
Output Current	16A
Ripple and noise	200mV pk-pk
Regulation	Load regulation = 28mV Typical, Line regulation =14mV Typical
Switching Frequency	260Khz - 320Khz
Isolation Voltage	1500Vdc
Transient response.	500mV deviation 500uS recovery (50% - 75% - 50% Io,m, 0.1A/μs)

Environmental Specification

Storage Temperature	-55 to +125 deg C
Ambient operating temp	-40 to +85 deg C
MTBF at 25degC	1.5 Million hours (80% load, 300LFM, 40°C Ta)
OTP	110°C Typical


DC/DC Product Specification

Embedded Power for
Business-Critical Continuity


- Half brick fully regulated DCDC converter.

Rev 05/07/2012
AVE series
Page 2 of 2

Mechanical (open frame)

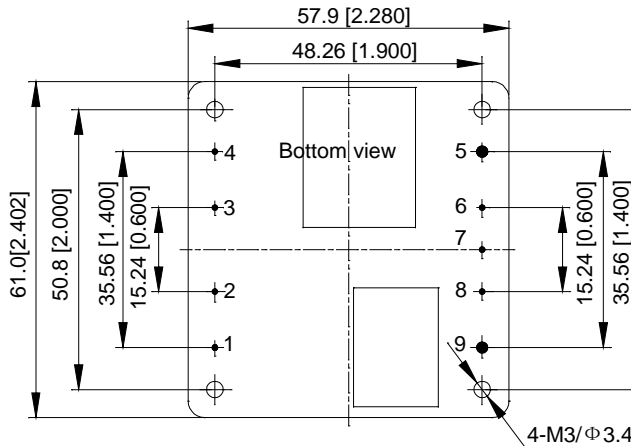

Pin #	Function
1	+V in
2	Enable
3	Case
4	-V in
5	-V out
6	-Sense
7	Trim
8	+Sense
9	+V out

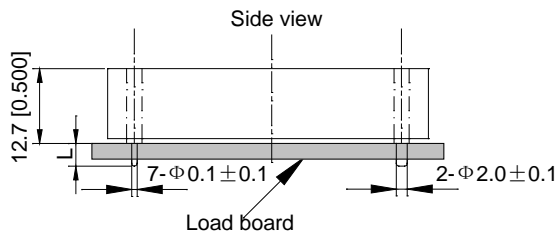

Unit: mm[inch] Bottom view: pin on upside
Tolerance: X.Xmm ± 0.5mm[X.X in. ± 0.02in.]
X.XXmm ± 0.25mm[X.XX in. ± 0.01in.]

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Ordering information

Input voltage	Output voltage	Output current	Efficiency	Part number
48V	28V	16A	94.5%	AVE450B-48S28-6Y/M
48V	28V	16A	94.5%	AVE450B-48S28-6L/M

Notes

- Standard converter is Negative enable
- '-6' = 3.8mm pin length.
- '-L' = RoHS-6 compliant.
- '-Y' = RoHS-5 compliant.
- '-M' = Thread hole fixture.

Notes,

- 1\ 20Mhz bandwidth. External 10uF tantalum capacitor placed across +Vout and -Vout; 33 uF e-cap or equivalent placed across +Vin and -Vin.
- 2\ Efficiency measurements taken at full load and nominal line and Tamb = 25degC
- 3\ All specifications taken at nominal line, full load and Tamb = 25degC unless otherwise noted
- 4\ Mechanical dimensions are for reference only. Dimensions are in MM. Mechanical tolerance = +/- 0.5mmm
- 5\ Technical reference notes should be consulted for detailed information when available.
- 6\ All specifications subject to change without notice
- 7\ Warranty 2 years
- 8\ The through-hole terminated modules are intended for wave-soldering process – special request for other manufacturing processes to be made to Emerson

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2007 Emerson Electric Co.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.