

#### Features

- ◆ Highest power density:  
50 W in 1" x 2" x 0.4" package
- ◆ Excellent efficiency up to 92 %
- ◆ Operating temperature range  
-40°C to +85°C
- ◆ No minimum load required
- ◆ Output voltage adjustable
- ◆ Remote On/Off
- ◆ I/O isolation 1500 VDC
- ◆ 3-year product warranty



The TEN 50 Series is a range of isolated high performance dc-dc converter modules. Due to the very high efficiency of up to 92% and the use of highest reliable components these 50 W converters come with a footprint of only 1.0" x 2.0". The 12 models have a wide 2:1 input voltage range and a tight output voltage regulation. They do not need a minimum load and offer a high efficiency also at low load conditions. The output voltage is adjustable by external resistor. Remote On/Off and protection against overload and short circuit are standard features of these converters.

Typical applications are in mobile equipment, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on the PCB is critical.

#### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency
TEN 50-1210	<b>9 – 18 VDC</b> (nominal 12 VDC)	3.3 VDC	10'000 mA	89 %
TEN 50-1211		5.0 VDC	10'000 mA	90 %
TEN 50-1212		12 VDC	4'170 mA	91 %
TEN 50-1213		15 VDC	3'330 mA	91 %
TEN 50-1215		24 VDC	2'080 mA	91 %
TEN 50-2410	<b>18 – 36 VDC</b> (nominal 24 VDC)	3.3 VDC	10'000 mA	89 %
TEN 50-2411		5.0 VDC	10'000 mA	92 %
TEN 50-2412		12 VDC	4'170 mA	92 %
TEN 50-2413		15 VDC	3'330 mA	92 %
TEN 50-2415		24 VDC	2'080 mA	91 %
TEN 50-4810	<b>36 – 75 VDC</b> (nominal 48 VDC)	3.3 VDC	10'000 mA	89 %
TEN 50-4811		5.0 VDC	10'000 mA	92 %
TEN 50-4812		12 VDC	4'170 mA	92 %
TEN 50-4813		15 VDC	3'330 mA	92 %
TEN 50-4815		24 VDC	2'080 mA	91 %

### Input Specifications

Input current at no load (nominal input voltage)	12 V; 3.3 & 5.0 VDC models:	85 mA typ. / 110 mA typ.
	12 V; 12 & 15 VDC models:	160 mA typ.
	12 V; 24 VDC models:	250 mA typ.
	24 V; 3.3 & 5.0 VDC models:	50 mA typ. / 70 mA typ.
	24 V; 12 & 15 VDC output models:	85 mA typ.
	24 V; 24 VDC models:	110 mA typ.
	48 V; 3.3 & 5.0 VDC models:	35 mA typ. / 45 mA typ.
	48 V; 12 & 15 VDC models: 48 V; 24 VDC models:	50 mA typ. 60 mA typ.
Surge voltage (100 msec. max.)	12 V models:	25 V max.
	24 V models:	50 V max.
	48 V models:	100 V max.
Reflected input ripple current	12 V models:	50 mA typ.
	24 V models:	40 mA typ.
	48 V models:	30 mA typ.
Conducted noise (input)	EN 55022 class A, FCC part 15 level A with external input capacitor (1210 MLCC):	
	12 V models:	22 $\mu$ F /25 V
	24 V models:	3.3 $\mu$ F /50 V
	48 V models:	2.2 $\mu$ F /100 V
Start-up voltage / under voltage shut down	12 V models:	9.0 VDC max./ 8.3 VDC (or lower)
	24 V models:	18 VDC max./ 16.5 VDC (or lower)
	48 V models:	36 VDC max./ 33 VDC (or lower)
Recommended input fuse (slow blow)	12 V models:	10 A
	24 V models:	5 A
	48 V models:	2.5 A

### Output Specifications

Voltage set accuracy		$\pm 1.0$ %
Output voltage adjustment range	24 VDC models:	+20 / -10 %
	other models:	$\pm 10$ % with external resistor (see page 3)
Regulation	- Input variation $V_{in \text{ min.}}$ to $V_{in \text{ max.}}$	0.5 % max.
	- Load variation 0 – 100 %	0.5 % max.
Minimum load		not required
Temperature coefficient		$\pm 0.02$ %/K
Ripple and noise (20 MHz Bandwidth) (measured with 1 $\mu$ F MLCC and a 10 $\mu$ F tantalum capacitor)	3.3 & 5.0 VDC models:	100 mVpk-pk. typ.
	12, 15 & 24 VDC models:	150 mVpk-pk typ.
Transient response (alignment to 1% at load step change 75% to 100% )		250 $\mu$ s typ.
Output current limitation		at 150% of lout max.
Short circuit protection	24 VDC models:	0.3 Hz. typ.
	other models:	hiccup mode 1.5 Hz, automatic recovery
Capacitive load	3.3 VDC models:	25'800 $\mu$ F max.
	5.0 VDC models:	17'000 $\mu$ F max.
	12.0 VDC models:	2'900 $\mu$ F max.
	15.0 VDC models:	1'900 $\mu$ F max.
	24.0 VDC models:	750 $\mu$ F max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>- Operating (natural convection cooling 20 LFM)</li> <li>- Case temperature</li> <li>- Storage</li> </ul>	<ul style="list-style-type: none"> <li>-40°C to +85°C (see load derating)</li> <li>+105°C max.</li> <li>-50°C to +125°C</li> </ul>
Load derating	<ul style="list-style-type: none"> <li>- without heatsink</li> <li>- with heatsink</li> </ul>	<ul style="list-style-type: none"> <li>1.1 %/K above 50°C</li> <li>1.3 %/K above 60°C</li> </ul>
Thermal impedance	<ul style="list-style-type: none"> <li>- Natural convection 20 LFM</li> <li>- Natural convection 20 LFM with heatsink</li> </ul>	<ul style="list-style-type: none"> <li>12°C/W</li> <li>10°C/W</li> </ul>
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>220'000 h
Isolation voltage (60 sec.)	- Input/Output	1500 VDC
Isolation capacitance	- Input/Output	2200 pF max. (100 kHz, 1 V)
Isolation resistance	- Input/Output	>1000 Mohm (500 VDC)
Switching frequency		24 VDC models: 285 kHz typ. other models: 320 kHz typ. (pulse width modulation PWM)
Remote On/Off	<ul style="list-style-type: none"> <li>- On:</li> <li>- Off:</li> <li>- Off idle current:</li> </ul>	<ul style="list-style-type: none"> <li>3.5 to 12 VDC to -Vin or open circuit.</li> <li>0 to +1.2 VDC or short circuit to -Vin</li> <li>2.5 mA typ.</li> </ul>
Safety standards		UL/cUL 60950-1 2nd edition, IEC 60950-1:2005 (2nd Edition); +A1:2009
Safety approvals	<ul style="list-style-type: none"> <li>- CSA certificate (UL/cUL 60950-1 2nd edition)</li> <li>- CB test certificate (IEC/EN 60950-1 2nd edition)</li> </ul>	<a href="http://www.tracopower.com/products/ten50-csa.pdf">www.tracopower.com/products/ten50-csa.pdf</a> <a href="http://www.tracopower.com/products/ten50-cb.pdf">www.tracopower.com/products/ten50-cb.pdf</a>


### Physical Specifications

Casing material		aluminium alloy, 6-side shielded, insulating baseplate
Potting material		epoxy (UL 94V-0 rated)
Weight		30 g (1.05 oz)
Soldering temperature		max. 260°C / 10 sec. (1.5 mm from casing)
Environmental compliance	<ul style="list-style-type: none"> <li>- Reach</li> <li>- RoHS</li> </ul>	<a href="http://www.tracopower.com/products/ten50-reach.pdf">www.tracopower.com/products/ten50-reach.pdf</a> directive 2011/65/EU


**Application note:** [www.tracopower.com/products/ten50-application.pdf](http://www.tracopower.com/products/ten50-application.pdf)

### Output Voltage Adjustment

**Trim up**




**Trim down**



for resistor values see application note

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.




**Outline Dimensions**

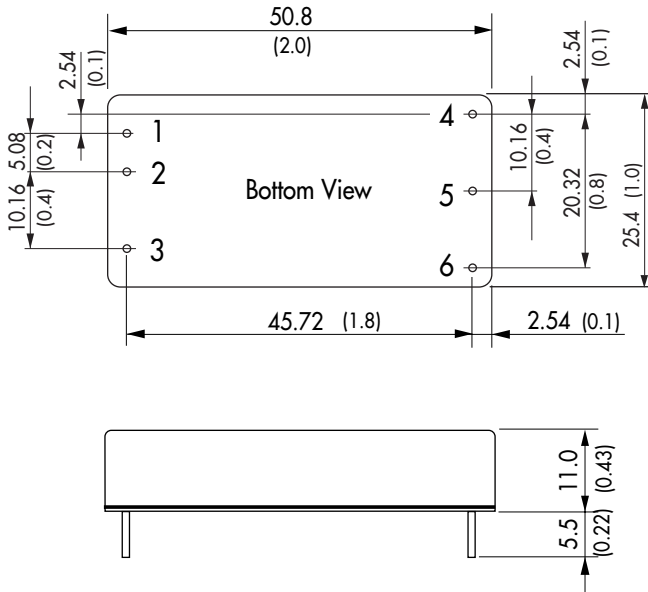

Pin-Out	
Pin	Single
1	+Vin (Vcc)
2	-Vin (GND)
3	Remote On/Off
4	+Vout
5	-Vout
6	Trim

Dimensions in [mm], ( ) = Inch  
 Pin diameter: 1.0 ±0.05 (0.04 ±0.002)  
 Pin pitch tolerance: ±0.13 (±0.005)  
 Case tolerances: ±0.25 (±0.01)

**Heat-sink TEN-HS4 (optional)**

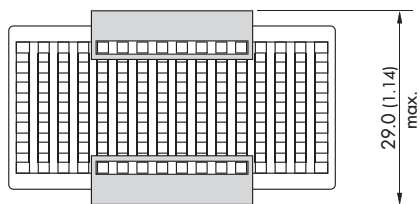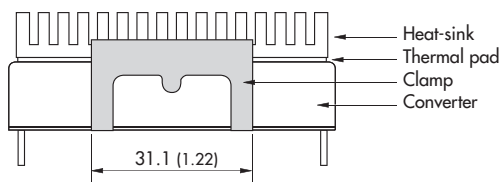

**Order code: TEN-HS4**

(cont.: heat-sink, thermal pad, 2 clamps)

**Material:** Aluminum

**Finish:** Anodic treatment (black)

**Weight:** 17 g (0.60oz) without converter

Thermal impedance after assembling: 10 K/W

**Note:**

Before attaching the heatsink, the product label on converter has to be removed for optimal performance.

For volume orders we can supply the converters with heatsink already mounted. Please contact us for a relative quotation.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.