



Beaglebone green User Manual

Release date: 2015/9/22

Version: 1.0

Wiki: http://www.seeedstudio.com/wiki/Beaglebone_green

Bazaar: http://www.seeedstudio.com/depot/BeagleBone-Green-p-2504.html?cPath=122_113

Document Revision History

Revision	Date	Author	Description
1.0	Sep 22, 2015	Loovee	Create file

Contents

Document Revision History	2
1. Introduction	2
2. Technical Details	3
3. Hardware Overview	4
3.1 Design materials	4
3.2 Headers	5
3.2.1 Cape Expansion Headers	5
3.2.2 65 Possible Digital I/Os	5
3.2.3 PWMs and Timers	6
3.2.4 Analog Inputs	7
3.2.5 UART	7
3.2.6 I2C	8
3.2.7 SPI	9
4. Software	10
4.1 Software Support	10
4.2 Getting Started	10
4.3 Cloud9 IDE	10
4.4 Update image	11
4.4.1 Step1: Download the latest microSD card image	11
4.4.2 Step2: Install compression utility	12
4.4.3 Step3: Decompress the image	12
4.4.4 Step4: Install SD card programming utility	12
4.4.5 Step5: Connect SD card to your computer	12
4.4.6 Step6: Write the image to your SD card	12
4.4.7 Step7: Eject the SD card	13
4.4.8 Step8: Boot your board off of the SD card	13
5. Resources	14

Disclaimer

For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.

Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.

Copyright


The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.

1. Introduction

BeagleBone Green (BBG) is based on the classical open-source hardware design of BeagleBone Black (BBB) and added two Grove connectors.

It has removed the HDMI port on the BBB and also updated the 5V barrel to Micro USB host. It is a low-cost, community-supported development platform for developers and hobbyists.

Boot Linux in under 10 seconds and get started on development in less than 5 minutes with just a single USB cable.

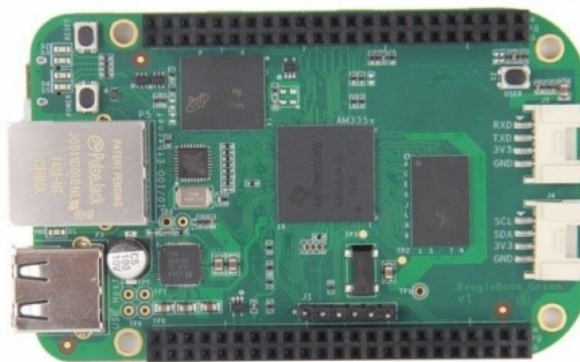

2. Technical Details

Processor

- AM335x 1GHz ARM® Cortex-A8
- 512MB DDR3 RAM
- 4GB eMMC on-board flash storage
- 3D graphics accelerator
- NEON floating-point

Software Compatibility

- Debian
- Android
- Ubuntu
- Cloud9 IDE on Node
- Support much more

Connectivity

- USB client for power & communications
- USB host
- Ethernet
- 2x Grove
- 2x 46 pin headers

3. Hardware Overview


Seeed.cc's BeagleBoneGreen page documents all of the known hardware issues, as well as the latest available software, hardware documentation and design materials.

Always read the System Reference Manual!

3.1 Design materials

Design materials for creating your own customized version of the hardware, or for better understanding the design are also linked from the traditional home of "<http://beagleboard.org/hardware/design>"

BeagleBone Green hardware details

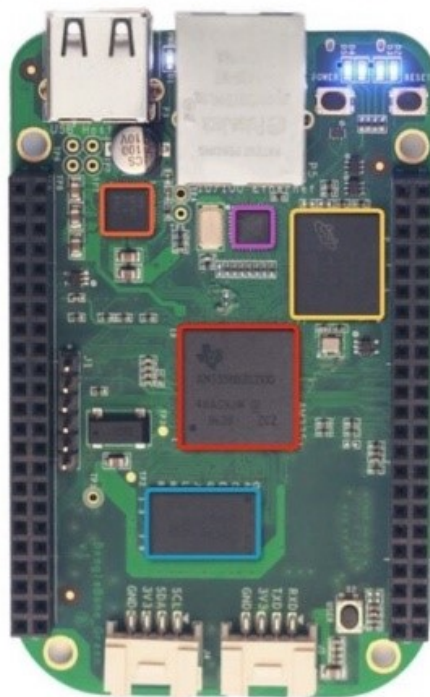

- **Sitara AM3358BZCZ100** is the processor for the board.
- **Micron 512M DDR3L** is the Dual Data Rate RAM memory.
- **Micron eMMC** is an onboard MMC chip that holds up to 4GB of data
- **SMSC Ethernet PHY** is the physical interface to the network
- **TPS65217C PMIC** provides the power rails to the various components on the board

POWER button can be used to enter and exit hibernate modes once that feature is implemented in the software.

3.2 Headers

The expansion headers provide extensive I/O capabilities.

3.2.1 Cape Expansion Headers

Each digital I/O pin has 8 different modes that can be selected, including GPIO.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	MMC1_DAT6	3	4	MMC1_DAT7
VDD_5V	5	6	VDD_5V	MMC1_DAT2	5	6	MMC1_DAT3
SYS_5V	7	8	SYS_5V	GPIO_66	7	8	GPIO_67
PWR_BTN	9	10	SYS_RESETN	GPIO_69	9	10	GPIO_68
UART4_RXD	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
UART4_TXD	13	14	EHRPWM1A	EHRPWM2B	13	14	GPIO_26
GPIO_48	15	16	EHRPWM1B	GPIO_47	15	16	GPIO_46
SPI0_CS0	17	18	SPI0_D1	GPIO_27	17	18	GPIO_65
I2C2_SCL	19	20	I2C2_SDA	EHRPWM2A	19	20	MMC1_CMD
SPI0_D0	21	22	SPI0_SCLK	MMC1_CLK	21	22	MMC1_DAT5
GPIO_49	23	24	UART1_TXD	MMC1_DAT4	23	24	MMC1_DAT1
GPIO_117	25	26	UART1_RXD	MMC1_DAT0	25	26	GPIO_61
GPIO_115	27	28	SPI1_CS0	LCD_VSYNC	27	28	LCD_PCLK
SPI1_D0	29	30	GPIO_122	LCD_HSYNC	29	30	LCD_AC_BIAS
SPI1_SCLK	31	32	VDD_ADC	LCD_DATA14	31	32	LCD_DATA15
AIN4	33	34	GNDA_ADC	LCD_DATA13	33	34	LCD_DATA11
AIN6	35	36	AIN5	LCD_DATA12	35	36	LCD_DATA10
AIN2	37	38	AIN3	LCD_DATA8	37	38	LCD_DATA9
AIN0	39	40	AIN1	LCD_DATA6	39	40	LCD_DATA7
GPIO_20	41	42	ECAPPWM0	LCD_DATA4	41	42	LCD_DATA5
DGND	43	44	DGND	LCD_DATA2	43	44	LCD_DATA3
DGND	45	46	DGND	LCD_DATA0	45	46	LCD_DATA1

LEGEND	
POWER/GROUND/RESET	
AVAILABLE DIGITAL	
AVAILABLE PWM	
SHARED I2C BUS	
RECONFIGURABLE DIGITAL	
ANALOG INPUTS (1.8V)	

3.2.2 65 Possible Digital I/Os

In GPIO mode, each digital I/O can produce interrupts.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	GPIO_38	3	4	GPIO_39
VDD_5V	5	6	VDD_5V	GPIO_34	5	6	GPIO_35
SYS_5V	7	8	SYS_5V	GPIO_66	7	8	GPIO_67
PWR_BUT	9	10	SYS_RESETN	GPIO_69	9	10	GPIO_68
GPIO_30	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
GPIO_31	13	14	GPIO_50	GPIO_23	13	14	GPIO_26
GPIO_48	15	16	GPIO_51	GPIO_47	15	16	GPIO_46
GPIO_5	17	18	GPIO_4	GPIO_27	17	18	GPIO_65
GPIO_3	19	20	GPIO_2	GPIO_22	19	20	GPIO_63
GPIO_49	21	22	GPIO_15	GPIO_62	21	22	GPIO_37
GPIO_117	23	24	GPIO_14	GPIO_36	23	24	GPIO_33
GPIO_115	25	26	GPIO_123	GPIO_32	25	26	GPIO_61
GPIO_121	27	28	GPIO_122	GPIO_86	27	28	GPIO_88
GPIO_120	29	30	VDD_ADC	GPIO_87	29	30	GPIO_89
AIN4	31	32	GNDA_ADC	GPIO_10	31	32	GPIO_11
AIN6	33	34	AIN5	GPIO_9	33	34	GPIO_81
AIN2	35	36	AIN3	GPIO_8	35	36	GPIO_80
AIN0	37	38	AIN1	GPIO_78	37	38	GPIO_79
GPIO_20	39	40	GPIO_7	GPIO_76	39	40	GPIO_77
DGND	41	42	DGND	GPIO_74	41	42	GPIO_75
DGND	43	44	DGND	GPIO_72	43	44	GPIO_73
DGND	45	46	DGND	GPIO_70	45	46	GPIO_71

3.2.3 PWMs and Timers

Up to 8 digital I/O pins can be configured with pulse-width modulators (PWM) to produce signals to control motors or create pseudo analog voltage levels, without taking up any extra CPU cycles.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	GPIO_38	3	4	GPIO_39
VDD_5V	5	6	VDD_5V	GPIO_34	5	6	GPIO_35
SYS_5V	7	8	SYS_5V	TIMER4	7	8	TIMER7
PWR_BUT	9	10	SYS_RESETN	TIMER5	9	10	TIMER6
GPIO_30	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
GPIO_31	13	14	EHRPWM1A	EHRPWM2B	13	14	GPIO_26
GPIO_48	15	16	EHRPWM1B	GPIO_47	15	16	GPIO_46
GPIO_5	17	18	GPIO_4	GPIO_27	17	18	GPIO_65
GPIO_3	19	20	GPIO_2	EHRPWM2A	19	20	GPIO_63
EHRPWMOB	21	22	EHRPWMOA	GPIO_62	21	22	GPIO_37
GPIO_49	23	24	GPIO_15	GPIO_36	23	24	GPIO_33
GPIO_117	25	26	GPIO_14	GPIO_32	25	26	GPIO_61
GPIO_115	27	28	ECAPPWM2	GPIO_86	27	28	GPIO_88
EHRPWMOB	29	30	GPIO_122	GPIO_87	29	30	GPIO_89
EHRPWMOA	31	32	VDD_ADC	GPIO_10	31	32	GPIO_11
AIN4	33	34	GNDA_ADC	GPIO_9	33	34	EHRPWM1B
AIN6	35	36	AIN5	GPIO_8	35	36	EHRPWM1A
AIN2	37	38	AIN3	GPIO_78	37	38	GPIO_79
AIN0	39	40	AIN1	GPIO_76	39	40	GPIO_77
GPIO_20	41	42	ECAPPWMO	GPIO_74	41	42	GPIO_75
DGND	43	44	DGND	GPIO_72	43	44	GPIO_73
DGND	45	46	DGND	EHRPWM2A	45	46	EHRPWM2B

3.2.4 Analog Inputs

Make sure you don't input more than 1.8V to the analog input pins. This is a single 12-bit analog-to-digital converter with 8 channels, 7 of which are made available on the headers.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	GPIO_38	3	4	GPIO_39
VDD_5V	5	6	VDD_5V	GPIO_34	5	6	GPIO_35
SYS_5V	7	8	SYS_5V	GPIO_66	7	8	GPIO_67
PWR_BTN	9	10	SYS_RESETN	GPIO_69	9	10	GPIO_68
GPIO_30	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
GPIO_31	13	14	GPIO_50	GPIO_23	13	14	GPIO_26
GPIO_48	15	16	GPIO_51	GPIO_47	15	16	GPIO_46
GPIO_5	17	18	GPIO_4	GPIO_27	17	18	GPIO_65
I2C_SCL	19	20	I2C_SDA	GPIO_22	19	20	GPIO_63
GPIO_3	21	22	GPIO_2	GPIO_62	21	22	GPIO_37
GPIO_49	23	24	GPIO_15	GPIO_36	23	24	GPIO_33
GPIO_117	25	26	GPIO_14	GPIO_32	25	26	GPIO_61
GPIO_115	27	28	GPIO_123	GPIO_86	27	28	GPIO_88
GPIO_121	29	30	GPIO_122	GPIO_87	29	30	GPIO_89
GPIO_120	31	32	VDD_ADC	GPIO_10	31	32	GPIO_11
AIN4	33	34	GNDA_ADC	GPIO_9	33	34	GPIO_81
AIN6	35	36	AIN5	GPIO_8	35	36	GPIO_80
AIN2	37	38	AIN3	GPIO_78	37	38	GPIO_79
AIN0	39	40	AIN1	GPIO_76	39	40	GPIO_77
GPIO_20	41	42	GPIO_7	GPIO_74	41	42	GPIO_75
DGND	43	44	DGND	GPIO_72	43	44	GPIO_73
DGND	45	46	DGND	GPIO_70	45	46	GPIO_71

3.2.5 UART

There is a dedicated header for getting to the UART0 pins and connecting a debug cable. Five additional serial ports are brought to the expansion headers, but one of them only has a single direction brought to the headers.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	GPIO_38	3	4	GPIO_39
VDD_5V	5	6	VDD_5V	GPIO_34	5	6	GPIO_35
SYS_5V	7	8	SYS_5V	GPIO_66	7	8	GPIO_67
PWR_BTN	9	10	SYS_RESETN	GPIO_69	9	10	GPIO_68
UART4_RXD	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
UART4_TXD	13	14	GPIO_50	GPIO_23	13	14	GPIO_26
GPIO_48	15	16	GPIO_51	GPIO_47	15	16	GPIO_46
GPIO_5	17	18	GPIO_4	GPIO_27	17	18	GPIO_65
UART1_RTSN	19	20	UART1_CTSN	GPIO_22	19	20	GPIO_63
UART2_TXD	21	22	UART2_RXD	GPIO_62	21	22	GPIO_37
GPIO_49	23	24	UART1_TXD	GPIO_36	23	24	GPIO_33
GPIO_117	25	26	UART1_RXD	GPIO_32	25	26	GPIO_61
GPIO_115	27	28	GPIO_123	GPIO_86	27	28	GPIO_88
GPIO_121	29	30	GPIO_122	GPIO_87	29	30	GPIO_89
GPIO_120	31	32	VDD_ADC	UART5_CTSN+	31	32	UART5_RTSN
AIN4	33	34	GNDA_ADC	UART4_RTSN	33	34	UART3_RTSN
AIN6	35	36	AIN5	UART4_CTSN	35	36	UART3_CTSN
AIN2	37	38	AIN3	UART5_TXD+	37	38	UART5_RXD+
AIN0	39	40	AIN1	GPIO_76	39	40	GPIO_77
GPIO_20	41	42	UART3_TXD	GPIO_74	41	42	GPIO_75
DGND	43	44	DGND	GPIO_72	43	44	GPIO_73
DGND	45	46	DGND	GPIO_70	45	46	GPIO_71

3.2.6 I2C

The first I2C bus is utilized for reading EEPROMS on cape add-on boards and can't be used for other digital I/O operations without interfering with that function, but you can still use it to add other I2C devices at available addresses. The second I2C bus is available for you to configure and use.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	GPIO_38	3	4	GPIO_39
VDD_5V	5	6	VDD_5V	GPIO_34	5	6	GPIO_35
SYS_5V	7	8	SYS_5V	GPIO_66	7	8	GPIO_67
PWR_BTN	9	10	SYS_RESETN	GPIO_69	9	10	GPIO_68
GPIO_30	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
GPIO_31	13	14	GPIO_50	GPIO_23	13	14	GPIO_26
GPIO_48	15	16	GPIO_51	GPIO_47	15	16	GPIO_46
I2C1_SCL	17	18	I2C1_SDA	GPIO_27	17	18	GPIO_65
I2C2_SCL	19	20	I2C2_SDA	GPIO_22	19	20	GPIO_63
I2C2_SCL	21	22	I2C2_SDA	GPIO_62	21	22	GPIO_37
GPIO_49	23	24	I2C1_SCL	GPIO_36	23	24	GPIO_33
GPIO_117	25	26	I2C1_SDA	GPIO_32	25	26	GPIO_61
GPIO_115	27	28	GPIO_123	GPIO_86	27	28	GPIO_88
GPIO_121	29	30	GPIO_122	GPIO_87	29	30	GPIO_89
GPIO_120	31	32	VDD_ADC	GPIO_10	31	32	GPIO_11
AIN4	33	34	GNDA_ADC	GPIO_9	33	34	GPIO_81
AIN6	35	36	AIN5	GPIO_8	35	36	GPIO_80
AIN2	37	38	AIN3	GPIO_78	37	38	GPIO_79
AIN0	39	40	AIN1	GPIO_76	39	40	GPIO_77
GPIO_20	41	42	GPIO_7	GPIO_74	41	42	GPIO_75
DGND	43	44	DGND	GPIO_72	43	44	GPIO_73
DGND	45	46	DGND	GPIO_70	45	46	GPIO_71

3.2.7 SPI

For shifting out data fast, you might consider using one of the SPI ports.

P9				P8			
DGND	1	2	DGND	DGND	1	2	DGND
VDD_3V3	3	4	VDD_3V3	GPIO_38	3	4	GPIO_39
VDD_5V	5	6	VDD_5V	GPIO_34	5	6	GPIO_35
SYS_5V	7	8	SYS_5V	GPIO_66	7	8	GPIO_67
PWR_BTN	9	10	SYS_RESETN	GPIO_69	9	10	GPIO_68
GPIO_30	11	12	GPIO_60	GPIO_45	11	12	GPIO_44
GPIO_31	13	14	GPIO_50	GPIO_23	13	14	GPIO_26
GPIO_48	15	16	GPIO_51	GPIO_47	15	16	GPIO_46
SPIO_CS0	17	18	SPIO_D1	GPIO_27	17	18	GPIO_65
SPI1_CS1	19	20	SPI1_CS0	GPIO_22	19	20	GPIO_63
SPIO_D0	21	22	SPIO_SCLK	GPIO_62	21	22	GPIO_37
GPIO_49	23	24	GPIO_15	GPIO_36	23	24	GPIO_33
GPIO_117	25	26	GPIO_14	GPIO_32	25	26	GPIO_61
GPIO_115	27	28	SPI1_CS0	GPIO_86	27	28	GPIO_88
SPI1_D0	29	30	SPI1_D1	GPIO_87	29	30	GPIO_89
SPI1_SCLK	31	32	VDD_ADC	GPIO_10	31	32	GPIO_11
AIN4	33	34	GNDA_ADC	GPIO_9	33	34	GPIO_81
AIN6	35	36	AIN5	GPIO_8	35	36	GPIO_80
AIN2	37	38	AIN3	GPIO_78	37	38	GPIO_79
AIN0	39	40	AIN1	GPIO_76	39	40	GPIO_77
GPIO_20	41	42	SPI1_CS1	GPIO_74	41	42	GPIO_75
DGND	43	44	DGND	GPIO_72	43	44	GPIO_73
DGND	45	46	DGND	GPIO_70	45	46	GPIO_71

4. Software

4.1 Software Support

Android? Ubuntu? Gentoo? Whatever your software preference, get started on development with your Beagle and the software resources by

click <http://beagleboard.org/Support/Software+Support>.

4.2 Getting Started


Beaglebone Green is a tiny computer with all the capability of today's desktop machines, without the bulk, expense, or noise. Read the step-by-step getting started tutorial by


click <http://beagleboard.org/getting-started> to begin developing with your BeagleBone in minutes.

4.3 Cloud9 IDE

To begin editing programs that live on your board, you can use the Cloud9 IDE. As a simple exercise to become familiar with Cloud9 IDE, creating a simple application to blink one of the 4 user programmable LEDs on the BeagleBone is a good start.

- **Step1:** Close any open file tabs.
- **Step2:** Click the "+" in the top-right to create a new file.



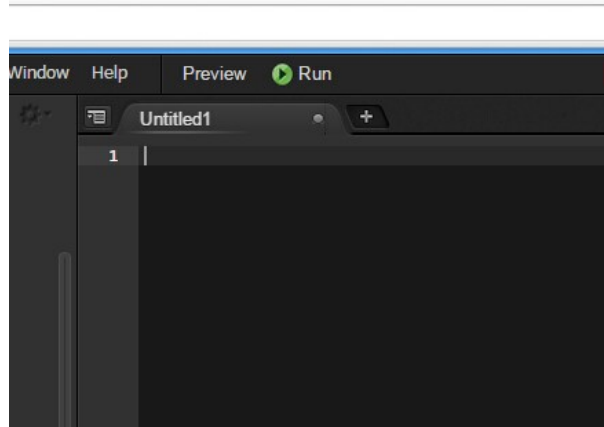

- **Step3:** Copy and paste the following code into the new tab

```
import Adafruit_BBIO.GPIO as GPIO
import time
GPIO.setup("P9_14", GPIO.OUT)
while True:
    GPIO.output("P9_14", GPIO.HIGH)
    time.sleep(0.5)
    GPIO.output("P9_14", GPIO.LOW)
    time.sleep(0.5)
```

- **Step4:** Save the file by clicking the disk icon and giving the file a name with the .py extension.
- **Step5:** Run the code

Select the arrow to the right of "**run**" (or "**debug**") in the toolbar to pull down the list of files to run and select your new file.

- **Step6:** Observe the BeagleBone P9_14 led blinking steadily about once a second.
- **Step7:** Stop the code by clicking "stop" in the toolbar.

4.4 Update image

There are multiple ways to run initial software on your board, but it is likely that the simplest way to get an update is to create an exact replica of a bootable microSD card and boot off of it.

The BeagleBone Green that can be initialized by a program booted off of a microSD card. If you want to update to the latest software image for your board, this is a way to do that.

4.4.1 Step1: Download the latest microSD card image

Download the image from

<http://statics.seeed.cc/products/platforms/BeagleBoneGreen/bone-debian-7.8-lxde-4gb-armhf-2015-07-13-4gb-for-user.7z> .

The file you download will have an .img.xz extension. This is a compressed sector-by-sector image of the SD card.

4.4.2 Step2: Install compression utility

Download and install 7-zip by click <http://www.7-zip.org/download.html> .



Download

Download 7-Zip 15.05 beta (2015-06-14) for Windows:

Link	Type	Windows	Description
Download	.exe	32-bit x86	7-Zip for 32-bit Windows
Download	.exe	64-bit x64	7-Zip for 64-bit Windows x64 (Intel 64 or AMD64)
Download	.7z	x86 / x64	7-Zip Extra: standalone console version, 7z DLL, Plugin for Far Manager
Download	.7z	Any	7-Zip Source code
Download	.7z	Any / x86 / x64	LZMA SDK: (C, C++, C#, Java)

4.4.3 Step3: Decompress the image

Use 7-zip to decompress the SD card .img file

4.4.4 Step4: Install SD card programming utility

Download and install Image Writer for Windows by click

<http://sourceforge.net/projects/win32diskimager/files/latest/download> .


Be sure to download the binary distribution.

4.4.5 Step5: Connect SD card to your computer

Use the provided microSD card to SD adapter or a USB adapter to connect the SD card to your computer.

4.4.6 Step6: Write the image to your SD card

Use either the Ubuntu Image Writer or instructions on its page to write the decompressed image to your SD card.

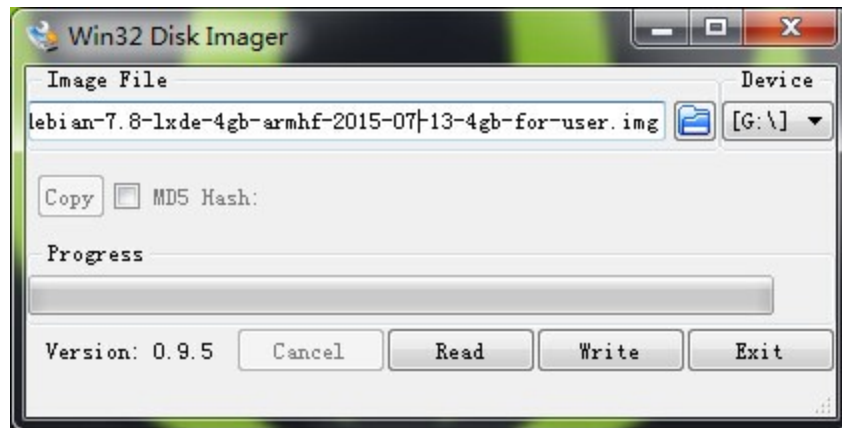

4.4.7 Step7: Eject the SD card

Eject the newly programmed SD card.

4.4.8 Step8: Boot your board off of the SD card

Insert SD card into your (powered-down) board, hold down the USER/BOOT button (if using Black) and apply power, either by the USB cable or 5V adapter.

If using an original white BeagleBone, you are done.

If using BeagleBone Green and the image is meant to program your on-board eMMC, you'll need to wait while the programming occurs.

When the flashing is complete, all 4 USRx LEDs will be lit solid.

Note: This can take up to 45 minutes. Power-down your board, remove the SD card and apply power again to be complete.

5. Resources

- [BEAGLEBONE_GREEN SRM\(pdf\)](#)
- [BEAGLEBONE_GREEN Schematic\(pdf\)](#)
- [BEAGLEBONE_GREEN Schematic\(OrCAD\)](#)
- [BEAGLEBONE_GREEN BOM\(xls\)](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.