

# Features

## Unregulated Converter

- Fully RoHS 6/6 Conform
- Full Power at 100°C Ambient Temperature
- 1kVDC Isolation
- Suitable for Fully Automated Assembly (including Vapour Phase Soldering)
- Optional Continuous Short Circuit Protection

### Selection Guide

| Part Number SMD | Input Voltage (VDC)   | Output Voltage (VDC) | Output Current (mA) | Efficiency typ. (%) | Max Capacitive Load <sup>(1)</sup> ** |
|-----------------|-----------------------|----------------------|---------------------|---------------------|---------------------------------------|
| R1DA**xx3.33.3  | 3.3, 5, 9, 12, 15, 24 | 3.3/3.3              | 150/150             | 75                  | 470µF/470µF                           |
| R1DA**xx0505    | 3.3, 5, 9, 12, 15, 24 | 5/5                  | 100/100             | 72-78               | 470µF/470µF                           |
| R1DA**xx0909    | 3.3, 5, 9, 12, 15, 24 | 9/9                  | 56/56               | 74-78               | 220µF/220µF                           |
| R1DA**xx1212    | 3.3, 5, 9, 12, 15, 24 | 12/12                | 42/42               | 75-80               | 68µF/68µF                             |
| R1DA**xx1515    | 3.3, 5, 9, 12, 15, 24 | 15/15                | 33/33               | 75-82               | 68µF/68µF                             |

xx = Input Voltage (other input and output voltage combinations available on request)

\* add Suffix "P" for Continuous Short Circuit Protection, e. g. R1DA-050505/P

\* add Suffix -R for Tape & Reel Packing e.g. R1DA-050505-R. For more Details see Application Notes.

### Specifications (measured at T<sub>A</sub> = 25°C, nominal input voltage, full load and after warm-up)

|                                                                |                                                              |                                         |
|----------------------------------------------------------------|--------------------------------------------------------------|-----------------------------------------|
| Input Voltage Range                                            | ±10%                                                         |                                         |
| Output Voltage Accuracy                                        | -1% typ., ±5% max.                                           |                                         |
| Line Voltage Regulation<br>(Low Line to High Line @ max. Load) | All Variants                                                 | 1% typ.                                 |
| Load Regulation<br>(10% to 100% Load)                          | 3.3V output types                                            | 15% typ., 20% max.                      |
|                                                                | 5V output types                                              | 12%typ. / 15% max.                      |
|                                                                | 9V output types                                              | 7% typ., 10% max.                       |
|                                                                | 2V, 15V output types                                         | 6% typ., 10% max.                       |
| Output Ripple and Noise (20MHz BW limited)                     | 50 mVp-p typ. / 100mVp-p max.                                |                                         |
| Operating Frequency                                            | 20kHz min. / 50kHz typ. / 90kHz max.                         |                                         |
| Efficiency at Full Load                                        | See Selection Guide                                          |                                         |
| Minumum Load = 0%                                              | Specifications valid for 10% minimum Load only               |                                         |
| Isolation Voltage Input/Output<br>(tested for 1 second)        | 1000VDC                                                      |                                         |
| Isolation Voltage Output/Output<br>(rated for 1 minute)        | 500VAC / 60Hz                                                |                                         |
| Isolation Capacitance                                          | 75pF max.                                                    |                                         |
| Isolation Resistance                                           | V <sub>ISO</sub> =500V                                       | 10 GΩ min.                              |
| Short Circuit Protection                                       | 1 Second                                                     |                                         |
| P-Suffix                                                       | Continuous                                                   |                                         |
| Operating Temperature Range                                    | -40°C to +100°C (see Graph)                                  |                                         |
| Storage Temperature Range                                      | -50°C to +125°C                                              |                                         |
| Reflow Temperature                                             | RoHS compliant                                               | 245°C (30 sec), Peak 255°C (5 sec) max. |
| Vapour Phase Process                                           | (for more details see Application Notes) 230°C (90 sec) max. |                                         |
| Relative Humidity                                              | 95% RH                                                       |                                         |
| Humidity Susceptibility Test                                   | 1000 hrs / 90% humidity / +85°C ambient                      |                                         |
| Package Weight                                                 | 1.2g                                                         |                                         |
| Packing Quantity                                               | 33 pcs per tube / 500 pcs per reel                           |                                         |
| MTBF                                                           | Using MIL-HDBK 217F (+25°C)                                  | 1045 x 10 <sup>3</sup> hours            |
|                                                                | Using MIL-HDBK 217F (+85°C)                                  | 183 x 10 <sup>3</sup> hours             |

Detailed Information see Application Notes chapter „MTBF“

**ECONOLINE**  
DC/DC-Converter

**RECOM**

## 1 Watt SMD Dual Independent Outputs



**EN-60950-1-Certified**  
**UL-60950-1-Certified**

## R1DA

### Description

The R1DA converters are of the enclosed open frame type, i.e. they are not potted.

The converters are typically used in general purpose and industrial low power isolation and voltage matching applications where an SMD converter is required.

The converter series feature an extended ambient temperature operating range of -40°C - +100°C without derating and optional continuous short circuit protection.

In addition to single, dual and independent outputs, two isolation options and three different case formats, the converters are also available pre-packed as tape and reel for use with automatic insertion machines.

**Refer to Application Notes**

[www.recom-international.com](http://www.recom-international.com)

### Specifications - continued

#### Certifications


|                     |                       |                             |
|---------------------|-----------------------|-----------------------------|
| EN General Safety   | Report: 10010807-2009 | EN-60950-1, 2nd Edition     |
| Conducted Emissions |                       | EN55022 Class B with Filter |
| Radiated Emissions  |                       | EN55022 Class B with Filter |
| UL General Safety   | Report: E358085       | UL60950-1, 2nd Edition      |

#### Notes


Note 1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

## Derating-Graph (Ambient Temperature)

### R1DA-0505


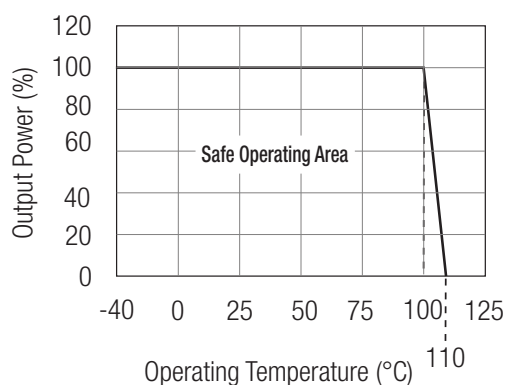


### Tolerance Envelope


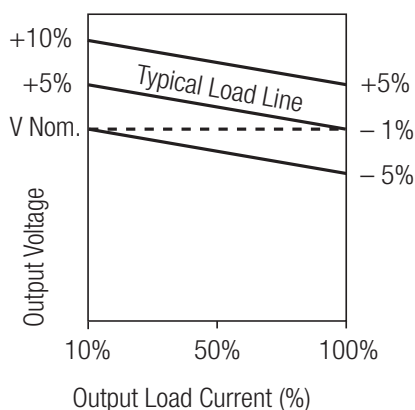


### Typical Characteristics

## R1DA-xx0505

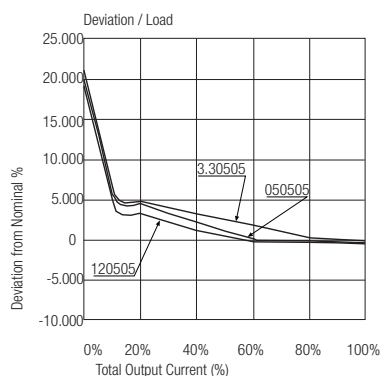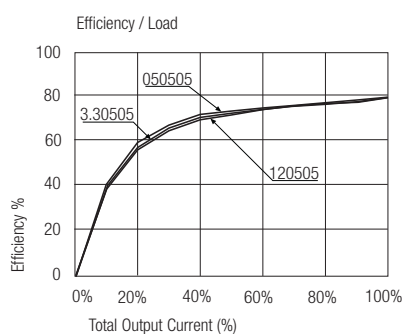


## R1DA-xx1212

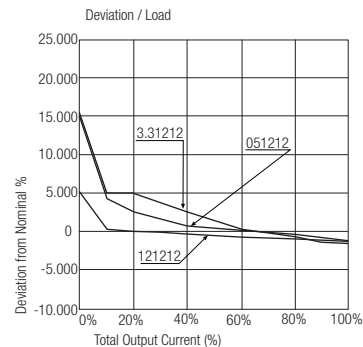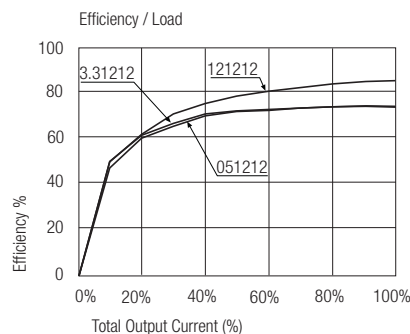

### Package Style and Pinning (mm)

#### 2 PIN Dual SMD Package

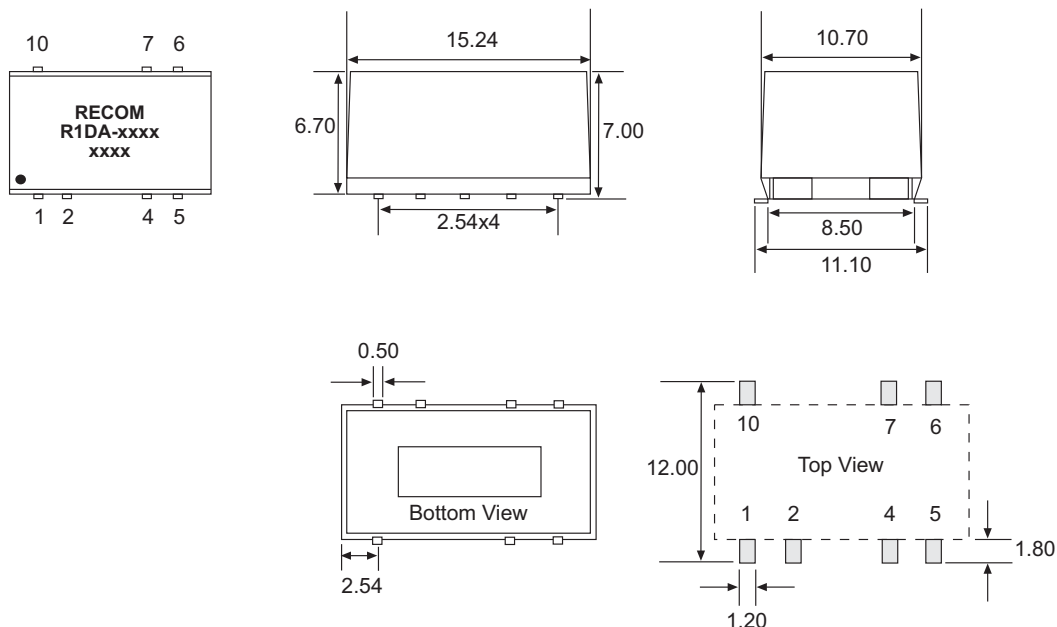


#### Pin Connections

| Pin # | Function |
|-------|----------|
| 1     | -Vin     |
| 2     | +Vin     |
| 4     | -Vout1   |
| 5     | +Vout1   |
| 6     | -Vout2   |
| 7     | +Vout2   |
| 10    | NC       |

NC= No Connection

### EMC Filtering - Suggestion for EN55022 Class B (Conducted and Emited)

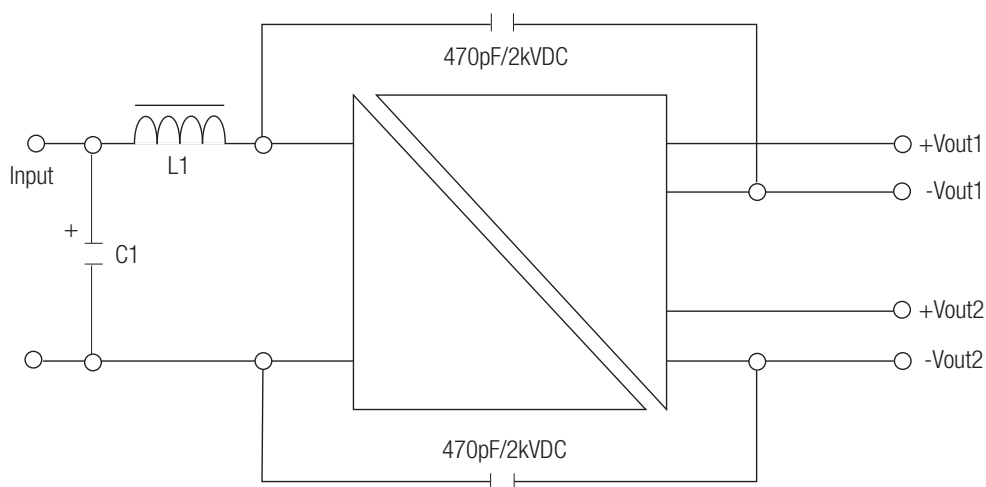

#### Standard

| C1    | L1    | Vin  |
|-------|-------|------|
| 2.2μF | 4.7μH | 3.3V |
| 2.2μF | 4.7μH | 5V   |
| 2.2μF | 10μH  | 9V   |
| 2.2μF | 10μH  | 12V  |
| 2.2μF | 10μH  | 15V  |
| 2.2μF | 22μH  | 24V  |

#### /P versions

| C1    | L1   | Vin  |
|-------|------|------|
| 4.7μF | 10μH | 3.3V |
| 4.7μF | 10μH | 5V   |
| 4.7μF | 10μH | 9V   |
| 4.7μF | 10μH | 12V  |
| 4.7μF | 22μH | 15V  |

C1 = MLCC

L1 = SMD Inductor



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.