

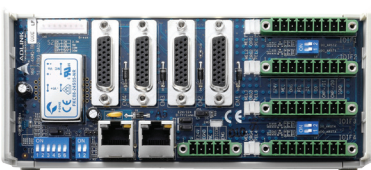


# MNET-4XMO / MNET-4XMO-C

## Distributed 4-axis Motion Control Modules (with High-Speed Trigger Function)

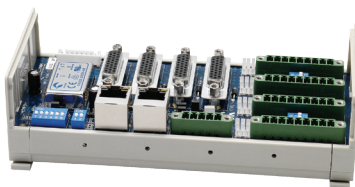

### Features

- Up to 256 axes on a single Motionnet network
- Transmission speed selectable: 2.5/5/10/20 Mbps
- Maximum wiring distance up to 100 meters
- 4-axis pulse train output channels; frequency up to 9.9 MHz
- Encoder frequency up to 20 MHz under 4xAB feedback mode
- 26 homing modes which includes 13 auto-homing modes
- Pulse output mode: OUT/DIR, CW/CCW, AB phase
- Linear interpolation: any 2 to 4 axes
- Circular interpolation: any 2 of 4 axes
- Position/Speed override
- Triangle Driver Elimination
- Programmable acceleration and deceleration
- 4 channels high-speed trigger pulse output frequency up to 100 kHz (MNET-4XMO-C only)
- One ultra-high speed linear trigger pulse output up to 1 MHz (MNET-4XMO-C only)
- Point table for continuous contouring up to 2,048 points (MNET-4XMO-C only)
- Dedicated motion I/O: EL, ORG, INP, RDY, SVON, ERC, and ARM
- Hardware emergency stop interface
- All digital inputs and outputs are 2500 VRMS isolated
- Hardware backlash compensation

### Software Support

- OS Information
  - Windows® 8/7/XP

### Ordering Information

- **MNET-4XMO**  
Motionnet distributed 4-axis motion control module
- **MNET-4XMO-C**  
Motionnet distributed 4-axis motion control module with high-speed trigger function

### Introduction

The MNET-4XMO is a 4-axis motion controller module for Motionnet distributed motion systems. It can generate fast frequency pulses (9.9 MHz) to drive stepper or servomotors in the machine automation field. As a motion controller, it can provide comprehensive motion functions which include 2 axes circular interpolation, 2-4 axes linear interpolation, or continuous interpolation for continual velocity and so on. Also, changing position/speed on the fly is available with a single axis operation.

In addition to the motion functions offered, ADLINK offers other model (MNET-4XMO-C) that comes equipped with the real-time position comparison and trigger pulse output function to easy integrate into Automated Optical Inspection application system. Up to 100 KHz trigger output frequency and easy trigger the most frame grabber or CCD to realize the line scan application. The path move function features the continuous moving with constant velocity. By using the path moving function, you can save the host PC resource with path auto-reload function and is able to guarantee the time-deterministic, continuous and smooth in whole motion progression.

### Specifications

Hardware	
■ Number of Controllable Axes	4
■ Pulse Output Rate	0.01 pps to 9.9 Mpps
■ Positioning Range	-2,147,483,648 to +2,147,483,647
■ Acceleration / Deceleration	1 to 65,535 (16-bit)
■ Speed Resolution	16-bit
Trajectories	
■ Acceleration / Deceleration Type	Pure S, T, bell curve programmable
■ Interpolation Mode	Any 2 - 4 axes linear interpolation Any 2 axes circular interpolation
I/O	
■ EMG Input	1
■ CMP Output	4 (differential type)
General Specifications	
■ Dimension	163.5 (W) × 74.9 (D) × 52.7 (H) mm (6.37" × 2.92" × 2.05")
■ Module Power Supply Input (I24 V, IGND)	24 V <sub>DC</sub> ± 10% (Consumption current, 0.3 A max.)
■ I/O Power Supply Input (E24 V, EGND)	24 V <sub>DC</sub> input (can be common to module power input by jumper)
■ Operating Temperature	0°C to 70°C (32°F to 158°F)
The following specifications are only applicable to the MNET-4XMO-C.	
Trigger Function (channel to channel ONLY)	
■ Trigger Spec.	Max. 100 KHz (4-axis)
■ Table Size	32,768 points/4-axis (8,192 points/axis)
High-Speed Trigger Function (Linear function ONLY)	
■ Trigger Pulse Frequency	Max. 1 MHz/1-axis
■ Trigger Pulse Width	0.1 us to 1 s (programmable)
Path Move	
■ Path Number	2,048 points total (min.)
■ Auto Reload	Point index check
■ Continuous move	1 group (includes single axis move or linear / circular interpolation move)

### Accessories

For more information on terminal boards & cables, please refer to page 6-31.

#### Cabling

- **HSL-4XMO-DM Cable**  
For Mitsubishi MR-J2S-A servo amplifier, available for 1 M, 2 M, and 3 M
- **HSL-4XMO-DY Cable**  
For Yaskawa Sigma V servo amplifier, available for 1 M, 2 M, and 3 M
- **4XMO-DM-J3 Cable**  
For Mitsubishi MR-J3 servo amplifiers, available for 2 M
- **4XMO-DA Cable**  
For Delta A2 servo, available for 3 M
- **HSL-4XMO-DP Cable**  
For Panasonic MINAS A4/A5 servo amplifiers, available for 1 M, 1.5 M, and 2 M
- **4XMO-Open Cable**  
Controller to amplifier bus (26-pin SCSI to open wire), available for 1 M and 2 M



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.