

2231A-30-3


- Get three isolated, independent, and adjustable outputs in one instrument
- Output a total of 195W of power with two 30V@3A outputs and one 5V@3A output
- Set voltage outputs with 0.06% basic accuracy and current outputs with 0.2% basic accuracy
- Output DC power with less than 5mVp-p noise
- Display voltage and current measurements continuously from all three outputs
- Double output levels by connecting the two 30V channels in series or parallel
- Store frequently used configurations in any of 30 setup memory locations
- Turn off any output after a predetermined test time with each channel's output timer
- Control the supply from a PC with an optional USB adapter

APPLICATIONS

- Engineering and science student labs
- Service work
- Electronic design

195W Triple Channel DC Power Supply

3-Year
Warranty

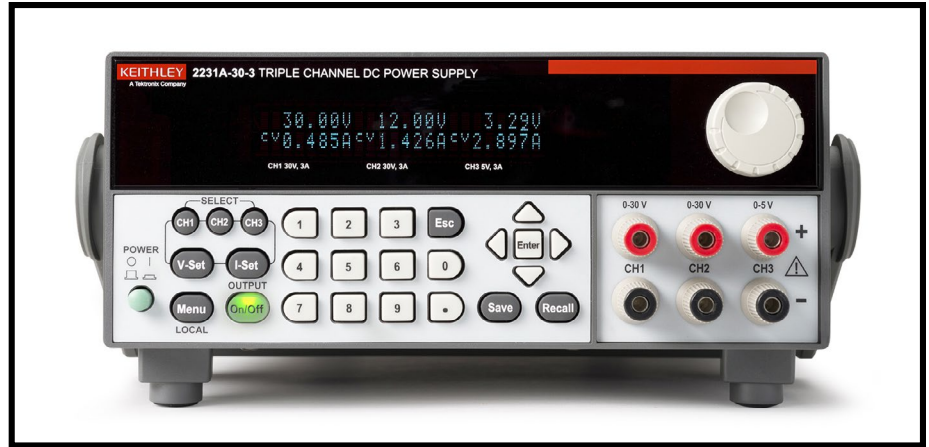

The Model 2231A-30-3 Triple Channel DC Power Supply can output a total of 195W of power, providing the power levels needed to energize a wide range of circuits and devices for benchtop work. Two channels can supply up to 30V at 3A each; the third channel can provide up to 5V at 3A. The Model 2231A-30-1 does not compromise on performance or convenience features, offering the versatility and ease of use you need, so it can be the only DC power supply on your bench.

Quality DC Power

The Model 2231A-30-3 is a linear-based design with less than 5mVp-p noise per output. Voltage and current settings have basic accuracies of 0.06% and 0.2% respectively. The load voltage and load current readback results provide the same levels of accuracy, so you can be confident you are sourcing accurate, low noise voltages and currents to your device-under-test (DUT).

Three Fully Independent Outputs


Each output of the Model 2231A-30-3 is fully programmable and can be turned on and off independently from the other channels; it essentially provides three power supplies in one instrument. You can power up both the analog circuitry and the digital circuitry of a printed circuit board or a complete device, all with the same instrument.

All Outputs Are Isolated from Each Other and from Ground

Each output can power a circuit on a different ground reference. The low connection on each output is not connected to any of the other outputs. That means one supply can test three separate circuits on three different ground references or can power circuits that are transformer or optically isolated from each other. Furthermore, all outputs are not referenced to ground, so the Model 2231A-30-3 can power both floating circuits and grounded circuits.

Power Bipolar Circuits

Because the Model 2231A-30-3's outputs are isolated, one output can be turned effectively into a negative source by connecting its high terminal to the common reference point of a bipolar circuit. A second output can connect its low terminal to the same common reference point. The result is a positive output and a negative output. If the two 30V channels are used in this configuration, both outputs can be changed at the same time by using the Model 2231A-30-3's tracking function. That allows varying both channels at the same time while keeping their outputs at identical magnitudes.

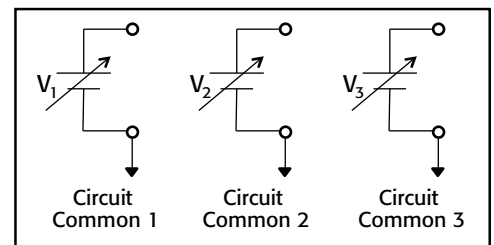

The Model 2231A-30-3 has three fully independent, programmable outputs that are electrically isolated from each other. This allows them to power circuits that are on different grounds, such as optically isolated circuits.

1.888.KEITHLEY (U.S. only)

www.keithley.com

A Greater Measure of Confidence

KEITHLEY
A Tektronix Company

195W Triple Channel DC Power Supply

DC POWER SUPPLIES

2231A-30-3

Ordering Information

2231A-30-3
Triple Channel DC
Power Supply

Accessories Supplied

Documentation CD with User Manual
Certificate of Calibration
Power Cord

ACCESSORIES AVAILABLE

| | |
|-----------|--|
| 2231A-001 | USB Adapter with USB Cable |
| RMU2U | Rack Mount Kit |
| 386759800 | RMU2U Rack Mount Cosmetic Filler Panel |

SERVICES AVAILABLE

| | |
|---------------------|--|
| 2231A-30-3-EW | 1 Year KeithleyCare® Gold Plan |
| 2231A-30-3-5Y-EW | 5 Year KeithleyCare Gold Plan |
| C/2231A-30-3-3Y-STD | KeithleyCare 3 Yr Std Calibration Plan |
| C/2231A-30-3-5Y-STD | KeithleyCare 5 Yr Std Calibration Plan |

195W Triple Channel DC Power Supply

Supply 60V or 6A


When the application requires outputting more than 30V or 3A, the two 30V channels can be combined to double the output level. Wire the two outputs in series to deliver up to 60V or wire them in parallel to deliver up to 6A. For your convenience, the Model 2231A-30-3 display will read the total output, either voltage or current, to eliminate confusion. Also, the supply controls both outputs to deliver the required voltage or current. There's no need to set up each channel individually; the supply manages the channels for you, so combining channels is uncomplicated.



Wire the two 30V channels in series or parallel to double the output voltage to 60V or the supplied current to 6A. The Model 2231A-30-3 has series and parallel modes that manage the channels and display the total output. This display shows the supply's parallel mode, including the output voltage and the total current from the channels wired in parallel.

Easily Test, Monitor, and Protect Your Circuits

- Adjust the outputs with the rotary knob or enter the output values precisely using the keypad with setting resolution of 10mV or 1mA.
- See the voltage and current readings on all channels at all times; the Model 2231A-30-3's display shows the readings from all three outputs simultaneously.
- Protect your DUT with an overvoltage protection setting for each output.
- Set timers to turn off an output after a programmed time to prevent excess stress on a circuit under development.
- Store and recall instrument setups for frequently used tests to begin testing quickly. You can store up to 30 unique test setups.

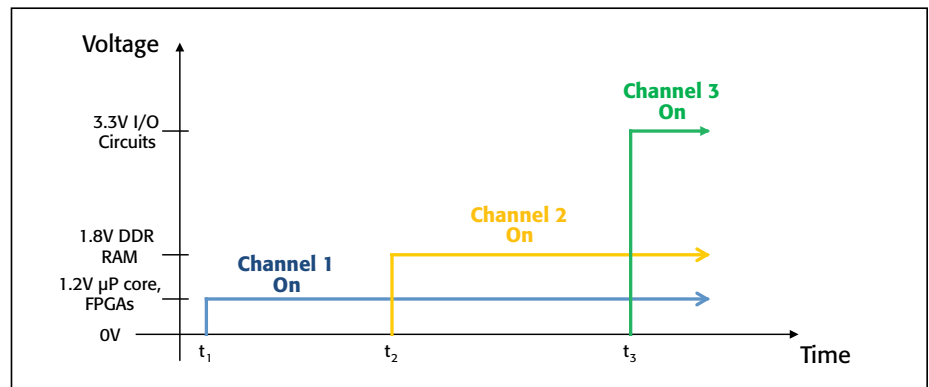

Safely power circuits up and down in the proper sequence using the three independently programmable output channels.

Control the Supply and Upload Data to a PC

Use the optional Model 2231A-001 USB Adapter to control the Model 2231A-30-1 via a PC's USB interface, then transfer readings from the outputs to combine with other test data for a more thorough analysis of DUT performance. The 2231A-001 USB Adapter provides the flexibility to use the supply under either manual or automated control.

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY
A Tektronix Company

A Greater Measure of Confidence

2231A-30-3

195W Triple Channel DC Power Supply

Specifications

DC OUTPUT RATING

| | Channel 1 | Channel 2 | Channel 3 |
|---------|-----------|-----------|-----------|
| Voltage | 0–30 V | 0–30 V | 0–5 V |
| Current | 0–3 A | 0–3 A | 0–3 A |

MAXIMUM POWER: 195W

LOAD REGULATION:

Voltage: $\leq 0.02\% + 4\text{mV}$
Current: $\leq 0.2\% + 3\text{mA}$

LINE REGULATION:

Voltage: $\leq 0.02\% + 4\text{mV}$
Current: $\leq 0.2\% + 3\text{mA}$

RIPPLE AND NOISE (20Hz–20MHz):

Voltage: $\leq 1\text{mVrms}/\leq 5\text{mVp-p}$
Current: $\leq 6\text{mArms}$

SETTING RESOLUTION:

Voltage: 10mV
Current: 1mA

SETTING ACCURACY:

Voltage: $\leq 0.06\% + 20\text{mV}$
Current: $\leq 0.2\% + 10\text{mA}$

REDBACK RESOLUTION:

Voltage: 10mV
Current: 1mA

REDBACK ACCURACY:

Voltage: $\leq 0.06\% + 20\text{mV}$
Current: $\leq 0.2\% + 10\text{mA}$

ISOLATION VOLTAGE, OUTPUT TO CHASSIS: Any output can be isolated up to 240V (DC + peak AC with AC limited to a maximum of 3Vpk-pk and a maximum of 60Hz) relative to the earth ground terminal.

ISOLATION VOLTAGE, OUTPUT TO OUTPUT: Any output can be isolated up to 240V (DC + peak AC with AC limited to a maximum of 3Vpk-pk and a maximum of 60Hz) relative to any other output terminal.

TRACKING AND COMBINATION MODES:

Tracking Mode: Maintains the ratio on the two 30V output channels that is present when the control is activated.

Combination V1 + V2 Series Mode: Deliver up to 60V when CH1 and CH2 are wired in series. Meter reads back combined voltage.

Combination I1 + I2 Parallel Mode: Deliver up to 6A when CH1 and CH2 are wired in parallel. Meter reads back combined current.

GENERAL

MEMORY: 30 setup memory locations.

OUTPUT TIMER RANGE: 0.1s to 99999.9s.

DISPLAY: Vacuum fluorescent display.

CONNECTIONS:

Front: Power output jacks: 3 sets, safety-shrouded banana jacks.

Rear: DB9 connector for remote control.

OVERTEMPERATURE PROTECTION: If the internal temperature of the supply exceeds 85°C, the supply will automatically turn off.

EMC COMPLIANCE: Conforms to European Union EMC Directive.

SAFETY COMPLIANCE: Conforms to European Union Low Voltage Directive.

POWER LINE RATINGS: 110VAC/230VAC $\pm 10\%$.

POWER LINE FREQUENCY: 47Hz–65Hz.

MAXIMUM POWER CONSUMPTION: 750VA.

OPERATING ENVIRONMENT: 0° to 40°C, 5% to 80% relative humidity at up to 40°C.

STORAGE ENVIRONMENT: –20° to 70°C, 5% to 80% relative humidity up to 40°C, and 5% to 60% relative humidity from 40° to 70°C.

PHYSICAL CHARACTERISTICS

Height: 88.2 mm (3.5 in)


Width: 214.5 mm (8.5 in)

Depth: 354.6 mm (14 in)

Net Weight: 7.10kg (15.7 lbs.).

Shipping Weight: 9.40kg (20.7 lbs.).

WARRANTY: 3 years.

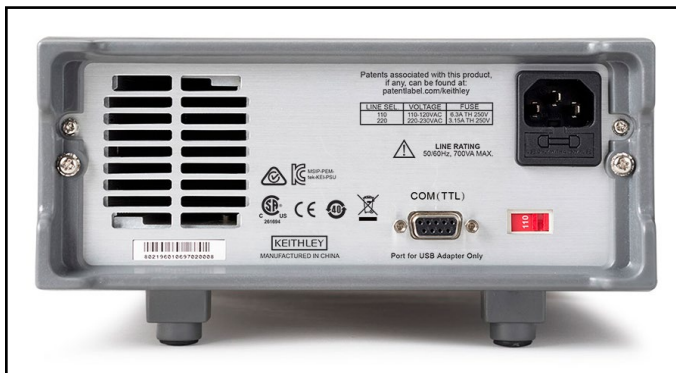

Model 2231A-30-3 rear panel showing the communication port, line power setting switch, and the power input connector with fuse holder.

Specifications are subject to change without notice. All Keithley trademarks and trade names are the property of Keithley Instruments. All other trademarks and trade names are the property of their respective companies.

KEITHLEY

A Tektronix Company

A Greater Measure of Confidence

KEITHLEY INSTRUMENTS ■ 28775 AURORA RD. ■ CLEVELAND, OH 44139-1891 ■ 440-248-0400 ■ Fax: 440-248-6168 ■ 1-888-KEITHLEY ■ www.keithley.com

BENELUX
+31-40-267-5506
www.keithley.nl

FRANCE
+33-01-69-86-83-60
www.keithley.fr

ITALY
+39-049-762-3950
www.keithley.it

MALAYSIA
60-4-643-9679
www.keithley.com

SINGAPORE
01-800-8255-2835
www.keithley.com.sg

BRAZIL
55-11-4058-0229
www.keithley.com

GERMANY
+49-89-84-93-07-40
www.keithley.de

JAPAN
81-120-441-046
www.keithley.jp

MEXICO
52-55-5424-7907
www.keithley.com

TAIWAN
886-3-572-9077
www.keithley.com.tw

CHINA
86-10-8447-5556
www.keithley.com.cn

INDIA
080-30792600
www.keithley.in

KOREA
82-2-6917-5000
www.keithley.co.kr

RUSSIA
+7-495-664-7564
www.keithley.ru

UNITED KINGDOM
+44-1344-39-2450
www.keithley.co.uk

For further information on how to purchase or to locate a sales partner please visit www.keithley.com/buy



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.