

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPERTY OF BEL/STEWART/TRP CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF TRP CONNECTOR.

PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5736910 5939955 6425781 6428361 6554638 6840817 7123117
7429195 7717749 7808751 6217391 6149050 7924130

REVISIONS				
#	LYR	DESCRIPTION	DATE	DWN APVD
E		EC-1805035	25MAY2018	JY TY
F		EC-1807016	11JUL2018	TRY TY
G		EC-1810004	08OCT2018	JY TY

1. MATERIALS:

- HOUSING: HIGH TEMPERATURE NYLON, BLACK, UL 94V-0
- SHIELD: 0.25mm THICK, BRASS PREPLATED WITH 0.76 um MIN SEMI-BRIGHT NICKEL;
- CONTACT TAILS: 0.20mm THICK, PHOSPHOR BRONZE, 1.27 um MIN OVERALL NICKEL UNDERPLATE, 3 um MIN TIN PLATE
- MOD JACK CONTACTS: 0.25mm THICK, PHOSPHOR BRONZE, 1.27 um MIN OVERALL NICKEL UNDERPLATE, WITH 1.27 um MIN LOCALIZED GOLD PLATE AT PLUG INTERFACE
- LIGHT EMITTING DIODE (LED): DIFFUSED EPOXY LENS, CARBON STEEL WIREFRAME PREPLATED WITH 2.03 um SILVER PLATE OVER 1.02 um NICKEL OVER 1.02 um COPPER UNDERPLATES; LEADS POST-PLATED WITH 3.05 um TIN.

2 RJ45 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUB-PART F.

3. MAGNETICS

- APPLICATION: 10/100/1000 BASE-T
- IMPEDANCE: 100 Ω
- TURNS RATIO (CHIP:CABLE): 1:1 ALL FOUR PAIRS
- OPEN CIRCUIT INDUCTANCE (OCL): 350 uH MIN @100kHz, 0.1VRMS, 8mADC BIAS FROM 0 °C TO 70 °C, ALL FOUR PAIRS
- ALL FOUR PAIRS BI-DIRECTIONAL
- PERFORMANCE @ 25 °C:
 - INSERTION LOSS (IL): 1.1dB MAX FROM 0.5MHz TO 100MHz
 - RETURN LOSS (RL): 18dB MIN FROM 0.5MHz TO 40MHz
 - 12-20LOG(f/80)dB MIN FROM 40.1MHz TO 100MHz
 - CROSSTALK ATTENUATION: 35dB MIN FROM 0.5MHz TO 40MHz
 - 33-20LOG(f/50)dB MIN FROM 40.1MHz TO 100MHz
 - COMMON MODE REJECTION RATIO (CMRR): 30dB MIN FROM 0.5MHz TO 100MHz
- ISOLATION VOLTAGE:2250VDC (MAX) FOR 60 SECONDS WITH A RISE TIME OF 500V/SEC

4. OPERATING TEMPERATURE: FROM 0°C TO +70°C.

5. LEDS ARE DRIVEN WITH CONSTANT CURRENT AT APPROX 20 mA

LED COLOR: DOMINANT WAVELENGTH (λ D): GREEN 568 nm TYP @ IF=20 mA

FORWARD VOLTAGE (VF): GREEN 2.2V TYP @ IF=20 mA

LED COLOR: DOMINANT WAVELENGTH (λ D): YELLOW 588 nm TYP @ IF=20 mA

FORWARD VOLTAGE (VF): YELLOW 2.1V TYP @ IF=20 mA

LED COLOR: DOMINANT WAVELENGTH (λ D): ORANGE 605 nm TYP @ IF=20 mA

FORWARD VOLTAGE (VF): ORANGE 2.1V TYP @ IF=20 mA





6. ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE NOTED.

7. TRADEMARK, PART NUMBER (DETAILED PART NUMBER REFER TO PART LIST), DATE CODE, COUNTRY OF ORIGIN, AND AGENCY APPROVAL MARKING IN APPROXIMATE LOCATION SHOWN

8. THESE PARTS ARE NOT DESIGNED FOR WAVE OR REFLOW SOLDERING APPLICATION


9. CONTACT LUBRICANT IN MATING AREA IS OPTIONAL

10. SUGGESTED PANEL OPENING DIMENSIONS ARE OPTIONAL

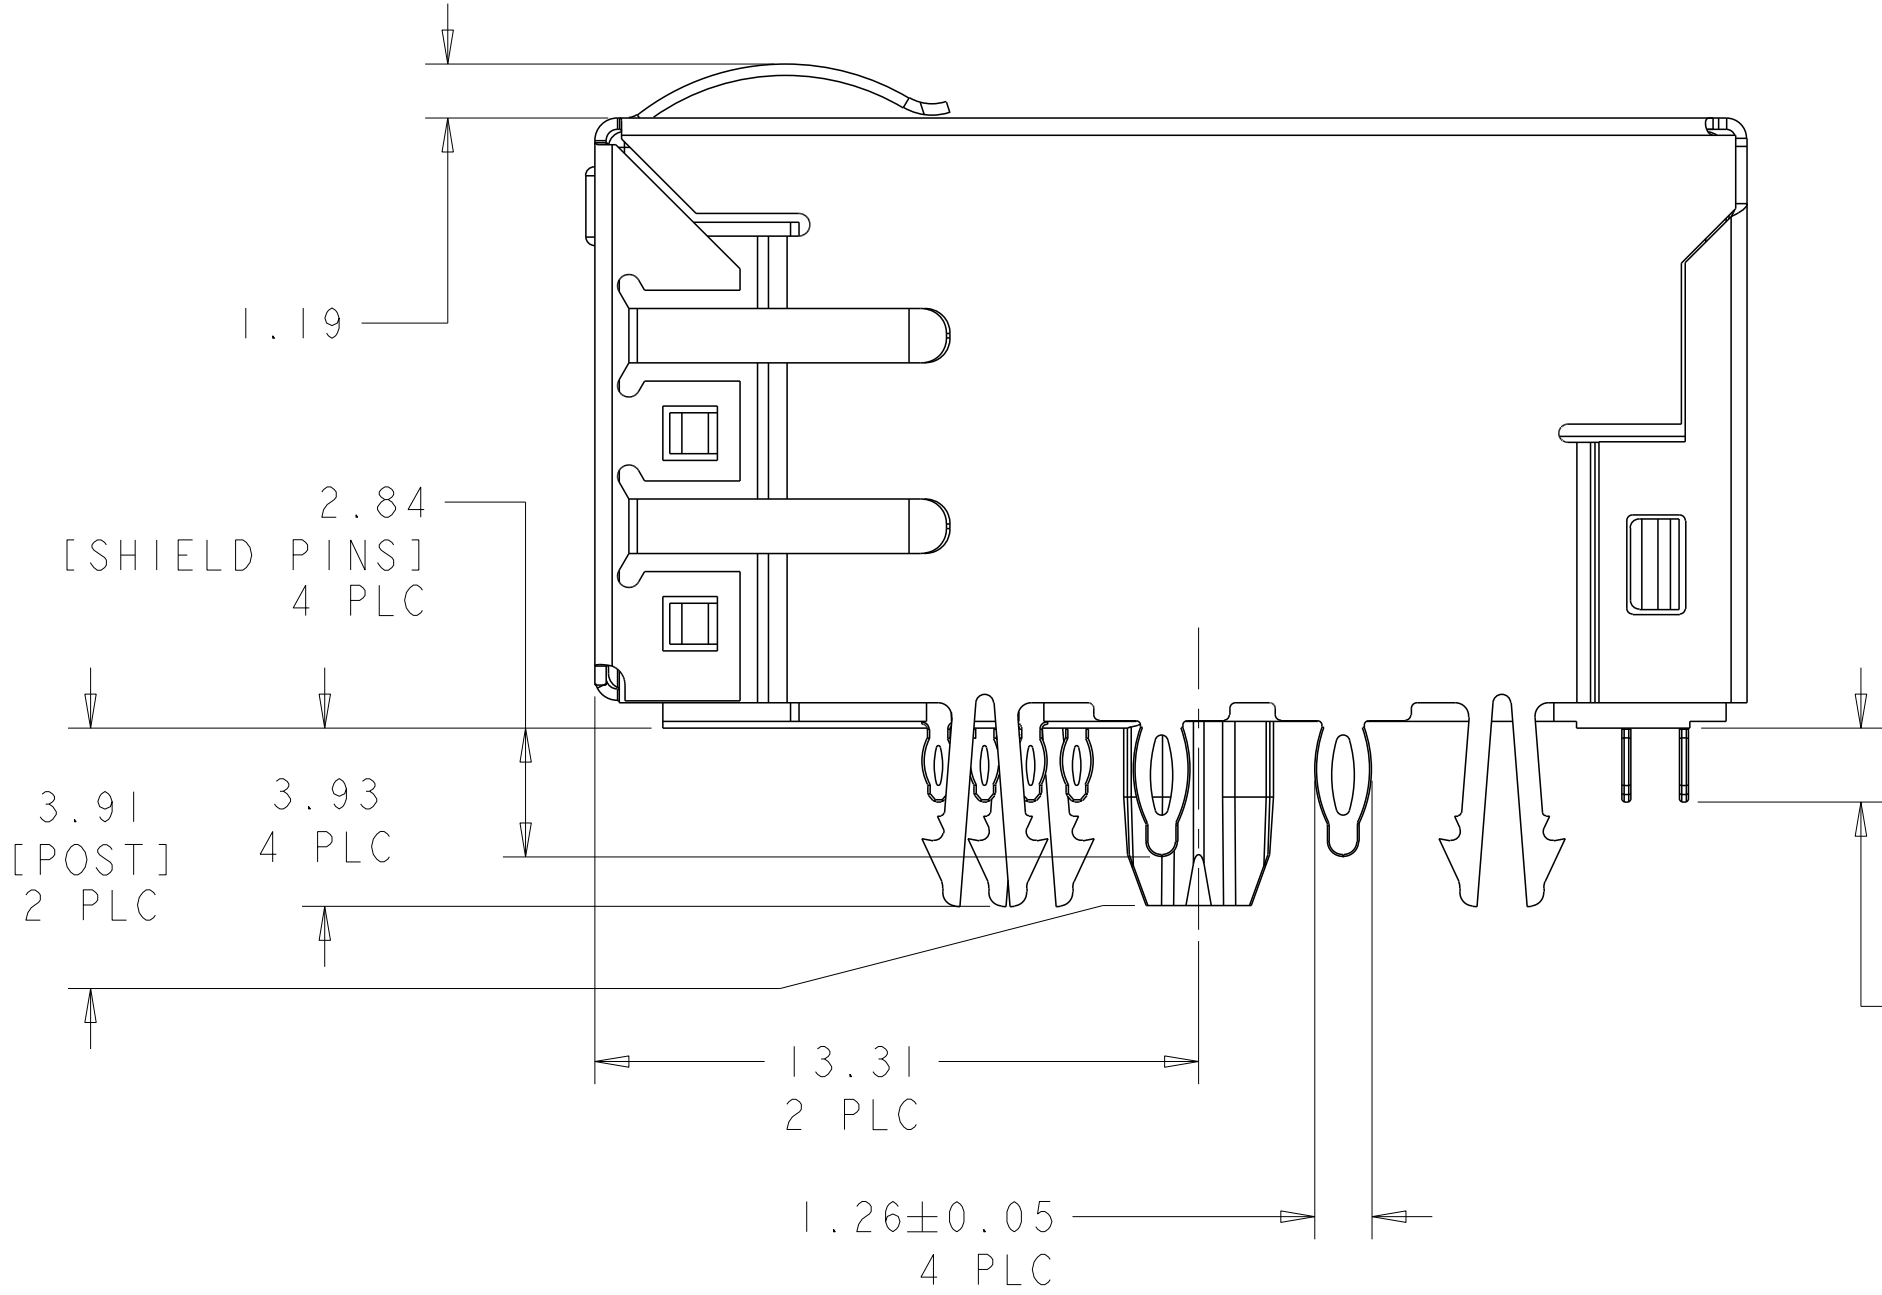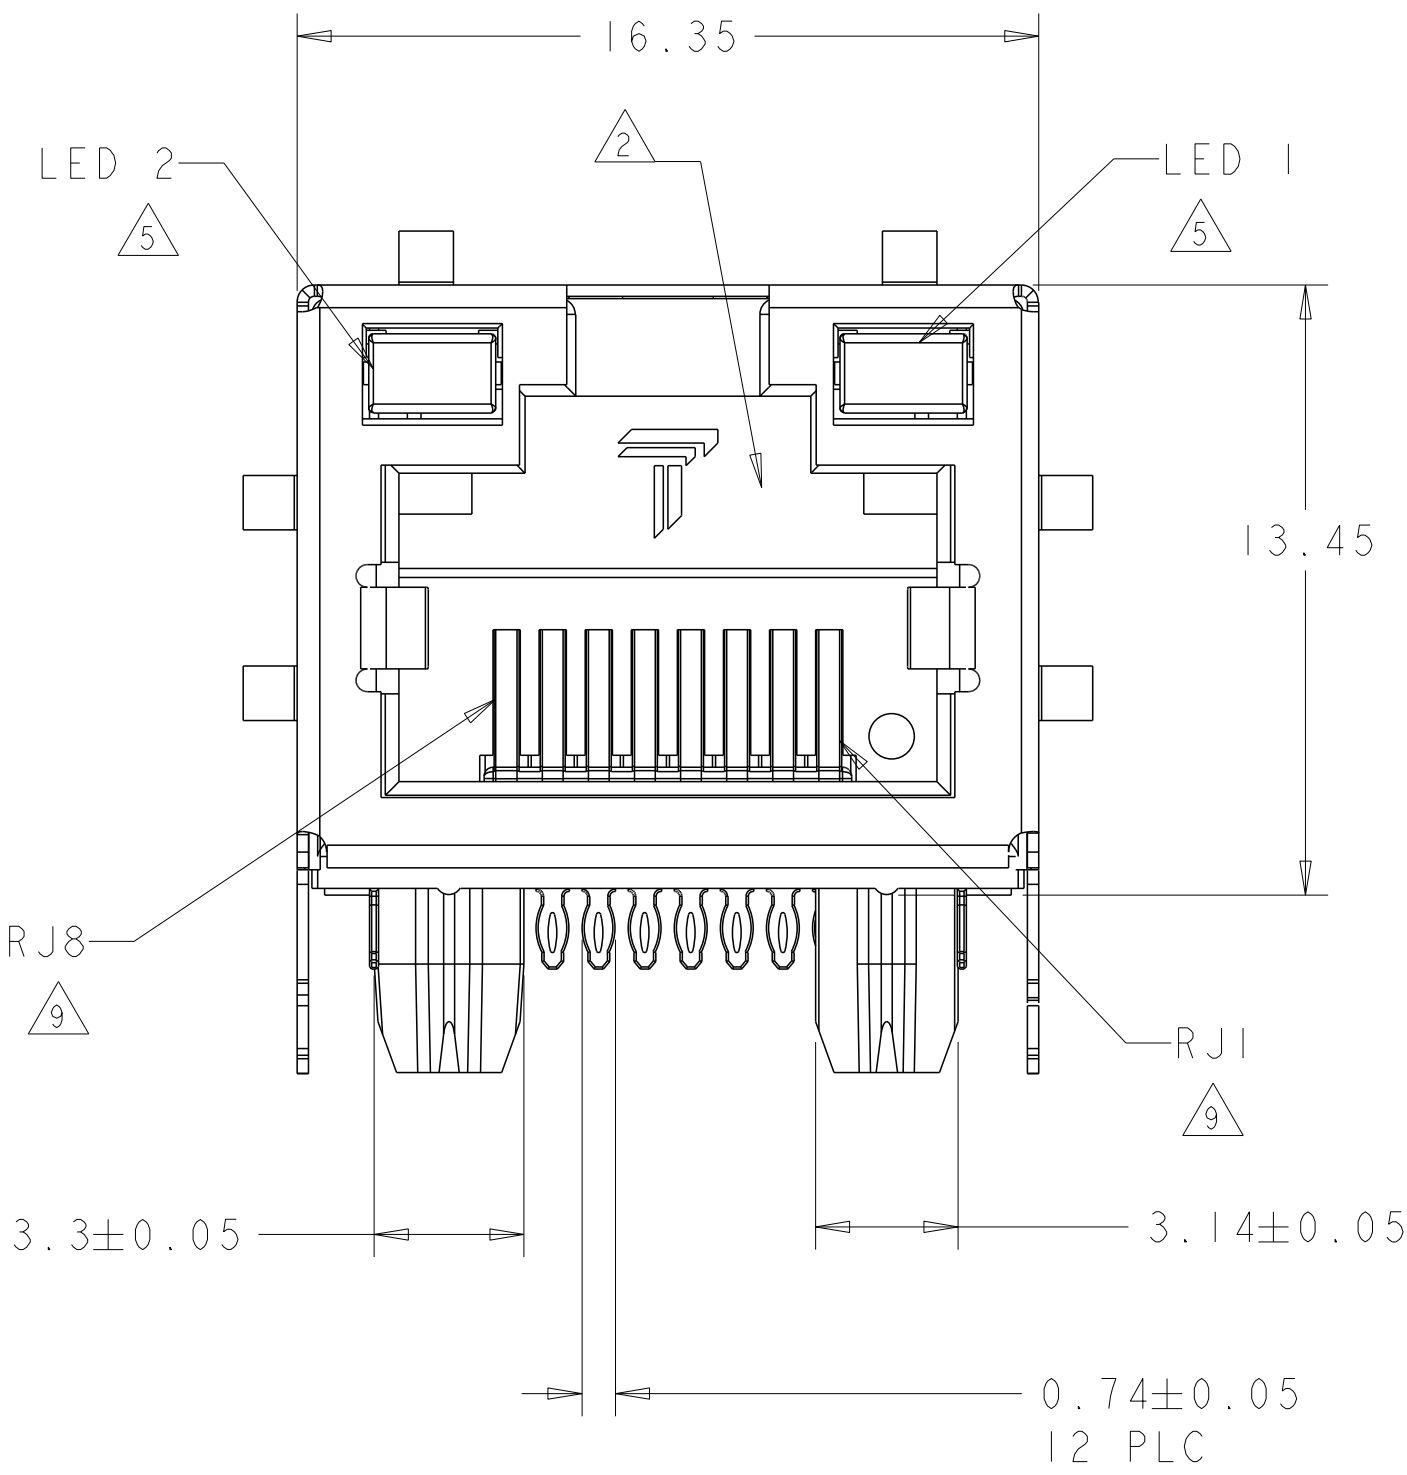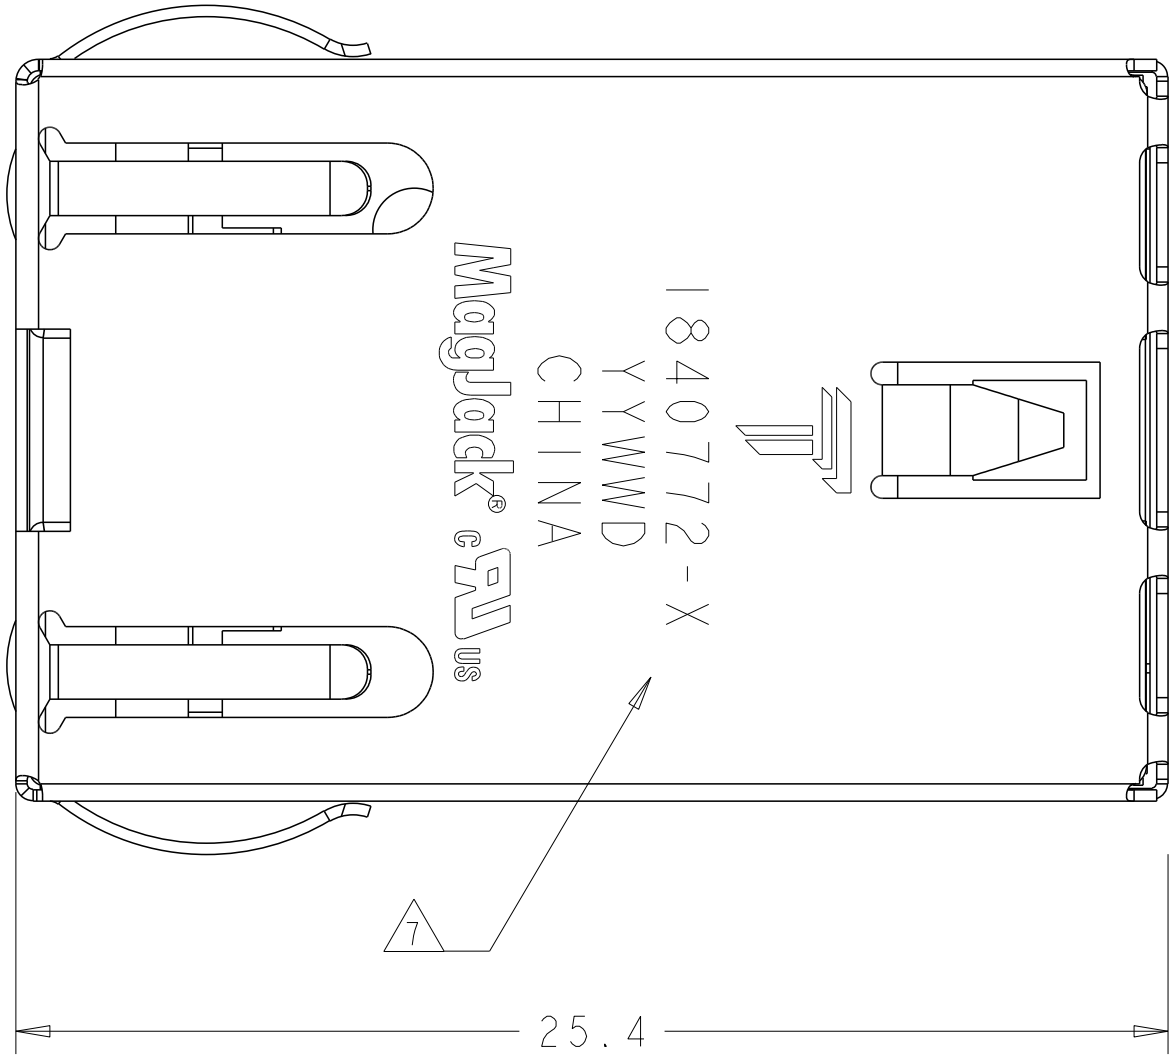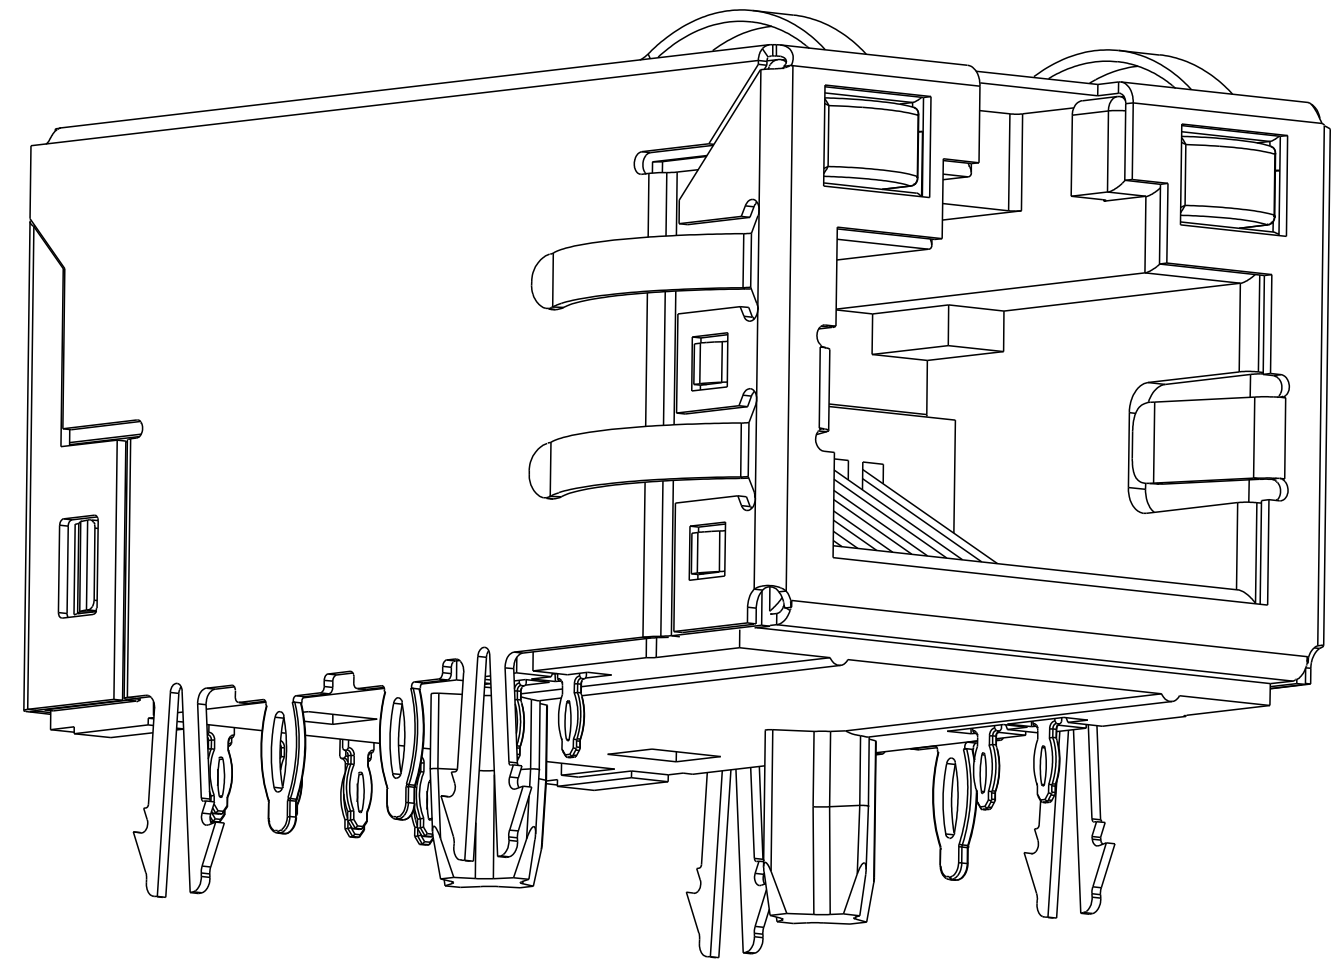


WITH	ORANGE	GREEN	1-1840772-7
WITHOUT	GREEN	YELLOW	1840772-8
WITHOUT	GREEN	GREEN	1840772-7
LUBE 9	LED 2	LED 1	PART NO.


THIS DRAWING IS A CONTROLLED DOCUMENT. AND COMPLIANT TO ASME Y14.5M		DWN TOWER YU 04SEP2009	 trp CONNECTOR a bel group DONGGUAN CHINA		
DIMENSIONS: mm		CHK KEITH ZHU 04SEP2009			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES APPLICATION SPEC		APVD KEITH ZHU 04SEP2009			
		MODEL NAME MAGJACK SINGLE NON-POE			
PRODUCT SPEC 108-104013		DESC 1X1 7G74P2 GIGABIT TAB UP PRESSFIT W/ LED			
CUSTOMER DRAWING		SIZE A1	CAGE CODE C=1840772	RESTRICTED TO -	
		SCALE 6:1	SHEET 1	OF 3	REV G

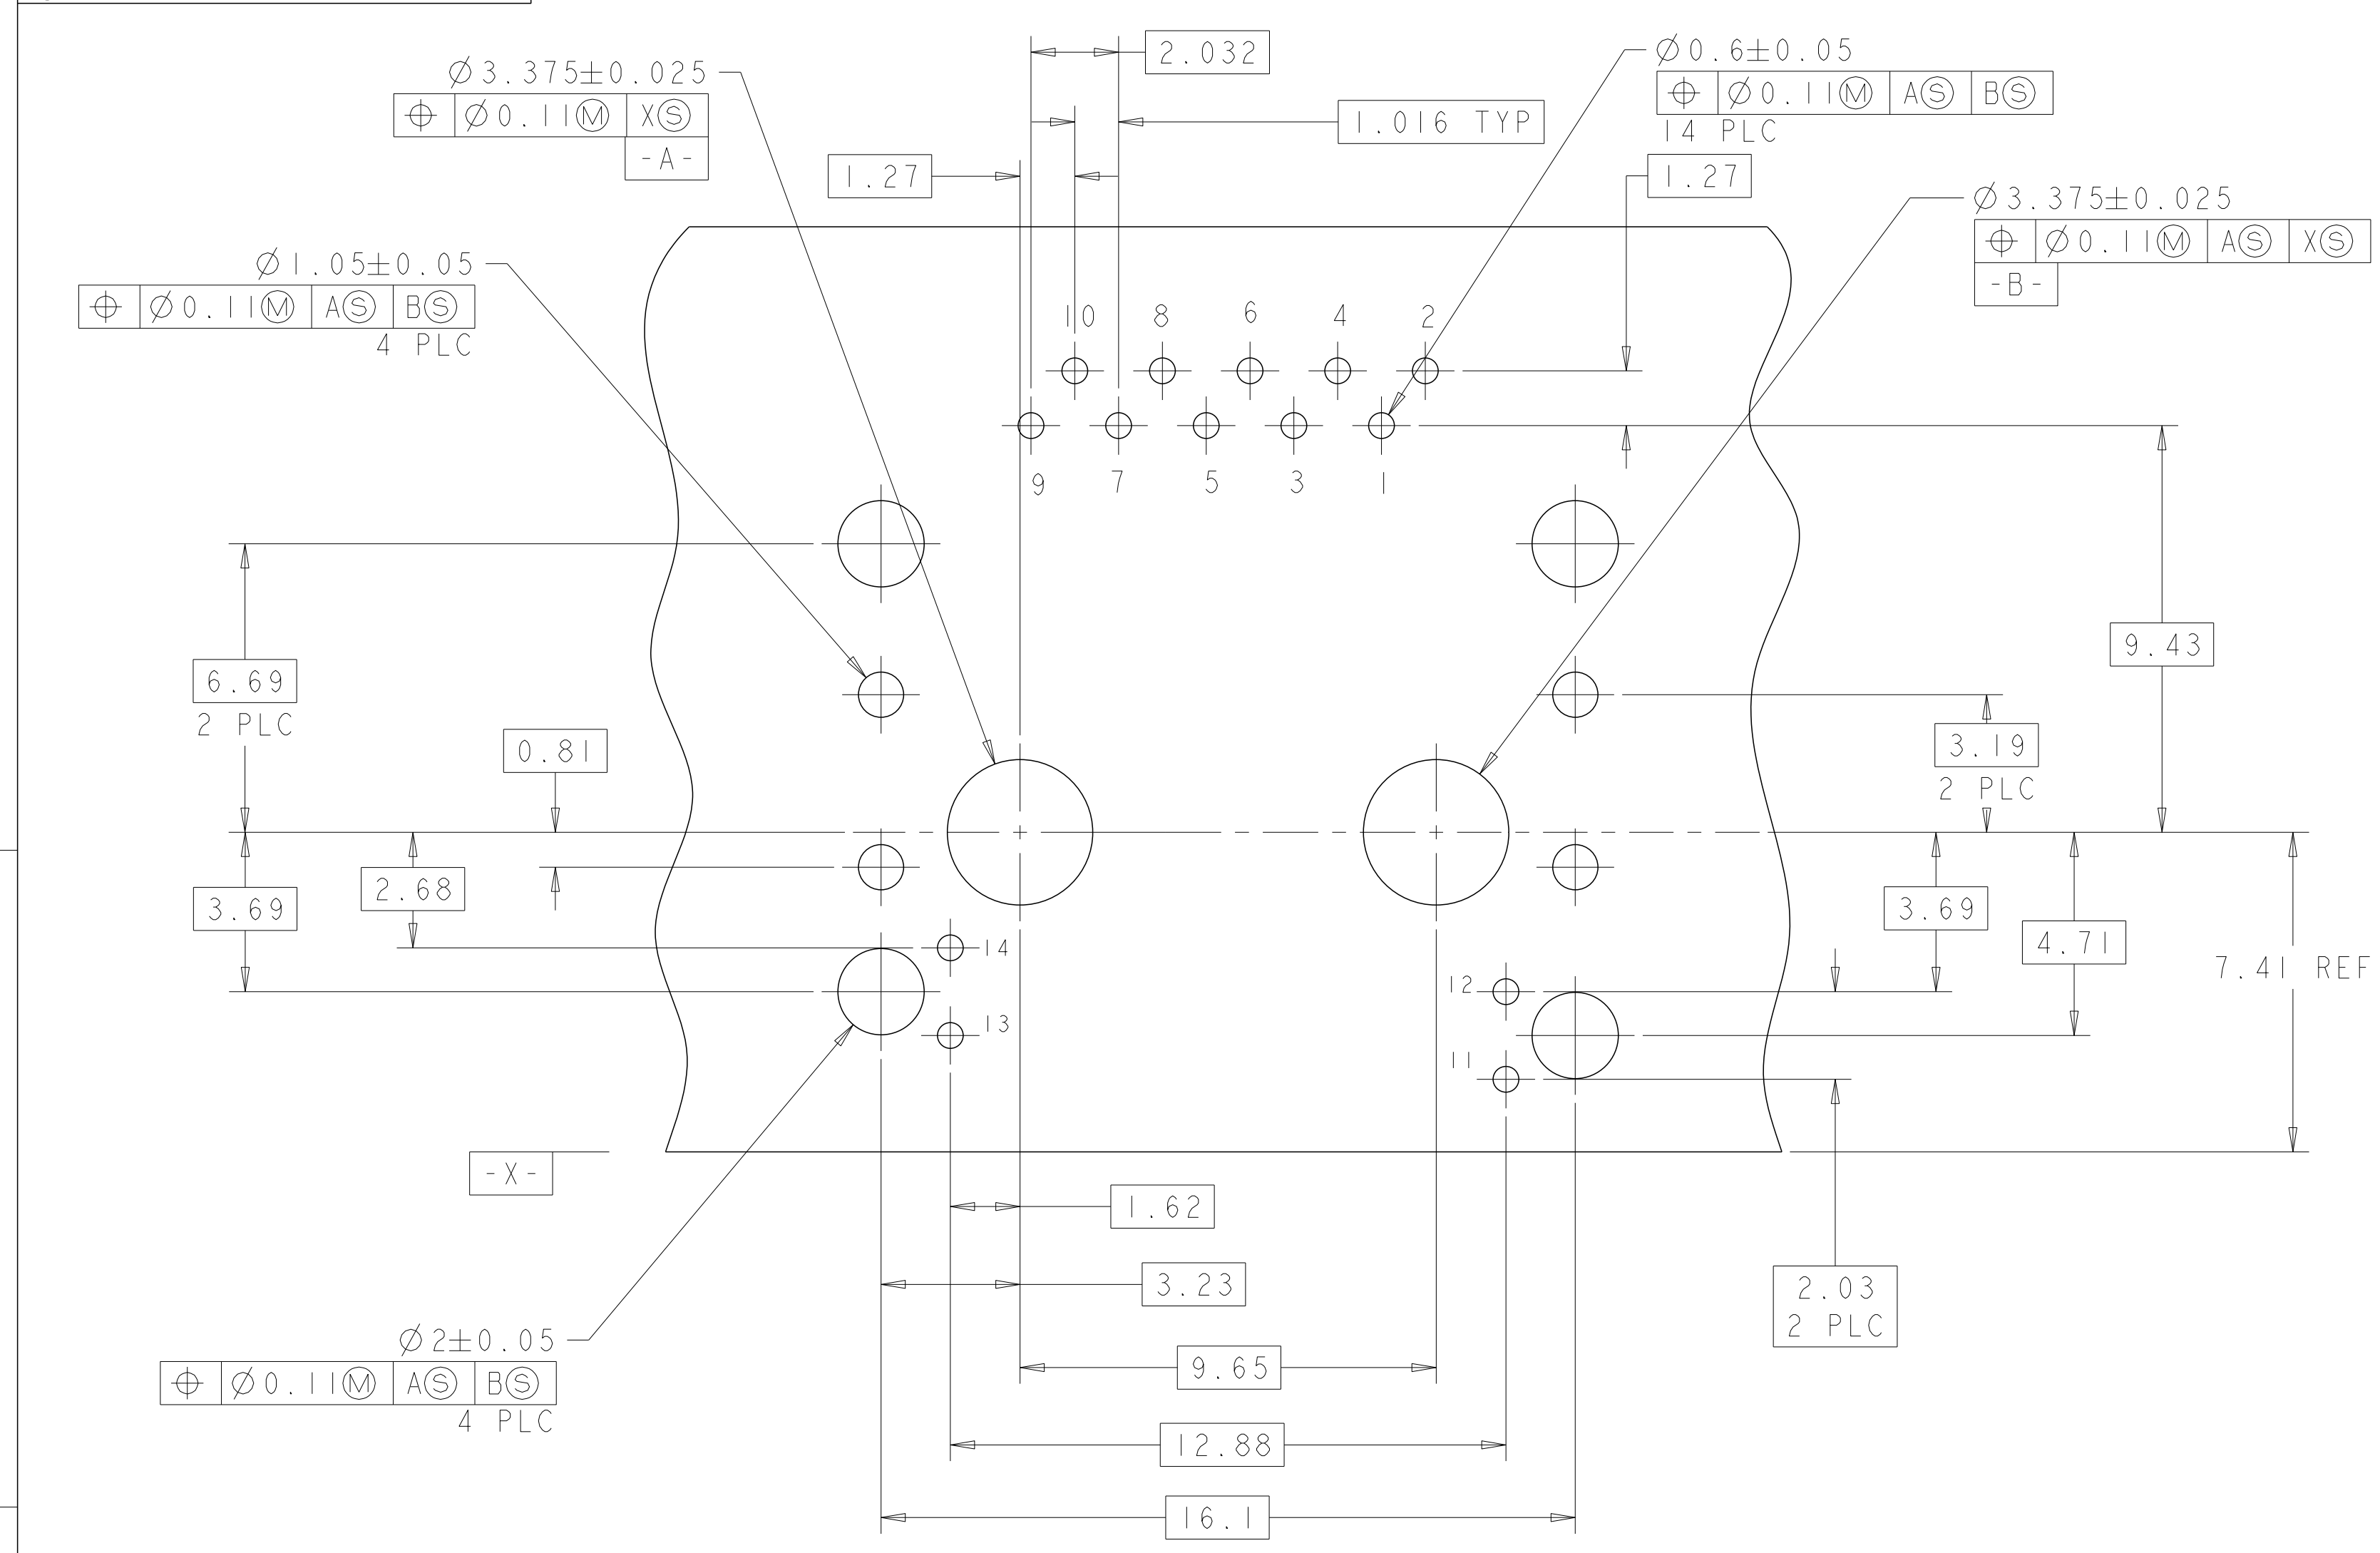


SUGGESTED CUSTOMER BOARD LAYOUT

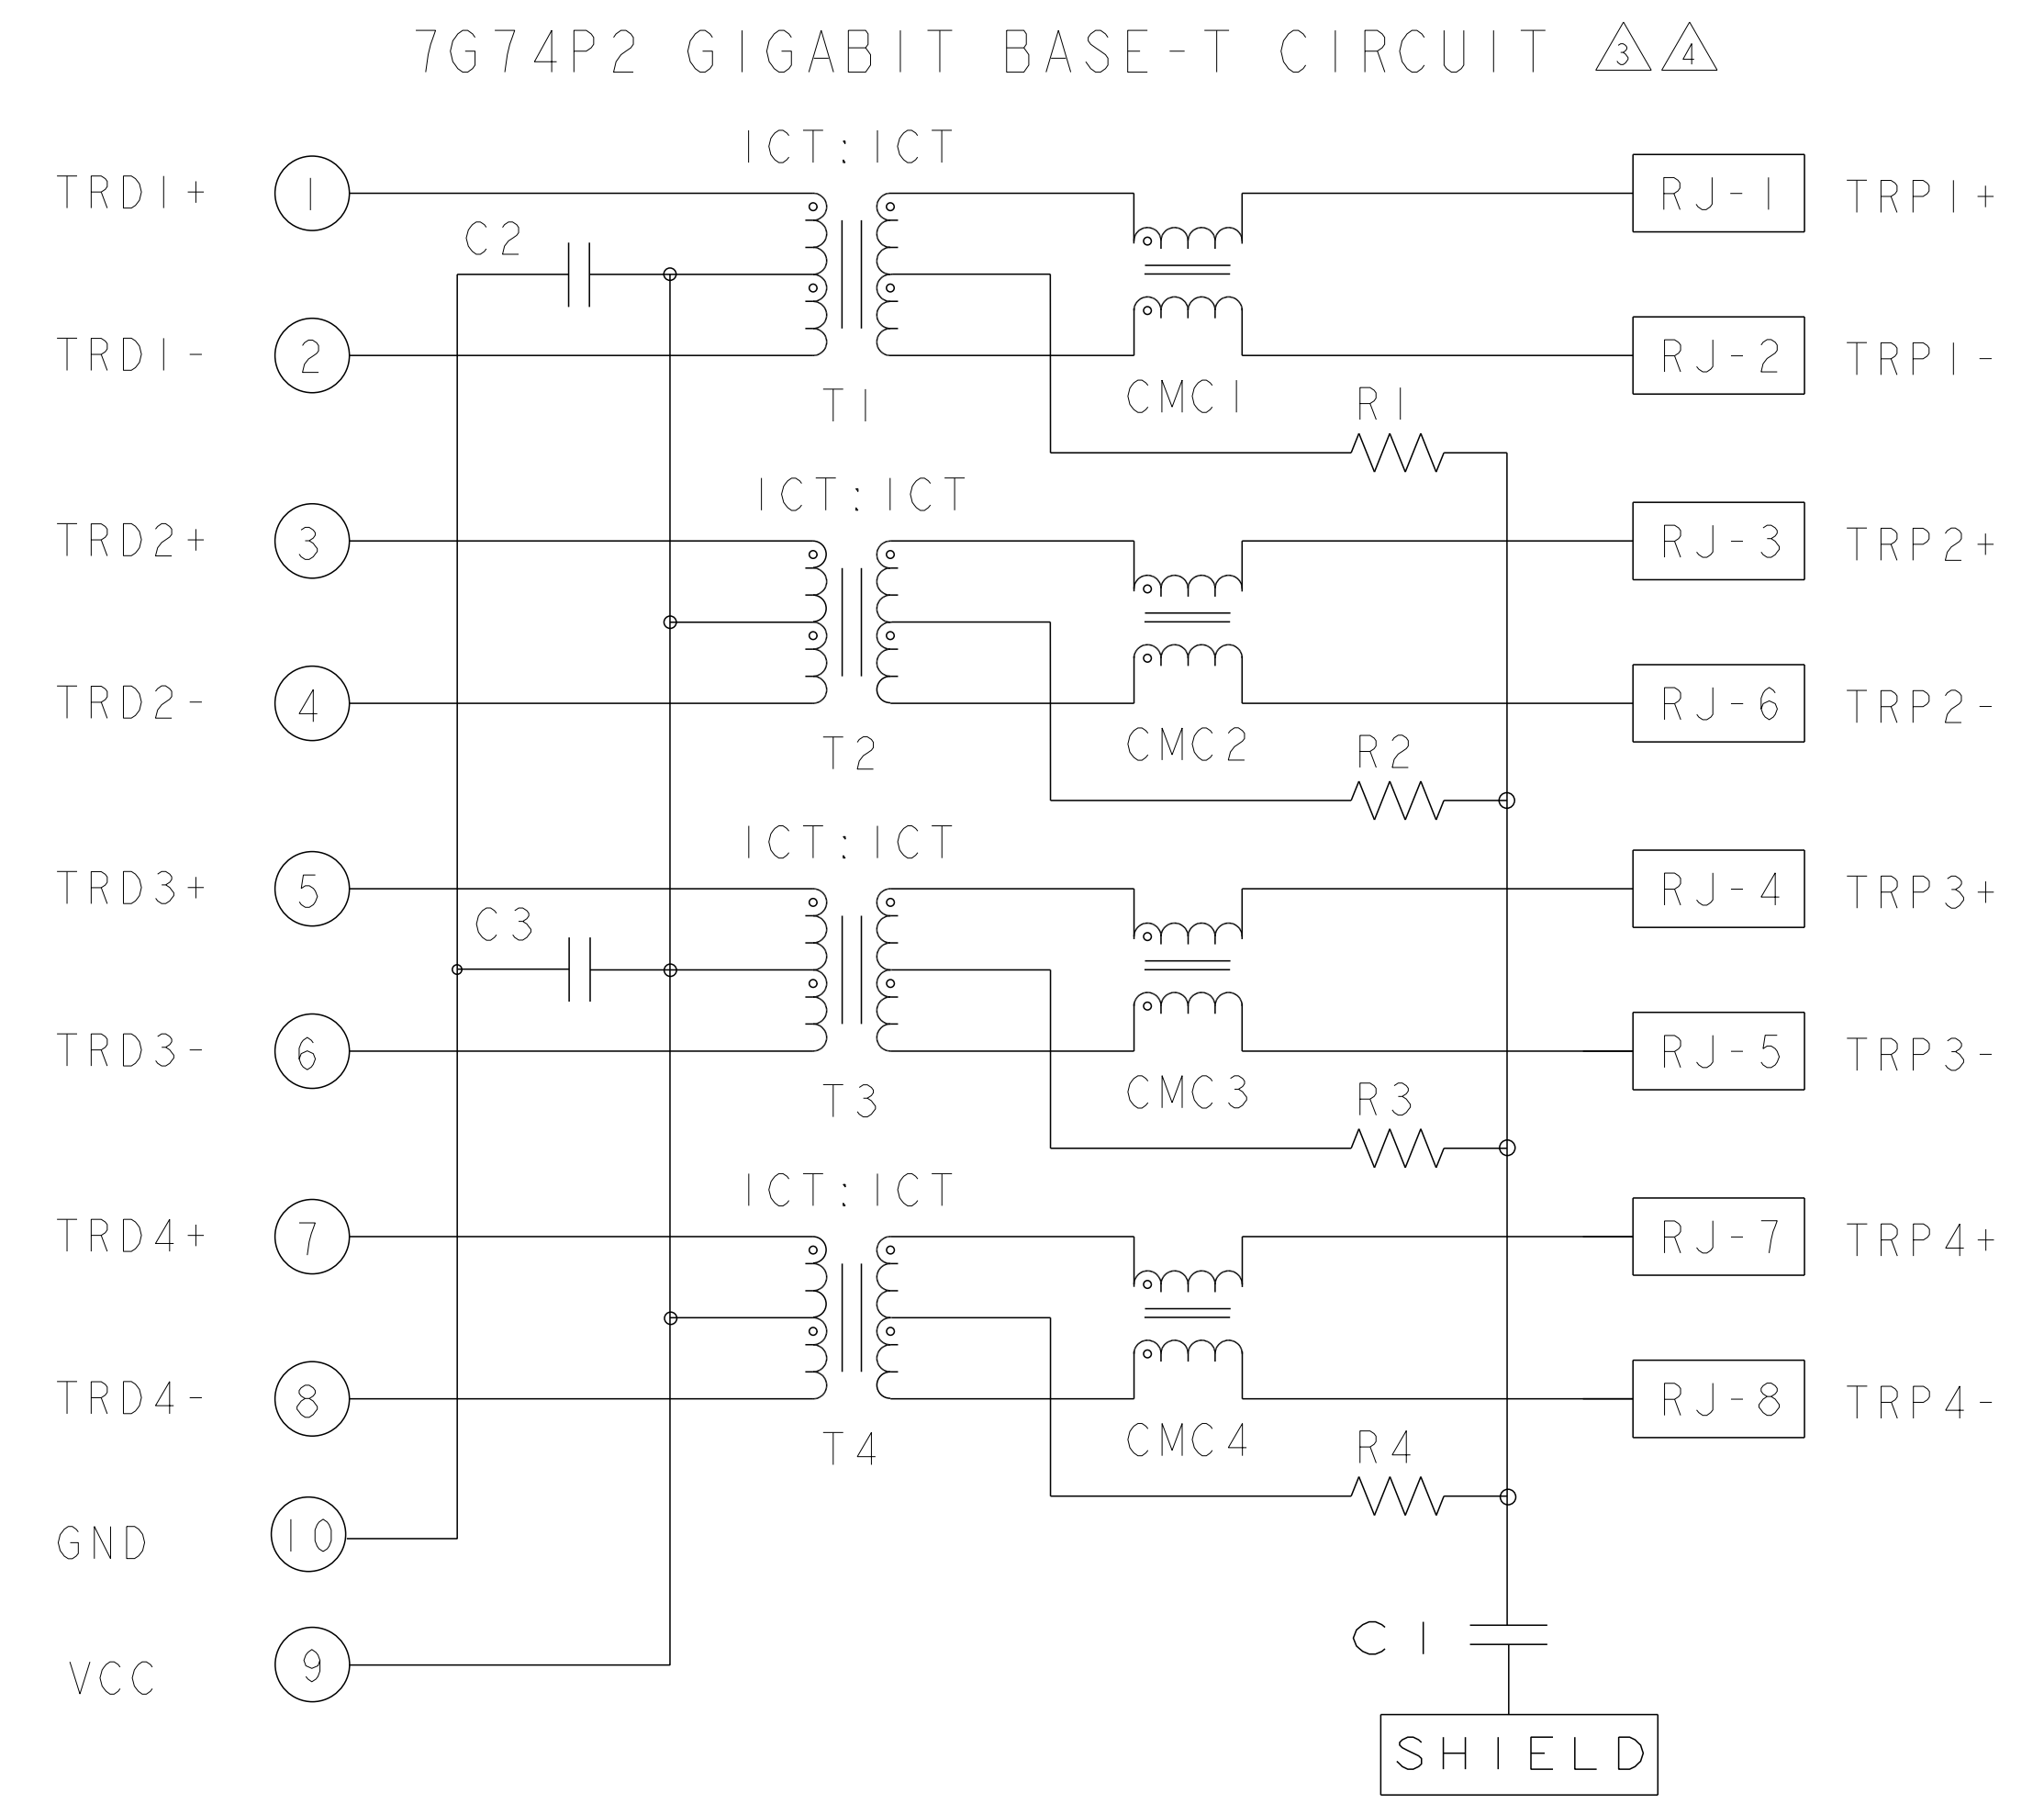

C1=1000PF, 3KV, $\pm 10\%$, X7R DECOUPLING CAP
C2 -C3 = 100 nf CAPACITOR
R1-R4 = 75 OHMS, 1/16W, $\pm 5\%$ RESISTORS

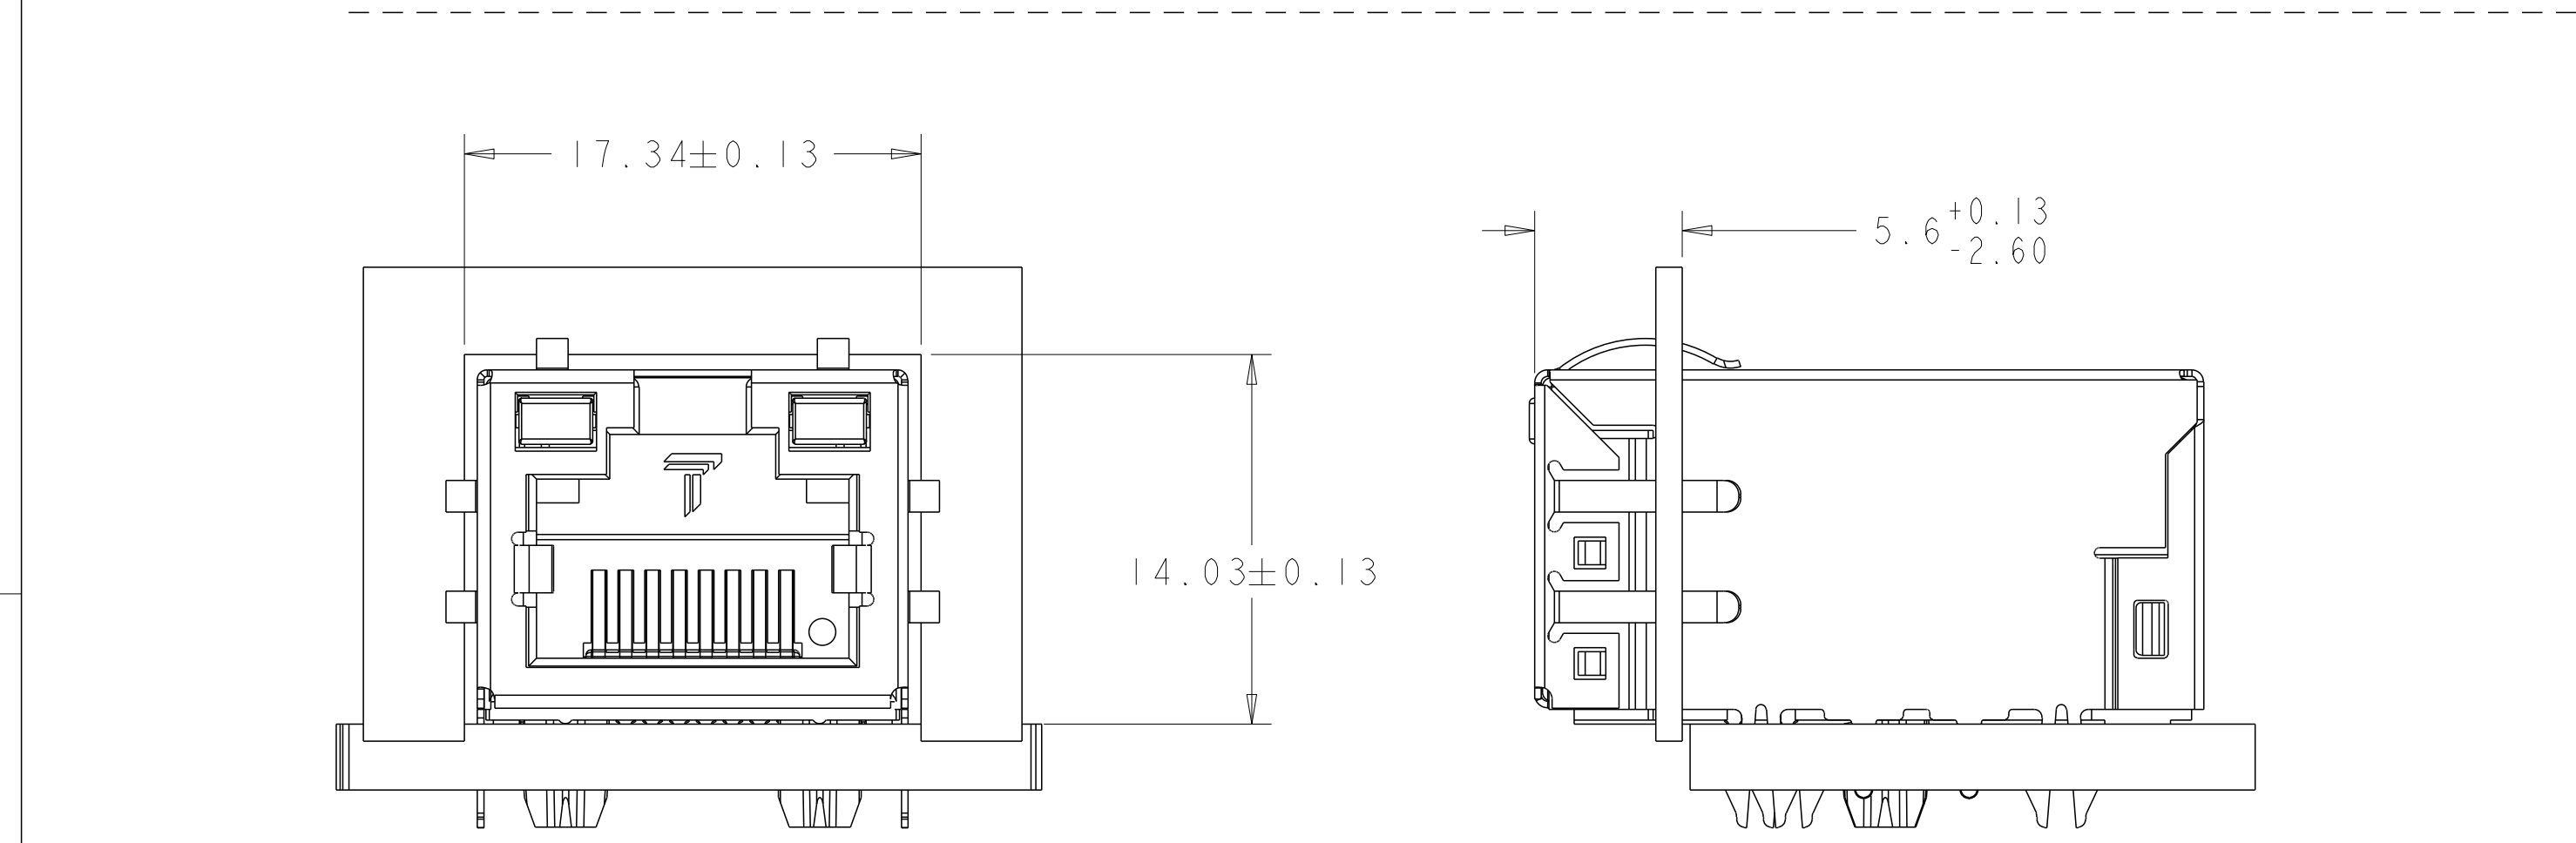


SUGGESTED PANEL OPENING
OPTION A

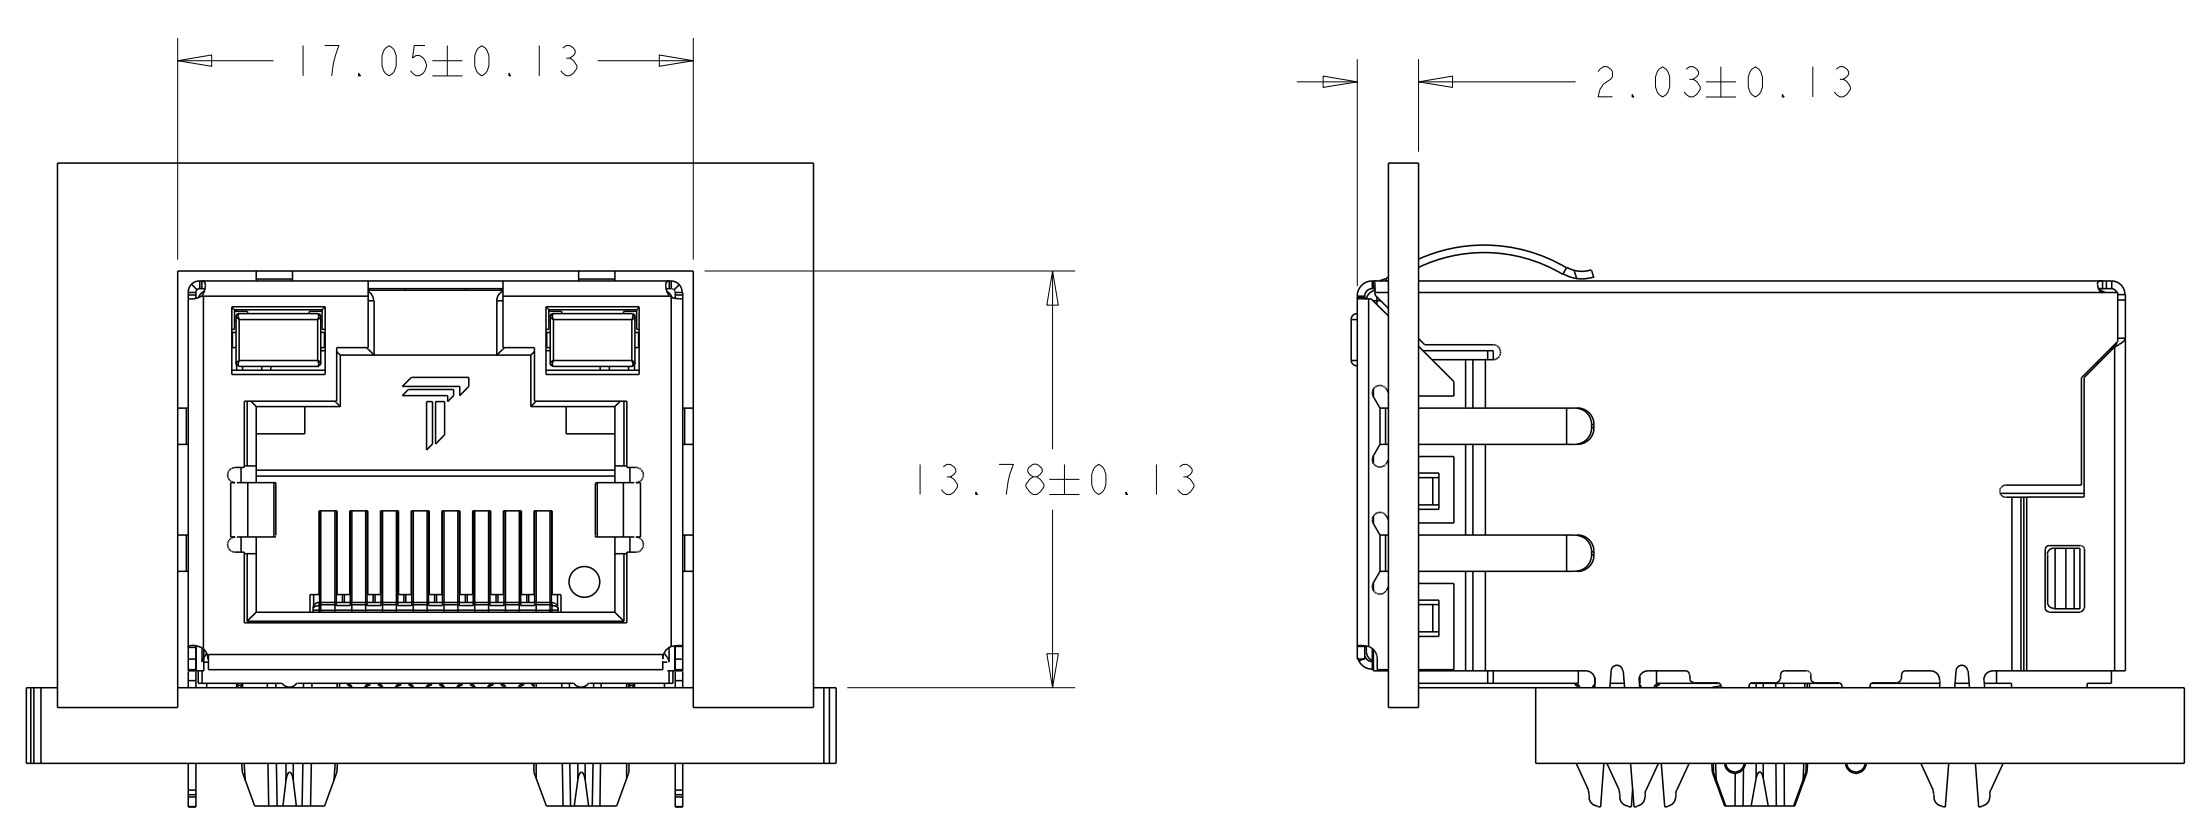


SUGGESTED PANEL OPENING
OPTION B

THIS DRAWING IS A CONTROLLED DOCUMENT. AND COMPLIANT TO ASME Y14.5M		OWN TOWER YU CHK KEITH ZHU APVD KEITH ZHU	04SEP2009 04SEP2009 04SEP2009	 DONGGUAN CHINA
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.25 1 PLC ± 0.25 2 PLC ± 0.25 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$ APPLICATION SPEC $\pm$	MODEL NAME MAGJACK	DESC IXI 7G74P2 GIGABIT TAB UP PRESSFIT W/ LED	
PRODUCT SPEC 108-104013		SIZE A1	CAGE CODE DRAWING NO C=1840772	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 3	REV G

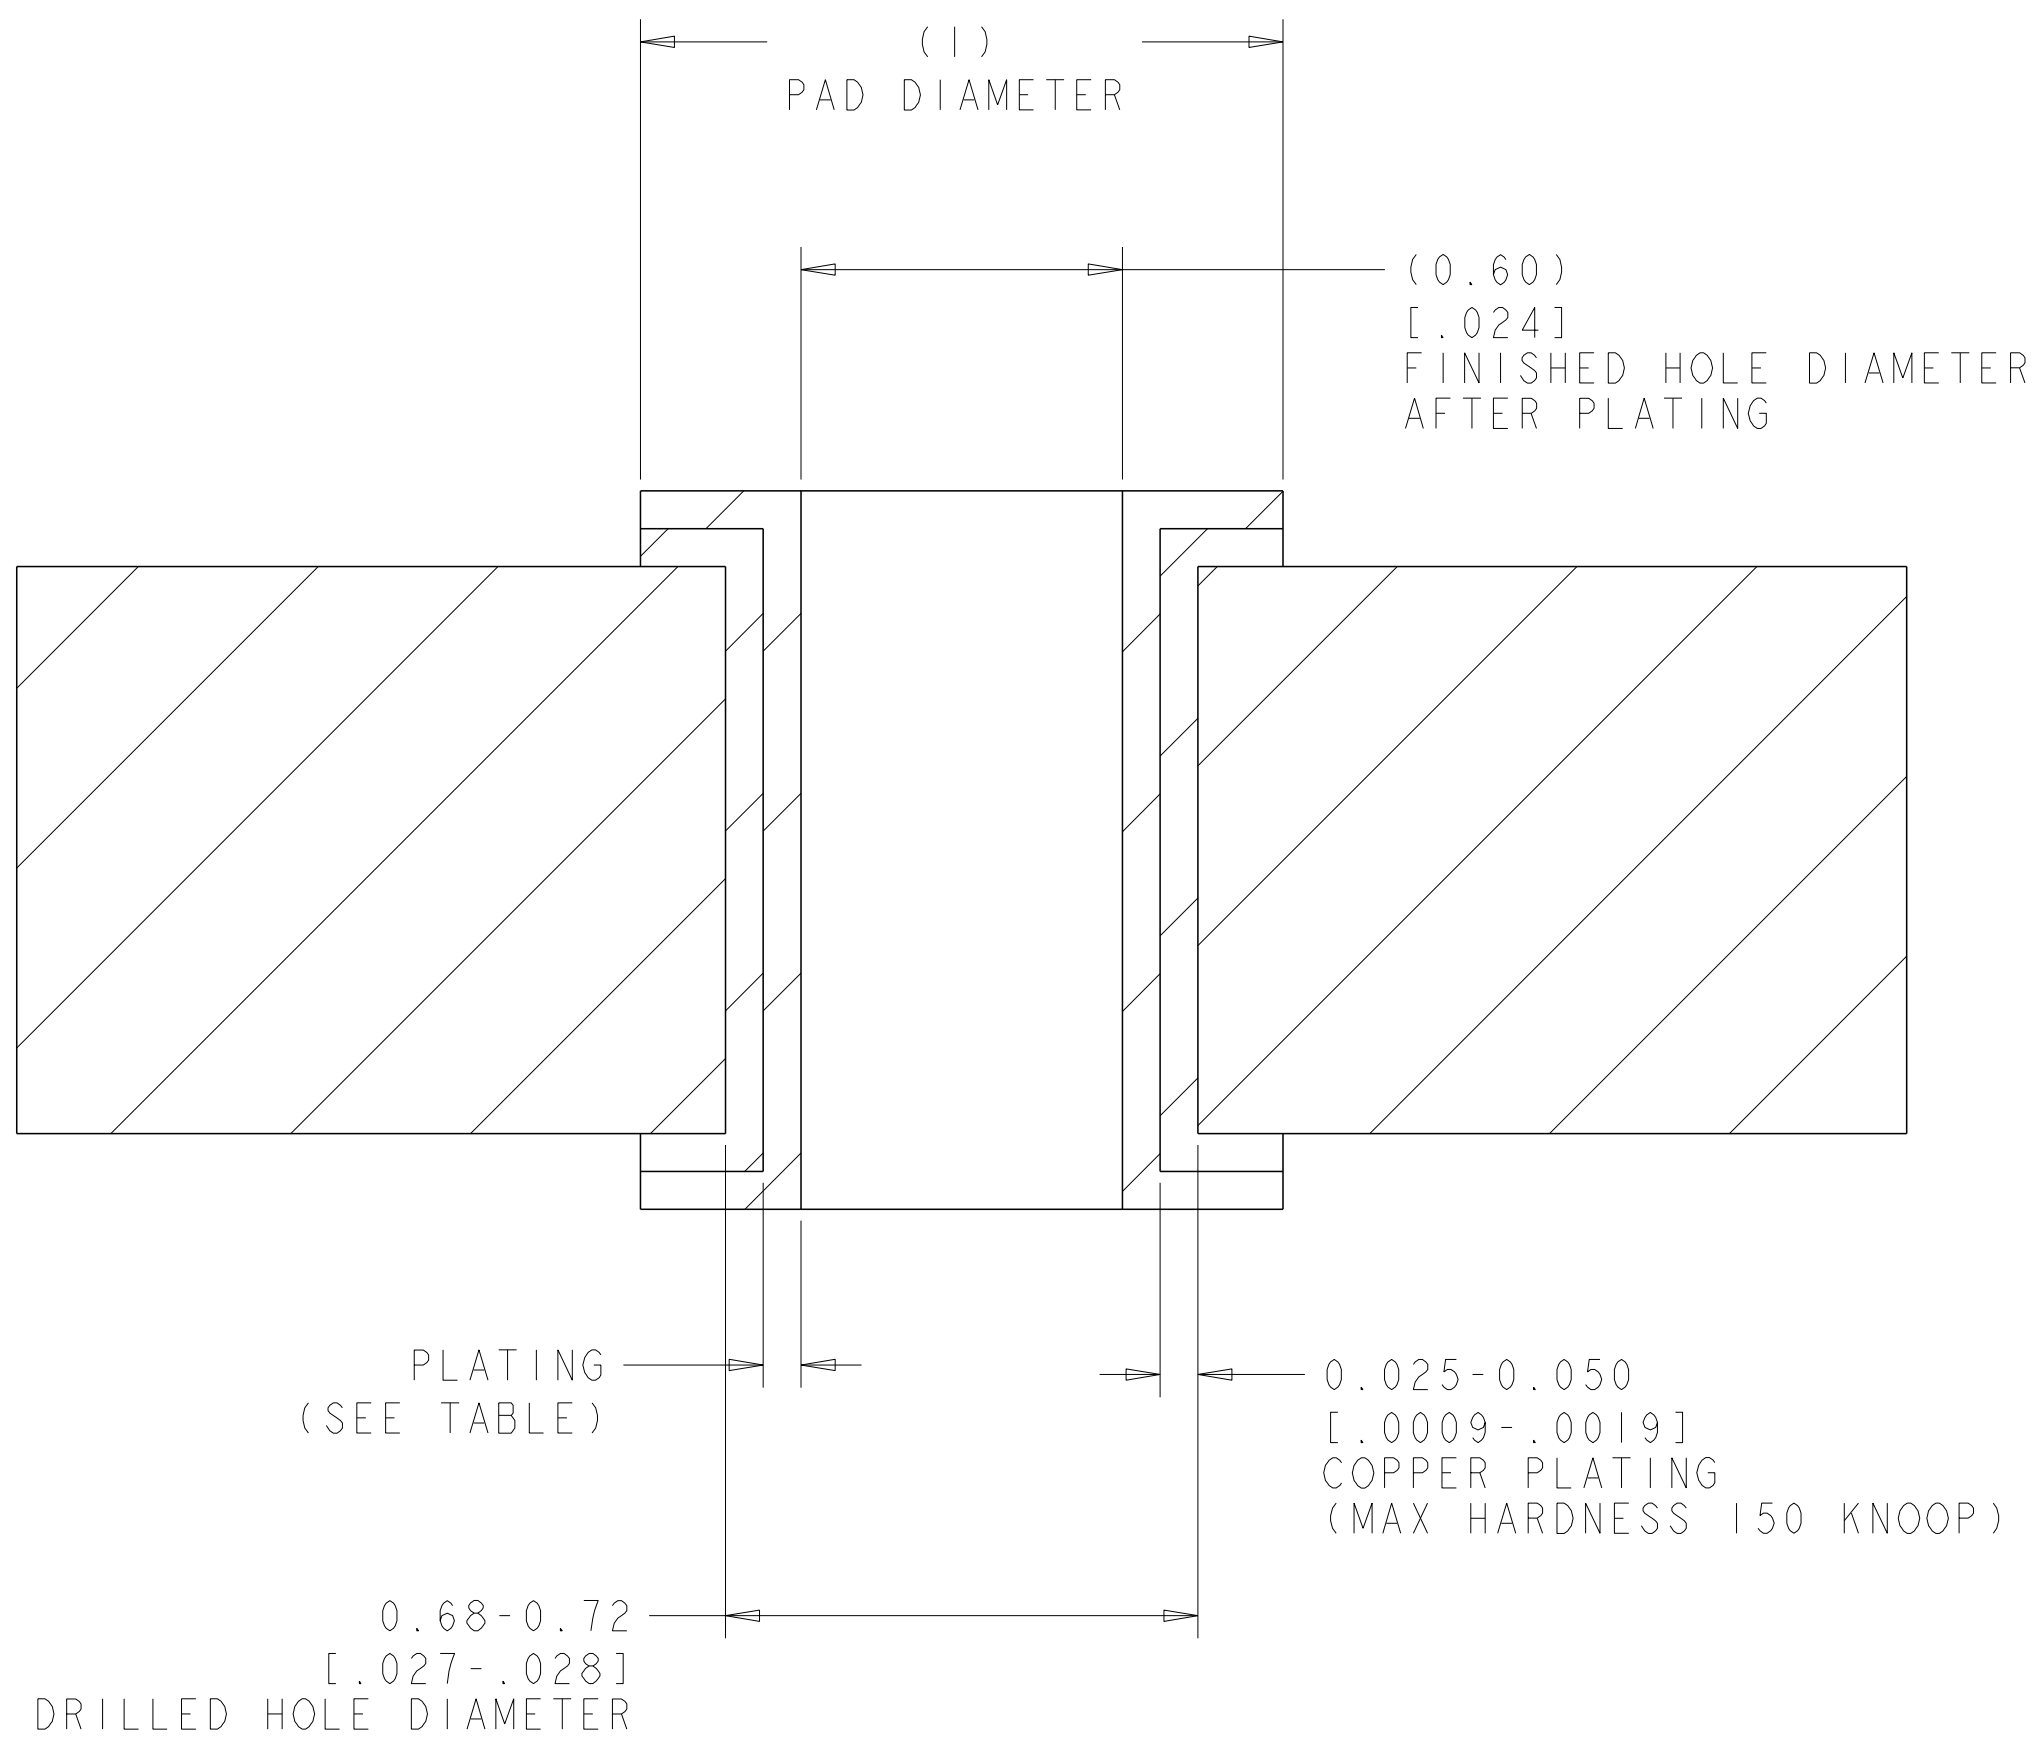

RECOMMENDED HOLE DIMENSIONS
FOR SIGNAL CONTACTS

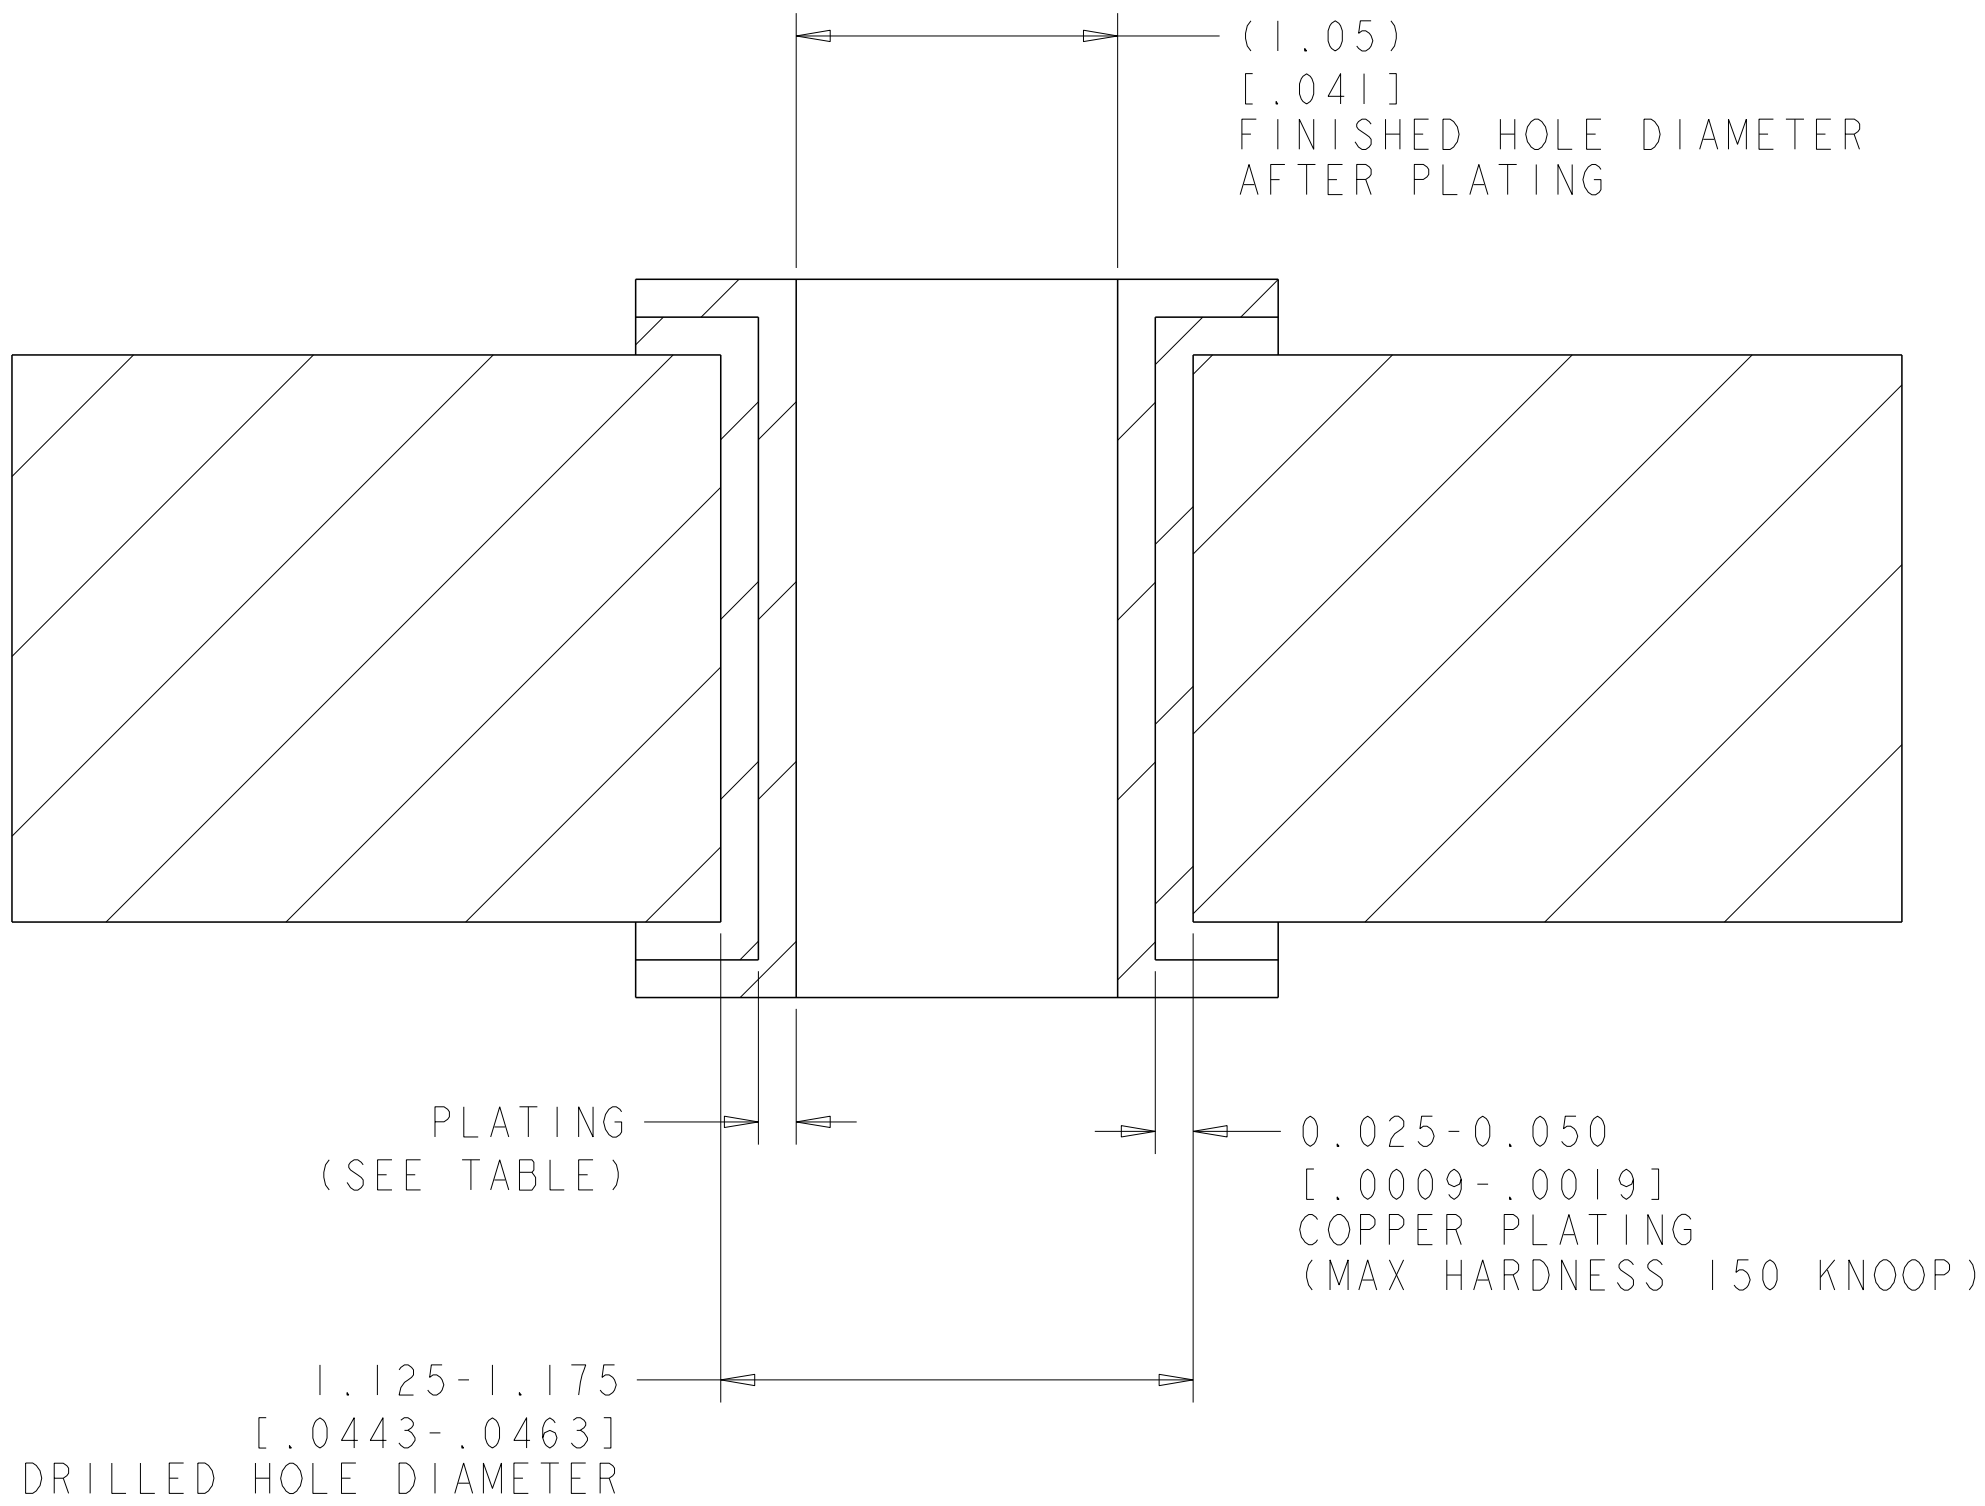

RECOMMENDED HOLE DIMENSIONS
FOR SHIELD CONTACTS

THICKNESS	PLATING
0.004-0.010	HOT AIR SOLDER LEVELING (HASL) TIN-LEAD (Sn Pb)
0.0005-0.001	IMMERSION TIN (Sn)
0.0002-0.0005	ORGANIC SOLDERABILITY PRESERVATIVE (OSP)
0.0001-0.0005 Au, 0.004-0.0076 Ni	IMMERSION GOLD (Au) OVER NICKEL (Ni) (ENIG)
0.010-0.025	TIN LEAD PLATING (Sn Pb)
0.0001-0.00015	IMMERSION SILVER (Ag)

THIS DRAWING IS A CONTROLLED DOCUMENT.
AND COMPLIANT TO ASME Y14.5M

DIMENSIONS:
mm

PRODUCT SPEC
108-104013

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0.25
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±
4 PLC ±
ANGLES
APPLICATION SPEC

±
±
±
±
±
±

-

DWN
TOWER YU 04SEP2009
CHK
KEITH ZHU 04SEP2009
APVD
KEITH ZHU 04SEP2009

MODEL NAME
MAGJACK
SINGLE NON-POE

CUSTOMER DRAWING

trp CONNECTOR
a bel group

IXI 7G74P2 GIGABIT
TAB UP PRESSFIT W/ LED

SIZE
A 1

CAGE CODE
C=1840772

DRAWING NO
-

RESTRICTED TO
-

SCALE
1:1

SHEET
3

OF
3

REV
G



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.