


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
05 ₂	REDRAWN IN CAD; ECN 97-0001	KYLE 8-27-97	<i>DCpm</i> 8/27/97

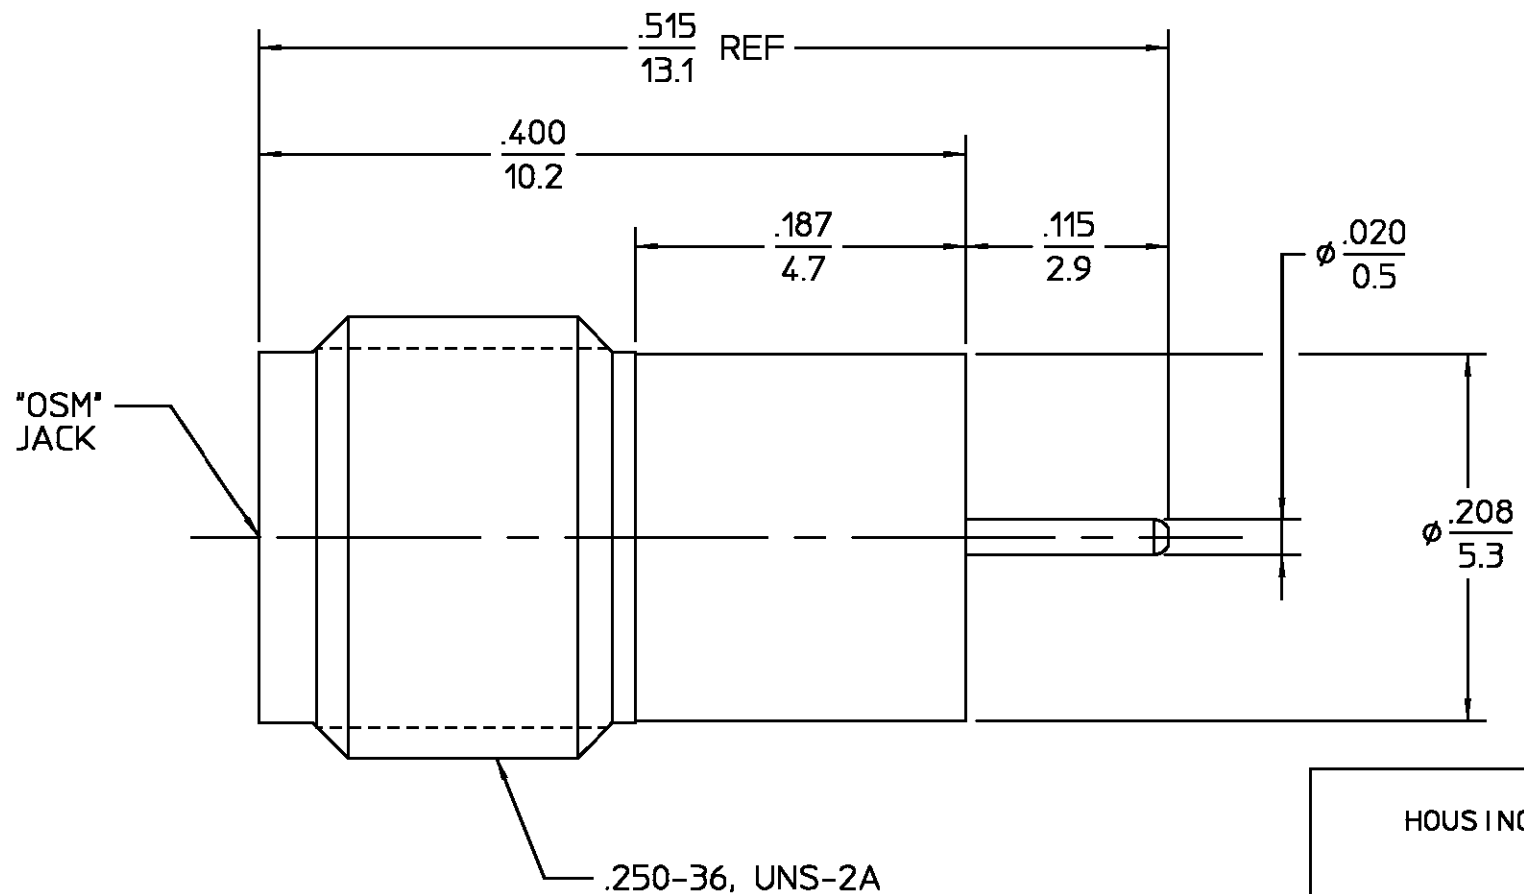

.XXX = in
XX.X = mm (REF)

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions <u>MIL-STD-348A</u>	Temperature Rating <u>-65°C To +165°C</u>
Frequency Range (GHz) <u>DC to 18</u>	<u>Fig. 310.2</u>	Vibration <u>MIL-STD-202, Method 204, Condition D</u>
Volt Rating (VRMS MAX) <u>333</u>	Recommended Mating Torque <u>N/A</u>	Shock <u>MIL-STD-202, Method 213, Condition I</u>
VSWR <u>1.05 + .01f(GHz)</u>	Mating Characteristics:	Thermal Shock <u>MIL-STD-202, Method 107, Condition B,</u>
Insertion Loss (dB MAX) <u>.04√f(GHz)</u>	Insertion (MAX Lbs) <u>3.0</u>	Moisture Resistance <u>MIL-STD-202, Method 106</u>
RF Leakage (dB MIN) <u>-(100 - f(GHz))</u>	Withdrawal (MIN Oz) <u>1.0</u>	Corrosion - <u>MIL-STD-202, Method 101, Condition B, 5% salt spray</u>
Corona, 70,000 Ft (VRMS MIN) <u>333</u>	Force to Engage and Disengage (In/Lbs MAX) <u>2.0</u>	Leak Test- <u>MIL-STD-202, Method 112, Condition C.</u>
Dielectric Withstanding Voltage (VRMS MIN) <u>1000 @ Sea Level</u>	Center Contact Captivation Axial (Lbs) <u>6.0</u>	(1 x 10 ⁻⁸ cc/sec/atm)
Contact Resistance (Milliohms MAX) Center Contact <u>10.0</u>	Radial (In/Oz) <u>N/A</u>	
Outer Contact <u>2.0</u>	Weight (Grams) <u>T.B.D.</u>	
RF High Potential (VRMS MIN @ 5 MHz) <u>667 @ Sea Level</u>		
LR.(Megohms MIN) <u>5000</u>		

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
CONTACT EXT	IRON-NICKEL-COBALT ALLOY PER MIL-I-23011 CLASS 1 (KOVAR)	GOLD PLATE PER MIL-G-45204
HERMETIC SEAL	GLASS BEAD	N/A
COMPONENT	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRAC. ± 1/64 DEC. ±.005 ANGLES ± 1°	DRAWN BY BDW	DATE 9-29-88	AMP	AMP Incorporated		
	CHECKED BY G.S	4-29-88		140 Fourth Avenue Waltham, MA 02451-7599		
	APPD BY G.D	5-5-88				
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASSY PROCEDURE	TITLE "OSM" PANEL FEEDTRU JACK RECEPTACLE-HERMETIC SEAL				
	NO. A.P. <u>N/A</u>	SIZE B	CODE IDENT NO. 26805	2058-3123-00	REV 05 ₂	
		SCALE 10:1			SHEET 1 OF 1	

CUSTOMER DRAWING

AMP PART # 1053141-1
SHEET 1 OF 1 REV A



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.