
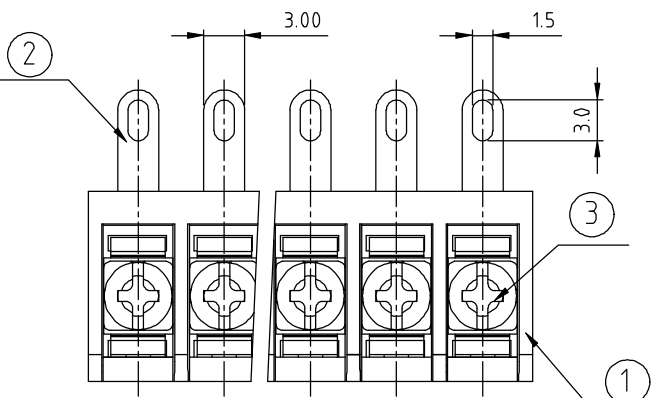
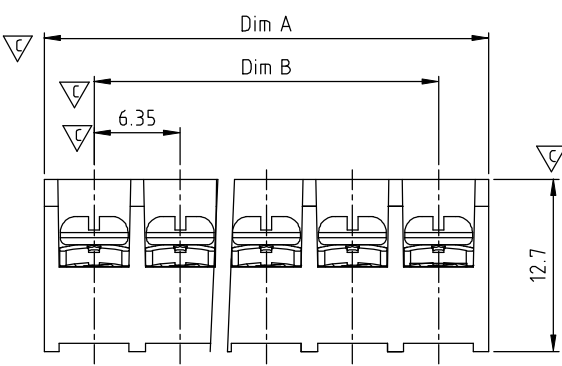


1	2	3	4	5	6	7																												
  				<table><tr><td>SIGN</td><td>DATE</td><td>DESCRIPTION</td><td>APPROVER</td></tr><tr><td>△</td><td>10/20'08</td><td>Add APPROVAL: : CQC</td><td>Kind</td></tr><tr><td>△</td><td>12/05'12</td><td>Change the screw plating specification</td><td>Jacky</td></tr><tr><td>△</td><td>12/05'12</td><td>Change the dimensional tolerance</td><td>Jacky</td></tr><tr><td>△</td><td>12/12'13</td><td>Add the view</td><td>Jacky</td></tr><tr><td>△</td><td>12/12'13</td><td>Change the withstand voltage and current</td><td>Jacky</td></tr><tr><td colspan="4">THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</td></tr></table>			SIGN	DATE	DESCRIPTION	APPROVER	△	10/20'08	Add APPROVAL: : CQC	Kind	△	12/05'12	Change the screw plating specification	Jacky	△	12/05'12	Change the dimensional tolerance	Jacky	△	12/12'13	Add the view	Jacky	△	12/12'13	Change the withstand voltage and current	Jacky	THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			
				SIGN	DATE	DESCRIPTION	APPROVER																											
				△	10/20'08	Add APPROVAL: : CQC	Kind																											
				△	12/05'12	Change the screw plating specification	Jacky																											
				△	12/05'12	Change the dimensional tolerance	Jacky																											
				△	12/12'13	Add the view	Jacky																											
△	12/12'13	Change the withstand voltage and current	Jacky																															
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!																																		
MATERIALS ELECTRICAL RATED VOLTAGE & CURRENT: WITHSTAND VOLTAGE: INSULATION RESISTANCE: OPERATING TEMPERATURE RANG: SCREW TORQUE VALUE: WIRE RANGE: 1) MOLDED PARTS: 2) TERMINAL: △ 3) TERMINAL SCREWS: △ APPROVAL:   PART NO.: Critical dimension:  cULus 250 V, 10 A AC 2000 V/Min 1000 MΩOR MORE AT DC 500 V -40 °C ~ +115 °C 5.3 Lb-In. 22 - 18 AWG Thermoplastic, UL 94 V-0 BLACK BRASS, 0.8t, Tin PLATED STEEL, M3																																		
YK 223xx0xx00G NO. OF POLES 02: 2 POLES 03: 3 POLES 04: 4 POLES ... 30: 30 POLES G: RoHS compliant (lead<4%) In copper Alloy MARK 0: "@" MARK 1: "ANY" MARK TERMINAL & SCREW PLATED 0: TERMINAL & SCREW: G/F △ 1: TERMINAL: G/F, SCREW: Zinc 2: TERMINAL: Sn, SCREW: G/F △ 3: TERMINAL: Sn, SCREW: Zinc																																		
N = Number of poles△ Dim A=Nx6.35+1.0 Dim B=(N-1)x6.35 <table><tr><td>Poles</td><td>Tol.</td><td>Dim A&B</td></tr><tr><td>2-5p</td><td>±0.20</td><td></td></tr><tr><td>6-10p</td><td>±0.25</td><td></td></tr><tr><td>11-16p</td><td>±0.35</td><td></td></tr><tr><td>17-24p</td><td>±0.40</td><td></td></tr><tr><td>25-30p</td><td>±0.50</td><td></td></tr></table>				Poles	Tol.	Dim A&B	2-5p	±0.20		6-10p	±0.25		11-16p	±0.35		17-24p	±0.40		25-30p	±0.50														
Poles	Tol.	Dim A&B																																
2-5p	±0.20																																	
6-10p	±0.25																																	
11-16p	±0.35																																	
17-24p	±0.40																																	
25-30p	±0.50																																	
ANYTEK CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD <table><tr><td colspan="2">TITLE</td><td colspan="2">YK-223 Series</td></tr><tr><td>PART NO.</td><td>YK223xx0xx00G</td><td>DWG NO.</td><td>8YK0001-223</td></tr><tr><td>APPROVED</td><td>CHECKED</td><td>DESIGNED</td><td>DRAWN</td></tr><tr><td></td><td></td><td>Jacky 2013.12.12</td><td>Jacky 2013.12.12</td></tr><tr><td colspan="2">SHEET: 01/01</td><td colspan="2">REV.: F</td></tr></table>				TITLE		YK-223 Series		PART NO.	YK223xx0xx00G	DWG NO.	8YK0001-223	APPROVED	CHECKED	DESIGNED	DRAWN			Jacky 2013.12.12	Jacky 2013.12.12	SHEET: 01/01		REV.: F												
TITLE		YK-223 Series																																
PART NO.	YK223xx0xx00G	DWG NO.	8YK0001-223																															
APPROVED	CHECKED	DESIGNED	DRAWN																															
		Jacky 2013.12.12	Jacky 2013.12.12																															
SHEET: 01/01		REV.: F																																
1	2	3	4	5	6	7																												

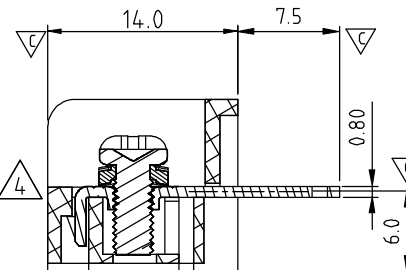

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.