


1		2		3		4		5		6		7																																																																									
E											<table><tr><td>SIGN</td><td>DATE</td><td>DESCRIPTION</td><td>APPROVER</td></tr><tr><td>△</td><td>10/20'08</td><td>Add APPROVAL: : CQC</td><td>Kind</td></tr><tr><td>△</td><td>12/05'12</td><td>Change the screw plating specification</td><td>Jacky</td></tr><tr><td>△</td><td>12/05'12</td><td>Change the dimensional tolerance</td><td>Jacky</td></tr><tr><td>△</td><td>12/12'13</td><td>Add the view</td><td>Jacky</td></tr><tr><td>△</td><td>12/12'13</td><td>Change the withstand voltage and current</td><td>Jacky</td></tr><tr><td colspan="12">THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</td></tr></table>		SIGN	DATE	DESCRIPTION	APPROVER	△	10/20'08	Add APPROVAL: : CQC	Kind	△	12/05'12	Change the screw plating specification	Jacky	△	12/05'12	Change the dimensional tolerance	Jacky	△	12/12'13	Add the view	Jacky	△	12/12'13	Change the withstand voltage and current	Jacky	THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!																																																
											SIGN	DATE	DESCRIPTION	APPROVER																																																																							
											△	10/20'08	Add APPROVAL: : CQC	Kind																																																																							
											△	12/05'12	Change the screw plating specification	Jacky																																																																							
											△	12/05'12	Change the dimensional tolerance	Jacky																																																																							
											△	12/12'13	Add the view	Jacky																																																																							
△	12/12'13	Change the withstand voltage and current	Jacky																																																																																		
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!																																																																																					
D	MATERIALS ELECTRICAL RATED VOLTAGE & CURRENT: cULus 250 V, 10 A / CQC 250 V, 9A△5 WITHSTAND VOLTAGE: AC 2000 V/Min INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C SCREW TORQUE VALUE: 5.3 Lb-In. WIRE RANGE: 22 - 18 AWG 1) MOLDED PARTS: Thermoplastic, UL 94 V-0 BLACK 2) TERMINAL: BRASS, 0.8t, Tin PLATED △ 3) TERMINAL SCREWS: STEEL, M3 △ APPROVAL:   PART NO.: Critical dimension: 																																																																																				
											C	YK 223 xx 0 x x 00G NO. OF POLES 02: 2 POLES 03: 3 POLES 04: 4 POLES ... 30: 30 POLES G: RoHS compliant (lead<4%) In copper Alloy MARK 0: "@" MARK 1: "ANY" MARK TERMINAL & SCREW PLATED 0: TERMINAL & SCREW: G/F △ 1: TERMINAL: G/F, SCREW: Zinc 2: TERMINAL: Sn, SCREW: G/F △ 3: TERMINAL: Sn, SCREW: Zinc																																																																									
																						B	N = Number of poles△ Dim A=Nx6.35+1.0 Dim B=(N-1)x6.35 <table><tr><td>Poles</td><td>Tol.</td><td>Dim A&B</td></tr><tr><td>2-5p</td><td>±0.20</td><td></td></tr><tr><td>6-10p</td><td>±0.25</td><td></td></tr><tr><td>11-16p</td><td>±0.35</td><td></td></tr><tr><td>17-24p</td><td>±0.40</td><td></td></tr><tr><td>25-30p</td><td>±0.50</td><td></td></tr></table>										Poles	Tol.	Dim A&B	2-5p	±0.20		6-10p	±0.25		11-16p	±0.35		17-24p	±0.40		25-30p	±0.50																																				
																																	Poles	Tol.	Dim A&B																																																		
																						2-5p	±0.20																																																														
											6-10p	±0.25																																																																									
11-16p	±0.35																																																																																				
17-24p	±0.40																																																																																				
25-30p	±0.50																																																																																				
A	<table><tr><td colspan="2">TITLE</td><td colspan="2">YK-223 Series</td></tr><tr><td colspan="2">PART NO.</td><td colspan="2">YK223xx0xx00G</td></tr><tr><td colspan="2">APPROVED</td><td>CHECKED</td><td>DESIGNED</td><td>DRAWN</td><td colspan="2">CUST NO.</td><td colspan="2">8YK0001-223</td></tr><tr><td colspan="2"></td><td></td><td>Jacky</td><td>Jacky</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td></td><td>2013.12.12</td><td>2013.12.12</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">Tolerance</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">X. ±0.50</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">X.X ±0.30</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">X.XX ±0.10</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">X° ±1°</td></tr></table>										TITLE		YK-223 Series		PART NO.		YK223xx0xx00G		APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		8YK0001-223					Jacky	Jacky								2013.12.12	2013.12.12											Tolerance								X. ±0.50								X.X ±0.30								X.XX ±0.10								X° ±1°	
											TITLE		YK-223 Series																																																																								
PART NO.		YK223xx0xx00G																																																																																			
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		8YK0001-223																																																																														
			Jacky	Jacky																																																																																	
			2013.12.12	2013.12.12																																																																																	
						Tolerance																																																																															
						X. ±0.50																																																																															
						X.X ±0.30																																																																															
						X.XX ±0.10																																																																															
						X° ±1°																																																																															
7																																																																																					

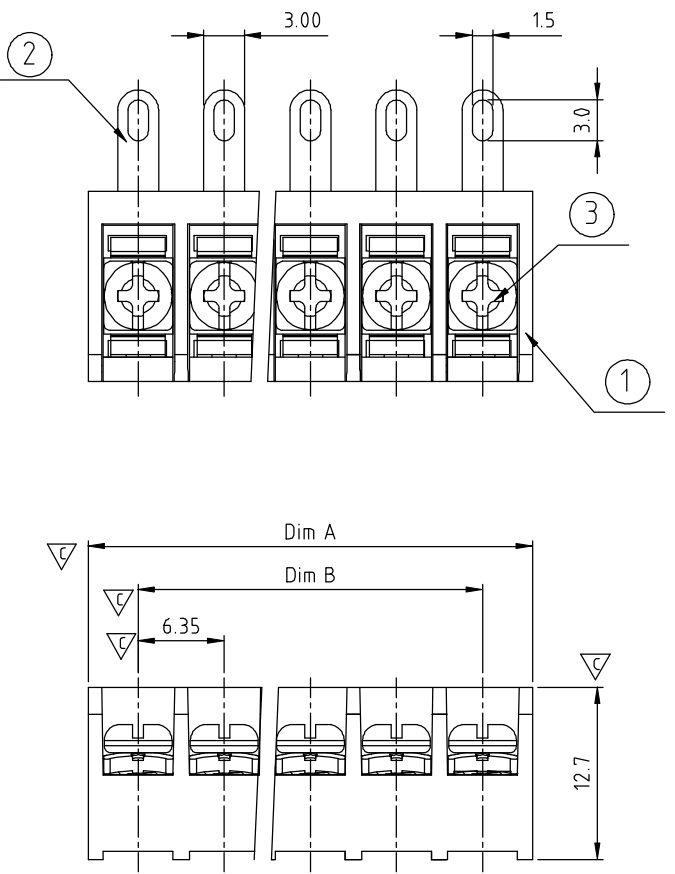

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.