



IGMC-111GP

# IGMC-111GP

2

Industrial Media Converter

➤ **Industrial Gigabit Ethernet to fiber media converter with 1x10/100/1000Base-T(X) and 1x100/1000Base-X, SFP socket**

## Features

- Support 1 port 10/100/1000Base-T(X) auto-negotiation and auto-MDI/MDI-X copper port
- Support 1 port 100/1000Base-X SFP fiber port
- Support Jumbo Frame up to 9K Bytes
- Support **LFP (Link Fault Pass-through)** function
- Relay output to carry capacity of 1A at 24 VDC for warning system
- Provided DIP-Switch to setting function
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




## Introduction

The IGMC-111GP is a cost-effective solution for the conversion interface between 10/100/1000Base-T(X) and 100/1000Base-X SFP socket; it allows you to extend communication distance by optical fiber. IGMC-111GP supports MDI/MDIX auto detection, so you don't need to use crossover wires.


The IGMC-111GP also supports the **LFP (Link Fault Pass-through)** feature. When one side of the link fails, the other side continues transmitting packets, and waiting for a response that never arrives from the disconnected side. Use the DIP-Switch to enable the LFP function, then IGMC-111GP will force the link to shut down as soon as noticed that the other link has failed, giving the application software a chance to react to the situation.

The IGMC-111GP with wide operating temperature range from -40 ~ 75°C and accepts a wide voltage range from dual 12~48 VDC power inputs, so it is suitable for harsh operating environments. Therefore, the IGMC-111GP is reliable media converter and can satisfy most demand of operating environment.

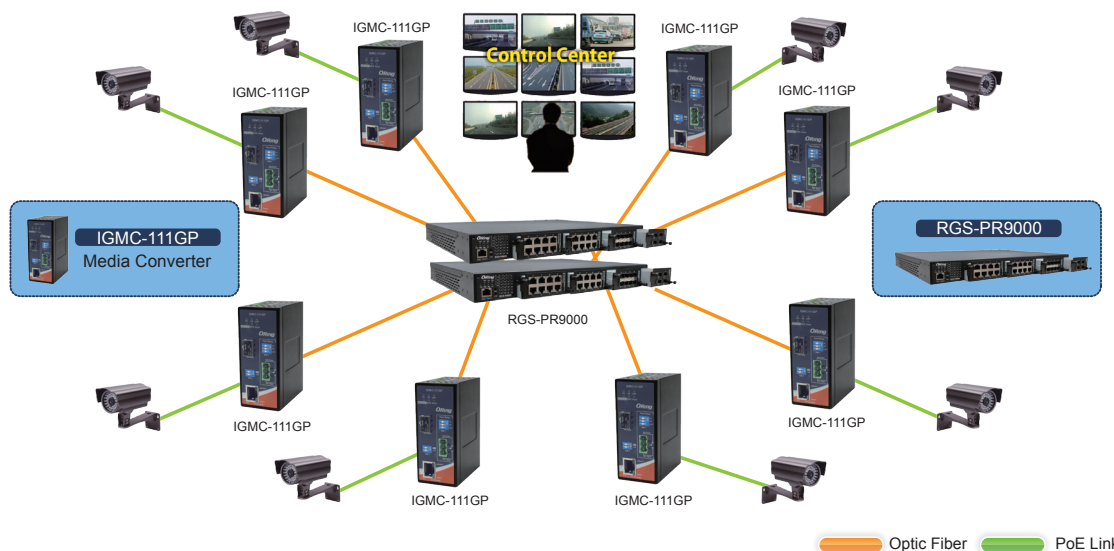

Connections of Media Converter

## Dimensions

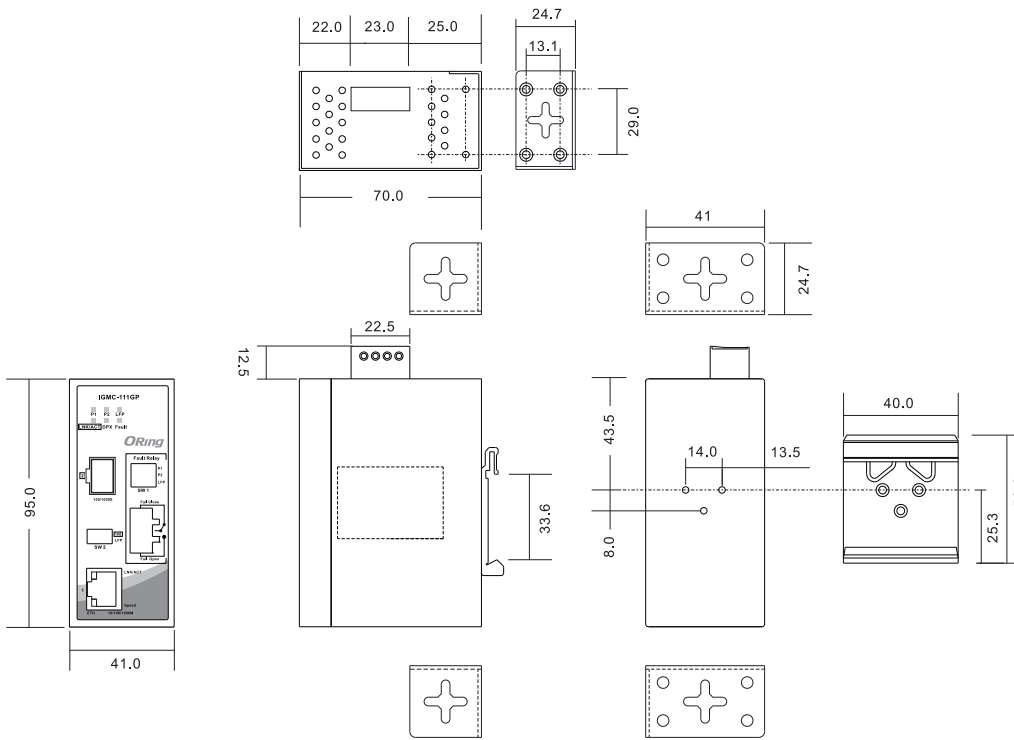

(Unit=mm)

## RJ-45 Pin Definition

### 10/100Base-T(X) P.S.E. RJ-45 port

RJ-45 Pin Definition	
Pin No.	Description
#1	TD+
#2	TD-
#3	RD+
#4	Not used
#5	Not used
#6	RD-
#7	Not used
#8	Not used

### 1000Base-T RJ-45 port

RJ-45 Pin Definition	
Pin No.	Description
#1	BI_DA+
#2	BI_DA-
#3	BI_DB+
#4	BI_DC+
#5	BI_DC-
#6	BI_DB-
#7	BI_DD+
#8	BI_DD-

## DIP-Switch Setting

3-PIN DIP-Switch 1		Description	
DIP-Switch No.	Function	DIP-Switch Status	
1	Power-1 failure detection	ON	When power-1 failure, enable relay output
		OFF	Disable power-1 failure detection
2	Power-2 failure detection	ON	When power-2 failure, enable relay output
		OFF	Disable power-2 failure detection
3	LFP warning detection	ON	LFP signals when detected, enable relay output
		OFF	Disable LFP signals detection

2-PIN DIP-Switch 2		Description	
DIP-Switch No.	Function	DIP-Switch Status	
1	100/1000Base-FX mode selection	ON	100Base-FX mode
		OFF	1000Base-X mode
2	LFP function	ON	Enable LFP function
		OFF	Disable LFP function

## Specifications

ORing Switch Model	IGMC-111GP
<b>Physical Ports</b>	
10/100/1000 Base-T(X) Port in RJ45 Auto MDI/MDIX	1
100/1000Base-X SFP port	1
<b>Technology</b>	
Ethernet Standards	IEEE 802.3i for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X
Jumbo Frame	9K Bytes (1G mode only)
<b>LED Indicators</b>	
Power / Ready Indicator	Green: Power LED x 2
LFP statue indicator	Amber LED – (ON) LFP function fail / (OFF) LFP function disable
100/1000Base-X SFP Port Indicator	Green for port Link/Act
10/100/1000Base-T(X) Port Duplex Mode Indicator	Green LED – (ON) Full-duplex mode / (OFF) Half-Duplex mode
10/100/1000Base-T(X) RJ45 port Indicator	Green for Link/Act Dual color LED for speed – Green for 1000Mbps, Amber for 100Mbps, Off-light for 10Mbps
Fault Indicator (Fault)	Amber : Indicate unexpected event occurred
<b>Fault Contact</b>	
Relay	Relay output to carry capacity of 1A at 24 VDC
<b>Power</b>	
Input Power	Dual 12~ 48VDC voltage power inputs in 4-pin terminal block
Power Consumption (Typ.)	4Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present
<b>Physical Characteristic</b>	
Enclosure	IP-30
Dimension (W x D x H)	40 (W) x70 (D) x 95 (H) mm
Weight (g)	291g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15B
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15B class A
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1

MTBF	1,167,318 hours
Warranty	5 years

## Ordering Information

IGMC-1 **A** **B** **CC**

Code Definition	10/100/1000Base-T(X) Port Number	100/1000Base-X Fiber Port Number	Fiber Port Type
<b>Option</b>	- <b>1</b> : 1 port	- <b>1</b> : 1 port	- <b>GP</b> : 100/1000Base-X SFP

Available Model	Model Name	Description
	IGMC-111GP	Industrial Gigabit Ethernet to fiber media converter with 1x10/100/1000Base-T(X) and 1x100/1000Base-X, SFP socket

<p><b>Packing List</b></p> <ul style="list-style-type: none"> <li>IGMC-111GP x 1</li> <li>Wall-mount Kit x 1</li> <li>Quick Installation Guide x 1</li> <li>DIN-Rail Kit x 1</li> </ul>	<p><b>Optional Accessories (Can be purchased separately)</b></p> <ul style="list-style-type: none"> <li>SFP 100 series : 100Mbps SFP optical transceiver</li> <li>SFP 1G series : 1Gbps SFP optical transceiver</li> </ul>
---	--



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.