





Chip Inductors – 0603HP Series (1608)

- Higher Q and lower DCR than other 0603 inductors
- Highest SRF values – as high as 16 GHz
- Excellent current handling capability – up to 2100 mA
- 54 inductance values from 1.8 to 390 nH



Typical Q vs Frequency

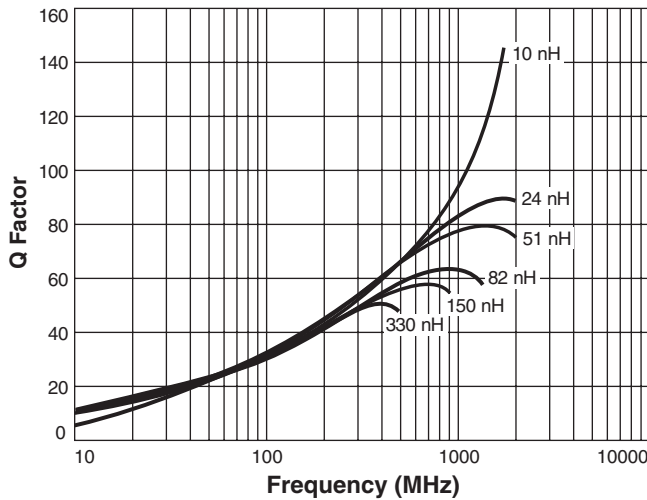

Typical L vs Frequency

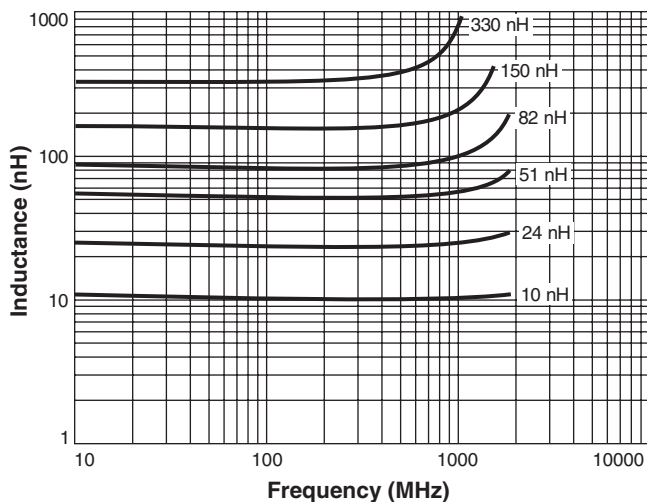

Current Derating

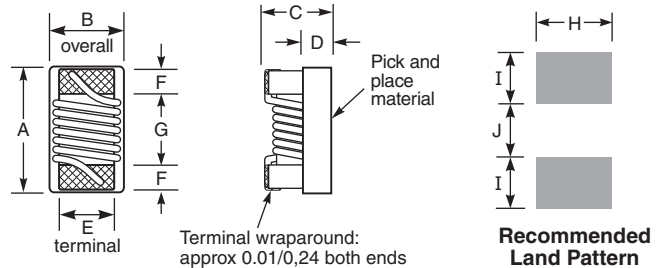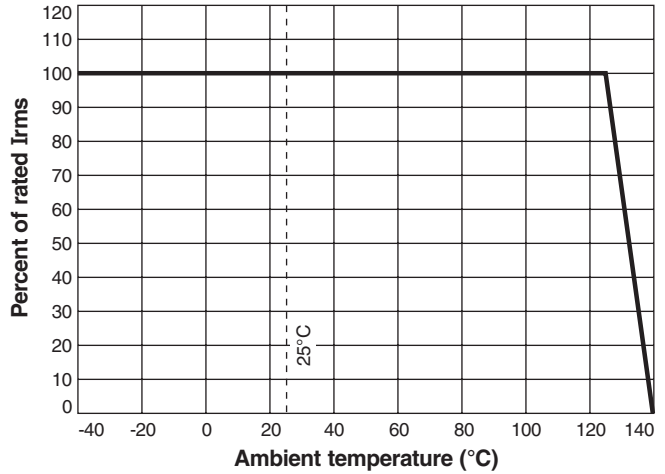

| A | B | C | D | E | F | G | H | I | J |
|-------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|
| max | (min-max) | max | | | | | | | |
| 0.069 | 0.034-0.043 | 0.037 | 0.015 | 0.029 | 0.013 | 0.038 | 0.040 | 0.027 | 0.028 |
| 1,75 | 0,86-1,09 | 0,94 | 0,38 | 0,74 | 0,33 | 0,96 | 1,02 | 0,69 | 0,71 |

Note: Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.

Core material Ceramic

Environmental RoHS compliant, halogen free optional

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 2.0 – 3.2 mg

Ambient temperature -40°C to +125°C with Irms current, +125°C to +140°C with derated current

Storage temperature Component: -40°C to +140°C. Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF) One per billion hours / one billion hours, calculated per Telcordia SR-332

Packaging 2000 per 7" reel. Paper tape: 8 mm wide, 1 mm thick, 4 mm pocket spacing

PCB washing Only pure water or alcohol recommended



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 537-1 Revised 05/02/12

© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.



0603HP Series (1608)

Designer's Kits C406A and B contain 10 each of all 5% values
 Designer's Kits C406A-2 and B-2 contain 10 each of all 2% values

| Part number ¹ | Inductance ² (nH) | Percent tol | L test freq (MHz) | Q typ at 250 MHz | 900 MHz | | 1.7 GHz | | SRF typ ⁴ (GHz) | DCR max ⁵ (Ohms) | Irms ⁶ (mA) | Color code |
|--------------------------|---------------------------------|----------------|-------------------------|------------------------|---------|--------------------|---------|--------------------|----------------------------------|-----------------------------------|---------------------------|---------------|
| | | | | | L typ | Q typ ³ | L typ | Q typ ³ | | | | |
| 0603HP-1N8XJL_ | 1.8 | 5 | 250 | 23 | 1.77 | 40 | 1.77 | 65 | 16.0 | 0.033 | 2100 | Black |
| 0603HP-2N2XJL_ | 2.2 | 5 | 250 | 13 | 2.14 | 25 | 2.12 | 35 | 15.0 | 0.180 | 900 | Yellow |
| 0603HP-3N3X_L_ | 3.3 | 5,3,2 | 250 | 32 | 3.28 | 67 | 3.32 | 104 | 9.60 | 0.024 | 1900 | Blue |
| 0603HP-3N6X_L_ | 3.6 | 5,3,2 | 250 | 40 | 3.59 | 70 | 3.62 | 116 | 9.70 | 0.031 | 1900 | Red |
| 0603HP-3N9X_L_ | 3.9 | 5,3,2 | 250 | 35 | 3.88 | 68 | 3.95 | 108 | 7.50 | 0.039 | 1600 | Brown |
| 0603HP-4N3X_L_ | 4.3 | 5,3,2 | 250 | 30 | 4.29 | 58 | 4.31 | 91 | 7.50 | 0.080 | 1300 | Orange |
| 0603HP-4N7X_L_ | 4.7 | 5,3,2 | 250 | 26 | 4.65 | 48 | 4.71 | 75 | 7.90 | 0.100 | 1100 | Violet |
| 0603HP-5N1X_L_ | 5.1 | 5,3,2 | 250 | 40 | 5.08 | 84 | 5.12 | 140 | 8.90 | 0.036 | 1700 | Green |
| 0603HP-5N6X_L_ | 5.6 | 5,3,2 | 250 | 48 | 5.60 | 87 | 5.73 | 145 | 6.60 | 0.036 | 1700 | Black |
| 0603HP-6N0X_L_ | 6.0 | 5,3,2 | 250 | 49 | 5.92 | 94 | 6.12 | 154 | 6.00 | 0.036 | 1700 | White |
| 0603HP-6N8X_L_ | 6.8 | 5,3,2 | 250 | 42 | 6.83 | 88 | 7.05 | 143 | 5.80 | 0.042 | 1400 | Red |
| 0603HP-7N2X_L_ | 7.2 | 5,3,2 | 250 | 48 | 7.25 | 96 | 7.38 | 139 | 5.40 | 0.052 | 1400 | Green |
| 0603HP-7N5X_L_ | 7.5 | 5,3,2 | 250 | 41 | 7.55 | 81 | 7.85 | 112 | 5.30 | 0.080 | 1300 | Brown |
| 0603HP-8N2X_L_ | 8.2 | 5,3,2 | 250 | 46 | 8.21 | 96 | 8.39 | 148 | 5.90 | 0.054 | 1400 | Orange |
| 0603HP-8N7X_L_ | 8.7 | 5,3,2 | 250 | 46 | 8.73 | 97 | 9.00 | 149 | 5.50 | 0.054 | 1400 | Yellow |
| 0603HP-9N1X_L_ | 9.1 | 5,3,2 | 250 | 40 | 9.18 | 76 | 9.64 | 109 | 5.10 | 0.037 | 1400 | Black |
| 0603HP-9N5X_L_ | 9.5 | 5,3,2 | 250 | 49 | 9.56 | 98 | 9.99 | 149 | 4.90 | 0.053 | 1400 | Blue |
| 0603HP-10NX_L_ | 10 | 5,3,2 | 250 | 49 | 10.16 | 90 | 10.64 | 142 | 4.30 | 0.048 | 1400 | Orange |
| 0603HP-11NX_L_ | 11 | 5,3,2 | 250 | 41 | 11.06 | 78 | 11.82 | 108 | 4.10 | 0.042 | 1400 | Gray |
| 0603HP-12NX_L_ | 12 | 5,3,2 | 250 | 37 | 12.26 | 69 | 13.20 | 91 | 4.10 | 0.088 | 1100 | Yellow |
| 0603HP-15NX_L_ | 15 | 5,3,2 | 250 | 48 | 15.41 | 83 | 17.20 | 124 | 3.60 | 0.078 | 1200 | Green |
| 0603HP-16NX_L_ | 16 | 5,3,2 | 250 | 45 | 16.37 | 77 | 18.70 | 116 | 3.50 | 0.085 | 1100 | White |
| 0603HP-18NX_L_ | 18 | 5,3,2 | 250 | 41 | 18.56 | 76 | 20.90 | 100 | 3.30 | 0.066 | 1200 | Blue |
| 0603HP-22NX_L_ | 22 | 5,3,2 | 250 | 44 | 22.7 | 77 | 25.90 | 88 | 3.15 | 0.140 | 850 | Violet |
| 0603HP-23NX_L_ | 23 | 5,3,2 | 250 | 40 | 24.0 | 69 | 29.53 | 80 | 3.00 | 0.150 | 850 | Orange |
| 0603HP-24NX_L_ | 24 | 5,3,2 | 250 | 42 | 24.9 | 77 | 28.90 | 91 | 2.95 | 0.074 | 1100 | Black |
| 0603HP-27NX_L_ | 27 | 5,3,2 | 250 | 44 | 28.4 | 74 | 34.00 | 84 | 2.80 | 0.150 | 780 | Gray |
| 0603HP-30NX_L_ | 30 | 5,3,2 | 250 | 49 | 31.5 | 82 | 37.90 | 82 | 2.80 | 0.130 | 920 | Brown |
| 0603HP-33NX_L_ | 33 | 5,3,2 | 250 | 45 | 34.9 | 76 | 42.90 | 80 | 2.70 | 0.170 | 680 | White |
| 0603HP-36NX_L_ | 36 | 5,3,2 | 250 | 44 | 38.5 | 69 | 50.00 | 64 | 2.50 | 0.225 | 720 | Red |
| 0603HP-39NX_L_ | 39 | 5,3,2 | 250 | 48 | 41.5 | 78 | 51.90 | 74 | 2.45 | 0.19 | 680 | Black |
| 0603HP-43NX_L_ | 43 | 5,3,2 | 250 | 45 | 45.7 | 83 | 58.10 | 76 | 2.45 | 0.17 | 810 | Orange |
| 0603HP-47NX_L_ | 47 | 5,3,2 | 200 | 47 | 50.6 | 77 | 66.90 | 72 | 2.30 | 0.24 | 680 | Brown |
| 0603HP-51NX_L_ | 51 | 5,3,2 | 200 | 49 | 54.6 | 73 | 71.30 | 62 | 2.30 | 0.28 | 660 | Blue |
| 0603HP-56NX_L_ | 56 | 5,3,2 | 200 | 50 | 60.3 | 74 | 79.90 | 56 | 2.20 | 0.30 | 610 | Red |
| 0603HP-68NX_L_ | 68 | 5,3,2 | 200 | 46 | 75.5 | 73 | 113.3 | 49 | 2.00 | 0.33 | 600 | Orange |
| 0603HP-72NX_L_ | 72 | 5,3,2 | 150 | 46 | 80.8 | 69 | — | — | 1.90 | 0.42 | 550 | Yellow |
| 0603HP-75NX_L_ | 75 | 5,3,2 | 150 | 46 | 84.6 | 71 | — | — | 1.90 | 0.52 | 500 | Violet |
| 0603HP-82NX_L_ | 82 | 5,3,2 | 150 | 45 | 94.0 | 62 | — | — | 1.80 | 0.46 | 510 | Green |
| 0603HP-91NX_L_ | 91 | 5,3,2 | 150 | 45 | 103.0 | 64 | — | — | 1.65 | 0.58 | 440 | White |
| 0603HP-R10X_L_ | 100 | 5,3,2 | 150 | 49 | 114.0 | 69 | — | — | 1.70 | 0.54 | 470 | Blue |
| 0603HP-R11X_L_ | 110 | 5,3,2 | 150 | 47 | 126.2 | 63 | — | — | 1.60 | 0.58 | 440 | Violet |
| 0603HP-R12X_L_ | 120 | 5,3,2 | 150 | 47 | 142.4 | 61 | — | — | 1.55 | 0.72 | 420 | Gray |
| 0603HP-R15X_L_ | 150 | 5,3,2 | 150 | 47 | 188.8 | 57 | — | — | 1.35 | 0.82 | 390 | White |
| 0603HP-R18X_L_ | 180 | 5,3,2 | 100 | 48 | 232.2 | 50 | — | — | 1.30 | 1.50 | 310 | Black |
| 0603HP-R20X_L_ | 200 | 5,3,2 | 100 | 47 | 265.0 | 47 | — | — | 1.25 | 2.00 | 280 | Green |
| 0603HP-R21X_L_ | 210 | 5,3,2 | 100 | 48 | 288.0 | 45 | — | — | 1.20 | 2.00 | 280 | Gray |
| 0603HP-R22X_L_ | 220 | 5,3,2 | 100 | 47 | 315.0 | 41 | — | — | 1.10 | 2.00 | 280 | Brown |
| 0603HP-R25X_L_ | 250 | 5,3,2 | 100 | 45 | — | — | — | — | 1.05 | 3.00 | 240 | Violet |
| 0603HP-R27X_L_ | 270 | 5,3,2 | 100 | 46 | — | — | — | — | 1.05 | 2.25 | 260 | Red |
| 0603HP-R30X_L_ | 300 | 5,3,2 | 100 | 47 | — | — | — | — | 0.99 | 2.80 | 220 | Green |
| 0603HP-R33X_L_ | 330 | 5,3,2 | 100 | 46 | — | — | — | — | 0.93 | 3.60 | 180 | Blue |
| 0603HP-R36X_L_ | 360 | 5,3,2 | 100 | 47 | — | — | — | — | 0.93 | 4.00 | 170 | Gray |
| 0603HP-R39X_L_ | 390 | 5,3,2 | 100 | 47 | — | — | — | — | 0.88 | 4.00 | 170 | Yellow |

1. When ordering, please specify **tolerance, termination and packaging** codes:

0603HP-R39XJLW

Tolerance: G = 2% H = 3% J = 5%
 (Table shows stock tolerances in bold.)

Termination: L = RoHS compliant silver-palladium-platinum-glass frit.
 E = Halogen free component. RoHS compliant silver-palladium-platinum-glass frit terminations.
 Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: W = 7" machine-ready reel. EIA-481 punched paper tape (2000 parts per full reel).
 U = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter W instead.

2. Inductance tested at listed frequency using an Agilent/HP 4286A impedance analyzer with a Coilcraft SMD-A fixture and Coilcraft-provided correlation pieces.

3. Q measured using an Agilent/HP 16197 test fixture in an Agilent/HP 4291 impedance analyzer.

4. SRF measured using an Agilent/HP 8722ES network analyzer and a Coilcraft SMD-D test fixture.

5. DCR measured on a micro-ohmmeter and a Coilcraft CCF858 test fixture.

6. Current that causes a 15°C temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.
 Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 537-2 Revised 05/02/12

© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.