

# Features

## Regulated Converters

- 2kV, 4kVDC & 6kVDC Isolation
- Industry Standard 3W DIP24 Package
- Feedback Regulated Output
- Continuous Short Circuit Protection
- Wide Input 2:1 & 4:1
- Medical Approvals (4kV/6kV Versions)
- EN and UL Certificates
- 3 Pinout Options, 3 Case Styles
- Control Pin Option
- Efficiency to 86%

### Description

Besides the standard isolation of 2kVDC, this series offers options of 4kVDC (= "/H4") or 6kVDC (= "/H6") making it suitable for medical applications and other sophisticated industrial applications. Packaging can be either DIP-24 plastic or 5-side-shielded DIP24 metal case (= option "/M") as well as SMD pinning (= option "/SMD"). For all the above variants, 2 industry-standard pinouts (= option "/A" or "/C") are available, and B pinning is available with 1.6kVDC isolation. Remote on/off control is possible with the /CTRL option (A pinning only). The converters can deliver 140% rated power for short periods of time to cope with applications with large capacitive loads or high start up currents.

### Selection Guide

| Part Number<br>DIP24 (SMD) | Input Voltage<br>(VDC)            | Output Voltage<br>(VDC) | Output Current<br>(mA) | Efficiency<br>(%) | Max Capacitive Load <sup>(1)</sup> |
|----------------------------|-----------------------------------|-------------------------|------------------------|-------------------|------------------------------------|
| REC3-xx3.3SRW/H*           | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 3.3                     | 900                    | 66-76             | 4700µF                             |
| REC3-xx05SRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 5                       | 600                    | 71-79             | 4700µF                             |
| REC3-xx09SRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 9                       | 330                    | 74-83             | 3300µF                             |
| REC3-xx12SRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 12                      | 250                    | 75-85             | 2200µF                             |
| REC3-xx15SRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 15                      | 200                    | 75-86             | 2200µF                             |
| REC3-xx05DRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±5                      | ±300                   | 74-83             | ±2200µF                            |
| REC3-xx12DRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±12                     | ±125                   | 75-85             | ±1000µF                            |
| REC3-xx15DRW/H*            | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±15                     | ±100                   | 75-86             | ±1000µF                            |
| REC3-xx3.3SRWZ/H*          | 9 - 36, 18 - 72                   | 3.3                     | 900                    | 77-79             | 4700µF                             |
| REC3-xx05SRWZ/H*           | 9 - 36, 18 - 72                   | 5                       | 600                    | 78-80             | 4700µF                             |
| REC3-xx09SRWZ/H*           | 9 - 36, 18 - 72                   | 9                       | 330                    | 80-83             | 3300µF                             |
| REC3-xx12SRWZ/H*           | 9 - 36, 18 - 72                   | 12                      | 250                    | 83-85             | 2200µF                             |
| REC3-xx15SRWZ/H*           | 9 - 36, 18 - 72                   | 15                      | 200                    | 83-85             | 2200µF                             |
| REC3-xx05DRWZ/H*           | 9 - 36, 18 - 72                   | ±5                      | ±300                   | 77-80             | ±2200µF                            |
| REC3-xx12DRWZ/H*           | 9 - 36, 18 - 72                   | ±12                     | ±125                   | 83-85             | ±1000µF                            |
| REC3-xx15DRWZ/H*           | 9 - 36, 18 - 72                   | ±15                     | ±100                   | 83-85             | ±1000µF                            |

H\* = H2, H4 or H6 for A or C pinning options with 2kVDC, 4kVDC or 6kVDC isolation.

H\* = H for B pinning option with 1.6kVDC isolation only.

#### 2:1 Input

(REC3-S/DRWH4/H6)  
 xx = 4.5-9Vin = 05  
 xx = 9-18Vin = 12  
 xx = 18-36Vin = 24  
 xx = 36-72Vin = 48

#### 4:1 Input

(REC3-S/DRWZ(H4/H6))  
 xx = 9-36Vin = 24  
 xx = 18-72Vin = 48

\* add suffix "/A", "/B" or "/C" for pinning options, see next page and Isolation Restrictions.

\* add suffix "/M" for metal case.

\* add suffix "/SMD" for SMD package.

\* add suffix "/CTRL" for control pin option (A Pinning only)

\* add suffix -R for Tape and Reel packaging

#### Ordering Examples:

REC3-0512DRW/H2/A/CTRL= 2:1 input, 5V Vin, ±12V Vout, 2kVDC, pinout "A", plastic case, control pin  
 REC3-4812SRWZ/H4/A/M = 4:1 input, 48V Vin, 12V Vout, 4kVDC, pinout "A", metal case, no control pin  
 REC3-2412DRWZ/H/B = 4:1 input, 24V Vin, ±12V Vout, 1.6kVDC, pinout "B", plastic case, no control pin  
 REC3-0505SRW/H6/C/SMD-R = 2:1 input, 5V Vin, 5V Vout, 6kVDC, SMD pinout "C", plastic case, no control pin, Tape and Reel packaging.

# ECONOLINE

## DC/DC-Converter

with 3 year Warranty


# RECOM

## 3 Watt

## DIP24 & SMD

## Single & Dual

## Output

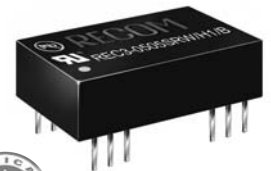

**EN-60950-1 Certified**  
**UL-60950-1 Certified**  
**EN-60601-1 Certified**

# REC3-S\_DRW

### Isolation Restrictions

'B' Pinning is restricted to 1.6kV isolation due to the closeness of the input and output pins.

If the options "/M" for metal case and "/SMD" for SMD pinout are combined, the maximum allowed isolation voltage is 2kVDC because of the shorter distances between pins and the metal case.

DIP-24 through-hole case and SMD-plastic case are not affected and offer the full isolation barriers of 2kV through to 6kVDC.

Refer to Application Notes

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

|  |  |  |                              |
|--|--|--|------------------------------|
| Input Voltage Range  | 2:1 & 4:1  |  |                              |
| Output Voltage Accuracy  | $\pm 2\%$ max.   |  |                              |
| Line Regulation (HL-LL)  | $\pm 0.4\%$ max.   |  |                              |
| Load Regulation (for output load current change from 20% to 100%)                          | $\pm 0.6\%$ max.   |  |                              |
| Minimum Load   | 0%   |  |                              |
| Output Ripple and Noise (0,1 $\mu\text{F}$ capacitor on output, 20MHz BW)                  | 50mVp-p max.   |  |                              |
| Switching Frequency at Full Load   | 2:1 Input types  | 90kHz min. / 150kHz max.   |                              |
| and nominal Input Voltage  | 4:1 Input types  | 120kHz min. / 180kHz max.  |                              |
| Input Filter   | Pi Network   |  |                              |
| Efficiency at Full Load  | see above  |  |                              |
| No Load Power Consumption  | 300mW max.   |  |                              |
| Isolation Voltage  | H2 types   | (tested for 1 second)<br>(rated for 1 minute)  | 2000VDC<br>1000VAC / 60Hz    |
| Isolation Voltage  | H4 types   | (tested for 1 second)<br>(rated for 1 minute)  | 4000VDC<br>2000VAC / 60Hz    |
| Isolation Voltage  | H6 types   | (tested for 1 second)<br>(rated for 1 minute)  | 6000VDC<br>3000VAC / 60Hz    |
| Isolation Capacitance  | 2:1 Input types  | 20pF min. / 60pF max.  |                              |
|  | 4:1 Input types  | 40pF min. / 80pF max.  |                              |
| Isolation Resistance   | 1 G $\Omega$ min.  |  |                              |
| Short Circuit Protection (Max temp. = 60 $^\circ\text{C}$ during short circuit conditions) | Continuous, Auto Restart                                       |  |                              |
| Operating Temperature Range (free air convection)  | 5V input types   | -40 $^\circ\text{C}$ to +80 $^\circ\text{C}$ (see Graph)                                     |                              |
|  | others   | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$ (see Graph)                                     |                              |
| Storage Temperature Range  | -55 $^\circ\text{C}$ to +125 $^\circ\text{C}$                  |  |                              |
| Relative Humidity  | 95% RH   |  |                              |
| Case Material  | Non-Conductive Plastic or Metal                                |  |                              |
| Thermal Impedance  | Natural convection   | 20 $^\circ\text{C}/\text{W}$ for plastic case<br>12 $^\circ\text{C}/\text{W}$ for metal case |                              |
| Package Weight   | 13g  |  |                              |
| Packing Quantity   | 15 pcs per Tube<br>100 pcs per Reel                            |  |                              |
| MTBF (+25 $^\circ\text{C}$ )   | } Detailed Information see<br>Application Notes chapter "MTBF" | using MIL-HDBK 217F  | 1043 x 10 <sup>3</sup> hours |
| (+85 $^\circ\text{C}$ )  |  | using MIL-HDBK 217F  | 186 x 10 <sup>3</sup> hours  |
| Certifications   | UL General Safety Report: E358085                              | UL 60950-1 1st Ed.<br>C22.2 No. 60950-1-03   |                              |
|  | EN General Safety Report: SPCLVD1212007                        | EN60950-1:2006 + A1:2010+A12:2011  |                              |
|  | EN Medical Safety Report: MDD1205098-3 + RM1205098-3           | IEC/EN 60601-1 3rd Ed.   |                              |
|  | Medical Report + ISO14971 Risk Assessment                      |  |                              |

## Derating-Graph (Ambient Temperature)




### Notes

Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter


REC3-RW

### Typical Characteristics


## Single 2:1 Input

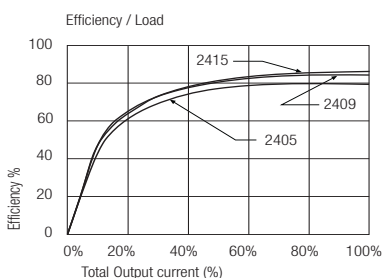

## Single 2:1 Input

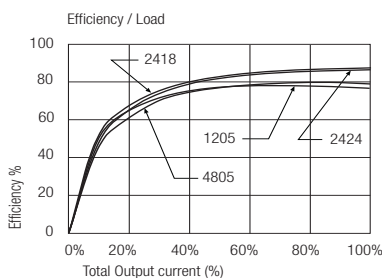

## Dual 2:1 Input



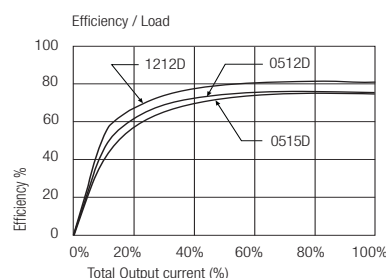


Typical Characteristics - Continued

## Single 4:1 Input


## Single 4:1 Input

## Dual 4:1 Input

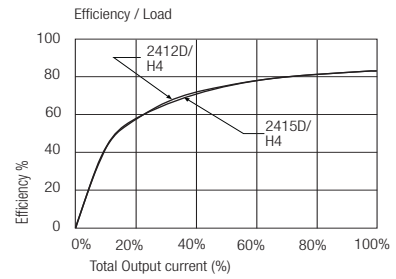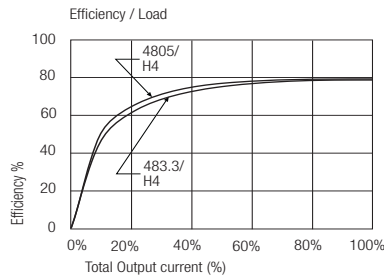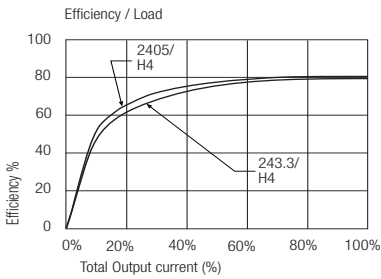

Package Style and Pinning (mm) DIP 24 , Wide Input 2:1 & 4:1

**"A" Pinning**  
/H2, /H4 & /H6





Pin Connections

| Pin #      | Single | Dual  |
|------------|--------|-------|
| 1 (option) | CTRL   | CTRL  |
| 2          | -Vin   | -Vin  |
| 3          | -Vin   | -Vin  |
| 9          | NC     | Com   |
| 11         | NC     | -Vout |
| 14         | +Vout  | +Vout |
| 16         | -Vout  | Com   |
| 22         | +Vin   | +Vin  |
| 23         | +Vin   | +Vin  |

NC = No Connection


XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

REC3-RW


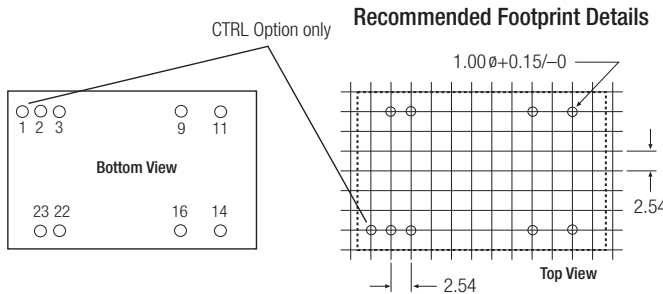


**CTRL Option**

ON = Open or  $0V < V_{ctrl} < 1.2V$   
OFF =  $2.2V < V_{ctrl} < 12V$

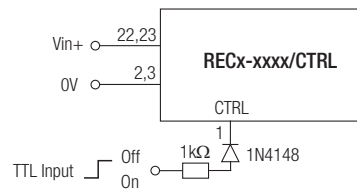

**"C" Pinning**  
/H2, /H4 & /H6




Pin Connections


| Pin # | Single | Dual  |
|-------|--------|-------|
| 1     | +Vin   | +Vin  |
| 2     | +Vin   | +Vin  |
| 10    | NC     | Com   |
| 11    | NC     | Com   |
| 12    | -Vout  | NC    |
| 13    | +Vout  | -Vout |
| 15    | NC     | +Vout |
| 23    | -Vin   | -Vin  |
| 24    | -Vin   | -Vin  |

NC = No Connection



XX.X ± 0.5 mm  
XX.XX ± 0.25 mm




Recommended Footprint Details



### "B" Pinning /H (1.6kV Only)



#### Recommended Footprint Details



#### Pin Connections


| Pin # | Single | Dual  |
|-------|--------|-------|
| 1     | +Vin   | +Vin  |
| 2     | No Pin | -Vout |
| 3     | No Pin | Com   |
| 10    | -Vout  | Com   |
| 11    | +Vout  | +Vout |
| 12    | -Vin   | -Vin  |
| 13    | -Vin   | -Vin  |
| 14    | +Vout  | +Vout |
| 15    | -Vout  | Com   |
| 22    | No Pin | Com   |
| 23    | No Pin | -Vout |
| 24    | +Vin   | +Vin  |

NC = No Connection



XX.X ± 0.5 mm

XX.XX ± 0.25 mm

### SMD Pinning



#### Recommended Footprint Details

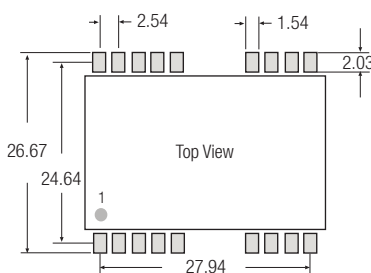

SMD pin connections follow standard package A (/A/SMD), B (/B/SMD) or C (/C/SMD) pinning.

All unused pins are NC (No Connection). See Below for detailed pinout lists

for all packages incl.SMD case the length of plastic case is 31,8 mm, length of metal case 32.0 mm

#### /A/SMD Pinning

| Pin Connections |        |       | Pin Connections |        |       |
|-----------------|--------|-------|-----------------|--------|-------|
| Pin #           | Single | Dual  | Pin #           | Single | Dual  |
| 1 (Option)      | CTRL   | CTRL  | 13              | NC     | NC    |
| 2               | -Vin   | -Vin  | 14              | +Vout  | +Vout |
| 3               | -Vin   | -Vin  | 15              | NC     | NC    |
| 4               | NC     | NC    | 16              | -Vout  | Com   |
| 5               | NC     | NC    | 20              | NC     | NC    |
| 9               | NC     | Com   | 21              | NC     | NC    |
| 10              | NC     | NC    | 22              | +Vin   | +Vin  |
| 11              | NC     | -Vout | 23              | +Vin   | +Vin  |
| 12              | NC     | NC    | 24              | NC     | NC    |

#### /B/SMD Pinning

| Pin Connections |        |       | Pin Connections |        |       |
|-----------------|--------|-------|-----------------|--------|-------|
| Pin #           | Single | Dual  | Pin #           | Single | Dual  |
| 1               | +Vin   | +Vin  | 13              | -Vin   | -Vin  |
| 2               | NC     | -Vout | 14              | +Vout  | +Vout |
| 3               | NC     | Com   | 15              | -Vout  | Com   |
| 4               | NC     | NC    | 16              | NC     | NC    |
| 5               | NC     | NC    | 20              | NC     | NC    |
| 9               | NC     | NC    | 21              | NC     | NC    |
| 10              | -Vout  | Com   | 22              | NC     | Com   |
| 11              | +Vout  | +Vout | 23              | NC     | -Vout |
| 12              | -Vin   | -Vin  | 24              | +Vin   | +Vin  |

#### /C/SMD Pinning

| Pin Connections |        |      | Pin Connections |        |       |
|-----------------|--------|------|-----------------|--------|-------|
| Pin #           | Single | Dual | Pin #           | Single | Dual  |
| 1               | +Vin   | +Vin | 13              | +Vout  | -Vout |
| 2               | +Vin   | +Vin | 14              | NC     | NC    |
| 3               | NC     | NC   | 15              | NC     | +Vout |
| 4               | NC     | NC   | 16              | NC     | NC    |
| 5               | NC     | NC   | 20              | NC     | NC    |
| 9               | NC     | NC   | 21              | NC     | NC    |
| 10              | NC     | Com  | 22              | NC     | NC    |
| 11              | NC     | Com  | 23              | -Vin   | -Vin  |
| 12              | -Vout  | NC   | 24              | -Vin   | -Vin  |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.