

Type 942C, Polypropylene Capacitors, for High Pulse, Snubber

Very High dV/dt for Snubber Applications



Type 942 round, axial film capacitors utilize a hybrid section design of polypropylene film, metal foils and metallized polypropylene dielectric to achieve both high peak current as well as superior rms current ratings. This series is ideal for high pulse operation and high peak current circuits.

Highlights

- Very high dV/dt
- Very high pulse current
- Low inductance
- Self Healing

Specifications

| | |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Capacitance Range | 0.01 to 2.5 μ F |
| Capacitance Tolerance | \pm 10% Standard Tolerance |
| Rated Voltage | 600 to 2000 Vdc (300 to 500 Vac, 60 Hz) |
| Operating Temperature Range with Ripple | -55 $^{\circ}$ C to 105 $^{\circ}$ C* *Full rated voltage at 85 $^{\circ}$ C - derated linearly to 50% rated at 105 $^{\circ}$ C |
| Maximum rms Current | Check tables for values |
| Insulation Resistance | > 100,000 M Ω x μ F |
| Test Voltage between Terminals @ 25 $^{\circ}$ C | 150% rated DC voltage for 60 s |
| Test Voltage between Terminals & Case @ 25 $^{\circ}$ C | 3 kVac @ 50/60 Hz for 60 s |
| Life Test | 2,000 h @ 85 $^{\circ}$ C, 125% rated DC voltage |
| Life Expectancy | 60,000 h @ rated Vdc, 70 $^{\circ}$ C 30,000 h @ rated Vac, 70 $^{\circ}$ C |
| RoHS Compliant | |


Dimensions

Construction Diagram



Construction Details

| | |
|-------------------|---------------------------|
| Case Material | UL510 Polyester Tape Wrap |
| Resin Material | UL94V-0 Epoxy Fill |
| Terminal Material | Tin Plated Copper |

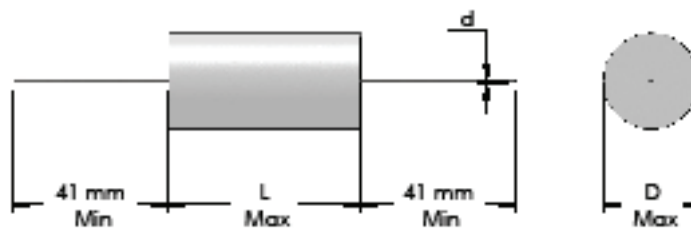

Type 942C, Polypropylene Capacitors, for High Pulse, Snubber

Very High dV/dt for Snubber Applications

Part Numbering System

| | | | | | | | | |
|---------------|-----------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------|---|----------------------------------------------|----------------------------------|------------------|------------------|
| 942 | C | | | 6 | P | 22 | K | -F |
| | | | | | | | | |
| | Termination | | | | Capacitance | Capacitance | Tolerance | RoHS |
| Series | Code | Voltage Code | | | Decimal Point | Significant | Code | Compliant |
| | | | | | | Figures μF | | Indicator |
| 942 | C = Tinned Copper Wire F = Insulated Stranded Wire H = Copper Lugs | 6 = 600 Vdc 8 = 850 Vdc 10 = 1000 Vdc | 12 = 1200 Vdc 16 = 1600 Vdc 20 = 2000 Vdc | | S = 0.0 P = 0. W = No decimal point | | K = \pm 10% | |

Ratings

NOTE: Other ratings, sizes and performance specifications are available. Contact us.

| Cap. (μ F) | Catalog Part Number | D mm | L mm | d mm | Typical ESR (m Ω) | Typical ESL (nH) | dV/dt (V/ μ s) | I _{PEAK} (A) | I _{RMS} 70 °C 100 kHz (A) |
|---------------------------|------------------------|---------|---------|---------|---------------------------------|------------------------|-----------------------|--------------------------|---------------------------------------------|
| 600 Vdc (300 Vac) | | | | | | | | | |
| .15 | 942C6P15K-F | 14.0 | 34.0 | 1.0 | 5 | 21 | 1427 | 214 | 7.7 |
| .22 | 942C6P22K-F | 16.0 | 34.0 | 1.0 | 7 | 22 | 1427 | 314 | 7.0 |
| .33 | 942C6P33K-F | 19.0 | 34.0 | 1.0 | 6 | 23 | 1427 | 471 | 8.4 |
| .47 | 942C6P47K-F | 22.0 | 34.0 | 1.0 | 5 | 24 | 1427 | 671 | 10.1 |
| .68 | 942C6P68K-F | 25.6 | 34.0 | 1.2 | 4 | 26 | 1427 | 970 | 12.4 |
| 1.00 | 942C6W1K-F | 23.5 | 46.0 | 1.2 | 5 | 30 | 800 | 800 | 11.8 |
| 1.50 | 942C6W1P5K-F | 28.5 | 46.0 | 1.2 | 4 | 32 | 800 | 1200 | 14.8 |
| 2.00 | 942C6W2K-F | 28.5 | 54.0 | 1.2 | 3 | 36 | 628 | 1256 | 18.2 |
| 2.20 | 942C6W2P2K-F | 30.0 | 54.0 | 1.2 | 3 | 36 | 628 | 1382 | 18.8 |
| 2.50 | 942C6W2P5K-F | 32.0 | 54.0 | 1.2 | 3 | 37 | 628 | 1570 | 19.5 |
| 850 Vdc (360 Vac) | | | | | | | | | |
| .15 | 942C8P15K-F | 15.5 | 34.0 | 1.0 | 5 | 22 | 1712 | 257 | 8.1 |
| .22 | 942C8P22K-F | 18.0 | 34.0 | 1.0 | 7 | 23 | 1712 | 377 | 7.5 |
| .33 | 942C8P33K-F | 21.5 | 34.0 | 1.0 | 6 | 24 | 1712 | 565 | 7.7 |
| .47 | 942C8P47K-F | 25.0 | 34.0 | 1.2 | 5 | 26 | 1712 | 805 | 10.9 |
| .68 | 942C8P68K-F | 29.5 | 34.0 | 1.2 | 4 | 27 | 1712 | 1164 | 13.6 |
| 1.00 | 942C8W1K-F | 28.0 | 46.0 | 1.2 | 5 | 32 | 960 | 960 | 13.1 |
| 1.50 | 942C8W1P5K-F | 29.0 | 54.0 | 1.2 | 4 | 36 | 754 | 1131 | 15.9 |
| 2.00 | 942C8W2K-F | 29.5 | 64.0 | 1.2 | 3 | 41 | 574 | 1148 | 19.9 |
| 1000 Vdc (400 Vac) | | | | | | | | | |
| .10 | 942C10P1K-F | 16.0 | 34.0 | 1.0 | 8 | 22 | 2283 | 228 | 6.6 |
| .15 | 942C10P15K-F | 19.0 | 34.0 | 1.0 | 7 | 23 | 2283 | 342 | 7.8 |
| .22 | 942C10P22K-F | 22.5 | 34.0 | 1.0 | 6 | 24 | 2283 | 502 | 9.3 |
| .33 | 942C10P33K-F | 21.0 | 46.0 | 1.0 | 5 | 29 | 1280 | 422 | 11.0 |
| .47 | 942C10P47K-F | 24.0 | 46.0 | 1.2 | 5 | 30 | 1280 | 601 | 11.9 |
| .68 | 942C10P68K-F | 28.5 | 46.0 | 1.2 | 5 | 32 | 1280 | 870 | 13.3 |
| 1.00 | 942C10W1K-F | 30.0 | 54.0 | 1.2 | 5 | 37 | 1005 | 1005 | 14.6 |
| 1.40 | 942C10W1P4K-F | 31.5 | 64.0 | 1.2 | 4 | 41 | 765 | 1071 | 17.9 |





Type 942C, Polypropylene Capacitors, for High Pulse, Snubber Very High dV/dt for Snubber Applications

| Cap. (μ F) | Catalog Part Number | D mm | L mm | d mm | Typical ESR (m Ω) | Typical ESL (nH) | dV/dt (V/ μ s) | I _{PEAK} (A) | I _{RMS} 70 °C 100 kHz (A) |
|---------------------------|------------------------|---------|---------|---------|---------------------------------|------------------------|-----------------------|--------------------------|---------------------------------------------|
| 1200 Vdc (430 Vac) | | | | | | | | | |
| .10 | 942C12P1K-F | 19.0 | 34.0 | 1.0 | 5 | 23 | 2854 | 285 | 9.2 |
| .15 | 942C12P15K-F | 22.5 | 34.0 | 1.0 | 5 | 24 | 2854 | 428 | 10.2 |
| .22 | 942C12P22K-F | 26.5 | 34.0 | 1.2 | 6 | 26 | 2854 | 628 | 10.3 |
| .33 | 942C12P33K-F | 24.5 | 46.0 | 1.2 | 6 | 31 | 1600 | 528 | 11.0 |
| .47 | 942C12P47K-F | 29.0 | 46.0 | 1.2 | 5 | 32 | 1600 | 752 | 13.4 |
| .68 | 942C12P68K-F | 30.5 | 54.0 | 1.2 | 5 | 37 | 1256 | 854 | 14.7 |
| .90 | 942C12P9K-F | 31.0 | 64.0 | 1.2 | 5 | 41 | 957 | 861 | 15.9 |
| 1600 Vdc (460 Vac) | | | | | | | | | |
| .022 | 942C16S22K-F | 12.0 | 34.0 | 1.0 | 27 | 20 | 3425 | 75 | 3.0 |
| .033 | 942C16S33K-F | 14.5 | 34.0 | 1.0 | 14 | 21 | 3425 | 113 | 4.7 |
| .047 | 942C16S47K-F | 16.5 | 34.0 | 1.0 | 8 | 22 | 3425 | 161 | 6.7 |
| .068 | 942C16S68K-F | 19.0 | 34.0 | 1.0 | 6 | 23 | 3425 | 233 | 8.4 |
| .10 | 942C16P1K-F | 22.5 | 34.0 | 1.0 | 4 | 24 | 3425 | 342 | 11.4 |
| .15 | 942C16P15K-F | 20.5 | 46.0 | 1.0 | 5 | 29 | 1919 | 288 | 10.9 |
| .22 | 942C16P22K-F | 23.5 | 46.0 | 1.0 | 5 | 68 | 1919 | 422 | 11.8 |
| .33 | 942C16P33K-F | 28.5 | 46.0 | 1.2 | 5 | 32 | 1919 | 633 | 13.3 |
| .47 | 942C16P47K-F | 30.0 | 54.0 | 1.2 | 5 | 36 | 1507 | 708 | 14.6 |
| .56 | 942C16P56K-F | 28.5 | 64.0 | 1.2 | 5 | 40 | 1148 | 643 | 15.1 |
| .68 | 942C16P68K-F | 31.5 | 64.0 | 1.2 | 5 | 42 | 1148 | 781 | 16.0 |
| 2000 Vdc (500 Vac) | | | | | | | | | |
| .01 | 942C20S1K-F | 12.0 | 34.0 | 1.0 | 50 | 20 | 5137 | 51 | 2.2 |
| .015 | 942C20S15K-F | 14.5 | 34.0 | 1.0 | 40 | 21 | 5137 | 77 | 2.8 |
| .022 | 942C20S22K-F | 16.5 | 34.0 | 1.0 | 20 | 22 | 5137 | 113 | 4.2 |
| .033 | 942C20S33K-F | 19.5 | 34.0 | 1.0 | 12 | 23 | 5137 | 170 | 6.0 |
| .047 | 942C20S47K-F | 18.0 | 46.0 | 1.0 | 10 | 28 | 2879 | 135 | 7.1 |
| .068 | 942C20S68K-F | 20.5 | 46.0 | 1.0 | 6 | 29 | 2879 | 196 | 9.9 |
| .10 | 942C20P1K-F | 24.5 | 46.0 | 1.2 | 5 | 30 | 2879 | 288 | 12.1 |
| .15 | 942C20P15K-F | 29.5 | 46.0 | 1.2 | 5 | 32 | 2879 | 432 | 13.5 |

Type 942C, Polypropylene Capacitors, for High Pulse, Snubber

Very High dV/dt for Snubber Applications

RMS Voltage vs Frequency @ 25 °C

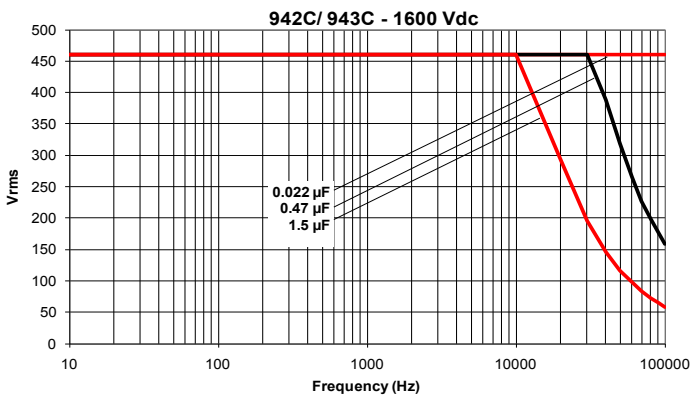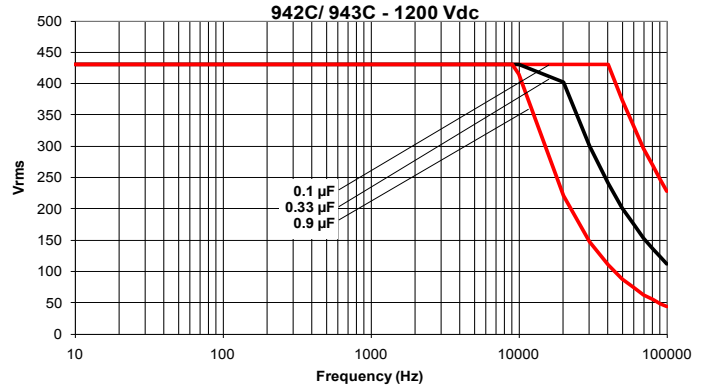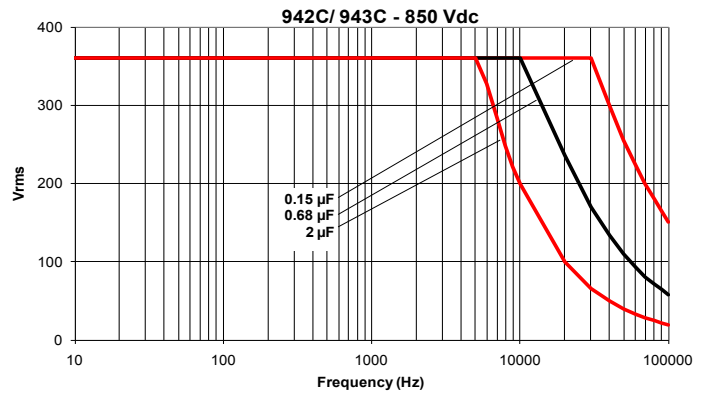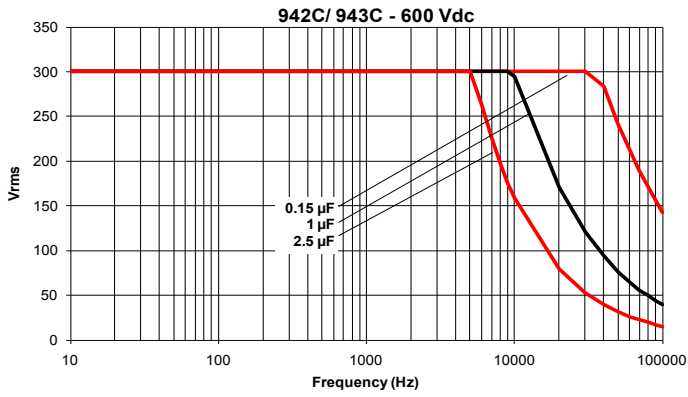

Type 942C, Polypropylene Capacitors, for High Pulse, Snubber

Very High dV/dt for Snubber Applications

RMS Voltage vs Frequency @ 25 °C





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.