



»» Features

- 10mm slim miniature PCB Power Relay.
- UL/CUL · CSA/CUS · TUV · VDE approved.
- High CTI 250 material (VDE and E version).
- High sensitivity : 200 mW & 400mW.
- High surge voltage : 3,000 V between contacts and coil.
- Comply with RoHS-Directive 2002/95/EC.

»» Type List

◆ Standard Type

| Terminal style | Contact form | UL Insulation system approval | Designation (provided with) | | |
|----------------|--------------|-------------------------------|-----------------------------|-------------|----------------------|
| | | | Flux tight | Sealed type | Sealed type washable |
| PCB terminal | 1A (SPNO) | ----- | 892-1AC-C | 892-1AC-V | 892-1AC-S |
| | | F | 892-1AC-F-C | 892-1AC-F-V | 892-1AC-F-S |
| | | ----- | 892-1AH-C | 892-1AH-V | 892-1AH-S |
| | | F | 892-1AH-F-C | 892-1AH-F-V | 892-1AH-F-S |
| | 1C (SPDT) | ----- | 892-1CC-C | 892-1CC-V | 892-1CC-S |
| | | F | 892-1CC-F-C | 892-1CC-F-V | 892-1CC-F-S |
| | | ----- | 892-1CH-C | 892-1CH-V | 892-1CH-S |
| | | F | 892-1CH-F-C | 892-1CH-F-V | 892-1CH-F-S |

◆ High Power Type

| | | | | | |
|--------------|--------------|-------|--------------|--------------|--------------|
| PCB terminal | 1A (SPNO) | ----- | 892H-1AC-C | 892H-1AC-V | 892H-1AC-S |
| | | F | 892H-1AC-F-C | 892H-1AC-F-V | 892H-1AC-F-S |
| | | ----- | 892H-1AH-C | 892H-1AH-V | 892H-1AH-S |
| | | F | 892H-1AH-F-C | 892H-1AH-F-V | 892H-1AH-F-S |
| | 1C (SPDT) | ----- | 892H-1CC-C | 892H-1CC-V | 892H-1CC-S |
| | | F | 892H-1CC-F-C | 892H-1CC-F-V | 892H-1CC-F-S |
| | | ----- | 892H-1CH-C | 892H-1CH-V | 892H-1CH-S |
| | | F | 892H-1CH-F-C | 892H-1CH-F-V | 892H-1CH-F-S |

◆ High Sensitivity Type

| | | | | | |
|--------------|--------------|-------|--------------|--------------|--------------|
| PCB terminal | 1A (SPNO) | ----- | 892N-1AC-C | 892N-1AC-V | 892N-1AC-S |
| | | F | 892N-1AC-F-C | 892N-1AC-F-V | 892N-1AC-F-S |
| | | ----- | 892N-1AH-C | 892N-1AH-V | 892N-1AH-S |
| | | F | 892N-1AH-F-C | 892N-1AH-F-V | 892N-1AH-F-S |
| | 1C (SPDT) | ----- | 892N-1CC-C | 892N-1CC-V | 892N-1CC-S |
| | | F | 892N-1CC-F-C | 892N-1CC-F-V | 892N-1CC-F-S |
| | | ----- | 892N-1CH-C | 892N-1CH-V | 892N-1CH-S |
| | | F | 892N-1CH-F-C | 892N-1CH-F-V | 892N-1CH-F-S |



»» Ordering Information

892 H N - 1AC - F - C E
 1 2 3 4 5 6 7

- | | | | |
|----------|--|----------|---|
| 1. 892 | -- Basic series designation | 1BH | -- Single pole normally closed · Contact material AgSnO |
| 2. Blank | -- Standard type | 1CH | -- Single pole double throw · Contact material AgSnO |
| H | -- High power type | | |
| 3. Blank | -- Standard type | 5. Blank | -- Standard type |
| N | -- High sensitivity type | F | -- Class F |
| 4. 1AC | -- Single pole normally open · Contact material AgNi | 6. C | -- Flux tight |
| 1BC | -- Single pole normally closed · Contact material AgNi | V | -- Sealed type |
| 1CC | -- Single pole double throw · Contact material AgNi | S | -- Sealed type washable |
| 1AH | -- Single pole normally open · Contact material AgSnO | 7. Blank | -- Standard type |
| | | E | -- CTI 250V |

»» Contact Rating

| Type | 892 | 892H |
|-------------------------|--|---|
| Resistive load | NO / NC : 5A/3A 240VAC NO / NC : 7A/3A 120VAC | NO / NC : 10A/5A 120VAC (50,000 ops.) NO / NC : 7A/5A 240VAC |
| Max. switching current | NO / NC : 7A/3A | NO / NC : 10A/5A |
| Max. switching voltage | 277VAC | 277VAC |
| Max. switching capacity | NO / NC : 1200VA/720VA | NO / NC : 1680VA/1200VA |

»» Coil Rating (DC)

◆ Standard Type

| Rated voltage (V) | Rated current ±10 % at 23°C (mA) | Coil resistance ±10 % at 23°C (Ω) | Max. continuous voltage at 85°C | Pick up voltage(Max) at 23°C | Drop out voltage(Min) at 23°C | Power consumption at rated voltage |
|-------------------|----------------------------------|-----------------------------------|---------------------------------|-------------------------------------|-------------------------------|------------------------------------|
| 3 | 133.3 | 22.5 | 160 % of rated voltage | 80 % of rated voltage (H type only) | 5 % of rated voltage | approx. 0.4W |
| 5 | 80 | 62.5 | | | | |
| 6 | 66.7 | 90 | | | | |
| 9 | 44.4 | 202.5 | | | | |
| 12 | 33.3 | 360 | | | | |
| 18 | 22.2 | 810 | | | | |
| 24 | 16.7 | 1440 | | | | |
| 36 | 11.1 | 3240 | | | | |
| 48 | 8.3 | 5760 | | | | |
| 60 | 6.7 | 9000 | | | | |

◆High Sensitivity Type

| Rated voltage (V) | Rated current ±10 % at 23°C (mA) | Coil resistance ±10 % at 23°C (Ω) | Max. continuous voltage at 85°C | Pick up voltage(Max) at 23°C | Drop out voltage(Min) at 23°C | Power consumption at rated voltage |
|-------------------|----------------------------------|-----------------------------------|---------------------------------|---|-------------------------------|------------------------------------|
| 3 | 66.7 | 45 | 170 % of rated voltage | 80 % of rated voltage (HN type or 1C type only) | 5 % of rated voltage | approx. 0.2W |
| 5 | 40.0 | 125 | | | | |
| 6 | 33.3 | 180 | | | | |
| 9 | 22.2 | 405 | | | | |
| 12 | 16.7 | 720 | | | | |
| 18 | 11.1 | 1620 | | | | |
| 24 | 8.3 | 2880 | | | | |
| 36 | 5.6 | 6480 | | | | |

»» Specification

| | | |
|--------------------------------------|-----------------------------|---|
| Contact material | AgNi / Ag SnO alloy | |
| Contact resistance ⁽¹⁾ | 100mΩ Max. | |
| Operate time ⁽¹⁾ | 10ms Max. | |
| Release time ⁽¹⁾ | 5ms Max. | |
| Insulation resistance ⁽¹⁾ | 1000MΩ Min. (DC 500V) | |
| Dielectric strength ⁽¹⁾ | Between open contact | : AC 1000V , 50/60Hz 1 min. |
| | Between contact and coil | : AC 4000V , 50/60Hz 1 min. |
| Vibration resistance | Operating extremes | 10~55Hz , amplitude 1.5 mm |
| | Damage limit | 10~55Hz , amplitude 1.5 mm |
| Shock resistance | Operating extremes | 30G |
| | Damage limits | 100G |
| Life expectancy | Mechanical | 10,000,000 operations (frequency 18,000 operations/hr) |
| | Electrical | 100,000 operations (frequency 900 operations/hr) |
| Operating ambient temperature | -40°C ~ +85°C (no freezing) | |
| Weight | Approx. 8g | |

Note : (1) initial value


»» Safety Approval

| Certified | CSA / CUS | TUV | VDE | UL / CUL |
|-----------|-----------|------------|----------|----------|
| File No. | 1245129 | R 50006512 | 40006318 | E88991 |

»» Safety Approval Rating

| CSA / CUS | | TUV | |
|--|---|---|--|
| 892 | 892H | 892 | 892H |
| NO : 7A 125VAC 5A 277VAC NC : 3A 125VAC 3A 277VAC | NO : 10A 125VAC 7A 277VAC TV-3 NC : 5A 125VAC 5A 277VAC | NO : 7A 120VAC 5A 240VAC NC : 3A 120VAC 3A 240VAC | NO : 10A 120VAC 7A 240VAC NC : 5A 120VAC 5A 240VAC |
| VDE | | UL / CUL | |
| 892 | 892H | 892 | 892H |
| NO : 5A 250VAC T85 NC : 3A 250VAC T85 | NO : 7A 250VAC T85 NC : 5A 250VAC T85 | NO : 7A 125VAC 5A 277VAC 1/10HP 125VAC 1/6HP 277VAC NC : 3A 125VAC 3A 277VAC | NO : 10A 125VAC 7A 277VAC NC : 5A 125VAC 5A 277VAC NO/NC : 4FLA/4LRA 120VAC |



»» Outline Dimensions

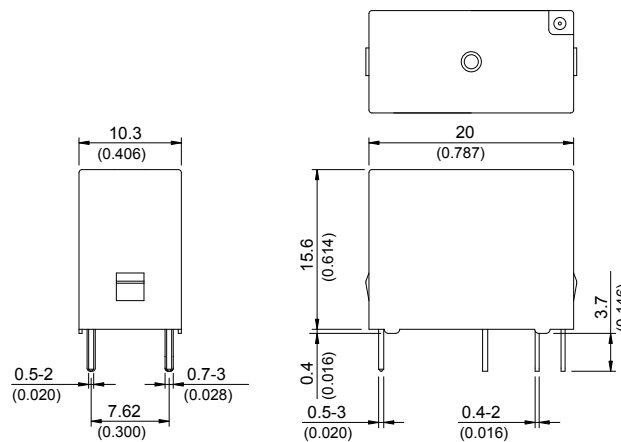


»» Wiring Diagram BOTTOM VIEW

1C

1A




»» PC Board Layout BOTTOM VIEW

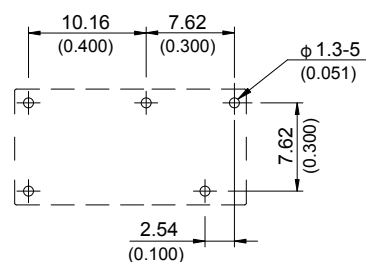


»» Engineering Data


Coil temperature rise

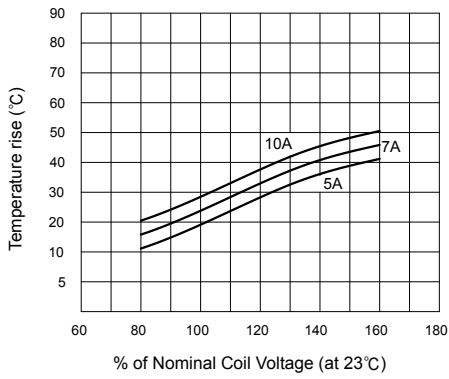


Coil temperature rise

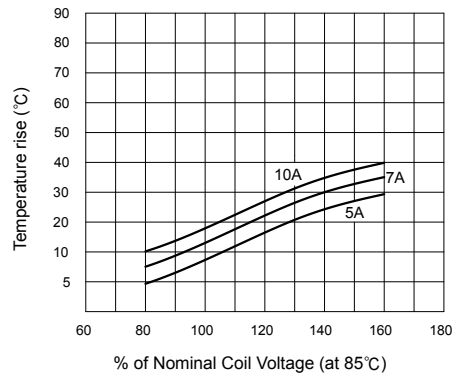


Life expectancy(892H)

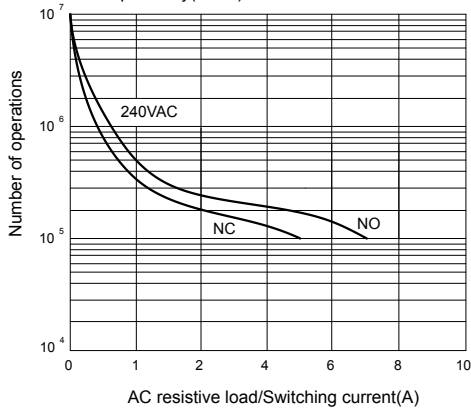

Life expectancy(892)

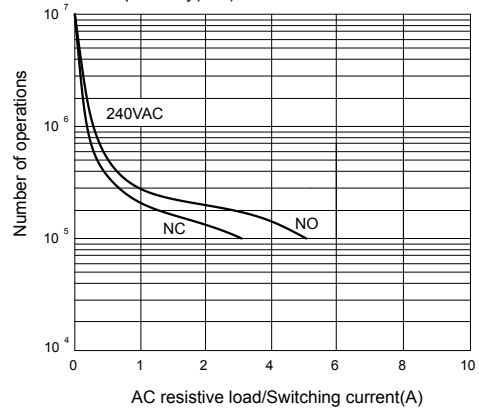

Operate time/Release time

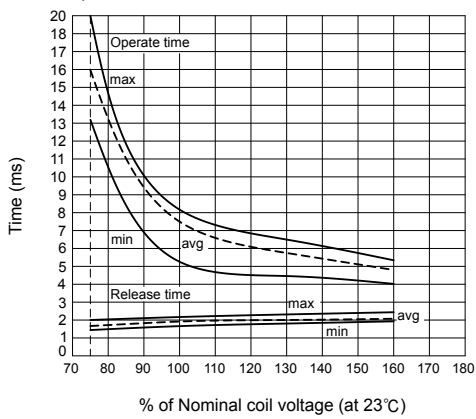



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.