


C&K CM Series Single Pole Power Rocker Switches

Features/Benefits

- ***Illuminated versions available***
- ***Easy to install snap-in design***
- ***Multiple actuator and termination styles to choose from***

Typical Applications

- **Computers and peripherals**
- **Power supplies**
- **Industrial equipment**
- **Small appliances**

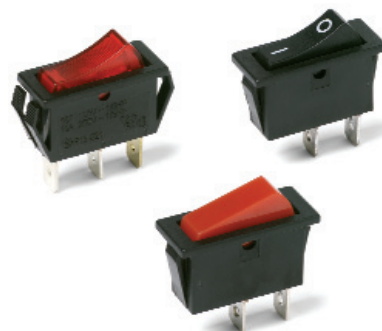

Specifications

CONTACT RATING:

UL/CSA: 16 AMPS @ 125 VAC, 1/8 HP:

10 AMPS @ 250 VAC, 1/3 HP.

ELECTRICAL LIFE: 10,000 make and break cycles at full load.

INSULATION RESISTANCE: $10^8 \Omega \text{ min.}$

DIELECTRIC STRENGTH: 1.500 VRMS @ sea level.

Materials

HOUSING AND ACTUATOR: 6/6 nylon (UL94V-2), black, gloss or matte finish.

ILLUMINATED ACTUATOR: Polycarbonate, gloss or matte finish.

CENTER CONTACTS: Silver plated, copper alloy.

END CONTACTS: Silver plated.

ALL TERMINALS: Silver plated, copper alloy.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages 20 thru 22. For additional options not shown in catalog, consult Customer Service Center.

Switch Function	
CM101	SPDT On-None-On
CM102	SPST On-None-Off
CM103	SPDT On-Off-On
CM107	SPDT On-Off-Mom.
CM12 *	SPST On-None-Off
Actuator	
J1	Rocker
J3	Illuminated rocker
J6	Rocker
J8	Illuminated rocker
Actuator Color	
2 (STD.)	Black
1	White
3	Red
R	Red, illuminated
A	Amber, illuminated
G	Green, illuminated
Mounting Style/Color	
S2 (STD.)	Snap-in, black
S4 (STD.)	Snap-in, black
S1	Snap-in, white
S3	Snap-in, white
Termination	
05 (STD.)	.250" quick connect
07	Solder lug
Actuator Marking	
(NONE) (STD.)	No marking
D	ON-OFF
H	"O I" - international ON-OFF
P	"O -" international ON-OFF
Contact Rating	
QA (STD.)	Silver
Lamp Rating	
(NONE) (STD.)	No lamp
7	125 VAC neon
8	250 VAC neon


* CM12 - for switches with both marking and illumination

C&K CM Series Single Pole Power Rocker Switches

SWITCH FUNCTION


NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
SP	CM101	ON	NONE	ON	2-3	N/A	2-1	
	CM102	ON	NONE	OFF				
	CM103	ON	OFF	ON				
	CM107	ON	OFF	MOM.				
	CM12 *	ON	NONE	OFF				

* CM12 - for switches with both marking and illumination

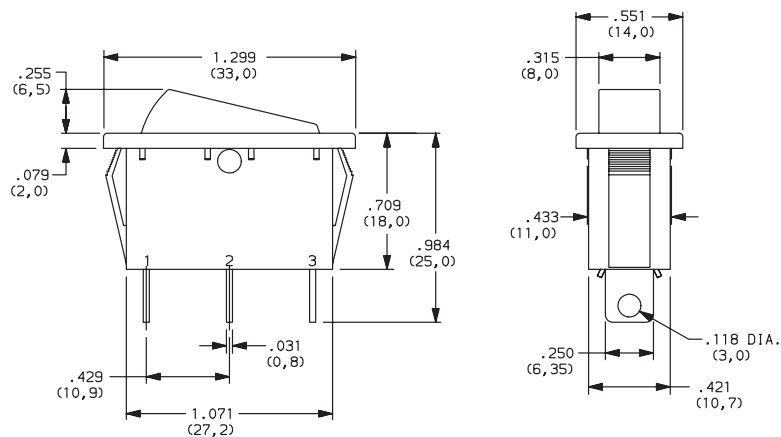


ACTUATOR

J1 ROCKER
J3 ILLUMINATED ROCKER

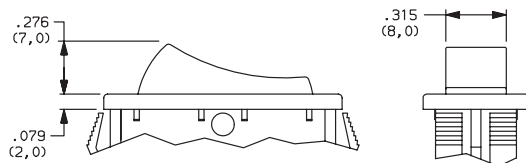

NOTE: J3 actuator available with CM102 switch function only.

J6 ROCKER
J8 ILLUMINATED ROCKER

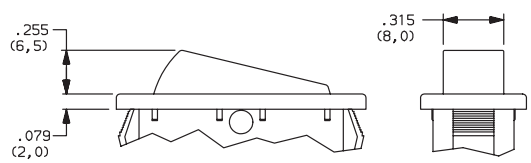

NOTE: J8 actuator available with CM102 switch function only.

C&K CM Series

Single Pole Power Rocker Switches


ACTUATOR COLOR

OPTION CODE	ACTUATOR COLOR
2	(STD.) BLACK
1	WHITE
3	RED
R	RED, ILLUMINATED
A	AMBER, ILLUMINATED
G	GREEN, ILLUMINATED

MOUNTING STYLE/COLOR



S2 (STD.) SNAP-IN, BLACK

S1 SNAP-IN, WHITE

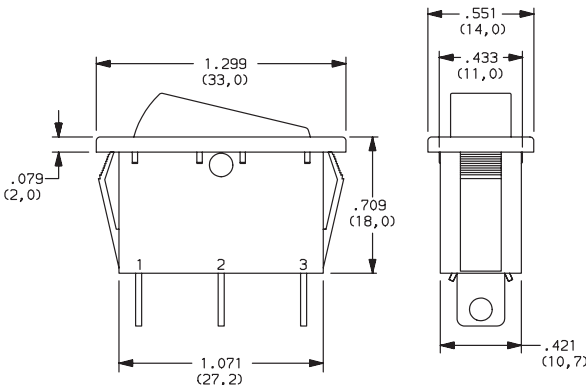

S4 (STD.) SNAP-IN, BLACK (SHORT FRAME)


S3 SNAP-IN, WHITE

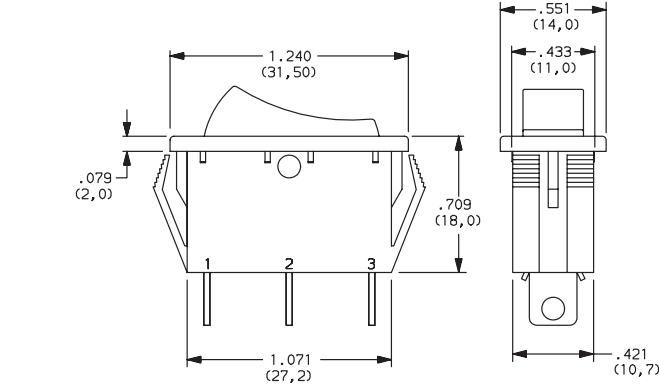


PANEL THICKNESS	"X"	"Y"
0.030-0.049 (0,75-1,25)	1.189-.004 (30,2-0,1)	0.441+.004 (11,2+0,1)
0.049-0.079 (1,25-2,0)	1.197-.004 (30,4-0,1)	0.441+.004 (11,2+0,1)
0.079-0.118 (2,0-3,0)	1.212-.004 (30,8-0,1)	0.441+.004 (11,2+0,1)

TERMINATION

05 (STD.) .250" QUICK CONNECT

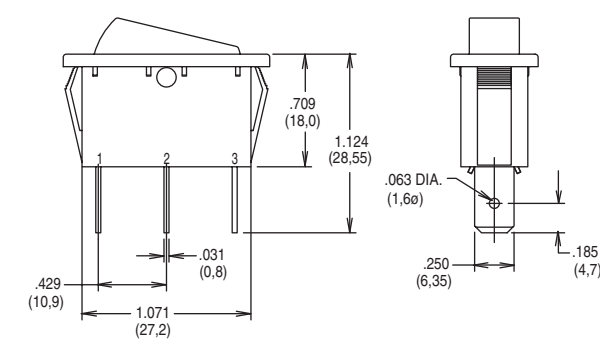

07 SOLDER LUG

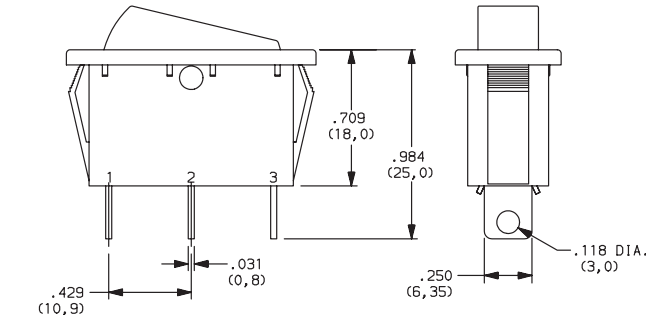

NOTE: Available with CM101 & CM102 switch functions only.

C&K CM Series

Single Pole Power Rocker Switches

ACTUATOR MARKING


NONE (STD.) NO MARKING




D ON-OFF



H O I



P O -



NOTE: Orientation of actuator marking and terminals.

CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATINGS	
QA (STD.)	SILVER	POWER	16 AMPS @ 125 VAC; 1/8 HP 10 AMPS @ 250 VAC, 1/3 HP (UL/CSA).

LAMP RATING

(NONE) NO LAMP

7 125 VAC 33kΩ NEON

8 250 VAC 150kΩ NEON

NOTE: Lamp rating for J3 & J8 actuator option.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.