

# Disc Type Capacitors with Lead

## High Voltage Ceramic Capacitors Commercial Grade

### CK45 series

Issue date: February 2013

- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Disc Type Capacitors with Lead

Conformity to RoHS Directive

## High Voltage Ceramic Capacitors Commercial Grade

### CK45 Series

#### FEATURES

- High voltage ceramic capacitors series higher reliability has been achieved through the use of TDK original dielectric and copper for electrode material due to nice matching of the ceramic dielectrics material for copper for electrode.
- These products shall conform to RoHS Directive due to lead(Pb) free of lead wire and internal solder material.
- Compatible with halogen-free external resin coating.

#### OPERATING TEMPERATURE RANGE: -25 to +105°C

(The maximum operating temperature of 105°C includes capacitor self-generated heat of up to 20°C.)



#### PRODUCT IDENTIFICATION

|     |     |     |     |     |     |     |     |     |      |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| CK  | 45  | -B  | 3AD | 102 | K   | Y   | N   | N   | A    |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) |

- (1) Type
- (2) Shape
- (3) Temperature characteristics
- (4) Rated voltage
- (5) Nominal capacitance
- (6) Capacitance tolerance
- (7) Class
- (8) Lead type
- (9) General use
- (10) Halogen-free compatible product

#### TEMPERATURE CHARACTERISTICS AND TOLERANCE

| Temperature characteristics | Test temperature range | Capacitance tolerance |
|-----------------------------|------------------------|-----------------------|
| B ( $\pm 10\%$ )            | -25 to +85°C           | K ( $\pm 10\%$ )      |
| E (+20, -55%)               | -25 to +85°C           | Z (+80, -20%)         |

#### CAPACITANCE AND DIMENSIONS

##### TEMPERATURE CHARACTERISTICS: B ( $\pm 10\%$ )

RATED VOLTAGE Edc: 1kV

| Part No.           | Capacitance (pF) | Dimensions (mm) |        |               |                | Taping dimensions |
|--------------------|------------------|-----------------|--------|---------------|----------------|-------------------|
|                    |                  | D max.          | T max. | F             | d              |                   |
| CK45-B3AD101KY□*NA | 100              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD151KY□*NA | 150              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD221KY□*NA | 220              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD331KY□*NA | 330              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD471KY□*NA | 470              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD681KY□*NA | 680              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD102KY□*NA | 1,000            | 6.0             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD152KY□*NA | 1,500            | 7.0             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD222KY□*NA | 2,200            | 8.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD332KY□*NA | 3,300            | 9.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3AD472KY□*NA | 4,700            | 11.0            | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |

\* □ : Lead shape symbol

RATED VOLTAGE Edc: 2kV

| Part No.           | Capacitance (pF) | Dimensions (mm) |        |               |                | Taping dimensions |
|--------------------|------------------|-----------------|--------|---------------|----------------|-------------------|
|                    |                  | D max.          | T max. | F             | d              |                   |
| CK45-B3DD101KY□*NA | 100              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD151KY□*NA | 150              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD221KY□*NA | 220              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD331KY□*NA | 330              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD471KY□*NA | 470              | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD681KY□*NA | 680              | 6.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD102KY□*NA | 1,000            | 7.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD152KY□*NA | 1,500            | 8.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD222KY□*NA | 2,200            | 10.0            | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-B3DD332KY□*NA | 3,300            | 11.5            | 5.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3DD472KY□*NA | 4,700            | 14.0            | 5.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |

\* □ : Lead shape symbol

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.

## CAPACITANCE AND DIMENSIONS

### TEMPERATURE CHARACTERISTICS: B ( $\pm 10\%$ )

RATED VOLTAGE E<sub>dc</sub>: 3kV

| Part No.           | Capacitance<br>(pF) | Dimensions (mm) |        | F             | d              | Taping dimensions |
|--------------------|---------------------|-----------------|--------|---------------|----------------|-------------------|
|                    |                     | D max.          | T max. |               |                |                   |
| CK45-B3FD101KY□*NA | 100                 | 5.5             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD151KY□NA  | 150                 | 5.5             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD221KY□NA  | 220                 | 5.5             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD331KY□NA  | 330                 | 6.5             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD471KY□NA  | 470                 | 7.0             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD681KY□NA  | 680                 | 8.0             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD102KY□NA  | 1,000               | 9.0             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD152KY□NA  | 1,500               | 10.5            | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-B3FD222KY□NA  | 2,200               | 12.5            | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |

\* □ : Lead shape symbol

### TEMPERATURE CHARACTERISTICS: E (+20, -55%)

RATED VOLTAGE E<sub>dc</sub>: 1kV

| Part No.           | Capacitance<br>(pF) | Dimensions (mm) |        | F             | d              | Taping dimensions |
|--------------------|---------------------|-----------------|--------|---------------|----------------|-------------------|
|                    |                     | D max.          | T max. |               |                |                   |
| CK45-E3AD471ZY□*NA | 470                 | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3AD102ZY□NA  | 1,000               | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3AD222ZY□NA  | 2,200               | 6.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3AD472ZY□NA  | 4,700               | 8.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3AD103ZY□NA  | 10,000              | 11.5            | 5.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |

\* □ : Lead shape symbol

RATED VOLTAGE E<sub>dc</sub>: 2kV

| Part No.           | Capacitance<br>(pF) | Dimensions (mm) |        | F             | d              | Taping dimensions |
|--------------------|---------------------|-----------------|--------|---------------|----------------|-------------------|
|                    |                     | D max.          | T max. |               |                |                   |
| CK45-E3DD471ZY□*NA | 470                 | 5.5             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3DD102ZY□NA  | 1,000               | 6.0             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3DD222ZY□NA  | 2,200               | 8.0             | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3DD472ZY□NA  | 4,700               | 10.5            | 5.0    | 5.0 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V1                |
| CK45-E3DD103ZY□NA  | 10,000              | 14.5            | 5.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V3                |

\* □ : Lead shape symbol

RATED VOLTAGE E<sub>dc</sub>: 3kV

| Part No.           | Capacitance<br>(pF) | Dimensions (mm) |        | F             | d              | Taping dimensions |
|--------------------|---------------------|-----------------|--------|---------------|----------------|-------------------|
|                    |                     | D max.          | T max. |               |                |                   |
| CK45-E3FD471ZY□*NA | 470                 | 6.0             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-E3FD102ZY□NA  | 1,000               | 7.5             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-E3FD222ZY□NA  | 2,200               | 9.5             | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |
| CK45-E3FD472ZY□NA  | 4,700               | 12.5            | 6.0    | 7.5 $\pm$ 1.5 | 0.6 $\pm$ 0.05 | V2                |

\* □ : Lead shape symbol

## LIST OF STANDARD LEAD SHAPES

The lead type is indicated by the letter which is the 15th character of the product name.

Example) TDK Product Name: **CK45-B3AD102KYNNNA**


└─N: Lead type (Vertical kink, Short)

|               | Long lead<br>Symbol G | Short lead<br>Symbol N | Taping<br>Symbol V |
|---------------|-----------------------|------------------------|--------------------|
| Vertical kink |                       |                        |                    |

- We recommend using a vertical kink type.
- For bulk products, we recommend a short lead type with the symbol N.

## TAPING DIMENSIONS

### VERTICAL KINK LEAD TYPE

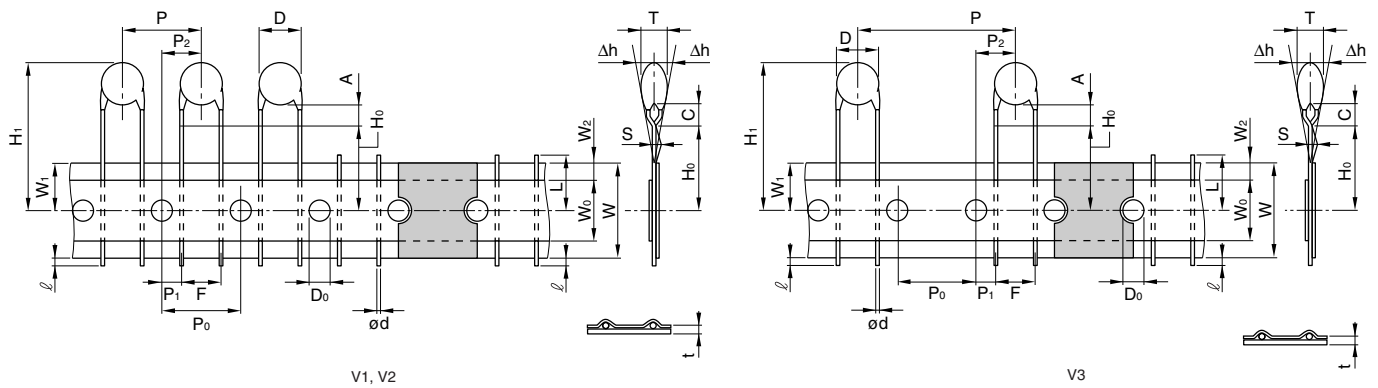

| Item                                 | Symbol         | Dimensions (mm)                               |                |                | Remarks  |
|--------------------------------------|----------------|---|----------------|----------------|--|
|                                      |                | V1  | V2             | V3             |  |
| Body diameter                        | D              | Depends on the specification of each product. |                |                |  |
| Body thickness                       | T              | Depends on the specification of each product. |                |                |  |
| Lead-wire diameter                   | ød             | 0.6±0.05                                      | 0.6±0.05       | 0.6±0.05       |  |
| Pitch of component                   | P              | 12.7±1.0                                      | 15.0±1.0       | 30.0±1.0       | Including the slant of body                          |
| Feed hole pitch                      | P <sub>0</sub> | 12.7±0.3                                      | 15.0±0.3       | 15.0±0.3       | Excepting the tape splicing part                     |
| Feed hole center to lead             | P <sub>1</sub> | 3.85±0.7                                      | 3.75±0.7       | 3.75±0.7       |  |
| Feed hole center to component center | P <sub>2</sub> | 6.35±1.3                                      | 7.5±1.3        | 7.5±1.3        |  |
| Lead-to lead distance                | F              | 5+0.8, -0.2                                   | 7.5±0.8        | 7.5±0.8        | Measuring point is bottom kink                       |
| Component alignment                  | Δh             | 0±2.0   | 0±2.0          | 0±2.0          | Including the slanting body due to bending lead-wire |
| Tape width                           | W              | 18.0+1.0, -0.5                                | 18.0+1.0, -0.5 | 18.0+1.0, -0.5 |  |
| Adhesive tape width                  | W <sub>0</sub> | 10.0min.                                      | 10.0min.       | 10.0min.       |  |
| Hole position                        | W <sub>1</sub> | 9.0±0.5                                       | 9.0±0.5        | 9.0±0.5        |  |
| Adhesive tape position               | W <sub>2</sub> | 4.0max.                                       | 4.0max.        | 4.0max.        | Adhesive tape do not stick out the tape              |
| Bottom of kink from tape center      | H <sub>0</sub> | 16.0+1.5, -0.5                                | 16.0+1.5, -0.5 | 16.0+1.5, -0.5 |  |
| Height of body from tape center      | H <sub>1</sub> | 46.0max.                                      | 46.0max.       | 46.0max.       |  |
| Lead-wire protrusion                 | ℓ              | 1.0max.                                       | 1.0max.        | 1.0max.        |  |
| Feed hole diameter                   | D <sub>0</sub> | 4.0±0.2                                       | 4.0±0.2        | 4.0±0.2        |  |
| Total tape thickness                 | t              | 0.6±0.3                                       | 0.6±0.3        | 0.6±0.3        | Including adhesive tape                              |
| Length of snapped lead               | L              | 11.0max.                                      | 11.0max.       | 11.0max.       |  |
| Coating on lead                      | C              | 4.0max.                                       | 4.0max.        | 4.0max.        |  |
| Height of kink                       | A              | 4.0max.                                       | 4.0max.        | 4.0max.        | Measuring point is bottom kink                       |
| Spring action                        | S              | 2.0max.                                       | 2.0max.        | 2.0max.        |  |

• For more information about products with other capacitance or other data, please contact us.

• All specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.