

EL4544

Triple 16x5 Differential Crosspoint Switch Capable of Operation in Single-Ended or Differential Input Modes

FN7362
Rev 5.00
February 23, 2012

The EL4544 is a high bandwidth 16-channel differential RGB to 5-channel RGB single-ended RGB-HV video crosspoint switch with embedded sync extraction. There are four 16-Channel input muxes, each capable of receiving a complete RGB video signal, and five output muxes, each capable of “seeing” any one of the four RGB inputs. Additionally, the fifth input mux has an overlay “screen on screen” function that can be displayed in conjunction with any of the stacked RGB inputs.

The EL4544 has a fast disable feature to reduce power consumption. The device also provides a presence of signal indicator by looking for syncs on a designated channel.

Ordering Information

| PART NUMBER (Note) | PART MARKING | PACKAGE (Pb-Free) | PKG. DWG. # |
|-----------------------|--------------|------------------------|-------------|
| EL4544IGZ | EL4544IGZ | 356 Pin (27x27mm) PBGA | V356.27x27B |

NOTE: These Intersil Pb-free WLCSP and BGA packaged products employ special Pb-free material sets; molding compounds/die attach materials and SnAgCu - e1 solder ball terminals, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free WLCSP and BGA packaged products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

Features

- Serial programming of switch array
- Parallel or serial modes
- High Z output disable
- Drives 150Ω loads
- 60MHz 0.1dB gain flatness
- -3dB bandwidth of 300MHz
- Crosstalk rejection: 75dB @ 100MHz
- Channels settle to 5% within 10ns after overlay switching
- 356 pin PBGA packaging
- Pb-free (RoHS compliant)


Applications

- Video switching

Pin Descriptions

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|----------------|---------------------|---|
| Rp0 | A3 | Red plus input 0 | <p style="text-align: center;">CIRCUIT 1</p> |
| Rn0 | B3 | Red minus input 0 | Reference Circuit 1 |
| Rp1 | A4 | Red plus input 1 | Reference Circuit 1 |
| Rn1 | B4 | Red minus input 1 | Reference Circuit 1 |
| Rp2 | A5 | Red plus input 2 | Reference Circuit 1 |
| Rn2 | B5 | Red minus input 2 | Reference Circuit 1 |
| Rp3 | A6 | Red plus input 3 | Reference Circuit 1 |
| Rn3 | B6 | Red minus input 3 | Reference Circuit 1 |
| Rp4 | A7 | Red plus input 4 | Reference Circuit 1 |
| Rn4 | B7 | Red minus input 4 | Reference Circuit 1 |
| Rp5 | A8 | Red plus input 5 | Reference Circuit 1 |
| Rn5 | B8 | Red minus input 5 | Reference Circuit 1 |
| Rp6 | A9 | Red plus input 6 | Reference Circuit 1 |
| Rn6 | B9 | Red minus input 6 | Reference Circuit 1 |
| Rp7 | A10 | Red plus input 7 | Reference Circuit 1 |
| Rn7 | B10 | Red minus input 7 | |
| Vm | Multiple Balls | Analog minus supply | |
| Vp | C11 | Analog plus supply | Reference Circuit 1 |
| Rp8 | A11 | Red plus input 8 | Reference Circuit 1 |
| Rn8 | B11 | Red minus input 8 | Reference Circuit 1 |
| Rp9 | A12 | Red plus input 9 | Reference Circuit 1 |
| Rn9 | B12 | Red minus input 9 | Reference Circuit 1 |
| RpA | A13 | Red plus input 10 | Reference Circuit 1 |
| RnA | B13 | Red minus input 10 | Reference Circuit 1 |
| RpB | A14 | Red plus input 11 | Reference Circuit 1 |
| RnB | B14 | Red minus input 11 | Reference Circuit 1 |
| RpC | A15 | Red plus input 12 | Reference Circuit 1 |
| RnC | B15 | Red minus input 12 | Reference Circuit 1 |
| RpD | A16 | Red plus input 13 | Reference Circuit 1 |
| RnD | B16 | Red minus input 13 | Reference Circuit 1 |
| RpE | A17 | Red plus input 14 | Reference Circuit 1 |
| RnE | B17 | Red minus input 14 | Reference Circuit 1 |
| RpF | A18 | Red plus input 15 | Reference Circuit 1 |
| RnF | B18 | Red minus input 15 | Reference Circuit 1 |

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|----------------|---|---|
| TMon1 | C18 | Thermal Monitor 1 has diodes to measure die temperature |  <p style="text-align: center;">CIRCUIT 6</p> |
| Vp | A20 | Analog plus supply | |
| Vm | Multiple Balls | Analog minus supply | |
| BnF | C19 | Blue minus input 15 | Reference Circuit 1 |
| BpF | C20 | Blue plus input 15 | Reference Circuit 1 |
| BnE | D19 | Blue minus input 14 | Reference Circuit 1 |
| BpE | D20 | Blue plus input 14 | Reference Circuit 1 |
| BnD | E19 | Blue minus input 13 | Reference Circuit 1 |
| BpD | E20 | Blue plus input 13 | Reference Circuit 1 |
| BnC | F19 | Blue minus input 12 | Reference Circuit 1 |
| BpC | F20 | Blue plus input 12 | Reference Circuit 1 |
| BnB | G19 | Blue minus input 11 | Reference Circuit 1 |
| BpB | G20 | Blue plus input 11 | Reference Circuit 1 |
| BnA | H19 | Blue minus input 10 | Reference Circuit 1 |
| BpA | H20 | Blue plus input 10 | Reference Circuit 1 |
| Bn9 | J19 | Blue minus input 9 | Reference Circuit 1 |
| Bp9 | J20 | Blue plus input 9 | Reference Circuit 1 |
| Bn8 | K19 | Blue minus input 8 | Reference Circuit 1 |
| Bp8 | K20 | Blue plus input 8 | Reference Circuit 1 |
| Vp | K18 | Analog plus supply | |
| Vm | Multiple Balls | Analog minus supply | |
| Bn7 | L19 | Blue minus input 7 | Reference Circuit 1 |
| Bp7 | L20 | Blue plus input 7 | Reference Circuit 1 |
| Bn6 | M19 | Blue minus input 6 | Reference Circuit 1 |
| Bp6 | M20 | Blue plus input 6 | Reference Circuit 1 |
| Bn5 | N19 | Blue minus input 5 | Reference Circuit 1 |
| Bp5 | N20 | Blue plus input 5 | Reference Circuit 1 |
| Bn4 | P19 | Blue minus input 4 | Reference Circuit 1 |
| Bp4 | P20 | Blue plus input 4 | Reference Circuit 1 |
| Bn3 | R19 | Blue minus input 3 | Reference Circuit 1 |
| Bp3 | R20 | Blue plus input 3 | Reference Circuit 1 |
| Bn2 | T19 | Blue minus input 2 | Reference Circuit 1 |
| Bp2 | T20 | Blue plus input 2 | Reference Circuit 1 |
| Bn1 | U19 | Blue minus input 1 | Reference Circuit 1 |

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|----------------|---|---------------------|
| Bp1 | U20 | Blue plus input 1 | Reference Circuit 1 |
| Bn0 | V19 | Blue minus input 0 | Reference Circuit 1 |
| Bp0 | V20 | Blue plus input 0 | Reference Circuit 1 |
| Vm | Vm | Analog minus supply | |
| Vp | Y20 | Analog plus supply | |
| TMon2 | V18 | Thermal Monitor 2 has diodes to measure die temperature | Reference Circuit 6 |
| GnF | W18 | Green minus input 15 | Reference Circuit 1 |
| GpF | Y18 | Green plus input 15 | Reference Circuit 1 |
| GnE | W17 | Green minus input 14 | Reference Circuit 1 |
| GpE | Y17 | Green plus input 14 | Reference Circuit 1 |
| GnD | W16 | Green minus input 13 | Reference Circuit 1 |
| GpD | Y16 | Green plus input 13 | Reference Circuit 1 |
| GnC | W15 | Green minus input 12 | Reference Circuit 1 |
| GpC | Y15 | Green plus input 12 | Reference Circuit 1 |
| GnB | W14 | Green minus input 11 | Reference Circuit 1 |
| GpB | Y14 | Green plus input 11 | Reference Circuit 1 |
| GnA | W13 | Green minus input 10 | Reference Circuit 1 |
| GpA | Y13 | Green plus input 10 | Reference Circuit 1 |
| Gn9 | W12 | Green minus input 9 | Reference Circuit 1 |
| Gp9 | Y12 | Green plus input 9 | Reference Circuit 1 |
| Gn8 | W11 | Green minus input 8 | Reference Circuit 1 |
| Gp8 | Y11 | Green plus input 8 | Reference Circuit 1 |
| Vp | V11 | Analog plus supply | |
| Vm | Multiple Balls | Analog minus supply | |
| Gn7 | W10 | Green minus input 7 | Reference Circuit 1 |
| Gp7 | Y10 | Green plus input 7 | Reference Circuit 1 |
| Gn6 | W9 | Green minus input 6 | Reference Circuit 1 |
| Gp6 | Y9 | Green plus input 6 | Reference Circuit 1 |
| Gn5 | W8 | Green minus input 5 | Reference Circuit 1 |
| Gp5 | Y8 | Green plus input 5 | Reference Circuit 1 |
| Gn4 | W7 | Green minus input 4 | Reference Circuit 1 |
| Gp4 | Y7 | Green plus input 4 | Reference Circuit 1 |
| Gn3 | W6 | Green minus input 3 | Reference Circuit 1 |
| Gp3 | Y6 | Green plus input 3 | Reference Circuit 1 |
| Gn2 | W5 | Green minus input 2 | Reference Circuit 1 |
| Gp2 | Y5 | Green plus input 2 | Reference Circuit 1 |
| Gn1 | W4 | Green minus input 1 | Reference Circuit 1 |
| Gp1 | Y4 | Green plus input 1 | Reference Circuit 1 |
| Gn0 | W3 | Green minus input 0 | Reference Circuit 1 |
| Gp0 | Y3 | Green plus input 0 | Reference Circuit 1 |


Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|----------------|---|---|
| Vm | Vm | Analog minus supply | |
| Vp | V3 | Analog plus supply | |
| Chip | V5 | Chip enable (active low): when "HI" disables all analog except references; all analog or digital video outputs are in a high impedance state; all registers hold their data but remain programmable since the serial interface is left active | <p style="text-align: center;">CIRCUIT 4</p> |
| Vdp | U5 | Digital logic power supply: nominally at 3V | |
| Reset | V4 | Reset (active low): clears all registers in interface and calibration sections; this causes the chip to standby with all outputs in a high impedance state | Reference Circuit 4 |
| sEn | U4 | Serial bus enable (active low): enables the serial bus when "LO"; latches the current value when transitioning to "HI" | Reference Circuit 4 |
| Vp | V3 | Analog plus supply | |
| Vm | Multiple Balls | Analog minus supply | |
| sClk | U3 | Serial bus clock | Reference Circuit 4 |
| sDo | T4 | Serial bus data output | Reference Circuit 4 |
| sDi | T3 | Serial bus data input | <p style="text-align: center;">CIRCUIT 5</p> |
| RefA | Y1 | Output stage reference level (input) A | Reference Circuit 6 |
| VmA | Y2 | RGB video output stages' minus supply A | <p style="text-align: center;">CIRCUIT 7</p> |
| Ba | W1 | Blue output A | <p style="text-align: center;">CIRCUIT 2</p> |

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|-------------|---|---------------------|
| Va | W2 | Vertical sync output A | Reference Circuit 5 |
| Ga | V1 | Green output A | Reference Circuit 2 |
| Ha | V2 | Horizontal sync output A | Reference Circuit 5 |
| Ra | U1 | Red output A | Reference Circuit 2 |
| VpA | U2 | RGB video output stages' plus supply A | Reference Circuit 7 |
| RefB | T1 | Output stage reference level (input) B | Reference Circuit 6 |
| VmB | T2 | RGB video output stages' minus supply B | Reference Circuit 7 |
| Bb | R1 | Blue output B | Reference Circuit 2 |
| Vb | R2 | Vertical sync output B | Reference Circuit 5 |
| Gb | P1 | Green output B | Reference Circuit 2 |
| Hb | P2 | Horizontal sync output B | Reference Circuit 5 |
| Rb | N1 | Red output B | Reference Circuit 2 |
| VpB | N2 | RGB video output stages' plus supply B | Reference Circuit 7 |
| RefC | M1 | Output stage reference level (input) C | Reference Circuit 6 |
| VmC | M2 | RGB video output stages' minus supply C | Reference Circuit 7 |
| Bc | L1 | Blue output C | Reference Circuit 2 |
| Vc | L2 | Vertical sync output C | Reference Circuit 5 |
| Gc | K1 | Green output C | Reference Circuit 2 |
| Hc | K2 | Horizontal sync output C | Reference Circuit 5 |
| Rc | J1 | Red output C | Reference Circuit 2 |
| VpC | J2 | RGB video output stages' plus supply C | Reference Circuit 7 |
| RefD | H1 | Output stage reference level (input) D | Reference Circuit 6 |
| VmD | H2 | RGB video output stages' minus supply D | Reference Circuit 7 |
| Bd | G1 | Blue output D | Reference Circuit 2 |
| Vd | G2 | Vertical sync output D | Reference Circuit 5 |
| Gd | F1 | Green output D | Reference Circuit 2 |
| Hd | F2 | Horizontal sync output D | Reference Circuit 5 |
| Rd | E1 | Red output D | Reference Circuit 2 |
| VpD | E2 | RGB video output stages' plus supply D | Reference Circuit 7 |
| RefS | D1 | Output stage reference level (input) S | Reference Circuit 6 |
| VmS | D2 | RGB video output stages' minus supply S | Reference Circuit 7 |
| Bs | C1 | Blue output S | Reference Circuit 2 |
| Vs | C2 | Vertical sync output S | Reference Circuit 5 |
| Gs | B1 | Green output S | Reference Circuit 2 |
| Hs | B2 | Horizontal sync output S | Reference Circuit 5 |
| Rs | A1 | Red output S | Reference Circuit 2 |
| VpS | A2 | RGB video output stages' plus supply S | Reference Circuit 7 |
| BoL | E3 | Blue overlay input for output group S | Reference Circuit 6 |
| GoL | E4 | Green overlay input for output group S | Reference Circuit 6 |
| RoL | D4 | Red overlay input for output group S | Reference Circuit 6 |

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|---|---|---|
| RefOL | D5 | Overlay inputs' reference level for output group S | Reference Circuit 6 |
| Vm | Multiple Balls | Analog minus supply | |
| BAZ | F4 | Blue auto-zero internal calibration level monitor for output group S |  <p style="text-align: center;">CIRCUIT 3</p> |
| GAZ | D6 | Green auto-zero internal calibration level monitor for output group S | Reference Circuit 3 |
| Vp | C3 | Analog plus supply | |
| RAZ | C6 | Red auto zero internal calibration level monitor for output group S | Reference Circuit 3 |
| Vdp | U5 | Digital logic power supply: nominally at 3V | |
| Ovl | D3 | Digital input to select whether overlay is active for output group S | Reference Circuit 4 |
| Cal | C4 | Digital input to calibrate S output group | Reference Circuit 4 |
| Trans | C5 | Digital input to select a transparent overlay for output group S | Reference Circuit 4 |
| Vp | C3 | Analog plus supply | |
| Vm | MultipleBalls | Analog minus supply | |
| Vm | A19 | Analog minus supply | |
| Vm | B19, B20, C7, C8, C9, C10, C12, C13, C14, C15, C16, C17, D7, D8, D9, D10, D11, D12, D13, D14, D15, D16, D17, D18, E17, E18, F3, F6, F7, F8, F9, F10, F11, F12, F13, F14, F15, F17, F18, G3, G4, G6, G7, G8, G9, G10, G11, G12, G13, G14, G15, G17, G18, H3, H4, H6, H7, H8, H9, H10, H11, H12, H13, H14, H15, H17, H18, J3, J4, J6, J7, J8, J9, J10, J11, J12, J13, J14, J15, J17, J18, K3, K4, K6, K7, K8, K9, K10, K11, K12, K13, K14, K15, K17, L3, L4, L6, L7, L8, L9, L10, L11, L12, L13, L14, L15, L17, L18, M3, M4, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M17, M18, N3, N4, N6, N7, N8, N9, N10, N11, N12, N13, N14, N15, N17, N18, P3, P4, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15, P17, P18, R3, R4, R6, R7, R8, R9, R10, R11, R12, R13, R1, R15, R17, R18, T17, T18, U7, U8, U9, U10, U11, U12, U13, U14, U15, U16, U17, U18, V7, V8, V9, V10, V12, V13, V14, V15, V16, V17, W19, W20, Y19 | | |
| N/C | U6, V6 | Not connected; may be grounded | |

Absolute Maximum Ratings ($T_A = +25^\circ\text{C}$)

| | |
|----------------------|----------|
| V_{SA} | 5.5V |
| Input Voltage | V_{SA} |
| V_{SD} | 3.6V |
| Output Current | 80mA |

Thermal Information

| | |
|---|---|
| Thermal Resistance (Typical, Note 1) | θ_{JA} ($^\circ\text{C}/\text{W}$) |
| 356 Ld PBGA | 25 |
| Storage Temperature Range | -65°C to $+150^\circ\text{C}$ |
| Operating Junction Temperature | $+135^\circ\text{C}$ |
| Recommended Operating Temperature | -40°C to $+85^\circ\text{C}$ |
| Pb-free reflow profile | see link below |
| | http://www.intersil.com/pbfree/Pb-FreeReflow.asp |

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: $T_J = T_C = T_A$

NOTE:

- θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Electrical Specifications $V_{SA} = 5\text{V}$, $V_{SD} = 3.3\text{V}$, Gain = 2, $R_L = 150\Omega$, $C_L = 2.7\text{pF}$, $T_A = +25^\circ\text{C}$.

| PARAMETER | DESCRIPTION | CONDITION | MIN | TYP | MAX | UNIT |
|---|--|---|------|------|------|------------------------------|
| SUPPLY CHARACTERISTICS | | | | | | |
| V_{SA} | Recommended Analog Supply Voltage | | 4.75 | 5.0 | 5.25 | V |
| V_{SD} | Recommended Digital Supply Voltage | | 2.4 | 3.3 | 3.6 | V |
| I_{SD} | Digital Supply Current | Enabled | | 3 | 10 | mA |
| I_{SA} | Analog Supply Current | Enabled - no load, all amplifiers enabled | | 685 | 790 | mA |
| | | Disabled | | 33 | 50 | mA |
| PSRR | Power Supply Rejection Ratio | 4.75V to 5.25V | | 40 | | dB |
| CHARACTERISTICS OF DIFFERENTIAL INPUTS | | | | | | |
| CMRR | Input Common Mode Rejection Ratio | 0V to 1.5V | 45 | 66 | | dB |
| A_V | Gain Accuracy for A, B, C, D, S Channels | Range of Deviation from gain of 2 (excluding overlay) | 1.85 | 2.0 | 2.15 | V/V |
| V_N | Input Referred Voltage Noise | | | 40 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| V_{OS} | Input Referred Offset Voltage | Includes muxes and output amps; A, B, C, D channels, gain = 1 | -80 | 0 | 80 | mV |
| | | S-Channel in auto-calibration mode, gain = 1 | -20 | 5 | 20 | mV |
| C_{IN} | Input Capacitance | | | 2 | | pF |
| R_{IN} | Input Resistance, Single-ended | | 1100 | 1500 | | Ω |
| V_{INSET} | Input Biasing Voltage | | 1.49 | 1.55 | 1.61 | V |
| OVERLAY SWITCHING CHARACTERISTICS | | | | | | |
| $P_{APERTURE}$ | Pixel Mux Aperture of Uncertainty | 5% setting for max signal charge | | 10 | | ns |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Impedance | | Enabled | | 100 | | $\text{m}\Omega$ |
| | | Disabled | | 10 | | $\text{M}\Omega$ |
| V_{OUT} | Maximum Recommended Output Range | | 0 | | 3.3 | V |
| I_{OUT} | Output Current | Short-circuit (5Ω) | | 60 | | mA |


Electrical Specifications $V_{SA} = 5V$, $V_{SD} = 3.3V$, Gain = 2, $R_L = 150\Omega$, $C_L = 2.7pF$, $T_A = +25^\circ C$. (Continued)

| PARAMETER | DESCRIPTION | CONDITION | MIN | TYP | MAX | UNIT |
|-----------------------|---|--|-----|-----|-----|------------|
| AC PERFORMANCE | | | | | | |
| SR | Slew Rate | $2V_{P-P}$ symmetrical, $R_L = 150\Omega$, $A_V = 2$, (Note 2) | | 800 | | V/ μ s |
| BW | -3dB Bandwidth | -3dB, 200mV $_{P-P}$, load of 150 Ω | | 300 | | MHz |
| | 0.1dB Bandwidth | 0.1dB, 200mV $_{P-P}$, load of 150 Ω | | 60 | | MHz |
| Settling Time | 1% Settling Time | $2V_{OUT}$ step, load of 150 Ω | | 10 | | ns |
| Crosstalk | Hostile Crosstalk Between any 2 Channels | 100MHz | | -70 | | dB |
| | Worst Case Hostile Crosstalk One Channel Affected by all Other Channels Running the Same Signal | 100MHz | | -50 | | dB |

NOTE:


2. Limits should be considered typical and are not production tested.

I/O Block Diagram of Video Signals

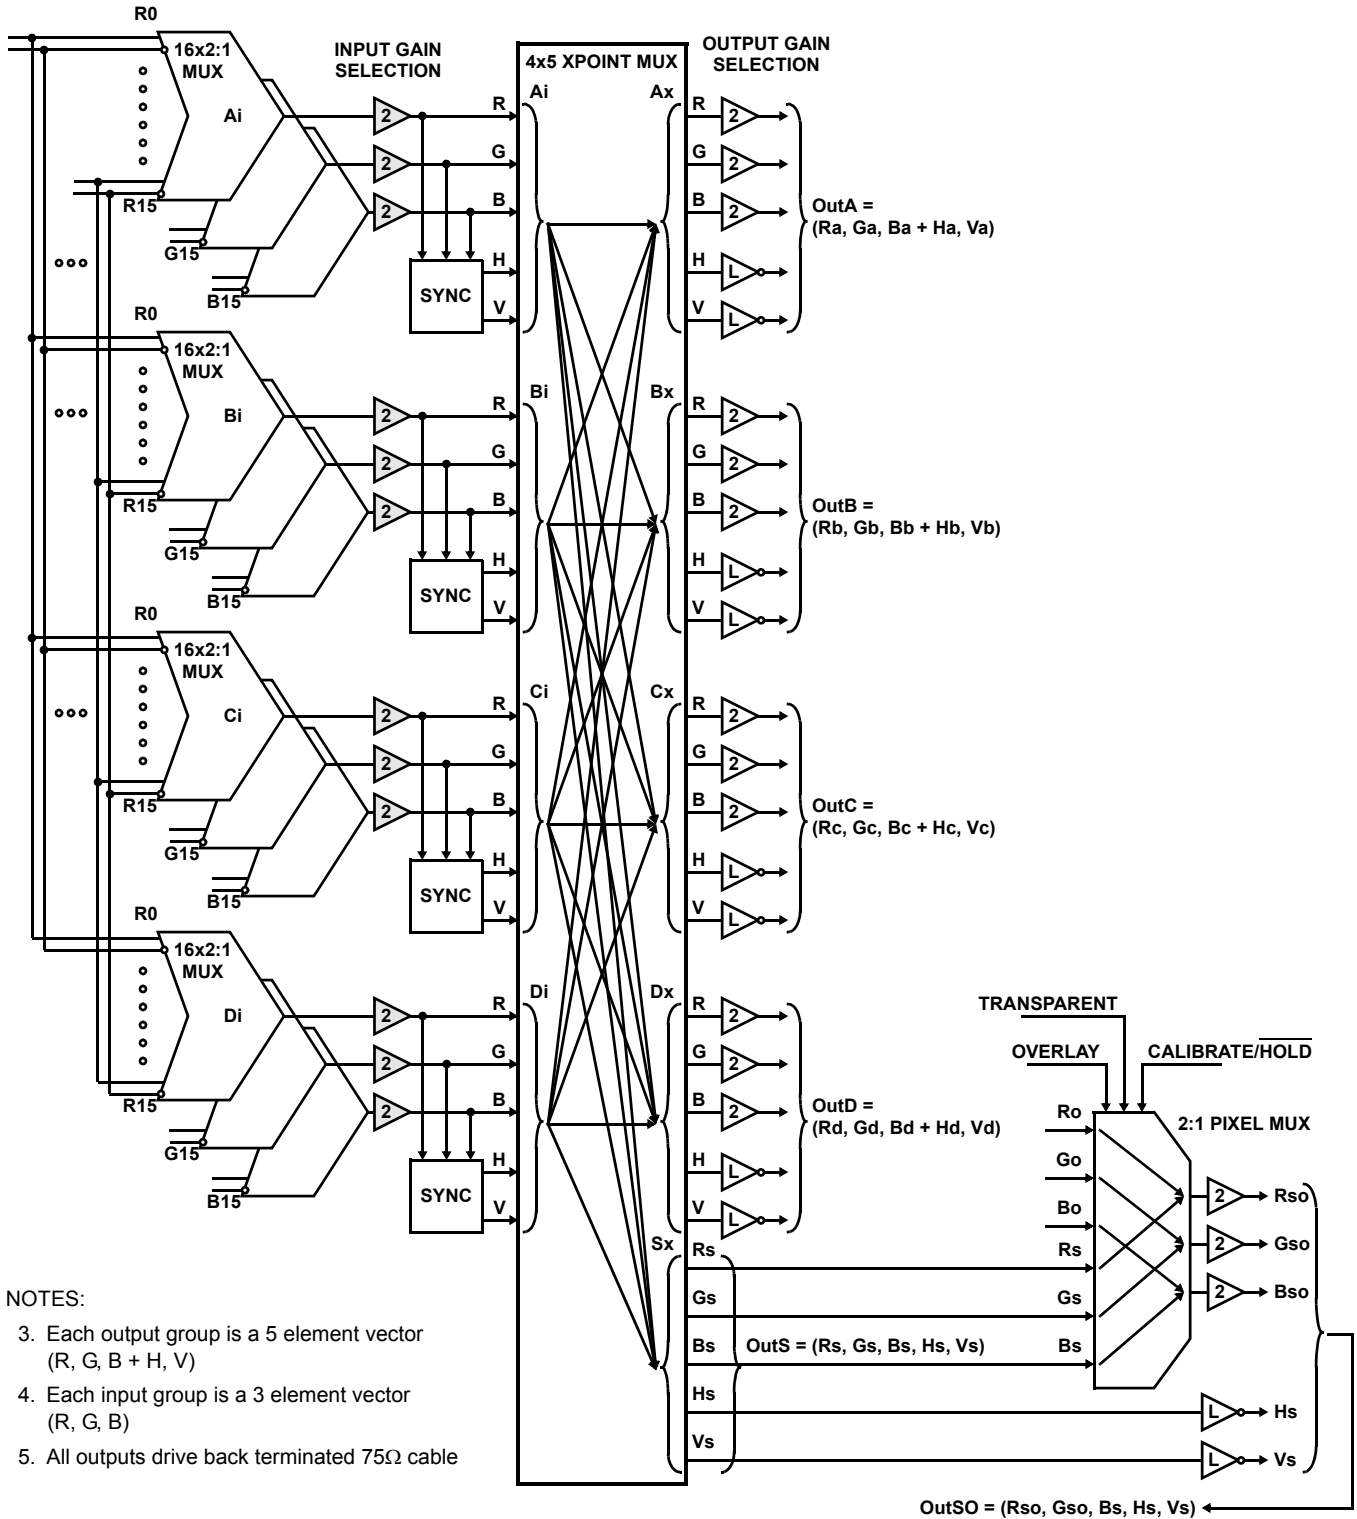


NOTES:


3. Each output group is a 5 element vector (R, G, B + H, V)
4. Each input group is a 3 element vector (R, G, B)
5. All outputs drive back terminated 75Ω cable

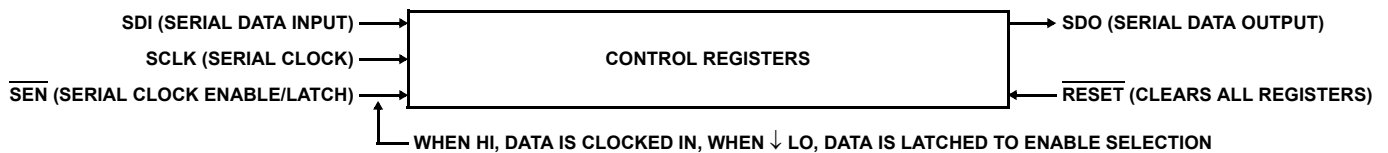

I/O Block Diagram of Video Signals with Power Supplies and References

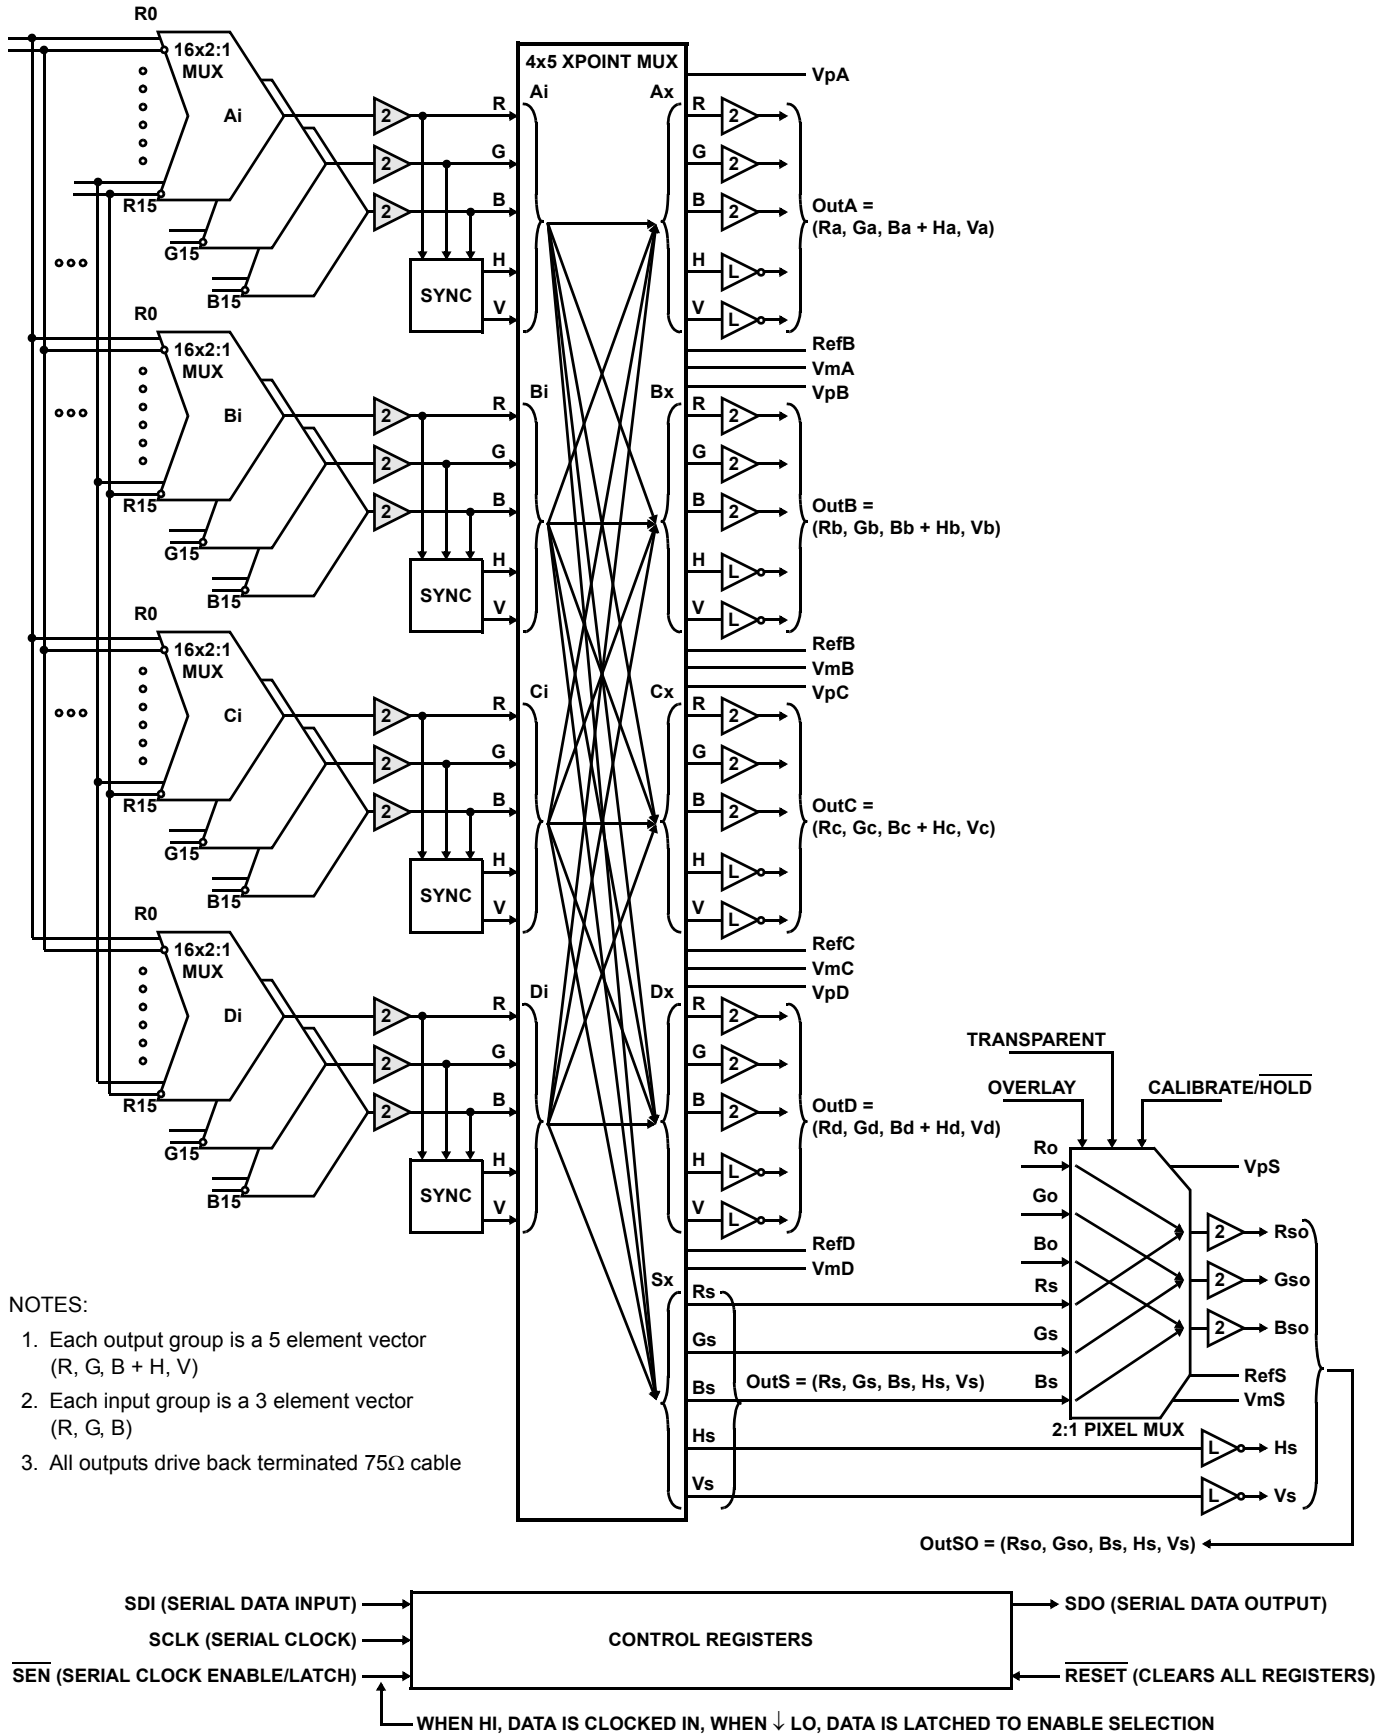


Serial Bus Interface Architecture

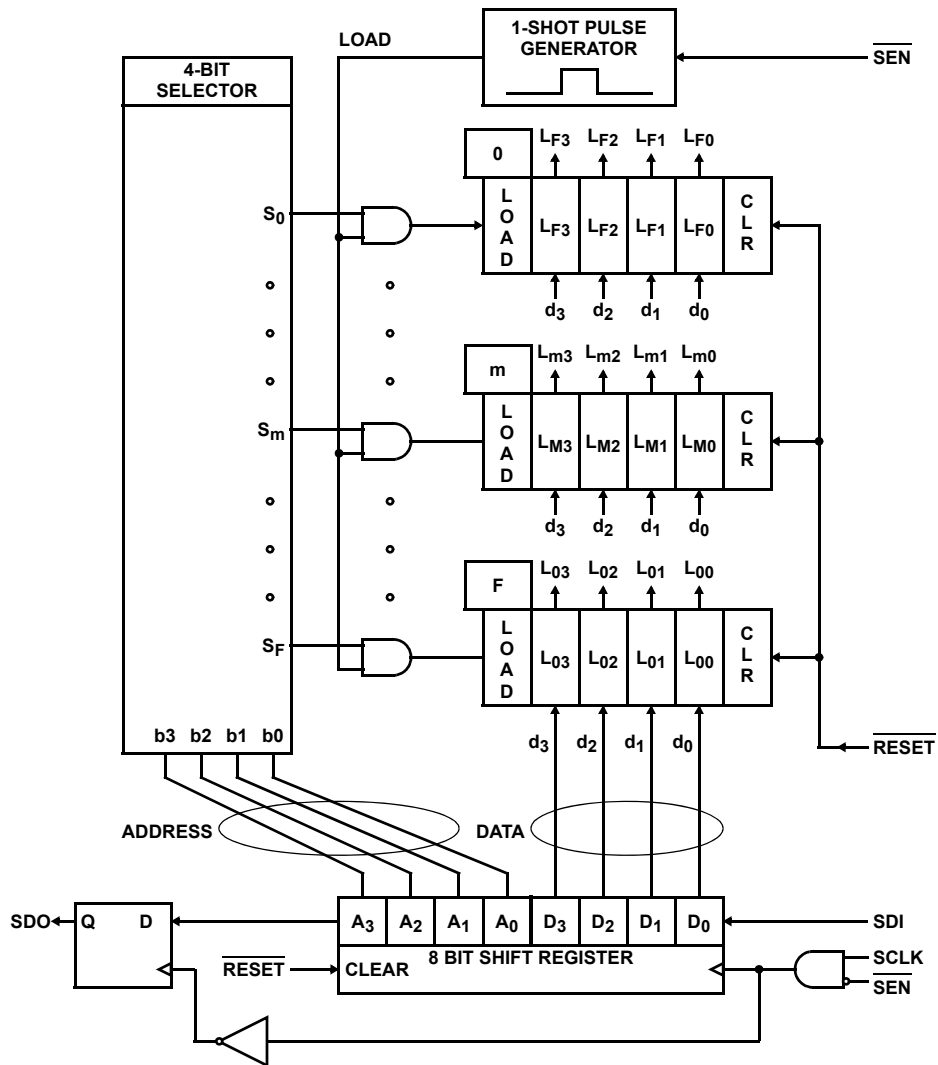

NOTE: The selector has 16 outputs, connected to 16 AND gates, connected to 16 4-bit latches. Rising edge of \overline{SEN} triggers the load one-shot.

Serial Bus Interface Timing Diagram

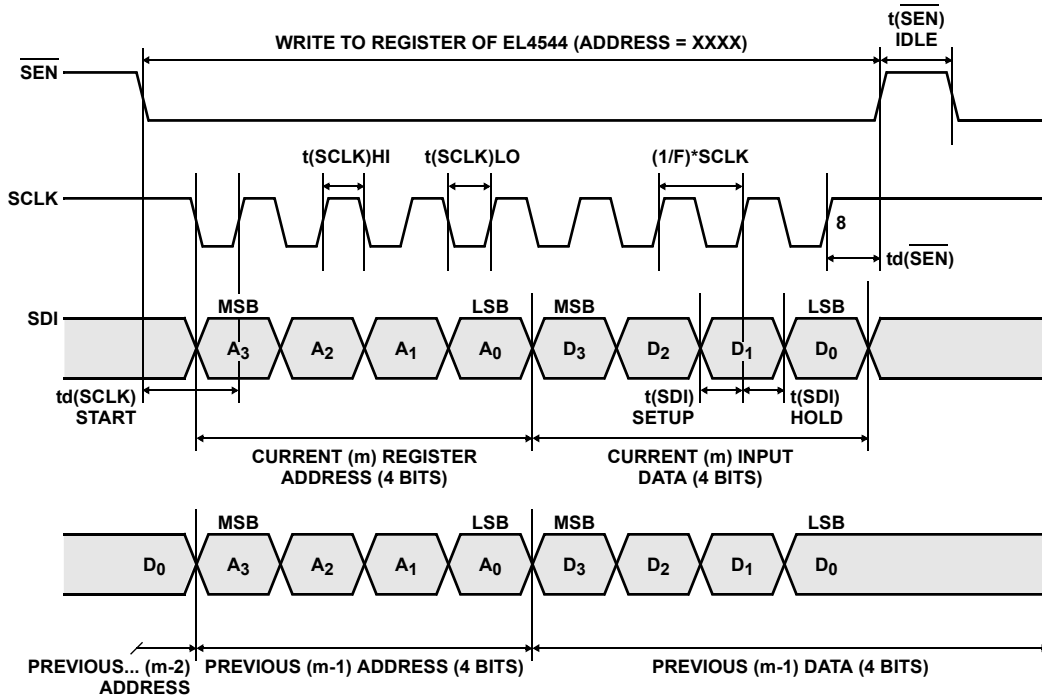

NOTE: Readback of the serial bus register can be done as follows: After \overline{SEN} is taken low, latching data, and before writing the next word, the data in the register can be read back by clocking out 8 bits before writing in the next word.

Serial Bus Interface Control Table

| HEX ADDRESS CODE | FUNCTION | ADDRESS | | | | DATA | | | |
|------------------|--|---------|----|----|----|----------|-----------------------|----------|----------|
| | | A3 | A2 | A1 | A0 | D3 | D2 | D1 | D0 |
| 0 | Ai Input Mux: Select Input of Input Mux Ai | 0 | 0 | 0 | 0 | S3 | S2 | S1 | S0 |
| 1 | Bi Input Mux: Select Input of Input Mux Bi | 0 | 0 | 0 | 1 | S3 | S2 | S1 | S0 |
| 2 | Ci Input Mux: Select Input of Input Mux Ci | 0 | 0 | 1 | 0 | S3 | S2 | S1 | S0 |
| 3 | Di Input Mux: Select Input of Input Mux Di | 0 | 0 | 1 | 1 | S3 | S2 | S1 | S0 |
| 4 | Enable Any of the 4 Input Muxes: Di/Ci/Bi/Ai | 0 | 1 | 0 | 0 | EnDi | EnCi | EnBi | EnAi |
| 5 | Ti Input Test Mux: Select Which Input Group is Connected to Input Test Mux | 0 | 1 | 0 | 1 | TiS3 | TiS2 | TiS1 | TiS0 |
| 6 | Enable Test Muxes: Input and Output | 0 | 1 | 1 | 0 | EnTi | ToS2 | ToS1 | ToS0 |
| 7 | Enable Sync Detectors for Di/Ci/Bi/Ai | 0 | 1 | 1 | 1 | EnDSync | EnCSync | EnBSync | EnASync |
| 8 | Ax Crosspoint Mux: Enable/Gain = 2 or 1/Select Input (2Bits) | 1 | 0 | 0 | 0 | En | $A_V = 2/\text{not}1$ | S1 | S0 |
| 9 | Bx Crosspoint Mux: Enable/Gain = 2 or 1/Select Input (2Bits) | 1 | 0 | 0 | 1 | En | $A_V = 2/\text{not}1$ | S1 | S0 |
| A | Cx Crosspoint Mux: Enable/Gain = 2 or 1/Select Input (2Bits) | 1 | 0 | 1 | 0 | En | $A_V = 2/\text{not}1$ | S1 | S0 |
| B | Dx Crosspoint Mux: Enable/Gain = 2 or 1/Select Input (2Bits) | 1 | 0 | 1 | 1 | En | $A_V = 2/\text{not}1$ | S1 | S0 |
| C | Sx Crosspoint Mux: Enable/Gain = 2 or 1/Select Input (2Bits) | 1 | 1 | 0 | 0 | En | $A_V = 2/\text{not}1$ | S1 | S0 |
| D | Sync, Overlay, and Calibration Modes | 1 | 1 | 0 | 1 | X | Trans | Toggle | Autocal |
| E | Gain for: Di/Ci/Bi/Ai Set to HI for gain of 2 Set to LO for gain of 1 | 1 | 1 | 1 | 0 | AvDi = 2 | AvCi = 2 | AvBi = 2 | AvDi = 2 |
| F | No Operation | 1 | 1 | 1 | 1 | X | X | X | X |

| | | | | | | | | |
|-----------------------|---|---|---|---|---|---|---|---|
| Order bits are loaded | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-----------------------|---|---|---|---|---|---|---|---|

Typical Performance Curves

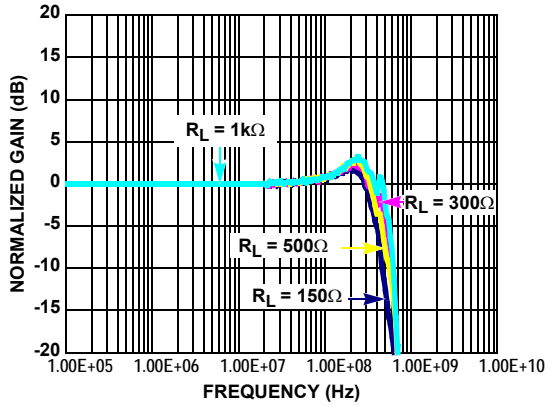


FIGURE 1. FREQUENCY FOR VARIOUS R_{LOAD}

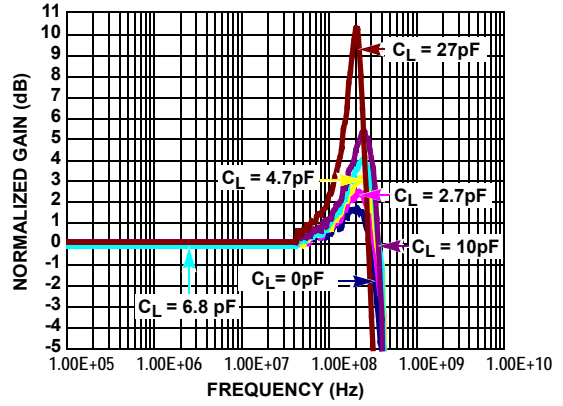


FIGURE 2. FREQUENCY FOR VARIOUS C_{LOAD}

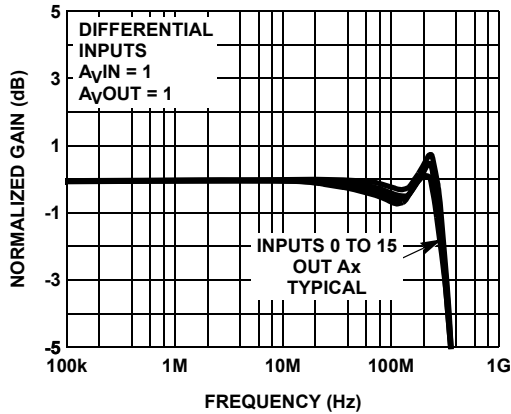


FIGURE 3. GAIN vs FREQUENCY FOR VARIOUS INPUT CHANNELS

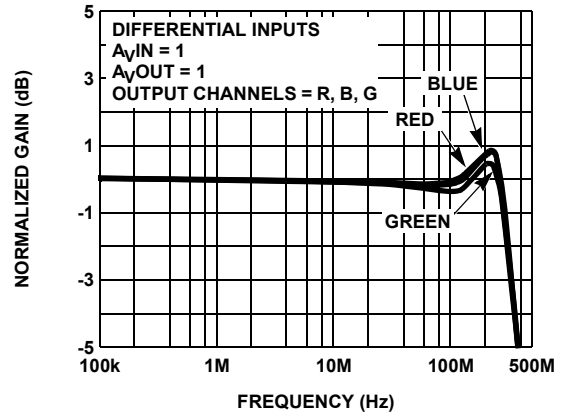


FIGURE 4. GAIN vs FREQUENCY FOR VARIOUS OUTPUT COLOR CHANNELS

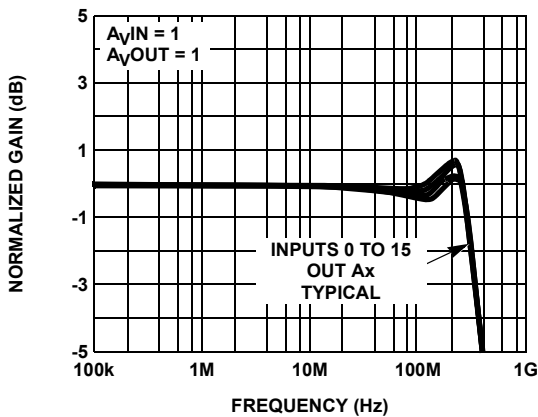


FIGURE 5. GAIN vs FREQUENCY FOR VARIOUS NON-INVERTING INPUTS

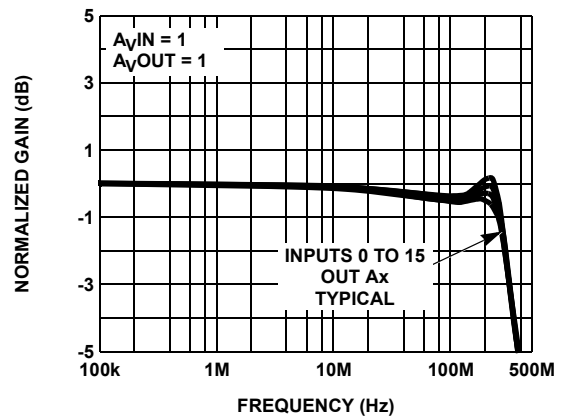


FIGURE 6. GAIN vs FREQUENCY FOR VARIOUS INVERTING INPUTS

Typical Performance Curves (Continued)

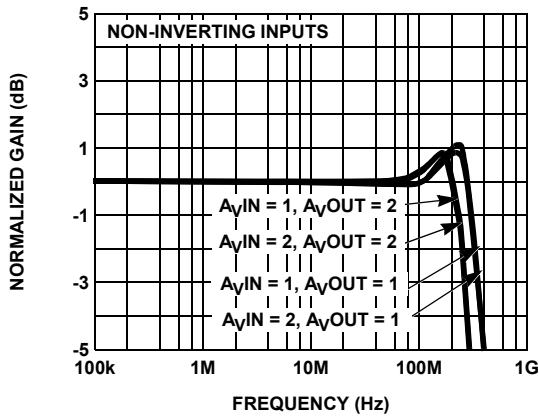


FIGURE 7. GAIN vs FREQUENCY FOR VARIOUS GAINS

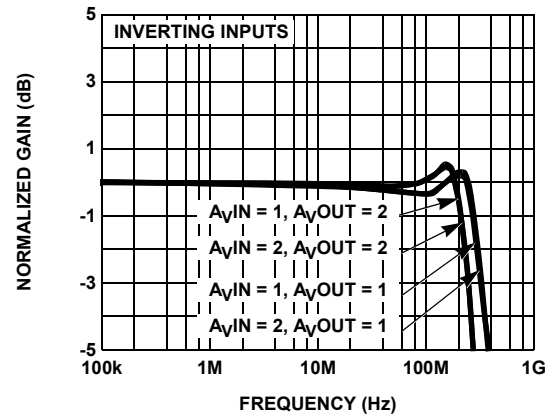


FIGURE 8. GAIN vs FREQUENCY FOR VARIOUS GAINS

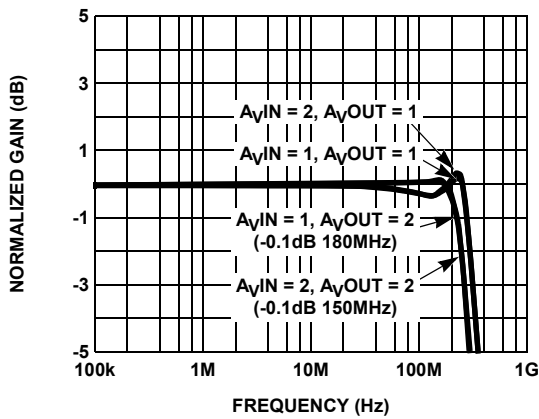


FIGURE 9. GAIN vs FREQUENCY FOR VARIOUS GAIN COMBINATIONS

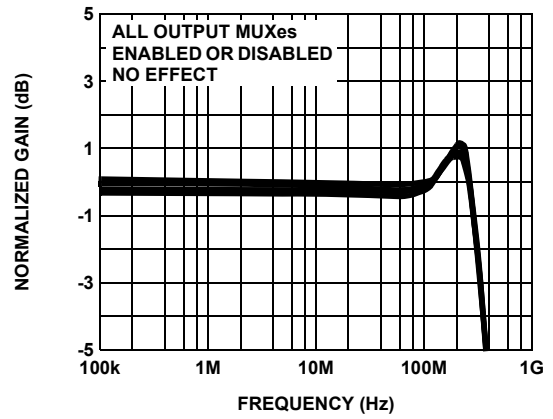


FIGURE 10. GAIN vs FREQUENCY FOR VARIOUS INPUT MUX LOADING

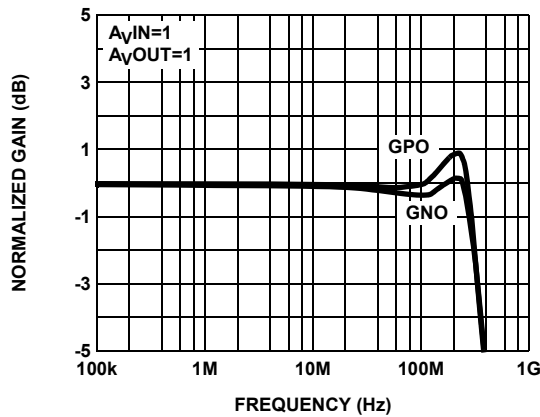


FIGURE 11. GAIN vs FREQUENCY DIFFERENTIAL INPUT COMPARISON

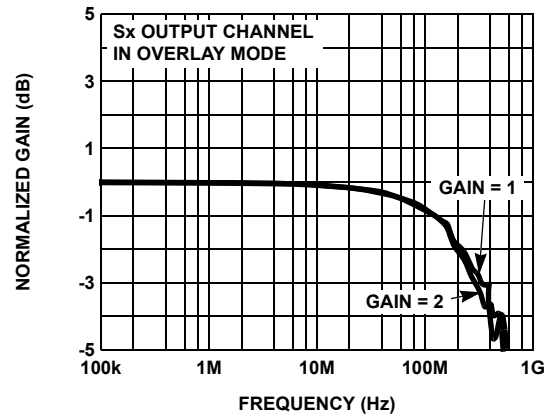


FIGURE 12. GAIN vs FREQUENCY FOR VARIOUS GAINS

Typical Performance Curves (Continued)

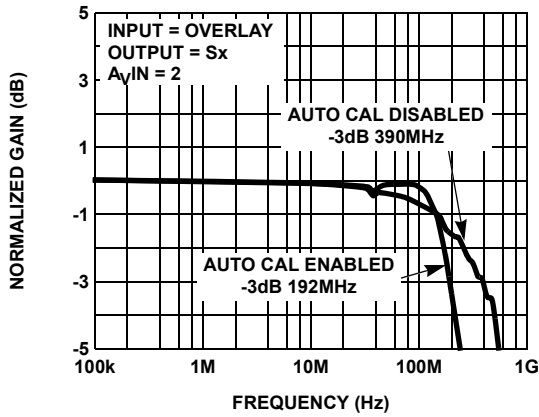


FIGURE 13. GAIN vs FREQUENCY FOR Sx CHANNEL FUNCTIONS

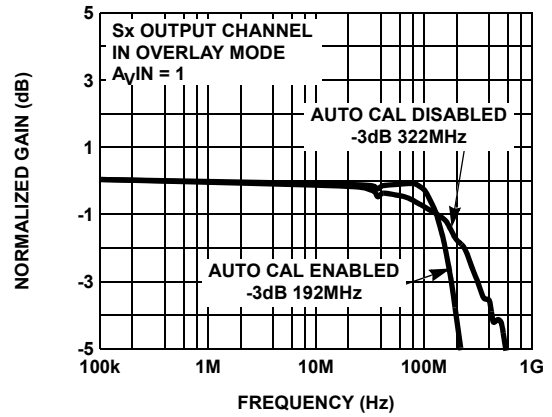


FIGURE 14. GAIN vs FREQUENCY FOR Sx CHANNEL FUNCTIONS

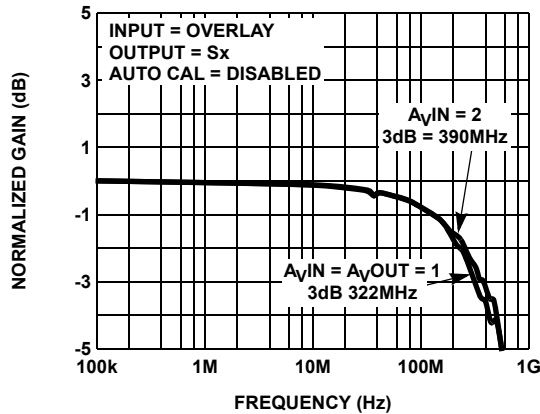


FIGURE 15. GAIN vs FREQUENCY FOR VARIOUS GAINS

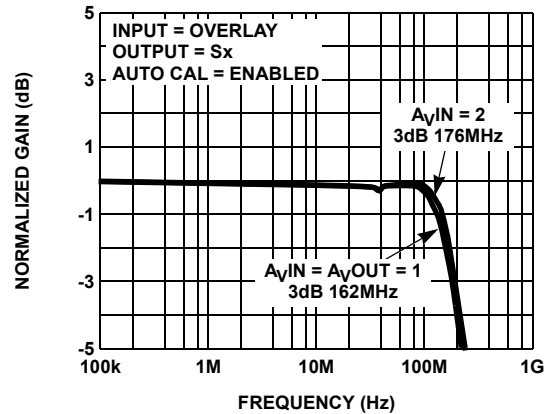


FIGURE 16. GAIN vs FREQUENCY FOR VARIOUS GAINS

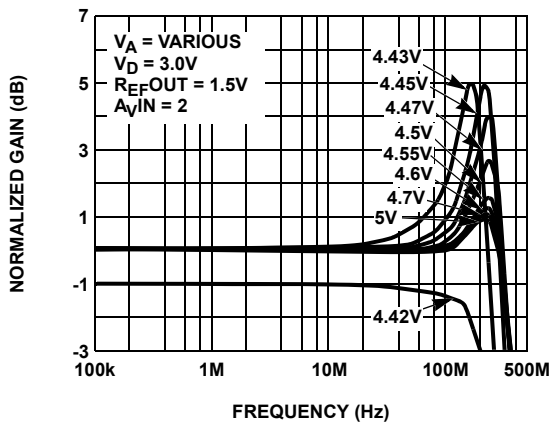


FIGURE 17. PEAKING FOR VARIOUS POWER SUPPLY SETTINGS

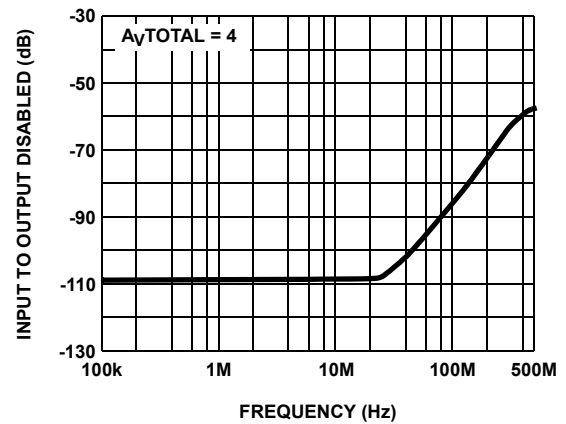


FIGURE 18. INPUT TO OUTPUT ISOLATION (DISABLED)

Typical Performance Curves (Continued)

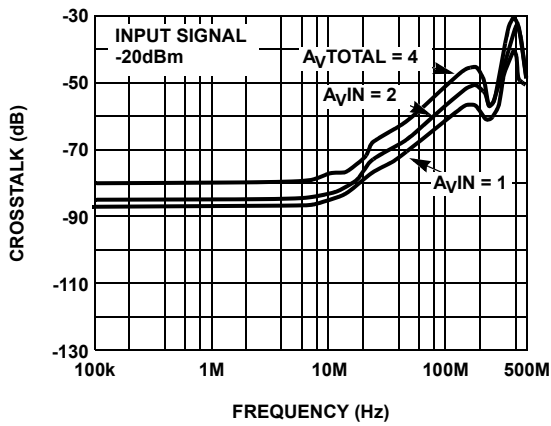


FIGURE 19. CROSSTALK FOR VARIOUS GAINS

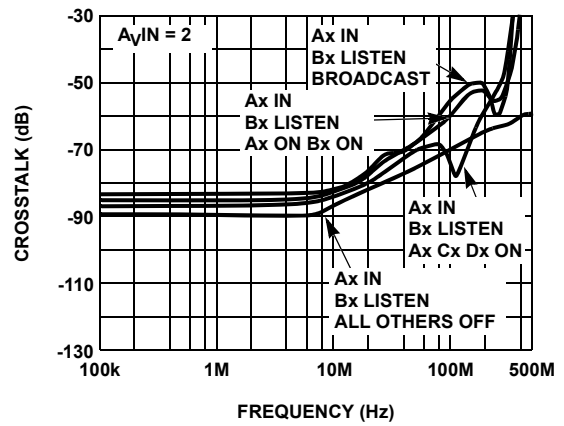


FIGURE 20. CROSSTALK FOR VARIOUS BROADCAST MODES

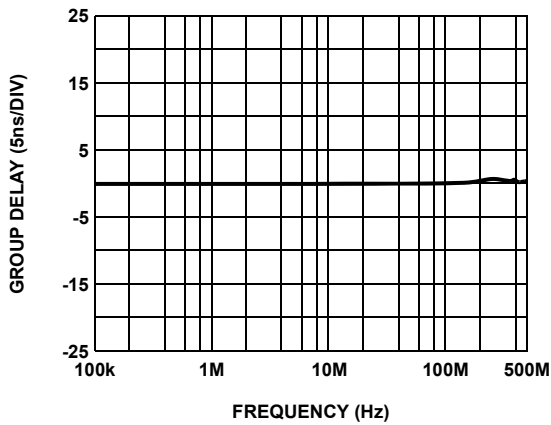


FIGURE 21. GROUP DELAY FOR OUTPUT CHANNELS A, B, C, D, S

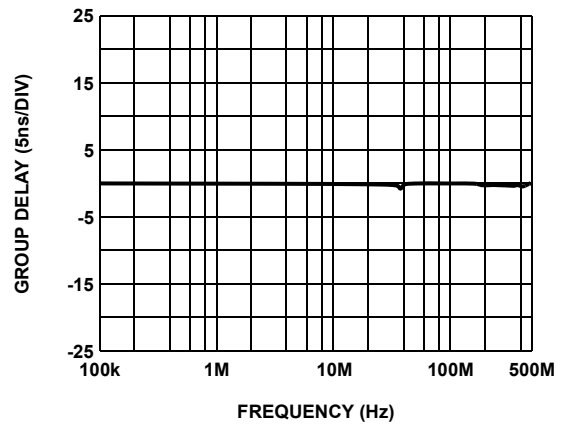


FIGURE 22. GROUP DELAY FOR OVERLAY MODE

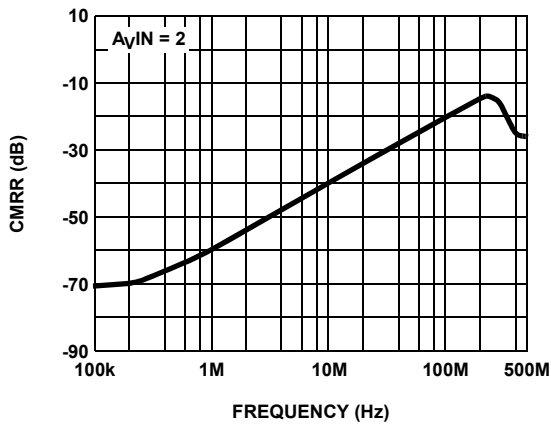


FIGURE 23. CMRR

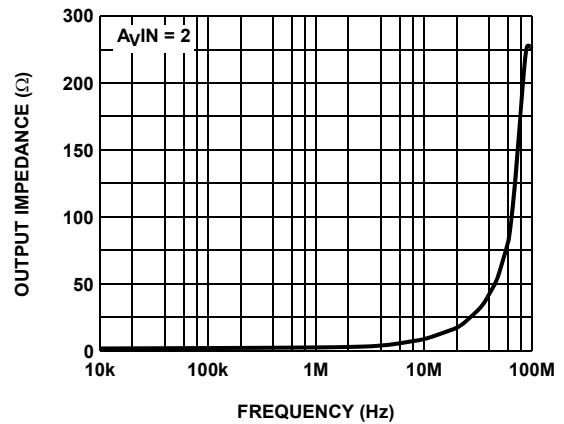


FIGURE 24. OUTPUT IMPEDANCE

Typical Performance Curves (Continued)

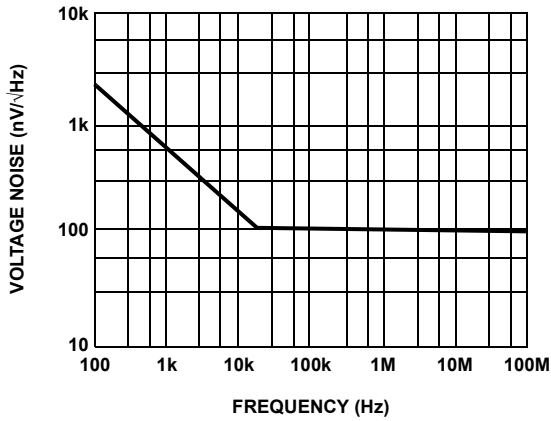


FIGURE 25. VOLTAGE NOISE vs FREQUENCY

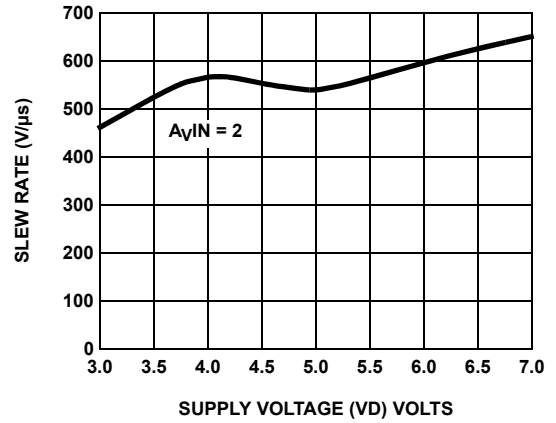


FIGURE 26. SLEW RATE vs SUPPLY (VD)

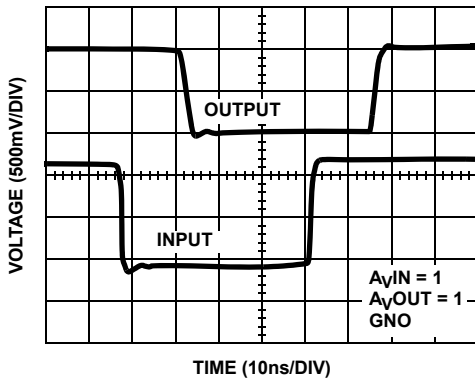


FIGURE 27. SMALL SIGNAL NEGATIVE PULSE RESPONSE

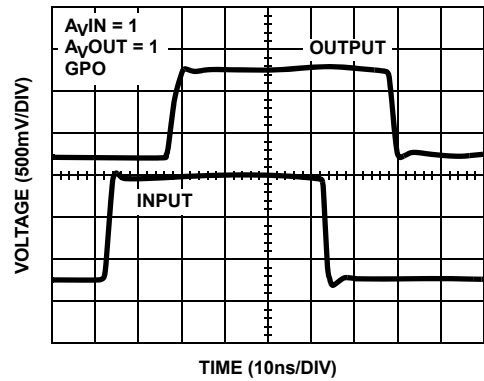


FIGURE 28. SMALL SIGNAL POSITIVE PULSE RESPONSE

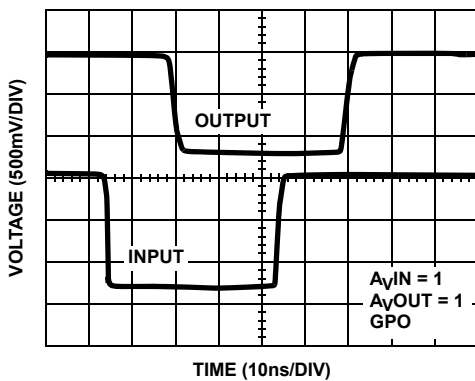


FIGURE 29. LARGE SIGNAL NEGATIVE PULSE RESPONSE

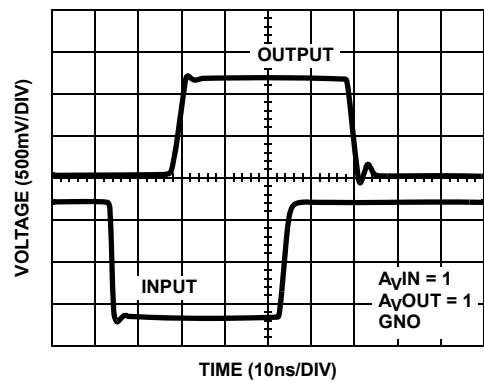


FIGURE 30. LARGE SIGNAL POSITIVE PULSE RESPONSE

Typical Performance Curves (Continued)

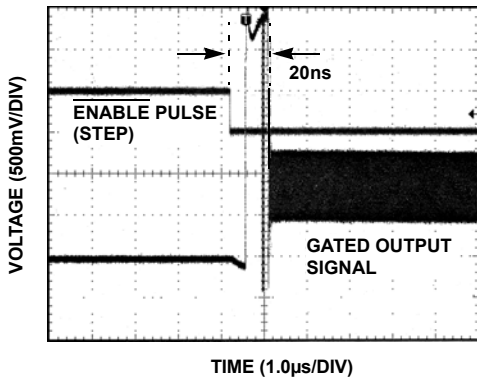


FIGURE 31. ENABLE TIME

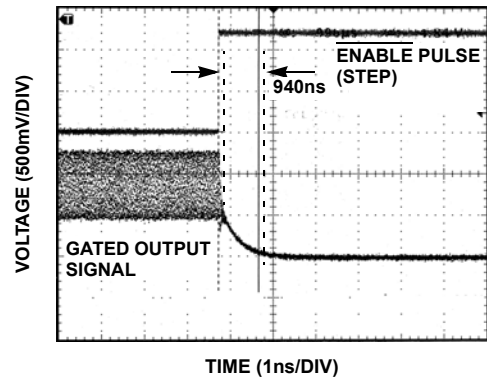


FIGURE 32. DISABLE TIME

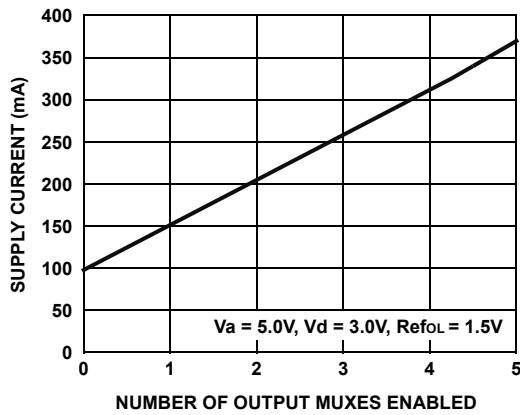


FIGURE 33. POWER SUPPLY CURRENT AS FUNCTION OF OUTPUT MUXES ENABLED - ALL INPUT MUXES DISABLED

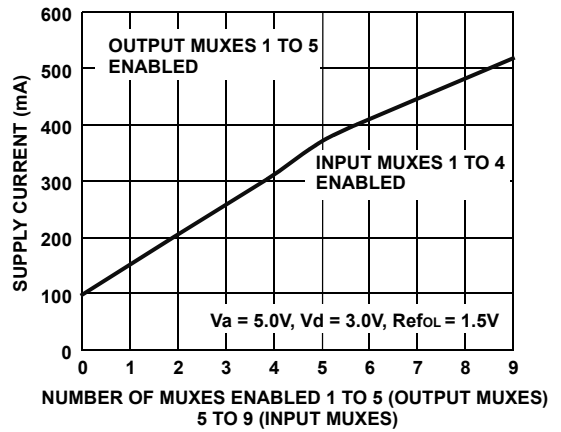


FIGURE 34. POWER SUPPLY CURRENT AS FUNCTION OF INPUT AND OUTPUT MUXES ENABLED

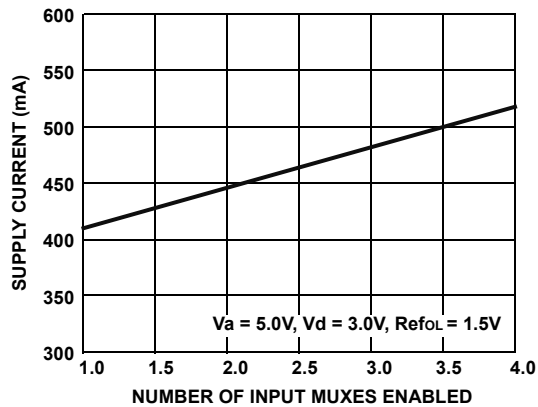


FIGURE 35. POWER SUPPLY CURRENT AS FUNCTION OF INPUT MUXES ENABLED (ALL OUTPUT MUXES ENABLED)

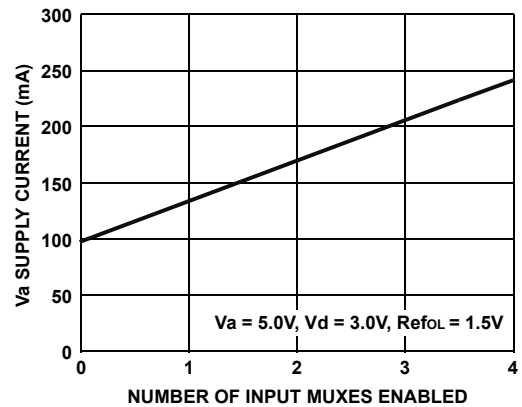


FIGURE 36. POWER SUPPLY CURRENT AS FUNCTION OF INPUT MUXES ENABLED (ALL OUTPUT MUXES DISABLED)

Typical Performance Curves (Continued)

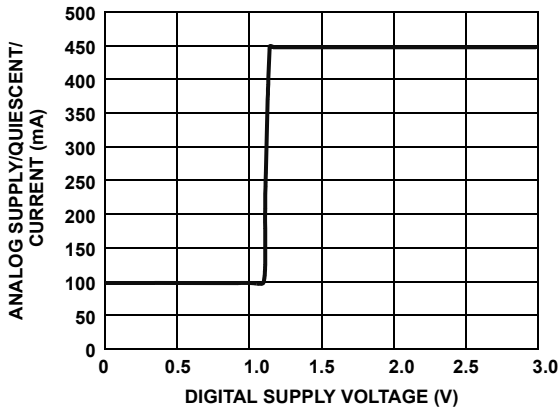


FIGURE 37. ANALOG CURRENT vs DIGITAL SUPPLY VOLTAGE

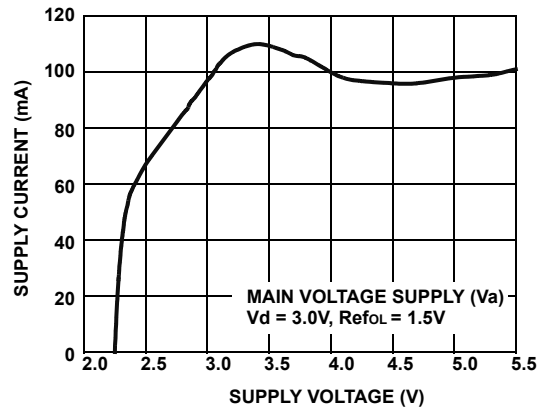


FIGURE 38. SUPPLY CURRENT VERSUS SUPPLY VOLTAGE BASE LINE IDLE (ALL INPUTS AND OUTPUTS DISABLED)

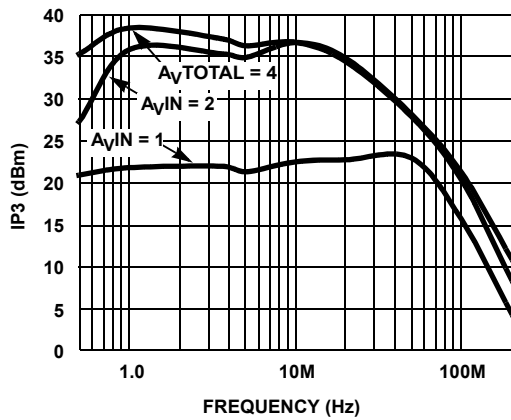


FIGURE 39. THIRD-ORDER INTERCEPT POINT vs FREQUENCY GREEN CHANNEL

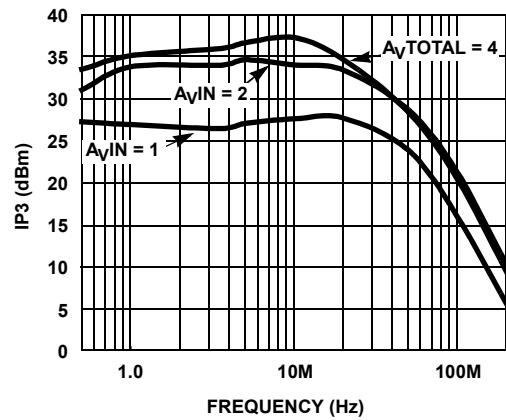


FIGURE 40. THIRD-ORDER INTERCEPT POINT vs FREQUENCY BLUE CHANNEL

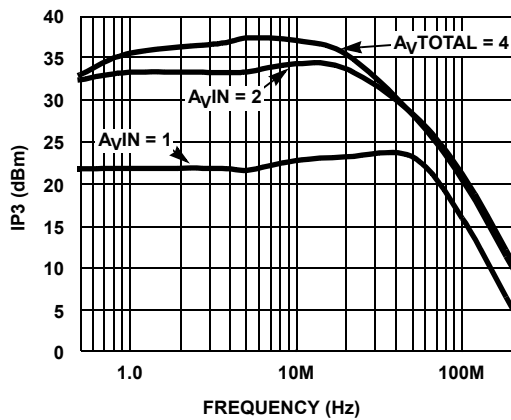


FIGURE 41. THIRD-ORDER INTERCEPT POINT vs FREQUENCY RED CHANNEL

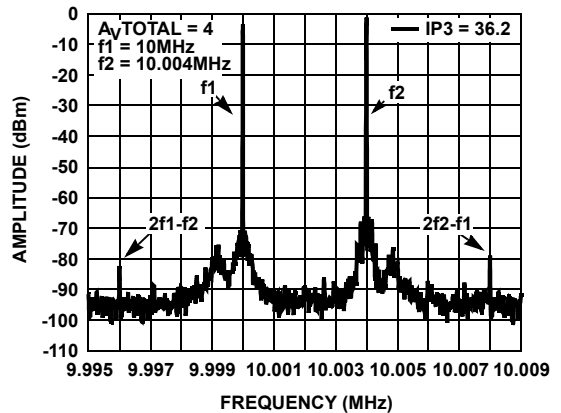


FIGURE 42. IP3 $A_{vTOTAL} = 4$ BLUE CHANNEL

Typical Performance Curves (Continued)

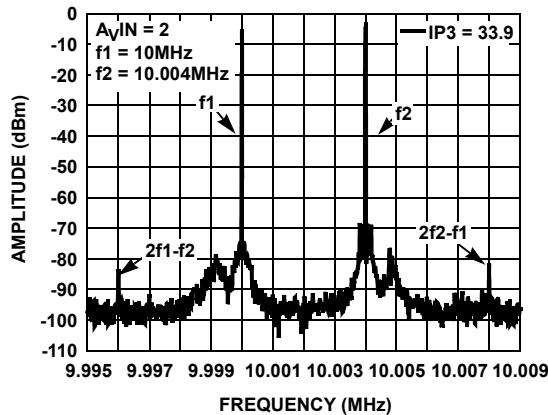


FIGURE 43. IP3 $A_{VIN} = 2$ BLUE CHANNEL

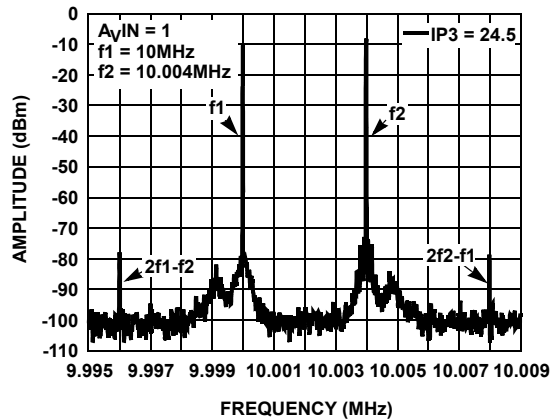


FIGURE 44. IP3 $A_{VIN} = 1$ BLUE CHANNEL

Functional Overview

Overall Functionality

The EL4544 is a video crosspoint switch that has 16 (RGB differential) input channels (with H and V sync embedded in their common-modes) which connect via an internal crosspoint mux to 5 (RGB + HV) single-ended output channels. The 5th output group has enhanced features that include: a pixel-by-pixel overlay mux and auto-calibrated offset cancellation. All analog and digital outputs have a high-impedance state, allowing several EL4544 to share the same output connections.

16 RGB Differential Video Inputs with Encoded Sync

For each of the 16 RGB groups of differential video inputs, horizontal and vertical sync are encoded as a combination of the common modes for each RGB group. Each of these differential input pins has a single-ended signal range that spans the entire 0V to 5V supply range. The embedded sync signals are provided by the EL4543 Triple Differential Twisted Pair Driver IC.

Overall Analog Signal Flow

There are four independent internal input multiplexors represented as **Ai**, **Bi**, **Ci**, and **Di** in the “I/O Block Diagram of Video Signals with Power Supplies and References” on page 12 and the “Serial Bus Interface Control Table” on page 15 (hexa-decimal addresses 0h, 1h, 2h, 3h). These muxes convert the selected RGB differential input signal to single-ended RGB and extract H and V sync. The five output crosspoint multiplexors represented as **Ax**, **Bx**, **Cx**, **Dx**, and **Sx**, can independently select from the four internal (RGBHV) signal groups **Ai**, **Bi**, **Ci**, and **Di** by programming the hexadecimal serial bus addresses 8h, 9h, Ah, Bh, and Ch. There are five RGBHV single-ended output signal groups labelled A, B, C, D, and S which buffer signals from the corresponding crosspoint outputs **Ax**, **Bx**, **Cx**, **Dx**, and **Sx**.

Each of these output groups has an independent reference pin (**RefA**, **RefB**, **RefC**, **RefD**, and **RefS**) that allows the user to program the reference level that corresponds to a zero voltage differential input.

Analog and Digital Video Outputs

All analog outputs (A, B, C, D, and S) have a signal range from 0V to 3.5V and are capable of driving the 150Ω load presented by a terminated video cable. The H and V sync outputs and all other digital I/O are compatible with 3V operation; their signal swings are determined by connecting the digital supply pin **Vdp** to a 3V source.

All the analog video outputs must be terminated with an AC or DC coupled 150Ω load to ground. If power dissipation is an issue and DC coupling is not desired, then placing a 150Ω resistor in series with a 100pF capacitor to ground will provide adequate termination.

How to Configure the Analog Video Outputs to Swing to 0V

The RGB analog outputs of the A, B, C, D, and S output groups are all capable of a range of swing that reaches the negative supply pin **Vm** = 0V. However, since the EL4544 has no internal supply connections, its single-ended outputs run out of bandwidth, slew rate, and linearity below 0.5V. If accurate wide band performance below 0.5V is required, add external pull-down resistors between each analog output and an external -5V supply.

This will keep the output stage biased. Values between 3kΩ to 1kΩ are suggested. The lower the selected resistance, the wider the bandwidth will be at 0V, but lower external resistance will increase overall IC power dissipation significantly since these resistors are loading their respective output stages.

Operating the S Output Group Near Ground

The S output group has one additional consideration to cover configurations where the output signals and the output

reference pin **RefS** are operated below 0.5V. Under these circumstances, each of the three auto-zero monitoring pins **RAZ**, **GAZ**, and **BAZ**, require an external 10kΩ resistor connecting each to an external -5V supply. This keeps the auto-zero circuitry active all the way down to ground.

Switchable Video Output Group Has Overlay Capability and Offset Cancellation

The S group of output signals have an overlay switch that allows single-ended inputs **RoL**, **GoL**, and **BoL**, to be inserted on a pixel-by-pixel basis. The pin **RefoL** allows the user to program the overlay input (reference) level that produces an output voltage equal to the output reference pin **RefS**. The S group of video outputs has an Auto-Calibration mode which can null out offsets through the entire selected signal path from its inputs to its outputs. (It is usually triggered during the front or back porch of video when the input signal is known to be at Black Level).

Transparent vs Opaque Overlays

The overlay input for the S group is directly selected by the Overlay control pin **OvI**. Two types of overlay are possible. The simplest overlay alternates between the dedicated overlay input and the "thru" input (that has been selected by the cross-point multiplexor). The "transparent" overlay mode is different from the standard overlay mode in that it presents the average of the overlay input and the "thru" input signal during overlay. The transparent mode is selected either by driving the Trans pin low or by programming bit D2 in Register D of the Serial Interface to a logical "1".

Serial Interface Control of the Auto-Calibration Feature

Programming bit D0 in Register D of the Serial Interface to a logical "1" activates the "Auto-Calibration" Mode which allows offsets from all inputs to the S group to be nulled-out via a calibration sequence. The programming Bit D1 in Register D of the Serial Interface is called **Toggle**. It allows for two modes of auto-calibration. If Toggle is programmed to a logical "0", Toggle mode is inactive. The auto-calibration cycle must be executed separately for both input groups (the overlay and the through signal groups).

What Happens During an Auto-Calibration Cycle

The auto-calibration (auto-zero) feature only applies to the S group of outputs. An auto-calibration cycle works as follows for either the overlay input or a selected "thru" input from the cross-point: During any time when the input signal is known to be at a "zero-level" ("zero-level" is a differential-zero input signal for any of the 16-RGB differential inputs or when the pin voltages to the overlay inputs **RoL = GoL = BoL** are all equal to **RefoL**), setting the calibration pin **Cal** to a logical "LO" activates the sample phase of auto-calibration and forces the analog outputs to be equal to the reference voltage of pin **RefS**. When pin **Cal** is brought back to a logical "HI", the calibration is held until the next calibration cycle, and the S group will accurately convey the video signal with low offsets. A

small hold-step ($\leq 1\text{mV}$) can be observed whenever the calibration signal is released. Each subsequent activation of the sampling phase refreshes the calibration. If Toggle mode is inactive, the user must individually calibrate both the overlay and non-overlay ("thru") output states by selecting the between them and running calibration separately for both of the input conditions. Changing the input selections by reprogramming the crosspoint to another input path or by changing the overlay mode (transparent/opaque), requires refreshing of this calibration. Ideally, the calibration is refreshed once per line of video. The drift during a line of video is negligible. (On the lab bench, using manual control, a drift rate on the order of 0.2mV/s will be observed.)

Toggle Mode Automatically Supervises the Calibration Cycles

The purpose of Toggle mode is to automatically alternate between calibrating the overlay and calibrating the "thru" paths to the S Output group. The Toggle mode assumes that overlays never exist outside of the video screen (that overlay only occurs during active video). When using the Toggle mode, the overlay function must be inactive during and around sync. When Toggle mode is active and the overlay switch is disabled, the EL4544 will automatically toggle between "thru" and overlay selections for alternate pulsing of the calibrate signal. Thus, every alternate calibrate pulse will override the selected "thru" state of the overlay switch, perform an auto-zero function, and then return the overlay switch back to its original "thru" position. This is true if the programming Bit D1 in Register D (labelled **Toggle**) of the Serial Interface is programmed to a logical "1". Whenever the IC is reset by momentarily pulling the Reset pin "LO", the Toggle mode is initialized such that the first path calibrated is the overlay path. The next calibration cycle will automatically calibrate the "thru" path.

Incorrect Use of the Toggle Mode

If the overlay is selected during auto-calibration with the Toggle mode active, the "thru" path will never be calibrated. Only the overlay gets calibrated in this configuration.

Integrated Die Temperature Probes

Thermal monitoring pins **TMon1** and **TMon2** allow the user to effectively monitor the die temperature by lightly forward biasing internal diodes and measuring their forward voltage drop. Since these diodes will have a $-2\text{mV}/^\circ\text{C}$ tempco, they can be an effective means of evaluating the thermal management of the user's application board and may even be configured to provide a thermally-triggered shutdown. To implement this feature, pull either of these pins below the negative supply with precision current source of $10\mu\text{A}$ to $100\mu\text{A}$. Measure the forward drop at room temperature with the chip disabled. During operation, every $+1^\circ\text{C}$ rise in temperature will produce a 2mV drop in the forward voltage.

Some Tips on the Most Effective Programming of the EL4544

The video inputs present a 1.75k Ω single ended and a 3.5k Ω differential load to an incoming video signal. Since this load is in parallel with the external termination network, it has a consistent effect on the system gain. To maintain this consistency, it is inadvisable to program more than one input stage (**Ai**, **Bi**, **Ci**, or **Di**) to "look" at any given video input (RGB0, RGB1, ..., RGBF) since each activated input stage puts an additional parallel load of 3.5k Ω onto the selected input. When programming the serial interface this is simply expressed as: Avoid programming the same value into the four data registers (for **Ai**, **Bi**, **Ci**, and **Di**) at hex addresses 0H, 1H, 2H, and 3H. They should all have unique values. This is important since if any inputs are selected more than once, their gains will mismatch an input that has only been selected once.

If one wishes to broadcast the same signal to multiple output channels, this can easily be accomplished without violating the advice of the previous paragraph. Select the input that needs to be broadcast using any one of the four input selectors (**Ai**, **Bi**, **Ci**, or **Di**), then have any of up to five of the output stages (**Ax**, **Bx**, **Cx**, **Dx**, **Sx**) point to the input stage that is pointing to the desired input signal. These are selected using hex 8H, 9H, AH, BH, and CH. Now the EL4544 is broadcasting a single video source to multiple outputs without excessively loading down the selected input.

Sync Decoding of EL4544

The EL4544 is designed to receive and decode Horizontal and Vertical Sync signals that have been encoded as

common-mode signals of the Red, Green, and Blue Video inputs. The EL4543 provides this encoding as shown in Table 1.

TABLE 1. SYNC SIGNAL ENCODING

| H | V | COMMON MODE A (RED) | COMMON MODE B (GREEN) | COMMON MODE C (BLUE) |
|------|------|---------------------|-----------------------|----------------------|
| Low | High | 3.0 | 2.0 | 2.5 |
| Low | Low | 2.5 | 3.0 | 2.0 |
| High | Low | 2.0 | 3.0 | 2.5 |
| High | High | 2.5 | 2.0 | 3.0 |

The EL4544 decodes the common-mode signals into H and V syncs as follows: Horizontal Sync is TRUE when the Blue_Common_Mode voltage is greater than the Average_of_Red_and_Green_Common_Mode voltage. Vertical Sync is TRUE when the Average_of_Red_and_Blue_Common_Mode voltage is greater than the Green_Common_Mode voltage. The sync comparators have an internal symmetrical hysteresis that is less than ± 50 mV. Timing skews between comparators under all conditions are less than one pixel. The comparators have an input common mode that allows for operation at least 1V from the negative supplies and at least 1.5V from the positive supplies.

Logic Levels for Serial Interface and Control Logic

TABLE 2. INPUT LOGIC THRESHOLD (+5V SUPPLY)

| | |
|----------------|------|
| V_{LO} , max | 0.8V |
| V_{HI} , min | 2V |

© Copyright Intersil Americas LLC 2005-2007. All Rights Reserved.

All trademarks and registered trademarks are the property of their respective owners.

For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.




For information regarding Intersil Corporation and its products, see www.intersil.com

Package Outline Drawing


V356.27x27B

356 BALL PLASTIC BALL GRID ARRAY PACKAGE (PBGA)

Rev 2, 10/10

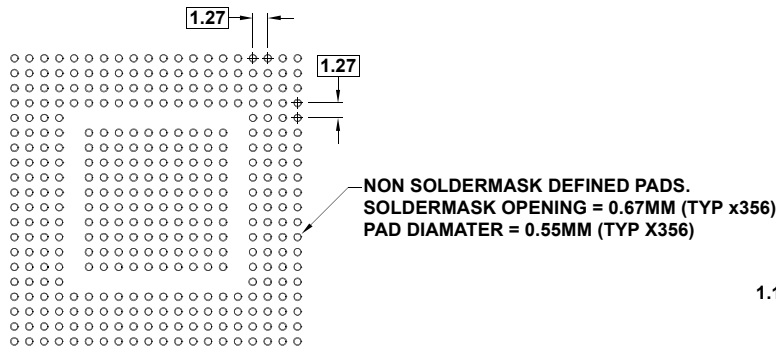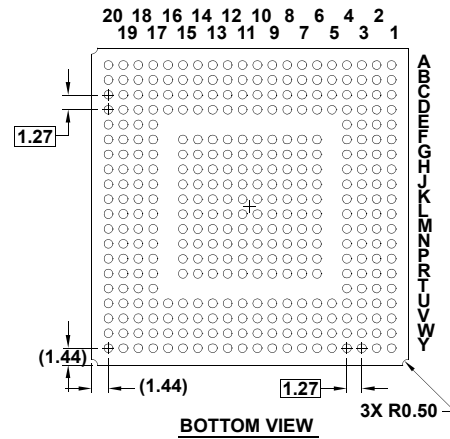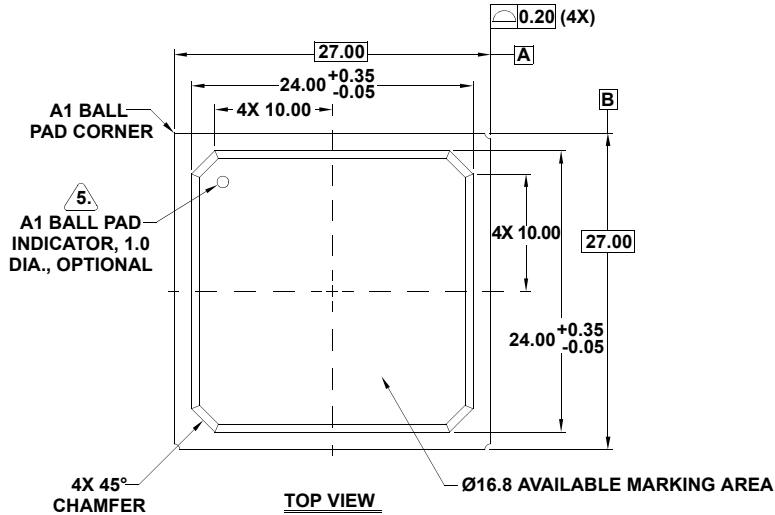

TYPICAL RECOMMENDED LAND PATTERN

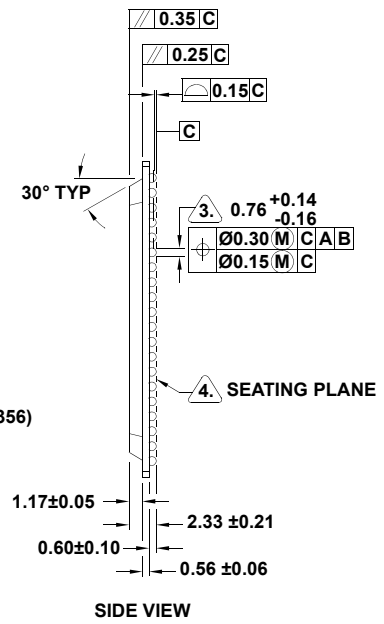

SIDE VIEW

NOTES:

1. All dimensions and tolerances conform to ASME Y14.5M-1994.
2. Dimensions are in millimeters.
3. Dimension is measured at the maximum solder ball diameter, parallel to primary datum C.
4. Primary datum C and seating plane are defined by the spherical crowns of the solder balls.
5. A1 ball pad corner I.D. for plate mold: To be marked by ink. Auto mold: Dimple to be formed by mold cap.
6. Reference specifications: This drawing conforms to JEDEC registered outline MS-034/A variation BAL-2.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.