

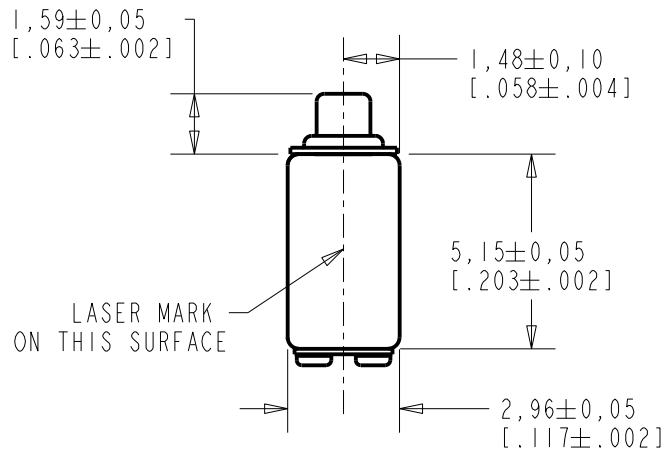


RAB-32057-000

SHT 1.1

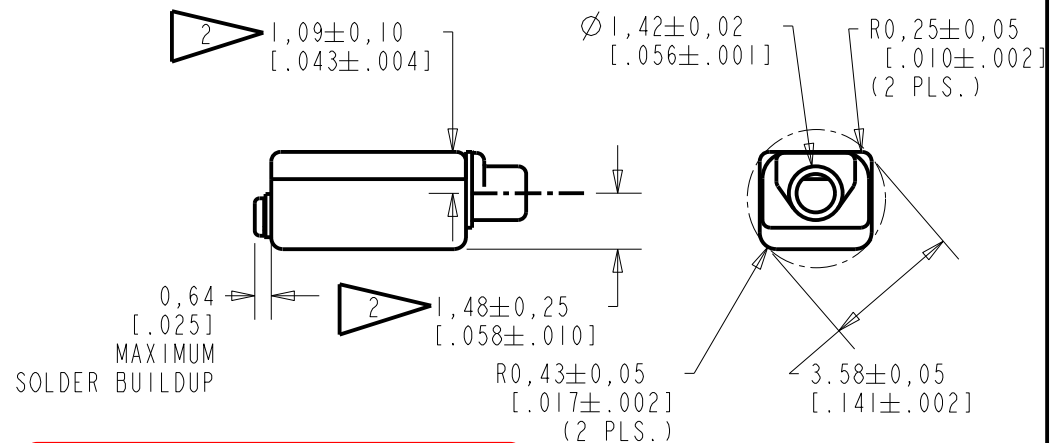

- NOTE:
- 1 A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL 1, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.
 - 2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER.
 - 3 DIMENSION TO APPROXIMATE CENTER OF TERMINAL PAD.

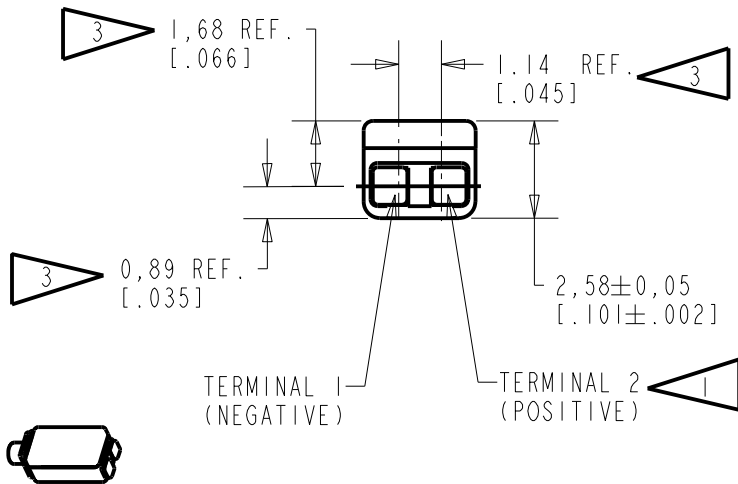

SCALE 2:1


NOMINAL WEIGHT .16 GRAMS DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

RED CONTROLLED

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
B	CI0116714	3-26-15	Active	B
A	CI0115003	8-8-13		

SCALE: 5:1	DR. BY: JL	DATE: 9-23-14
DO NOT SCALE DRAWING	CK. BY: GJP	DATE: 9-24-14
TITLE: RECEIVER	APP. BY: GJP	DATE: 9-24-14
OUTLINE DRAWING	RAB-32057-000 SHT 1.1	

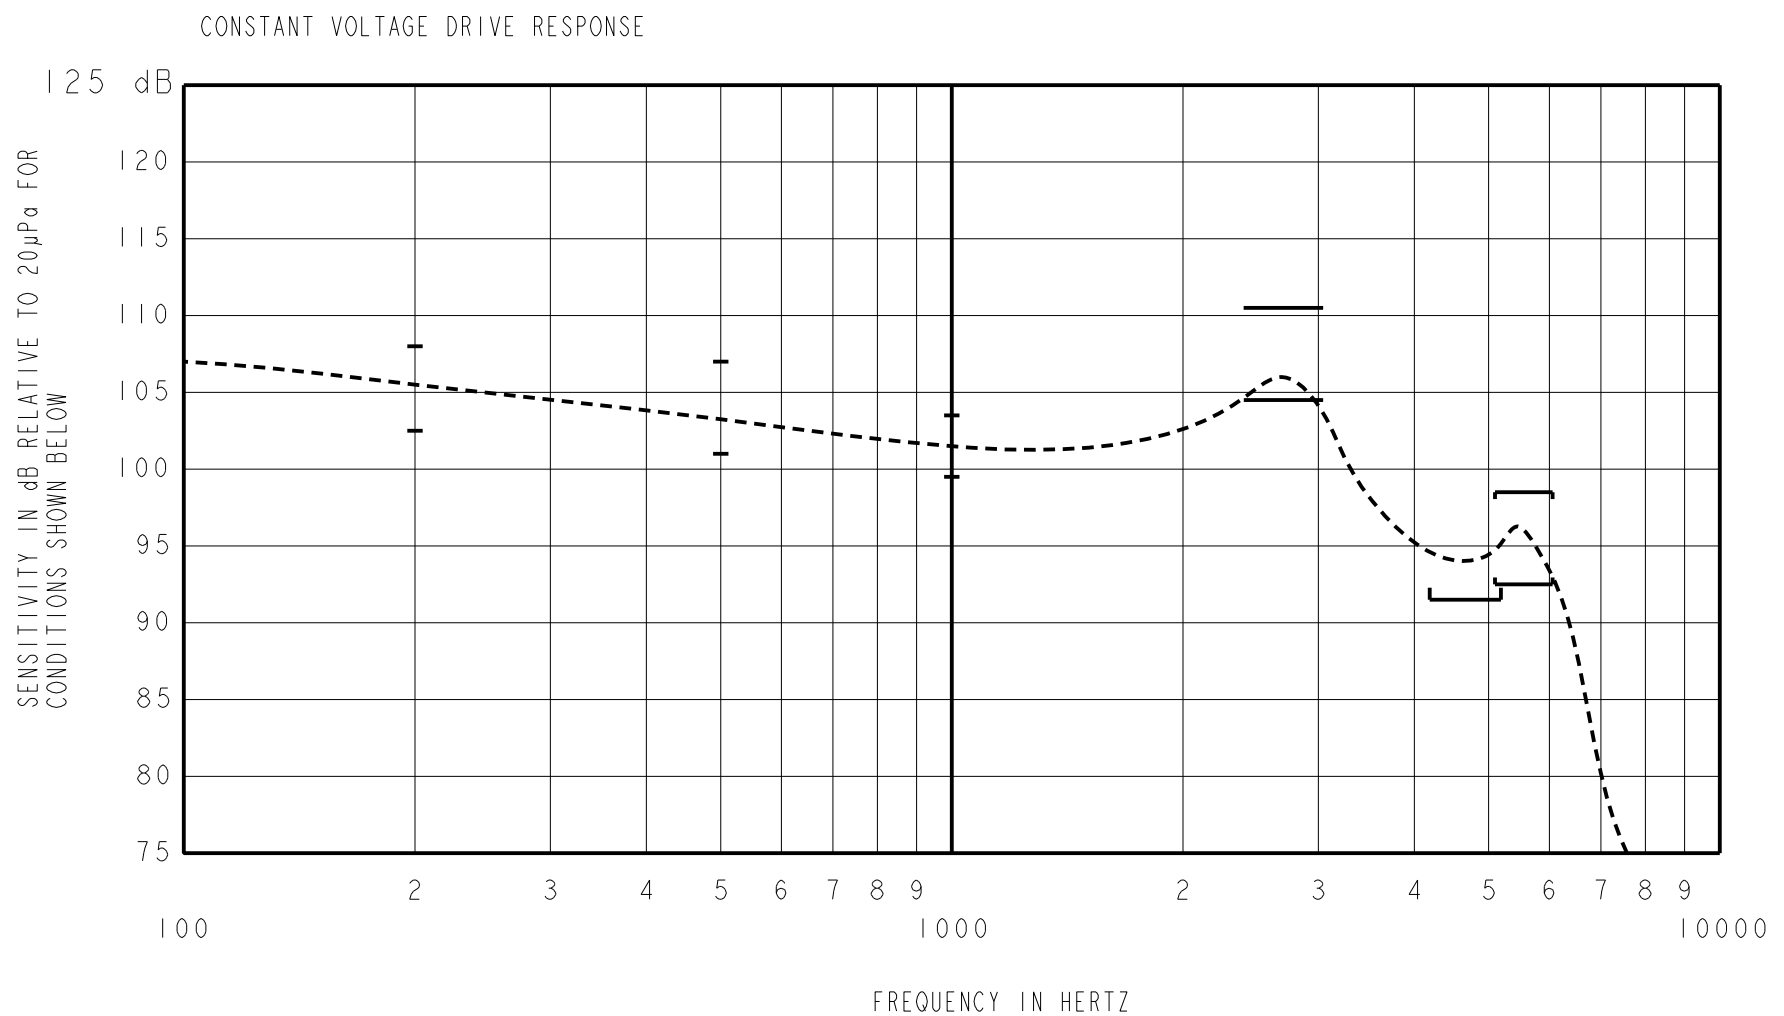

ACOUSTICAL

SENSITIVITY
DEVICE WILL PRODUCE THE SPL LISTED BELOW WITH THE TEST
CONDITIONS DESCRIBED IN TABLE 3. NOMINAL SENSITIVITY
AT 1 kHz IS dB RELATIVE TO 20µPa. ALL OTHER VALUES IN
dB RELATIVE TO THE SENSITIVITY AT 1 kHz.

LIMIT TYPE	FREQUENCY (Hz)	MINIMUM	NOMINAL	MAXIMUM
REL	200	+1.0	+4.0	+7.0
REL	500	-0.5	+2.0	+5.5
REF	1000	-2.0	101.5	+2.0
PEAK 1	2450-3050	+3.0	+4.5	+9.0
VALLEY	4200-5200	-10.0	---	---
PEAK 2	5100-6100	-8.0	-5.0	-2.0

TABLE 1.

TOTAL HARMONIC DISTORTION
DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS
LISTED BELOW.

FREQUENCY (Hz)	DRIVE (Vrms)	LIMIT (%)
1/3 PEAK1 (TYP. 917)	0.180	3
1/2 PEAK1 (TYP. 1375)	0.180	3
1/3 PEAK1 (TYP. 917)	0.507	8
1/2 PEAK1 (TYP. 1375)	0.507	8

TABLE 2.

TEST CONDITIONS

NOMINAL SOURCE VOLTAGE	0.180 Vrms
SOURCE IMPEDANCE	< 1 Ω
TUBING	10 mm (.394) LONG, 1 mm (.039) ID.
COUPLER CAVITY	2 CC SIMULATED ANSI S3.7 TYPE HA-3, (IEC 60318-5)

TABLE 3.

ELECTRICAL

DC RESISTANCE	65 Ω ±10%
IMPEDANCE @ 500 Hz	90 Ω ±15%
IMPEDANCE @ 1 kHz	140 Ω ±15%
INDUCTANCE @ 500 Hz	19.8 mH TYPICAL

TABLE 4.

ISOLATION: THE CASE WILL BE ELECTRICALLY ISOLATED
FROM THE COIL CIRCUIT

MECHANICAL

PORT LOCATION: 12S

SOLDER TYPE: ROHS COMPLIANT
SAC305

TEMPERATURE

OPERATING: SENSITIVITY WILL NOT VARY MORE THAN
+1/-3 dB FROM 0°C TO 63°C

STORAGE: -40°C TO 63°C






RED CONTROLLED


KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
B	C10116714	3-26-15	Active	B
A	C10115003	8-8-13		
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE
TITLE: RECEIVER PERFORMANCE SPECIFICATION			JL	9-23-14
			RAB-32057-000 SHT 2.1	
			CK. BY	DATE
			GJP	9-24-14
			APP. BY	DATE
			GJP	9-24-14

RAB-32057-000

PROPRIETARY NOTE: THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF KNOWLES ELECTRONICS, LLC. OR ITS AFFILIATED ENTITIES. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, USED, OR DISCLOSED TO ANY THIRD PARTY PARTIALLY OR WHOLLY IN ANY MANNER WITHOUT PRIOR WRITTEN PERMISSION OF, AND MUST BE RETURNED UPON REQUEST BY, KNOWLES ELECTRONICS, LLC.

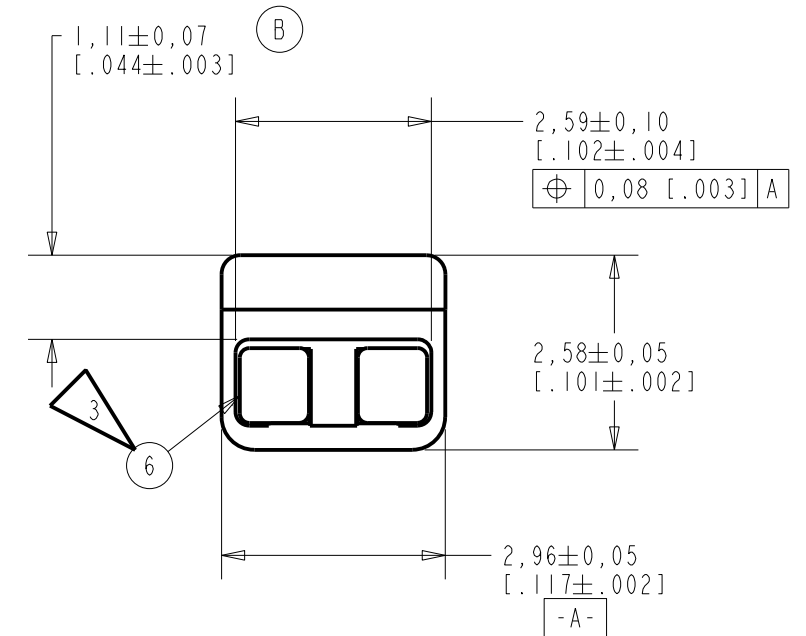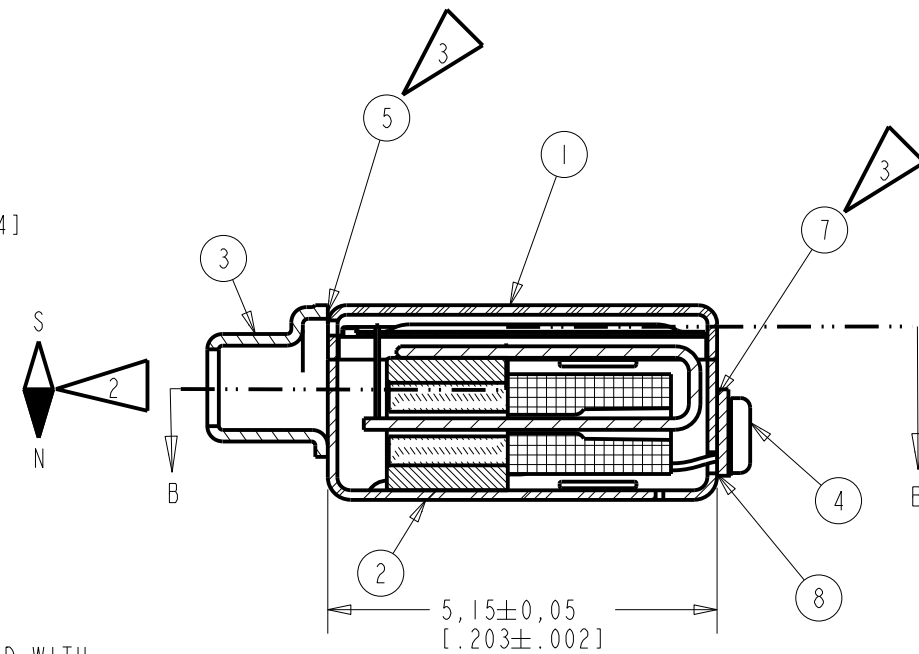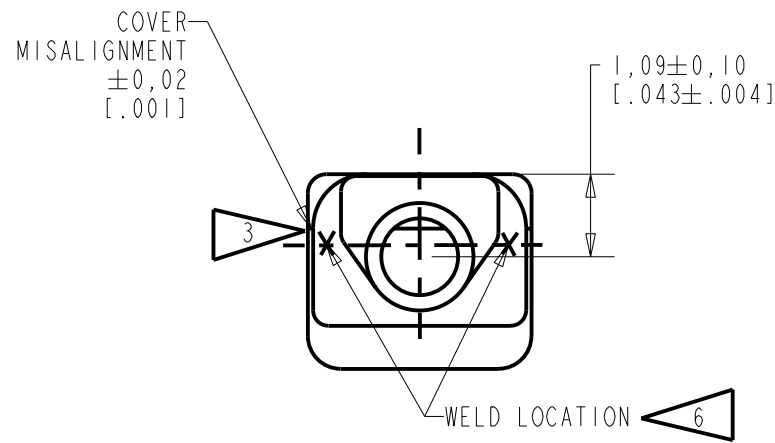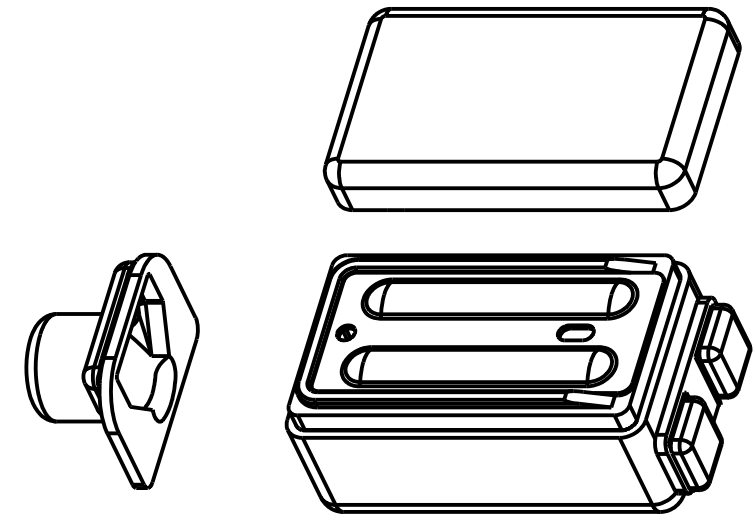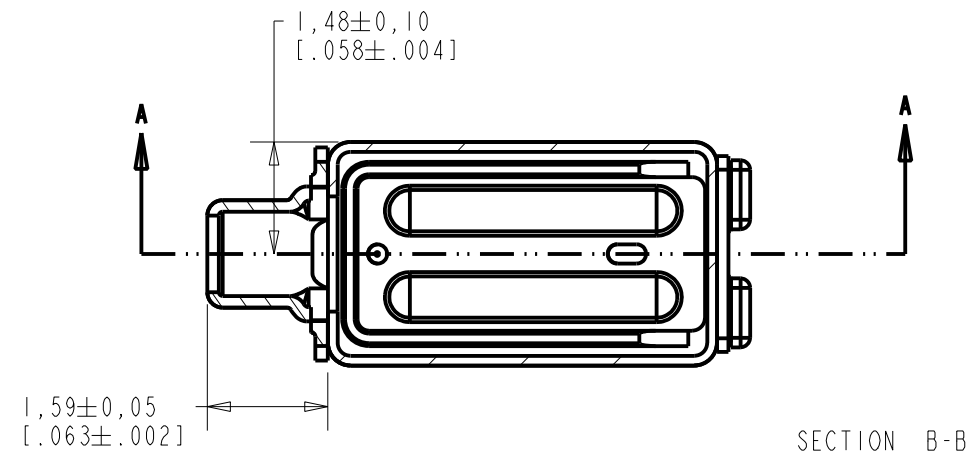

- NOTES:
- ITEMS NUMBERS (SHOWN THUS ) ON DRAWING CORRESPOND WITH ITEM NUMBERS ON BILL OF MATERIAL.
 - ORIENTATION OF COMPASS NEEDLE IN THE MAGNETIZING FIELD.
 - AIRTIGHT SEAL ALL AROUND.
 - UNITS SHALL BE FREE OF VISUAL DEFECTS SUCH AS SCRATCHES, ABRASION, SLUG MARKS, OIL, DIRT, OTHER CONTAMINATIONS, ETC., NOTICABLE WITH THE UNAIDED EYE.
 - NO CEMENT ON SOLDER PADS.
 - MIN. TUBE WELD STRENGTH OF 4.9N WITH FORCE APPLIED IN DIRECTION SHOWN.
 - NO THRU HOLES OR WELD FLASH AT COVER WELD.

RED CONTROLLED

SECTION A-A

DIMENSIONS IN MILLIMETERS [INCHES]

MATERIAL		SEE BILL OF MATERIAL		FINISH		---		RELEASE LEVEL	REVISION
								Active	B
								SCALE: 10:1	DO NOT SCALE DRAWING
REF.	XD-xxxx	A	C10116251	B	C10116714	<p style="text-align: center;">KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.</p>			
	c.o.								
UPDATE A DIMENSION.		4-21-15		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		THIRD ANGLE PROJECTION		<p>DR. BY DATE</p> <p>JL 9-23-14</p> <p>CH. BY DATE</p> <p>GJP 9-24-14</p> <p>APP. BY DATE</p> <p>GJP 9-24-14</p>	
TITLE		RECEIVER ASSEMBLY		RAB-32057-000		SHEET 3.1			

RAB-32057-000			KNOWLES ELECTRONICS		RAB-32057-000	
Sheet 4.1			ITASCA, ILLINOIS U.S.A.		Sheet 4.1	
Dr.	By	Date	Subject:	RECEIVER ASSEMBLY	Revision	B
Ch.	GJP	9-23-14				
App.	GJP	9-24-14				
					Release Level	
					Active	

COL. 1	2	3	4	Item No.	Line No.
Part or Dwg. no.	Tot. Req.	Nomenclature:	Applicable Specs or Remarks		
RAB-1006	1	DIAPHRAGM & COVER ASSEMBLY		1	1
RAB-1030-004	1	MOTOR & CUP ASSEMBLY		2	2
FC-006	1	TUBE		3	3
285-007-001	A/R	SOLDER		4	4
13-825-3145	A/R	CEMENT		5	5
13-825-3153	A/R	CEMENT		6	6
13-825-3160	A/R	CEMENT		7	7
113-113	1	TAB		8	8

RED CONTROLLED

REVISION	A	c.o. C10116251
	B	c.o. C10116714
RAB-1030-004 WAS RAB-1004-004; 113-113 WAS 113-083. JL 4-21-15		

RAB-32057-000
Sheet 4.1

PROPRIETARY NOTE: THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF KNOWLES ELECTRONICS, LLC. OR ITS AFFILIATED ENTITIES. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, USED, OR DISCLOSED TO ANY THIRD PARTY PARTIALLY OR WHOLLY IN ANY MANNER WITHOUT PRIOR WRITTEN PERMISSION OF, AND MUST BE RETURNED UPON REQUEST BY, KNOWLES ELECTRONICS, LLC.

REV: D

PRODUCTION TEST INFORMATION

SOFTWARE REVISION PXI FCAAT	SOFTWARE 2.60 MIN.
HARDWARE REVISION PXI FCAAT	KE 1065E.006 MIN.
FCAAT COUPLER	T8049
FCAAT TEST BOARD	T10736

PHASE

FREQUENCY (Hz)	AC DRIVE (Vrms)	DEGREE LIMIT	
		MIN.	MAX.
500	0.180	0	90

BUZZ

FREQUENCY (Hz)	AC DRIVE (Vrms)	DC BIAS (DC mA)	FREQUENCY RANGE (Hz)	HIGH LIMIT (dB SPL)
200	0.507	0	3550-6750	63

RED CONTROLLED

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
B	C10116714	3-26-15	Active	B
A	C10115003	8-8-13		

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: **RECEIVER**
PERFORMANCE SPECIFICATION

RAB-32057-000
SHT 5.1

DR. BY	DATE
JL	9-23-14
CK. BY	DATE
GJP	9-24-14
APP. BY	DATE
GJP	9-24-14



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.