

F

F

E

E

D

D

C

C

B

B

A

A

10

9

8

7

6

5



4

3

2

1

FINISHED LENGTH (SEE TABLE)

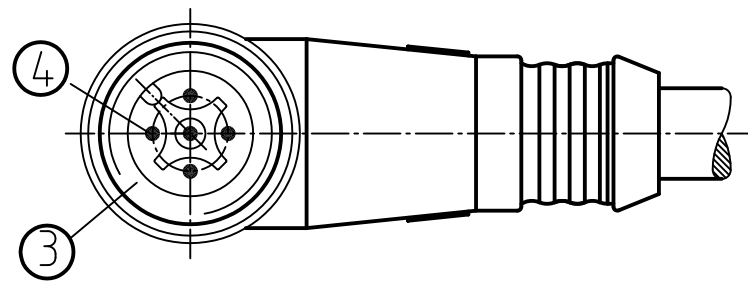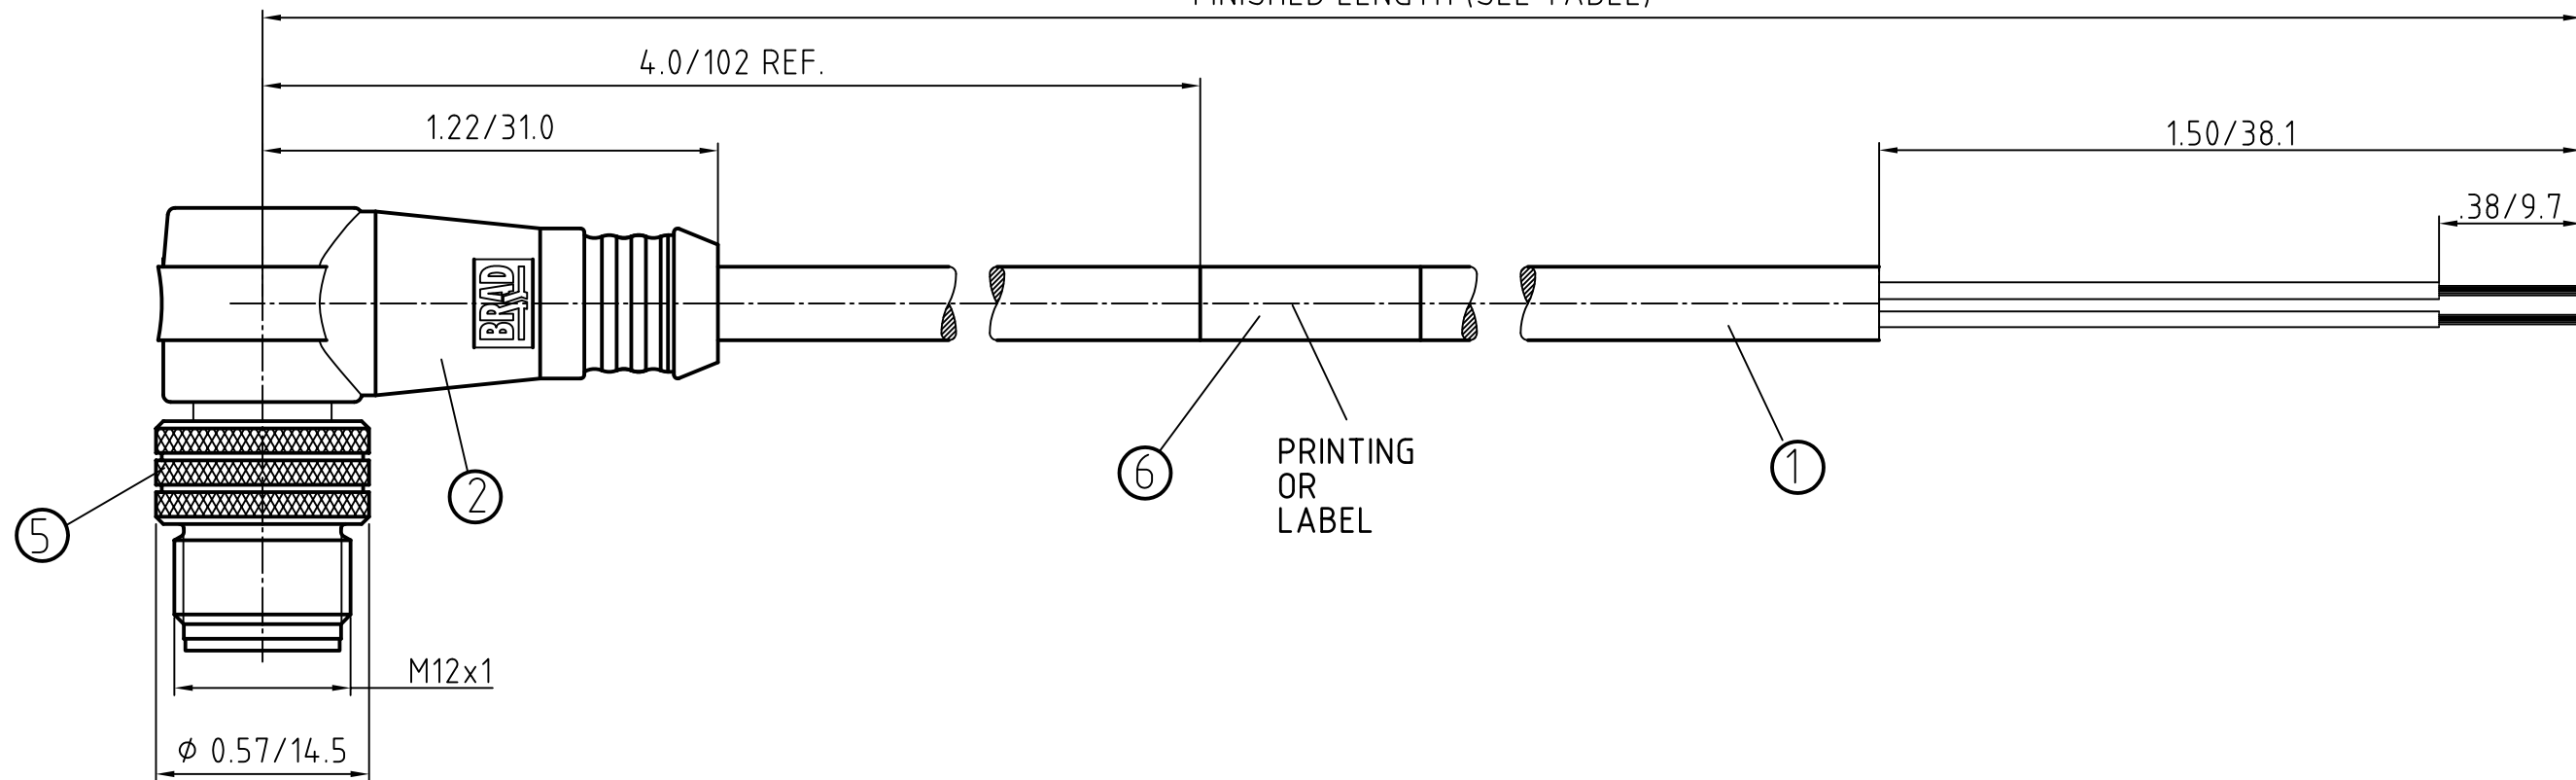

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837




ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW

MALE FACE VIEW

3-POLE


4-POLE

5-POLE



WIRING DIAGRAM

1 BROWN
3 BLUE
4 BLACK1 BROWN
2 WHITE
3 BLUE
4 BLACK1 BROWN
2 WHITE
3 BLUE
4 BLACK
5 GREY

DESCRIPTION EC NO: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26		QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION				
			 = 0  = 0		mm	INCH	DRAWN BY _____ DATE _____		MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE					
				4 PLACES	±---	±---	CHECKED BY _____ DATE _____							
				3 PLACES	±---	±---	RE _____ 2010/01/21							
				2 PLACES	±---	±.01	APPROVED BY _____ DATE _____							
1		REV	1 PLACE	±0.3	±---	NSTAUDIG 2010/01/25			MOLEX INCORPORATED					
			ANGULAR ± --- °			MATERIAL NO.					DOCUMENT NO.	SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE SHEET 2					SD-120065-037		1 OF 1	
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10

9

8

7

6

5

4

3

2

1

	10	9	8	7	6	5	4	3	2	1																																																																										
F	<table><tr><th>POL</th><th>MATERIAL NUMBER</th><th>ENGINEERING NUMBER</th><th>FINISHED LENGTH</th></tr><tr><td>3</td><td>1200651501</td><td>803007K05M020</td><td>6.56' +3.5" -0 [2.0M +89 -0]</td></tr></table> <table><tr><th>POL</th><th>MATERIAL NUMBER</th><th>ENGINEERING NUMBER</th><th>FINISHED LENGTH</th></tr><tr><td>4</td><td>1200651691</td><td>804007K05M020</td><td>6.56' +3.5" -0 [2.0M +89 -0]</td></tr><tr><td>4</td><td>1200651692</td><td>804007K05M040</td><td>13.12' +6.5" -0 [4.0M +165 -0]</td></tr><tr><td>4</td><td>1200651693</td><td>804007K05M050</td><td>16.40' +6.5" -0 [5.0M +165 -0]</td></tr><tr><td>4</td><td>1200651694</td><td>804007K05M060</td><td>19.69' +6.5" -0 [6.0M +165 -0]</td></tr><tr><td>4</td><td>1200651695</td><td>804007K05M100</td><td>32.81' +12.5" -0 [10.0M +318 -0]</td></tr></table>										POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	3	1200651501	803007K05M020	6.56' +3.5" -0 [2.0M +89 -0]	POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	4	1200651691	804007K05M020	6.56' +3.5" -0 [2.0M +89 -0]	4	1200651692	804007K05M040	13.12' +6.5" -0 [4.0M +165 -0]	4	1200651693	804007K05M050	16.40' +6.5" -0 [5.0M +165 -0]	4	1200651694	804007K05M060	19.69' +6.5" -0 [6.0M +165 -0]	4	1200651695	804007K05M100	32.81' +12.5" -0 [10.0M +318 -0]	F																																									
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH																																																																																	
3	1200651501	803007K05M020	6.56' +3.5" -0 [2.0M +89 -0]																																																																																	
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH																																																																																	
4	1200651691	804007K05M020	6.56' +3.5" -0 [2.0M +89 -0]																																																																																	
4	1200651692	804007K05M040	13.12' +6.5" -0 [4.0M +165 -0]																																																																																	
4	1200651693	804007K05M050	16.40' +6.5" -0 [5.0M +165 -0]																																																																																	
4	1200651694	804007K05M060	19.69' +6.5" -0 [6.0M +165 -0]																																																																																	
4	1200651695	804007K05M100	32.81' +12.5" -0 [10.0M +318 -0]																																																																																	
E											E																																																																									
D											D																																																																									
C											C																																																																									
B											B																																																																									
A	<table><tr><td rowspan="10">DESCRIPTION EC NO.: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26</td><td>QUALITY SYMBOLS</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE IN/MM</td><td>SCALE 2:1</td><td>DESIGN UNITS METRIC</td><td colspan="2">THIRD ANGLE PROJECTION</td></tr><tr><td rowspan="5"> = 0 = 0</td><td></td><td>mm</td><td>INCH</td><td>DRAWN BY</td><td>DATE</td><td colspan="4" rowspan="3">MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE</td></tr><tr><td>4 PLACES</td><td>±---</td><td>±---</td><td>----</td><td>----</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±---</td><td>CHECKED BY</td><td>DATE</td></tr><tr><td>2 PLACES</td><td>±---</td><td>±.01</td><td>RE</td><td>2010/01/21</td><td colspan="4" rowspan="2">MOLEX INCORPORATED</td></tr><tr><td>1 PLACE</td><td>±0.3</td><td>±---</td><td>APPROVED BY</td><td>DATE</td></tr><tr><td colspan="3">ANGULAR ± --- °</td><td>NSTAUDIG</td><td>2010/01/25</td><td colspan="4" rowspan="2">MATERIAL NO. SD-120065-037 SHEET NO. 1 OF 1</td></tr><tr><td colspan="3">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">SEE TABLE</td><td colspan="4">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td>1</td><td>REV</td><td colspan="9"></td></tr></table>										DESCRIPTION EC NO.: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		= 0 = 0		mm	INCH	DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE				4 PLACES	±---	±---	----	----	3 PLACES	±---	±---	CHECKED BY	DATE	2 PLACES	±---	±.01	RE	2010/01/21	MOLEX INCORPORATED				1 PLACE	±0.3	±---	APPROVED BY	DATE	ANGULAR ± --- °			NSTAUDIG	2010/01/25	MATERIAL NO. SD-120065-037 SHEET NO. 1 OF 1				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1	REV										A
DESCRIPTION EC NO.: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																																																												
	= 0 = 0		mm	INCH	DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE																																																																													
		4 PLACES	±---	±---	----	----																																																																														
		3 PLACES	±---	±---	CHECKED BY	DATE																																																																														
		2 PLACES	±---	±.01	RE	2010/01/21	MOLEX INCORPORATED																																																																													
		1 PLACE	±0.3	±---	APPROVED BY	DATE																																																																														
	ANGULAR ± --- °			NSTAUDIG	2010/01/25	MATERIAL NO. SD-120065-037 SHEET NO. 1 OF 1																																																																														
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																										
	1	REV																																																																																		
		10	9	8	7	6	5	4	3	2	1																																																																									



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.