

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECR-18-002882	21FEB2018	IT	SH

⚠ MATERIAL:
CAGE ASSEMBLY:
0.25mm THICK NICKEL SILVER ALLOY
EMI SPRINGS: COPPER ALLOY
HEAT SINK: ALUMINUM
HEAT SINK CLIP: STAINLESS STEEL.

⚠ 2 FINISH:
HEAT SINK: ELECTROLESS NICKEL
HEAT SINK CLIP: PASSIVATE.
EMI SPRINGS: 0.8µm MIN MATTE TIN OVER
0.8µm MIN NICKEL, NON-PLATED EDGES PERMISSIBLE.

⚠ 3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

⚠ 5 PADS AND VIAS CHASSIS GROUND.

5. MATES WITH SFP MSA COMPLIANT RECIEVERS.

6. INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OR ASME Y14.5M-1994.

⚠ 7 MINIMUM PC BOARD THICKNESS:
SINGLE SIDED: 1.5mm
DOUBLE SIDED: 2.25mm

⚠ 8 HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm.

⚠ 9 REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.


⚠ 10 REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.

11. CERTAIN MATING TRANCEIVERS MAY REQUIRE ADDITIONAL PCB THICKNESS THAT WOULD NEED TO BE DETERMINED BY THE CUSTOMER.


12. PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FORM FACTOR FOR SFP+ GANGED CAGES.

⚠ 13 DIMENSION APPLIES PRIOR TO INSERTION OF SFP MODULE.


⚠ 14 WITH BELLY GASKET: RF ABSORBER

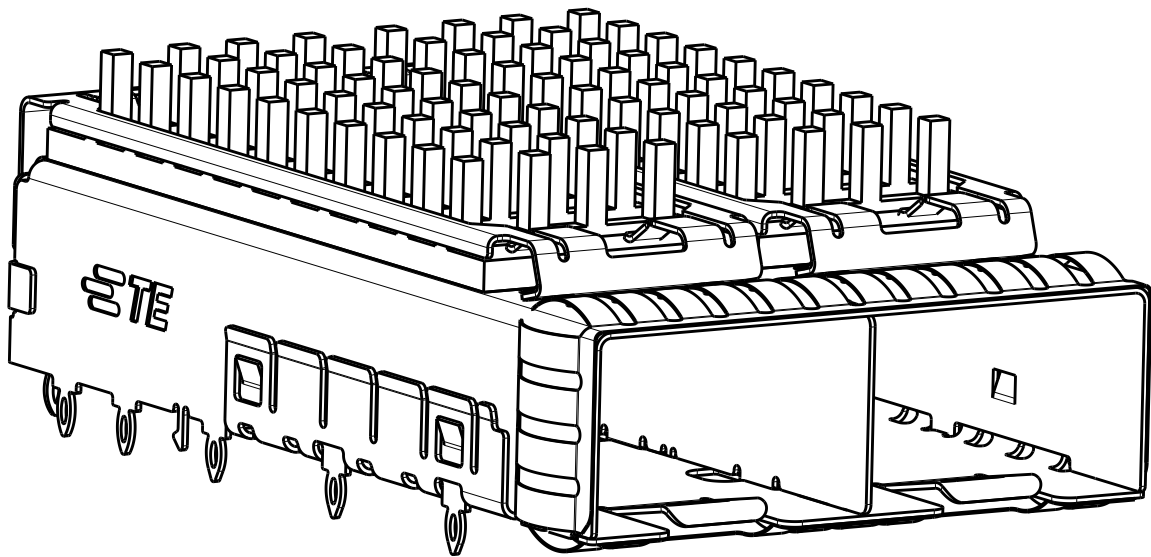



2198230-1,2,3,4
FINISHED ASSEMBLY WITH
PIN TYPE HEAT SINK

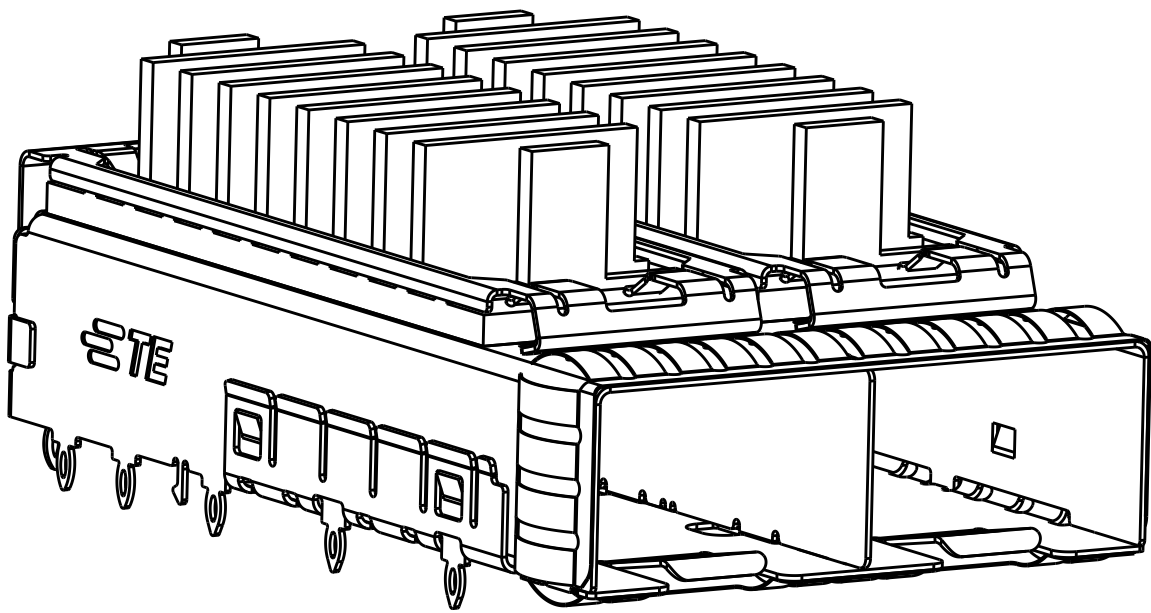

2198230-5,6,7,8
FINISHED ASSEMBLY WITH
FIN TYPE HEAT SINK

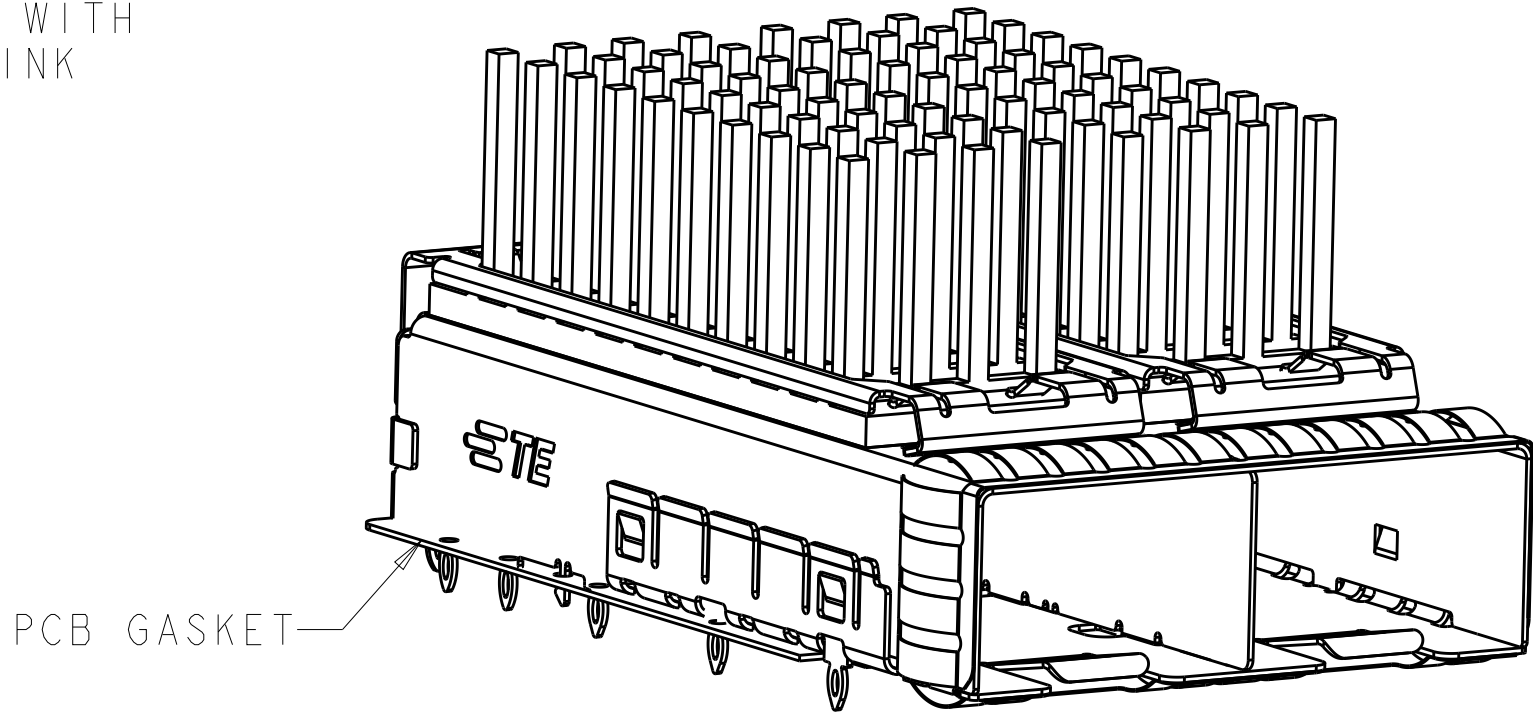


1-2198230-4
FINISHED ASSEMBLY WITH
PIN TYPE HEAT SINK, WITH BELLY GASKET

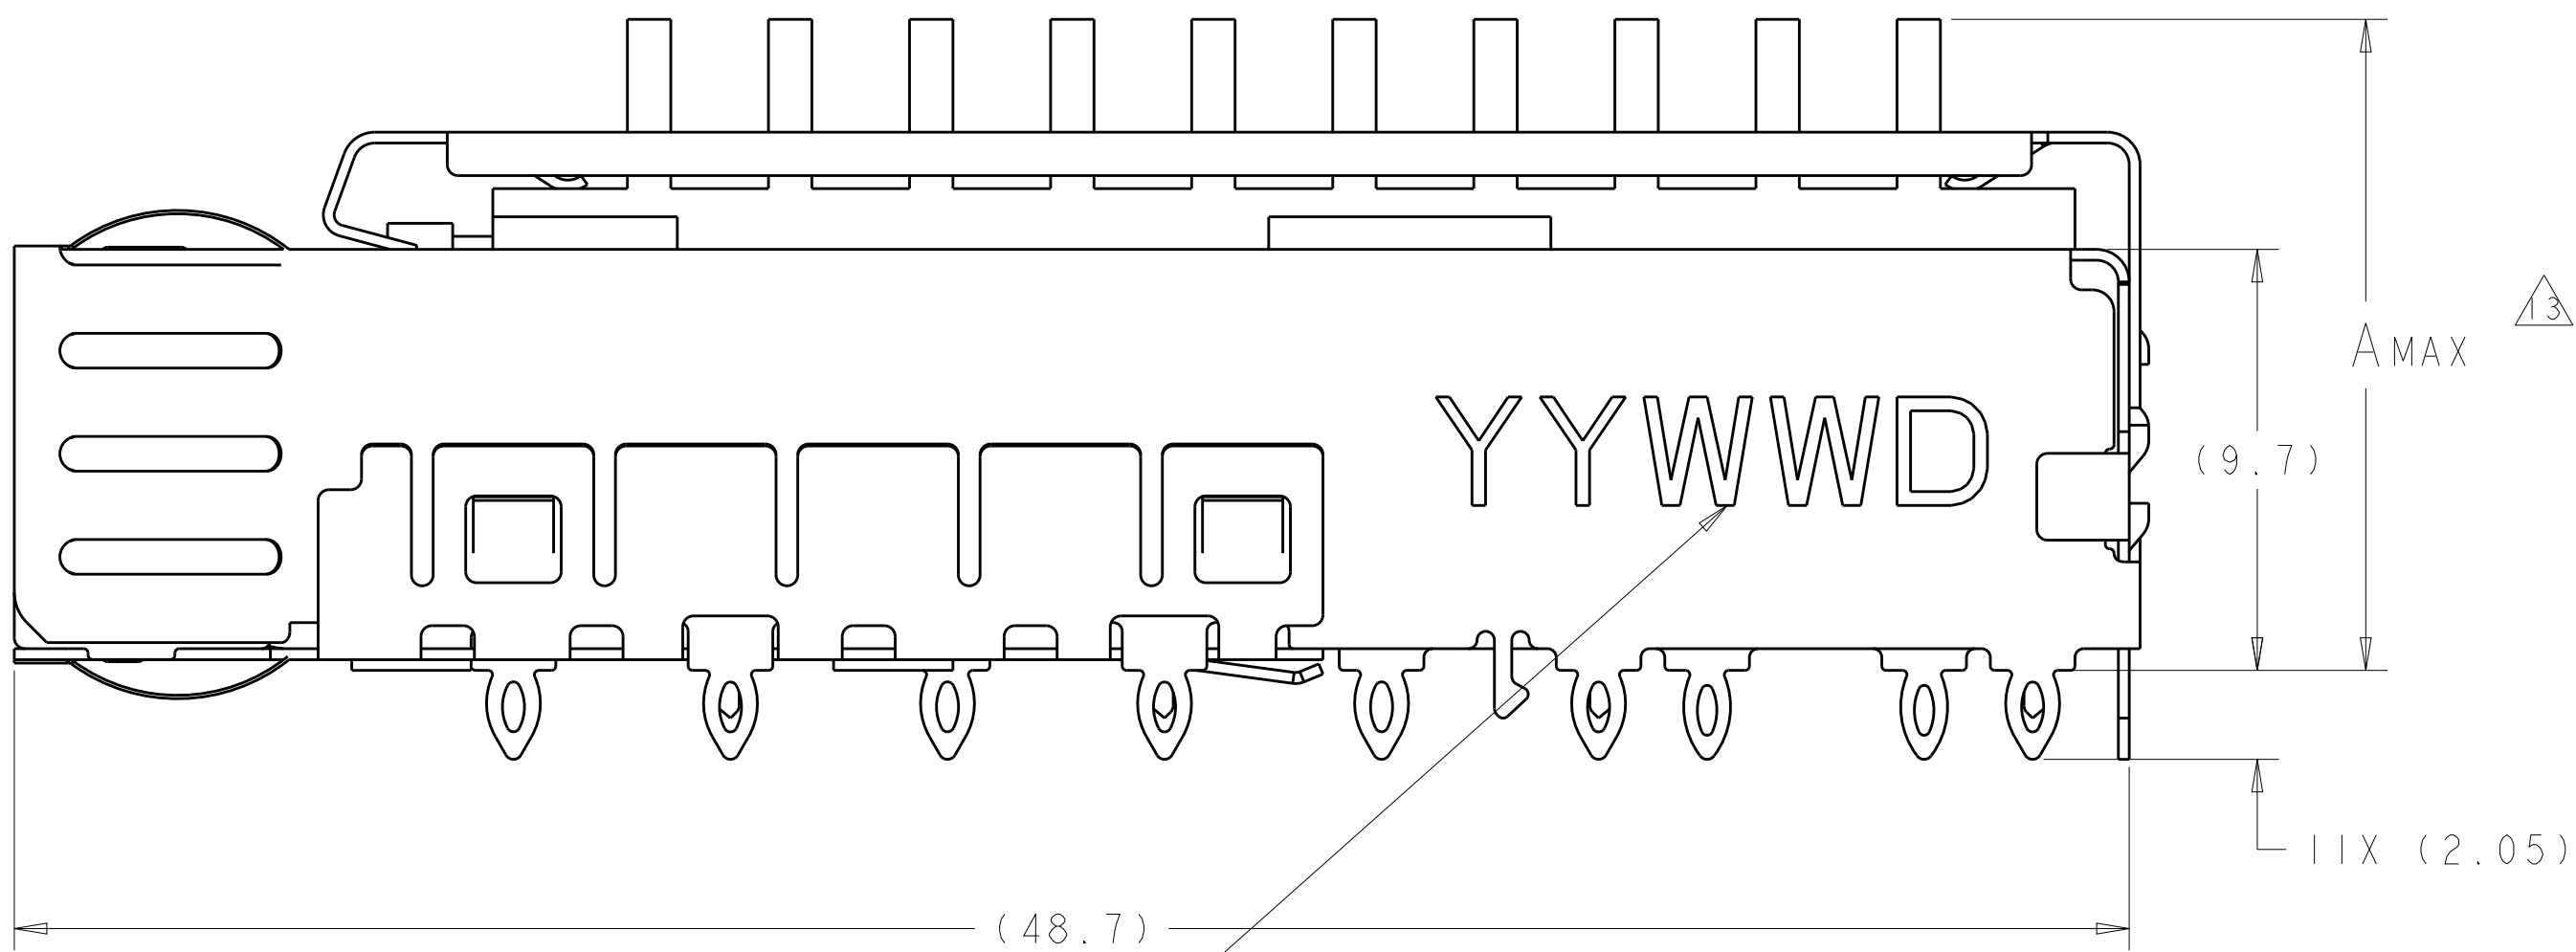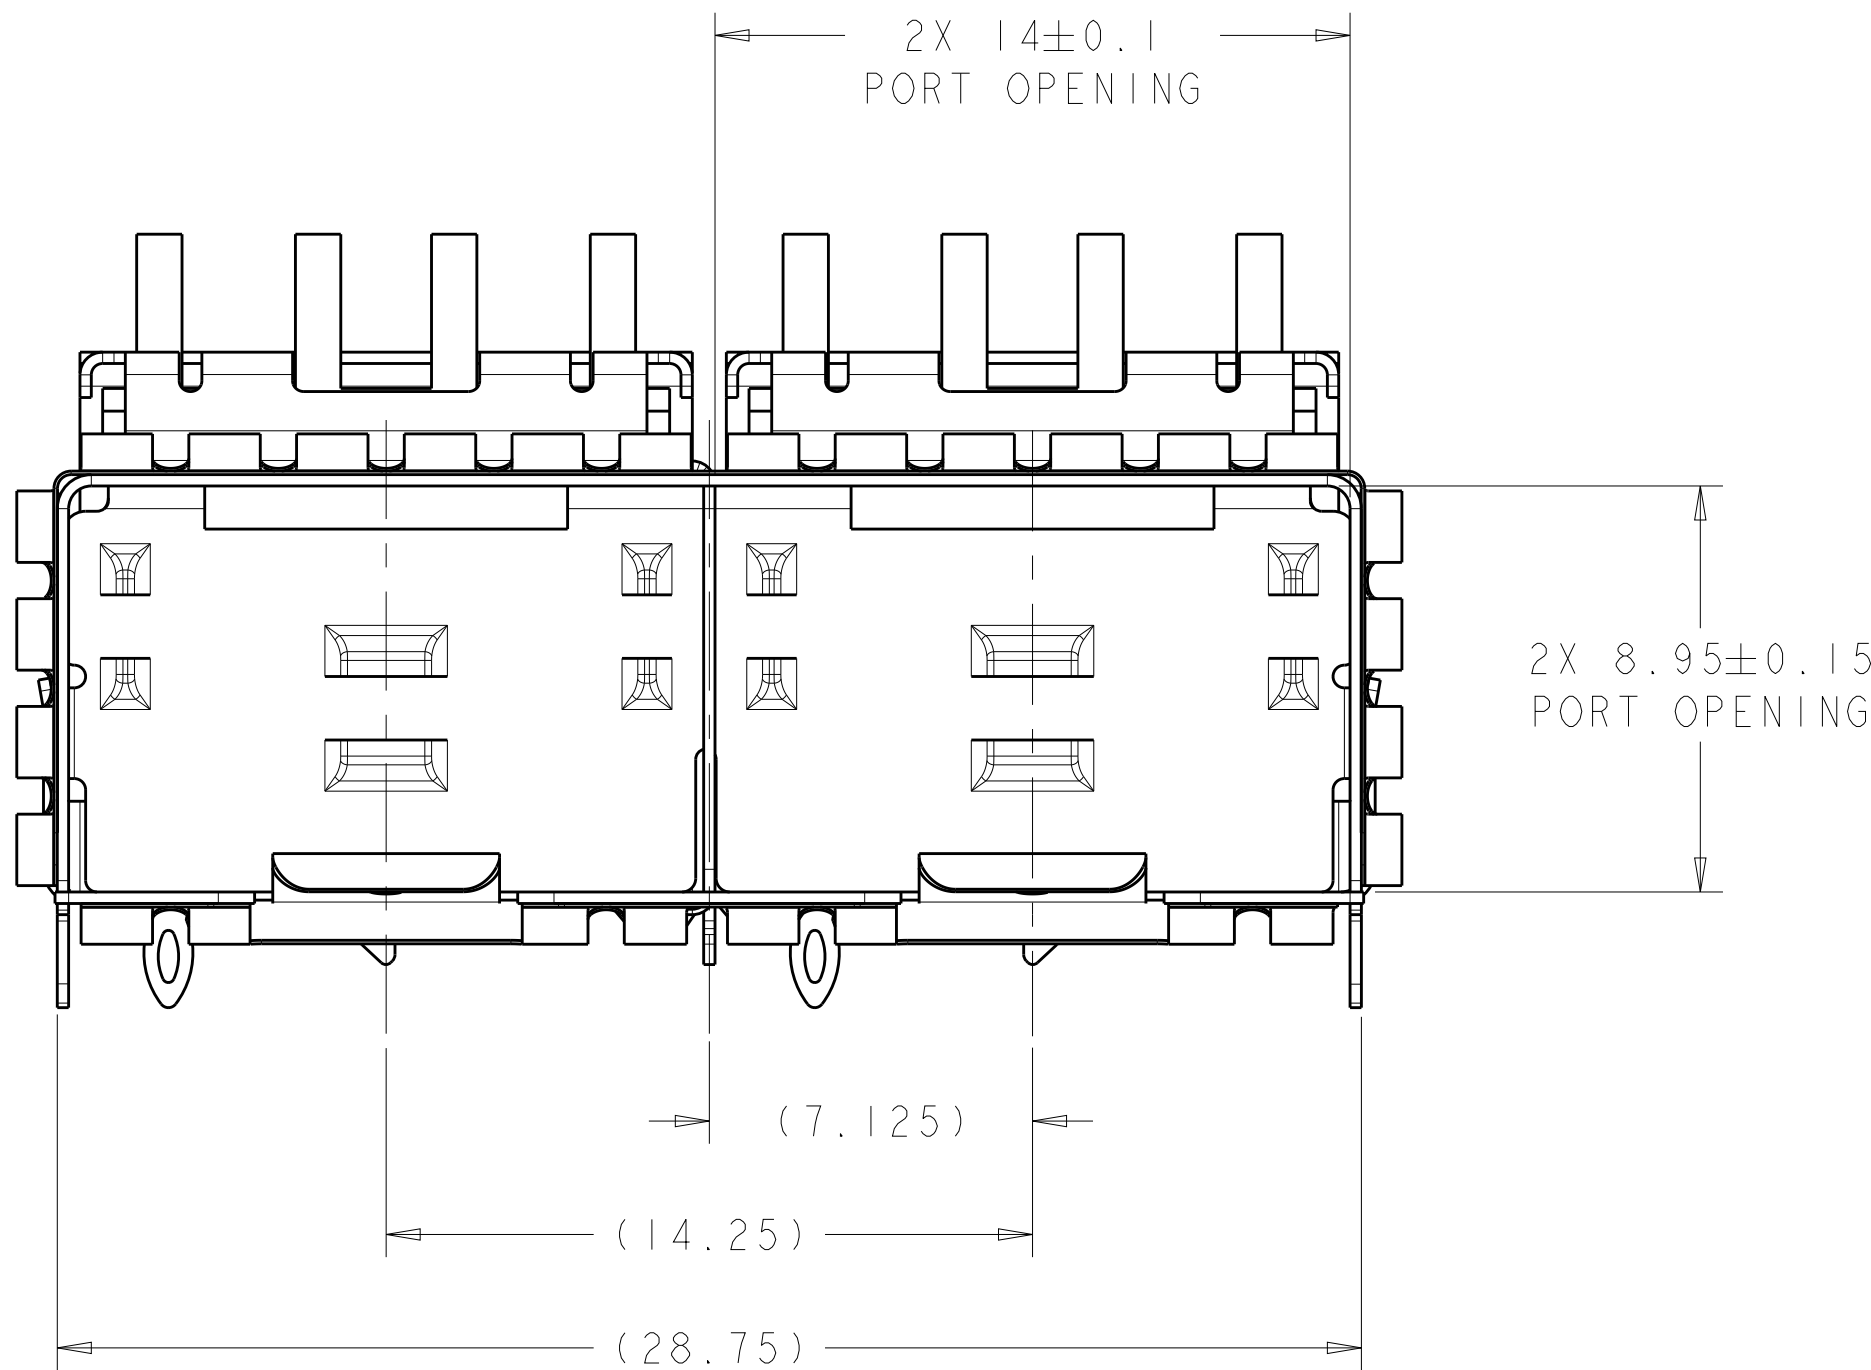


FIN TYPE	22.5	NETWORKING, TALL	2198230-8
FIN TYPE	18.1	NETWORKING, SHORT	2198230-7
FIN TYPE	15.5	SAN	2198230-6
FIN TYPE	13.2	PCI	2198230-5
PIN TYPE	22.5	NETWORKING, TALL	1-2198230-4
PIN TYPE	22.5	NETWORKING, TALL	2198230-4
PIN TYPE	18.1	NETWORKING, SHORT	2198230-3
PIN TYPE	15.5	SAN	2198230-2
PIN TYPE	13.2	PCI	2198230-1
HEAT SINK	A 13 DESCRIPTION		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 06OCT2011	TE Connectivity	
DIMENSIONS:		CHK M. SCHMITT 06OCT2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. SCHMITT 06OCT2011	NAME SFP+ ENHANCED 1X2 CAGE ASSEMBLY, PRESS-FIT, EMI SPRINGS, HEAT SINK	
	0 PLC ±0.13	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
	1 PLC ±0.1	108-2364		
	2 PLC ±0.08	APPLICATION SPEC	A100779C=2198230	
	3 PLC ±0.05	114-13120		
MATERIAL	FINISH	WEIGHT	Customer Drawing	
⚠	⚠ 2	-		
		SCALE 2:1	SHEET 1 OF 4	REV B

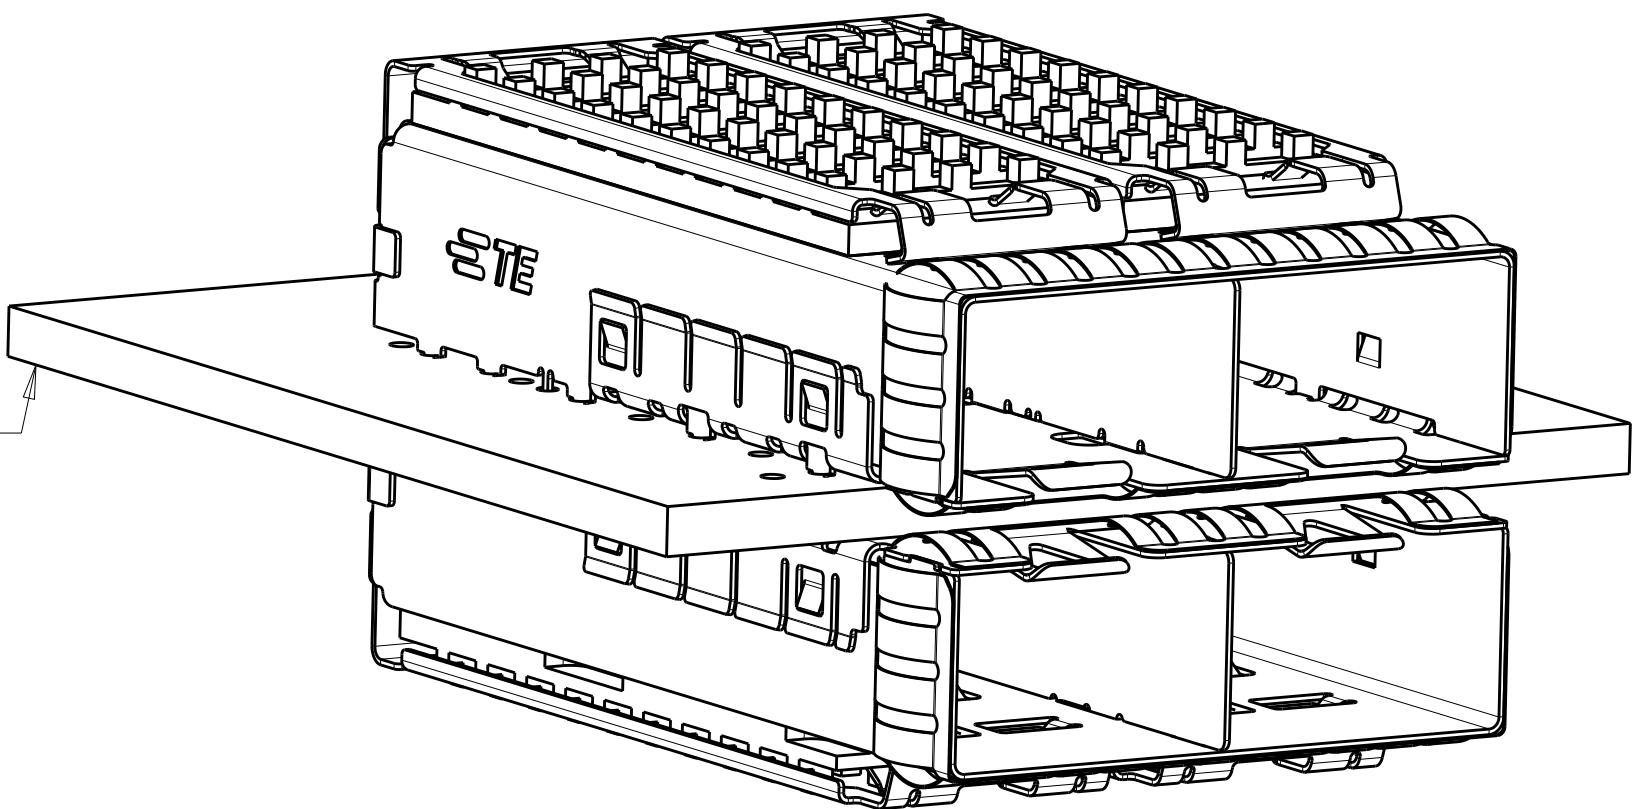


2198230-1
MOUNTED BELLY TO BELLY
SCALE 3:1


LOC		DIST		REVISIONS			
GP		00		P	LTR	DESCRIPTION	DATE
					-	SEE SHEET 1	-

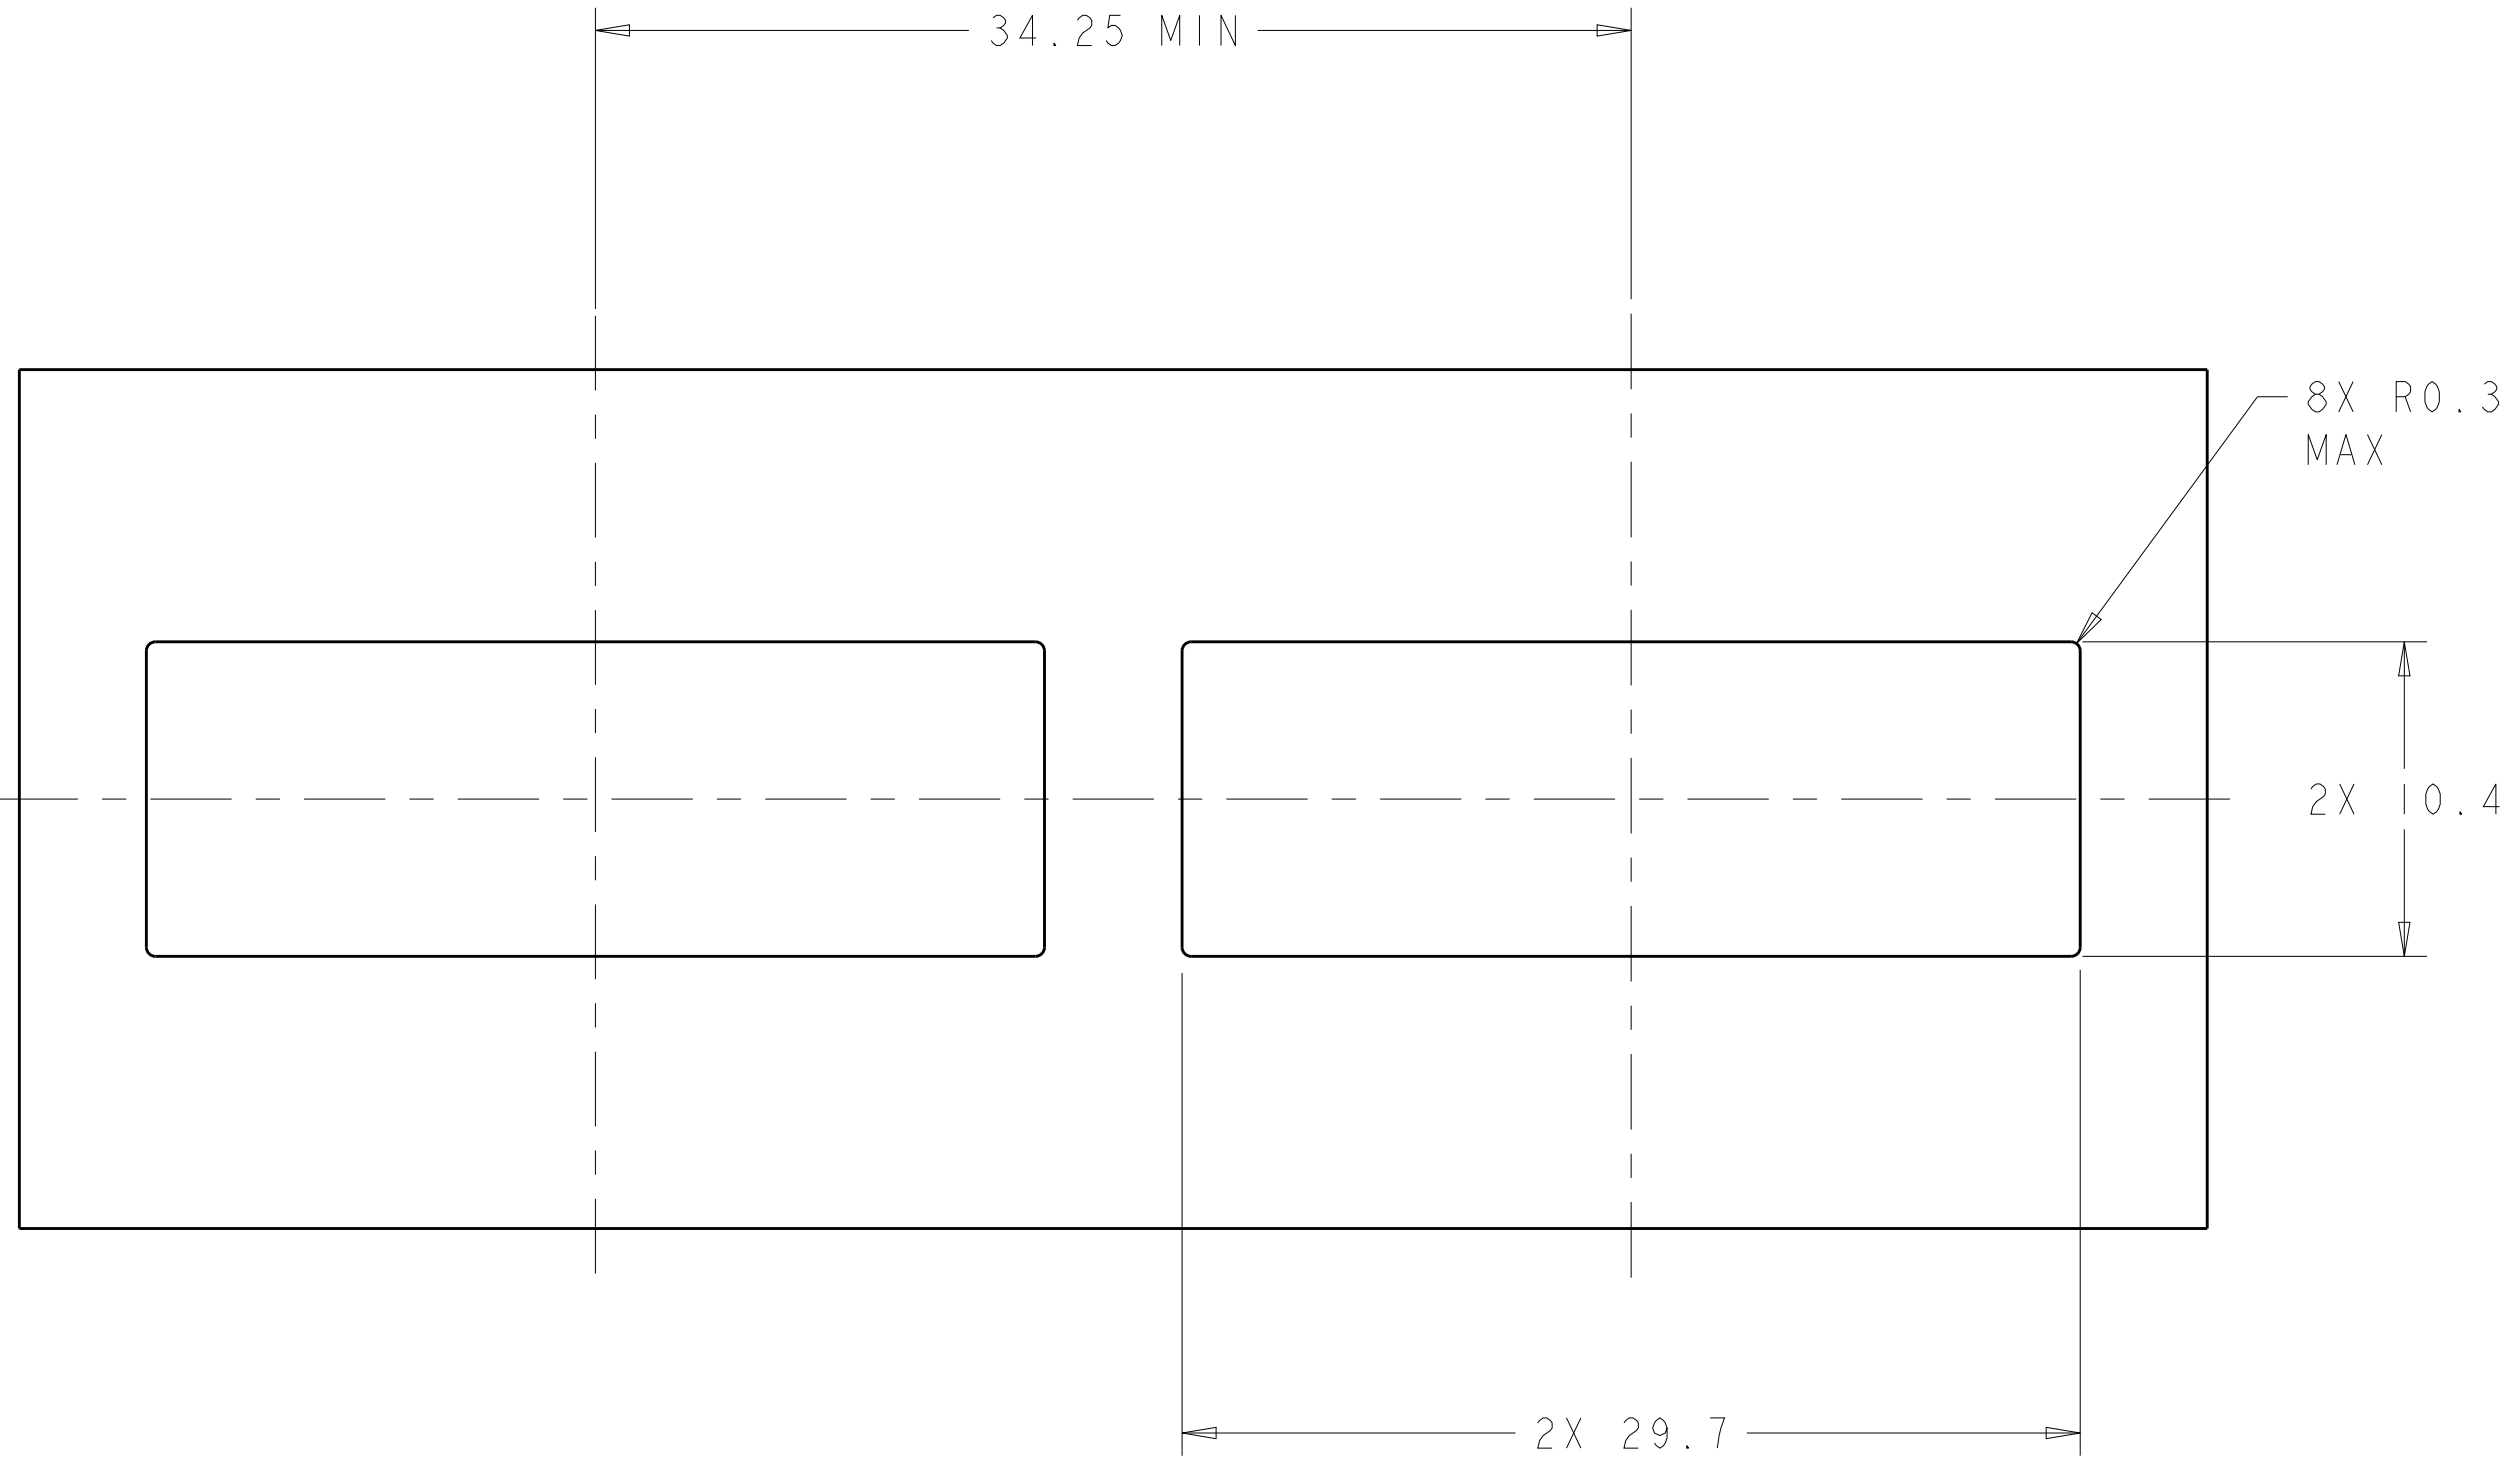


RECOMMENDED BEZEL CUT-OUT
SINGLE SIDED APPLICATIONS
SCALE 4:1

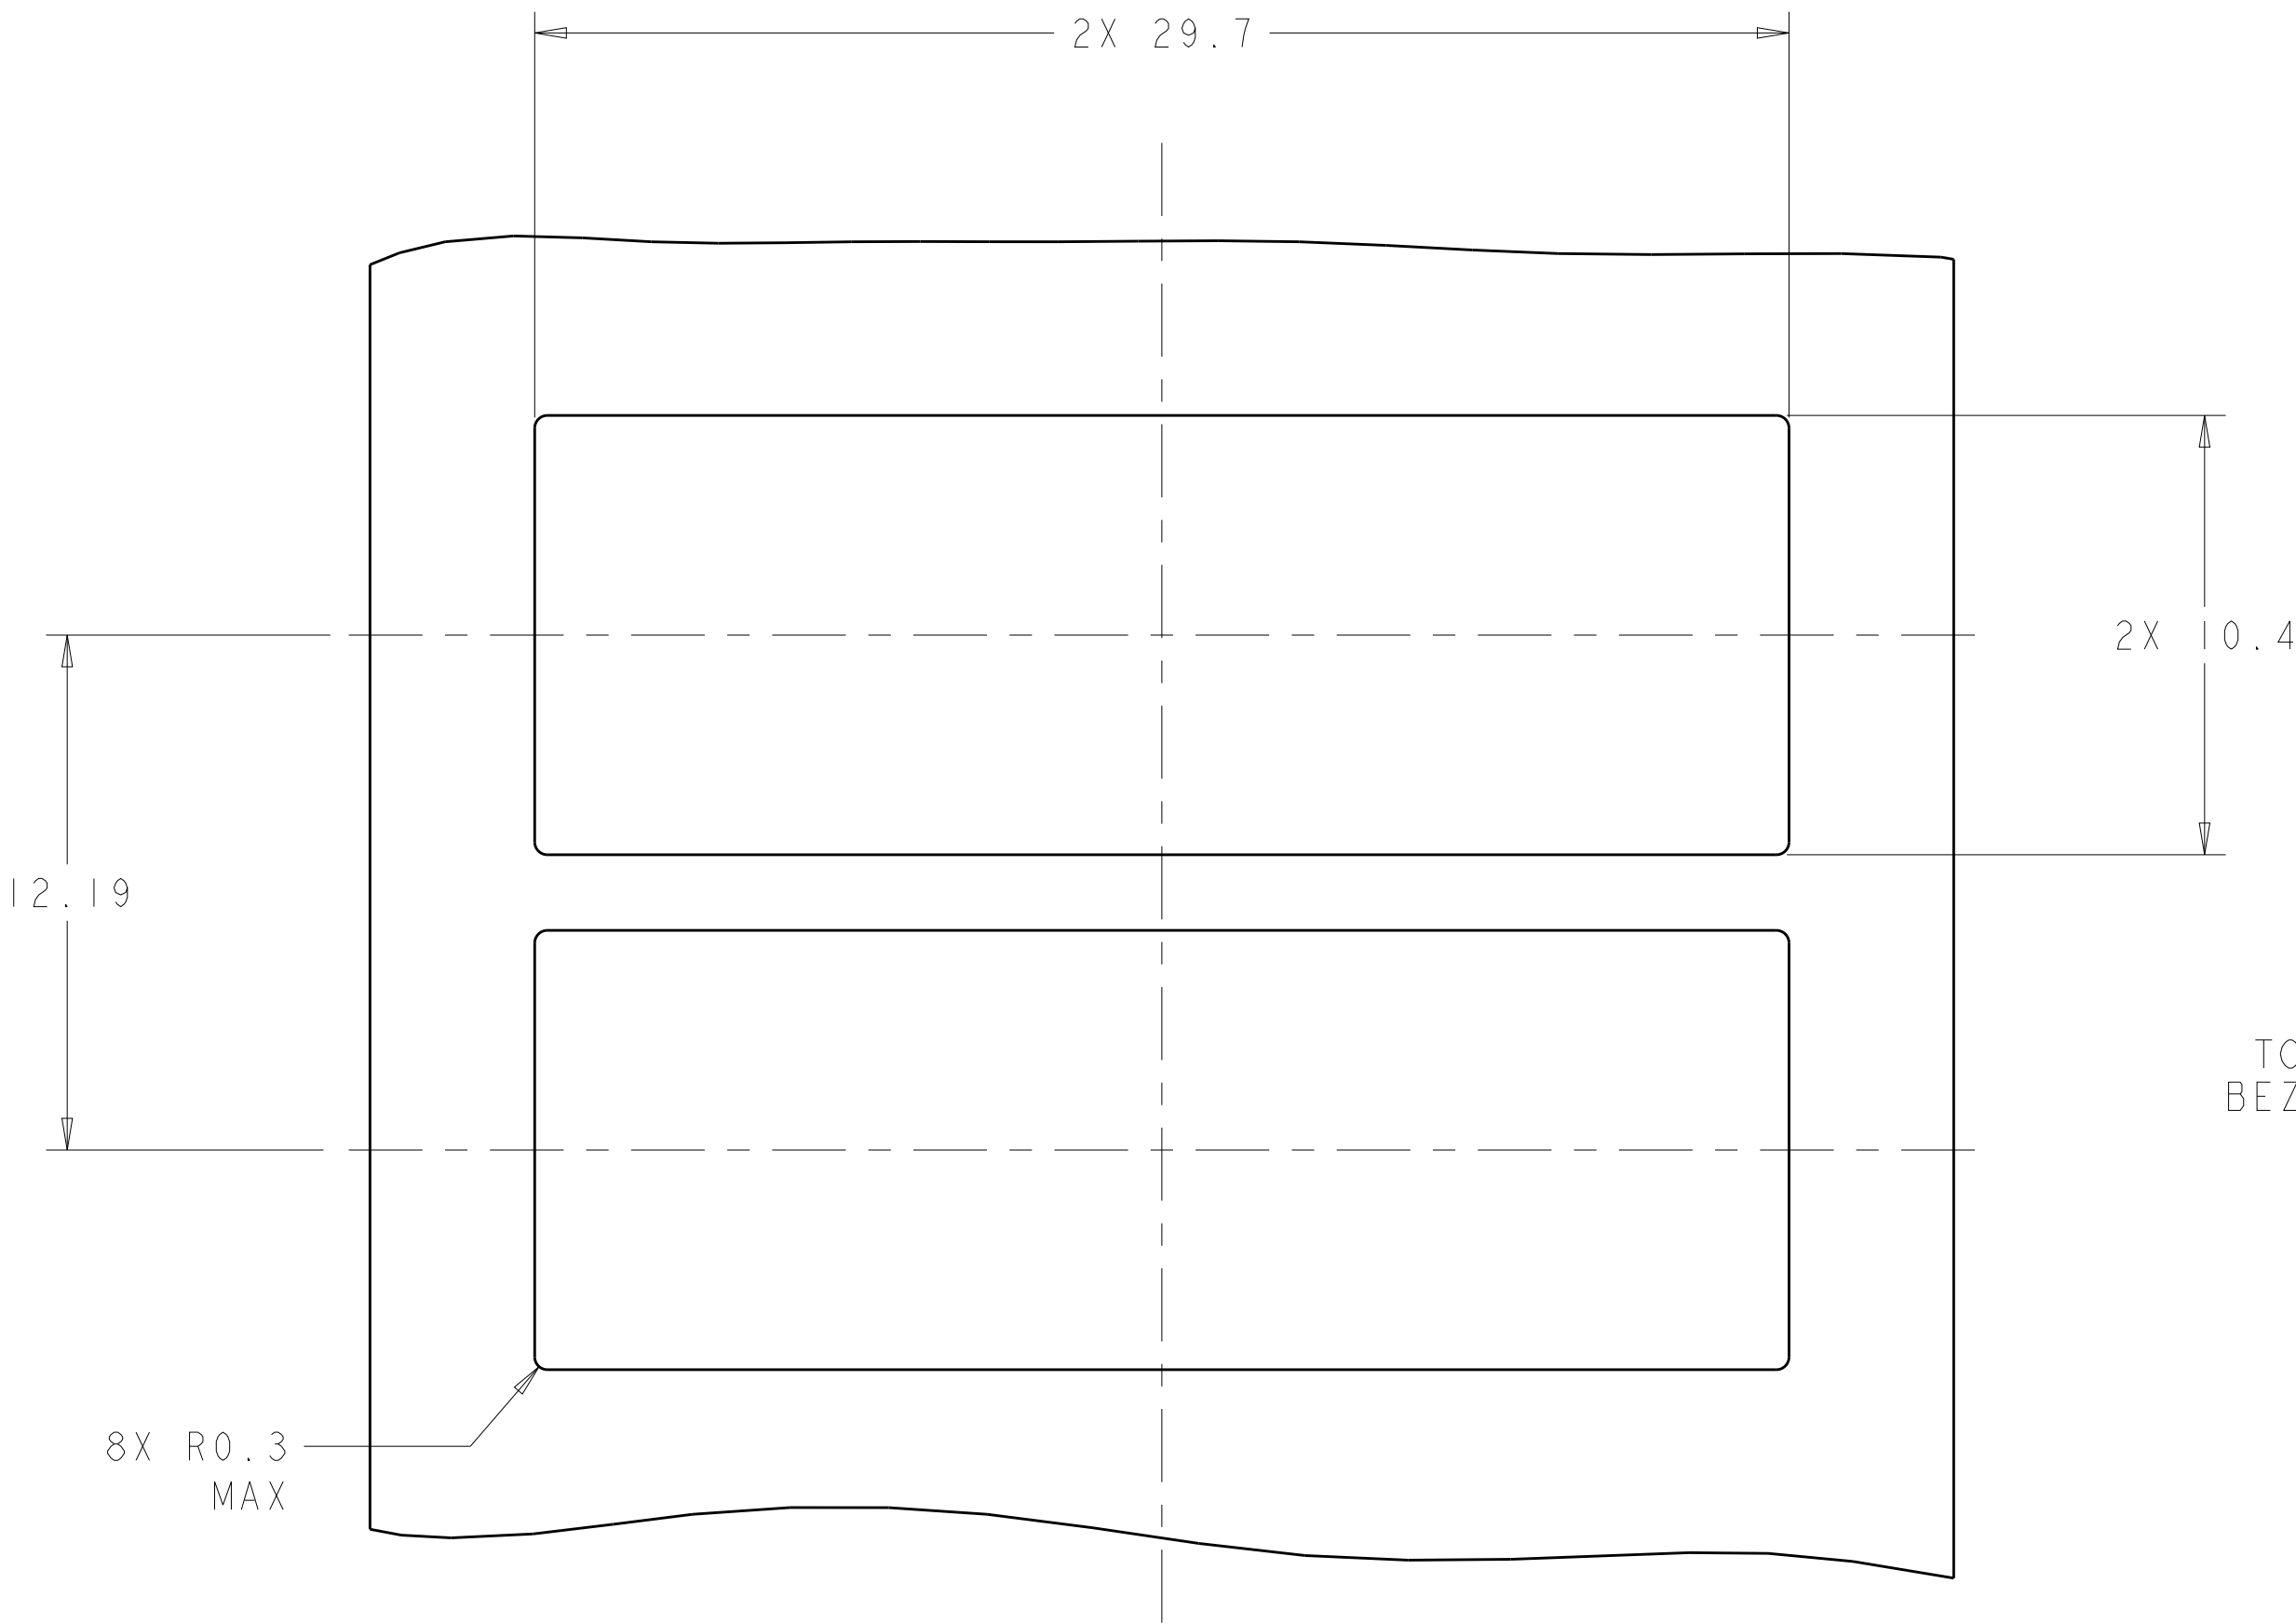

RECOMMENDED BEZEL CUT-OUT
BELLY TO BELLY APPLICATIONS

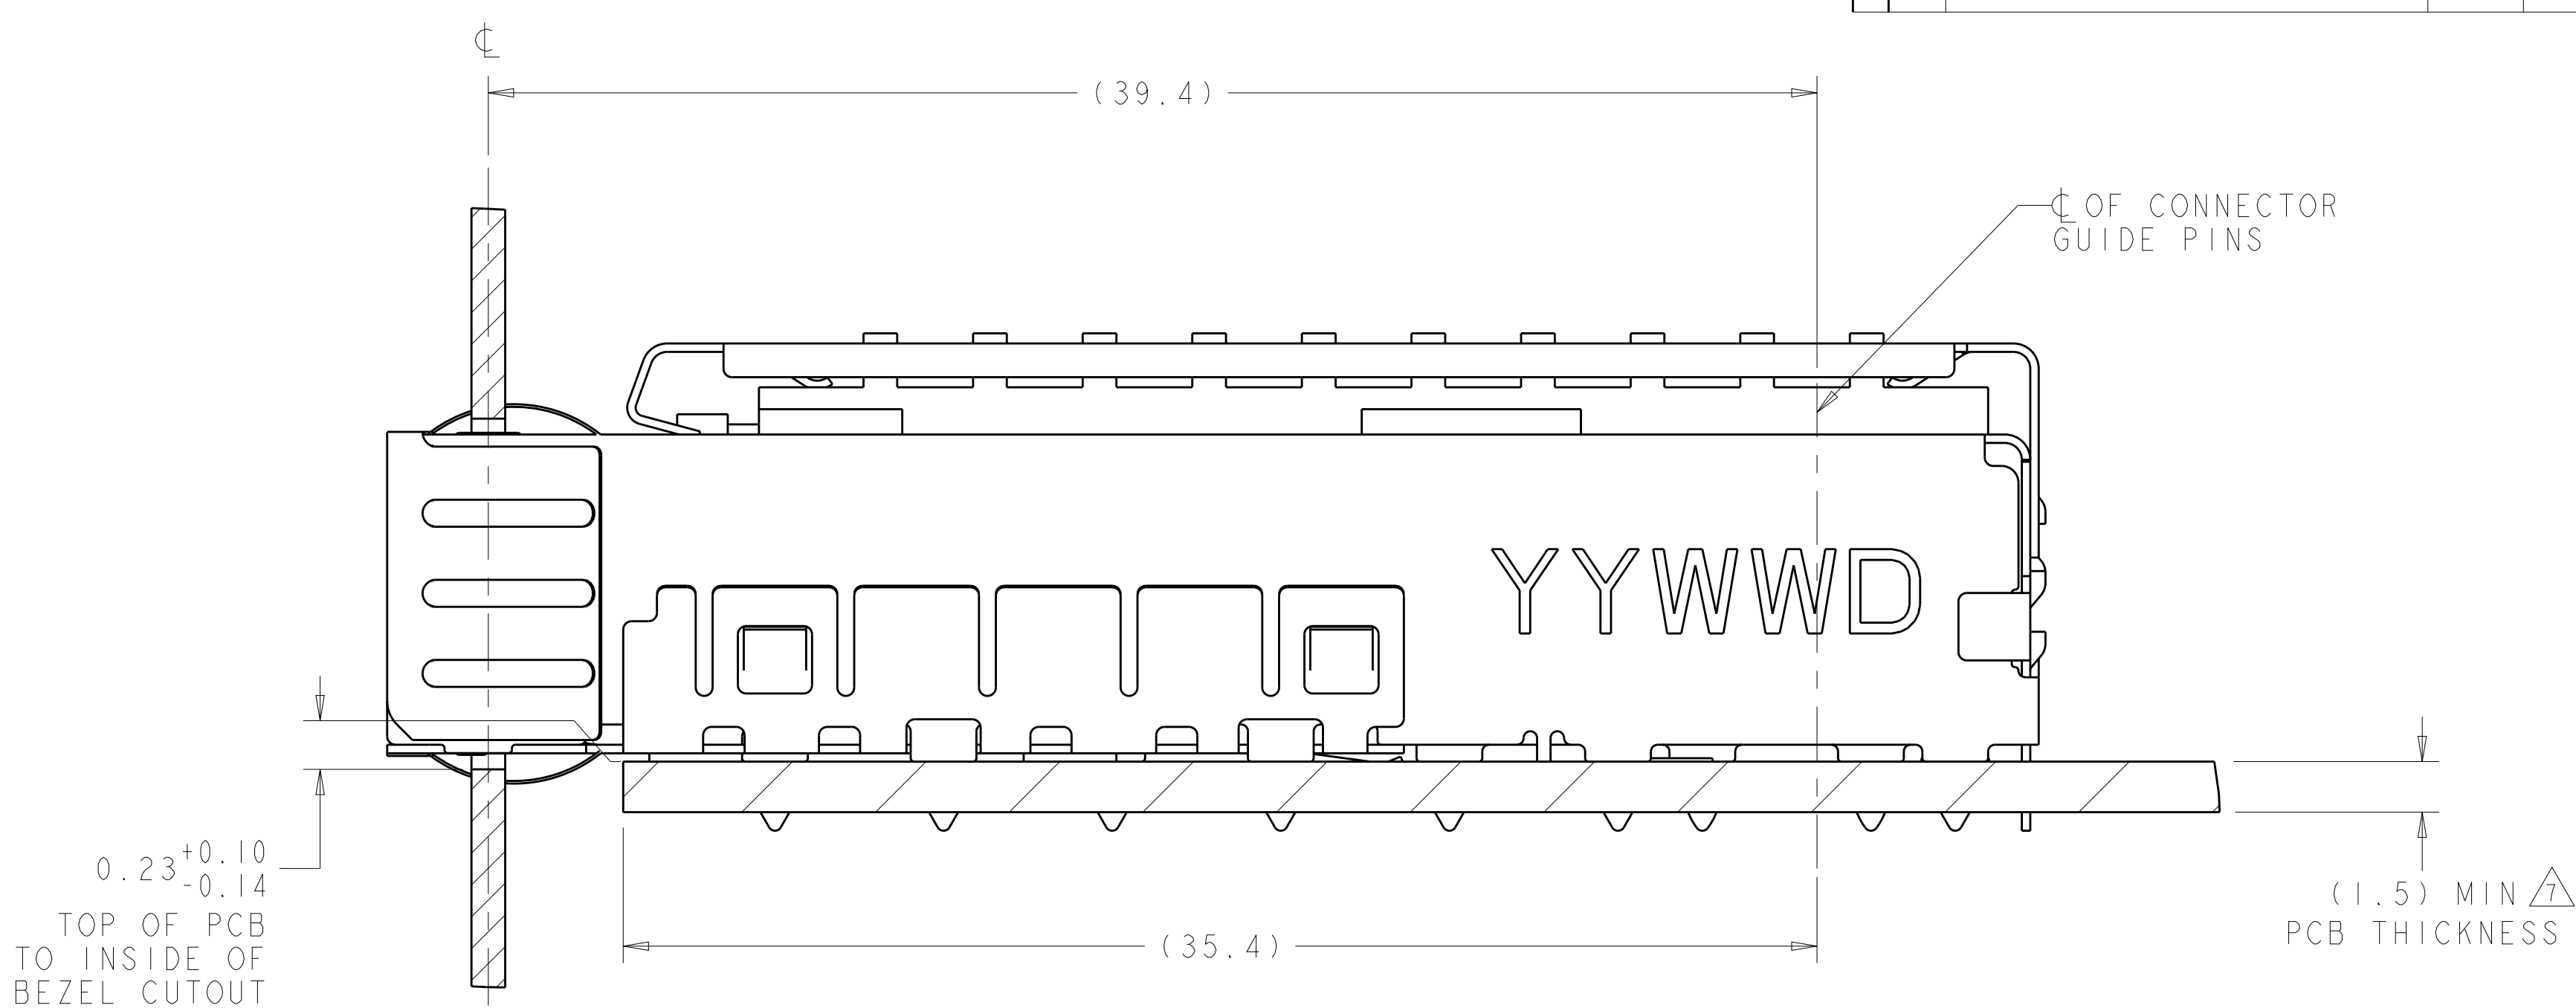



2198230-1
MOUNTED ON PC BOARD
SHOWN THRU RECOMMENDED BEZEL

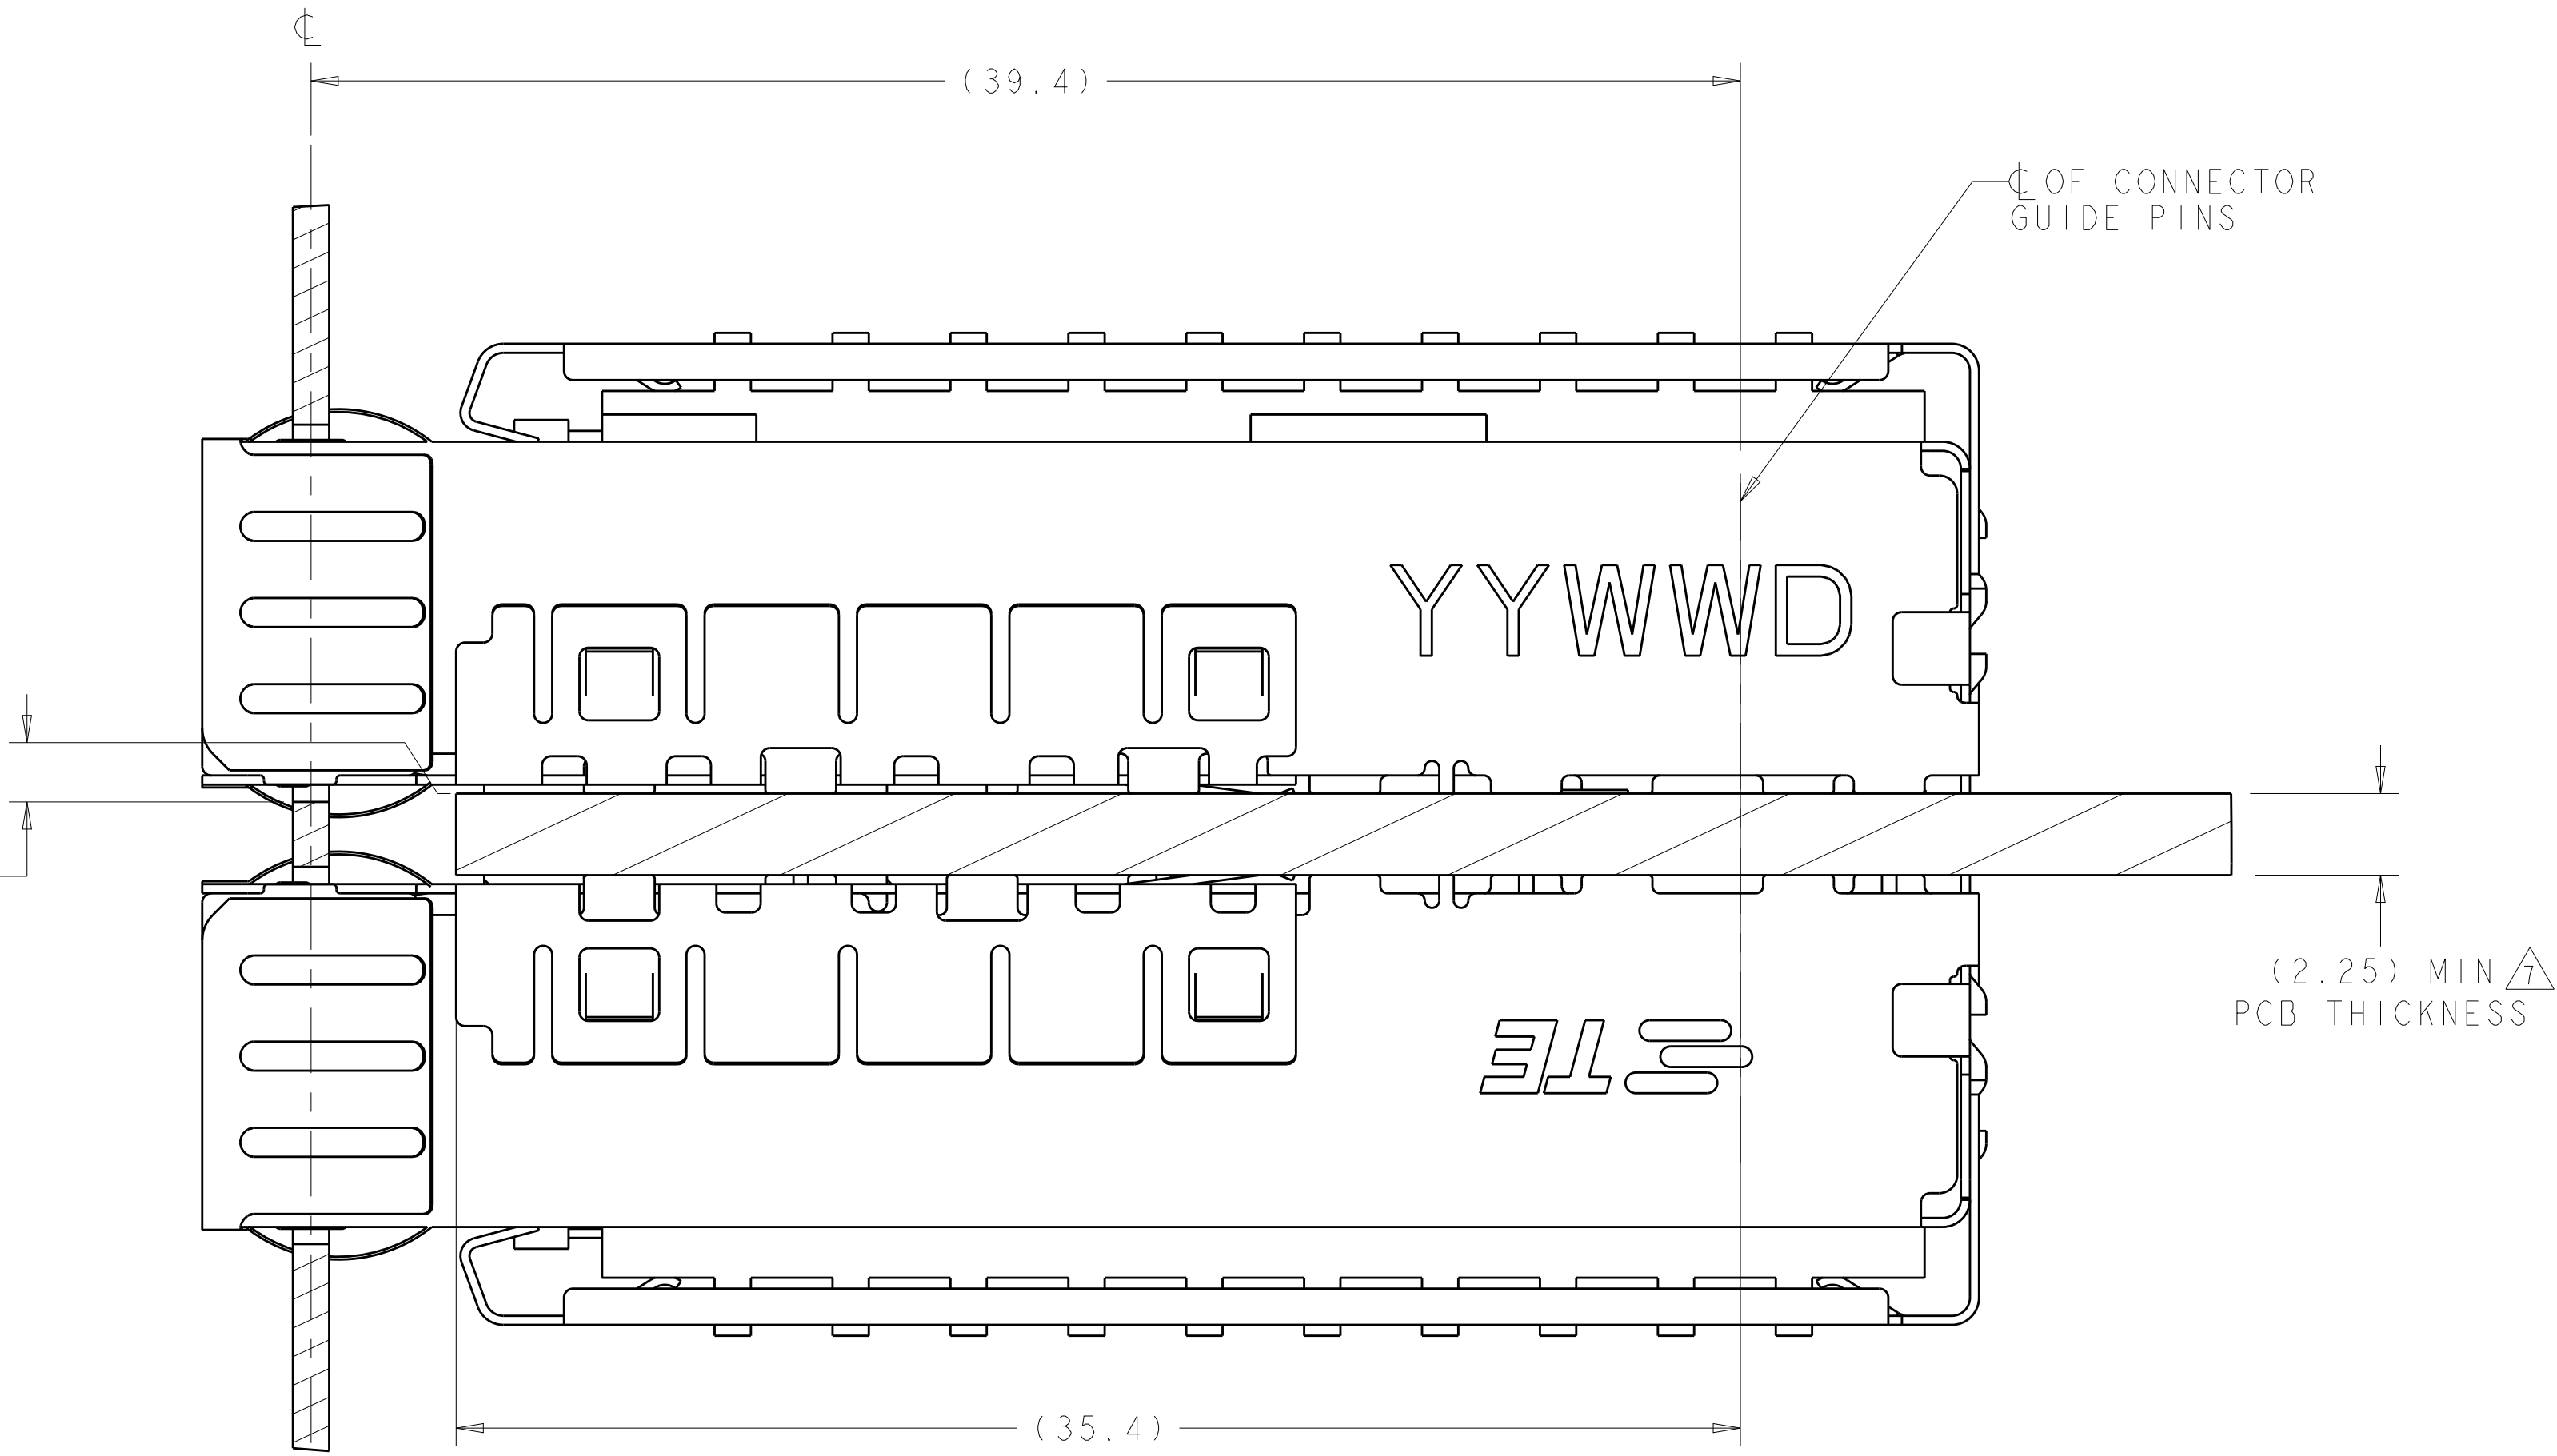


2198230-1
MOUNTED BELLY TO BELLY ON PC BOARD
SHOWN THRU RECOMMENDED BEZEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE	06OCT2011	TE Connectivity	
		CHK M. SCHMITT	06OCT2011		
		APVD M. SCHMITT	06OCT2011	NAME SFP+ ENHANCED 1X2 CAGE ASSEMBLY, PRESS-FIT, EMI SPRINGS, HEAT SINK	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE A1	
		0 PLC ±0.13		CAGE CODE 100779	
		1 PLC ±0.1		DRAWING NO 2198230	
		2 PLC ±0.08		RESTRICTED TO	
		3 PLC ±0.05			
		4 PLC ±0.05			
		ANGLES ±0.1			
		FINISH			
MATERIAL		WEIGHT		SCALE 6:1	
		Customer Drawing		SHEET 2 OF 4	
				REV B	



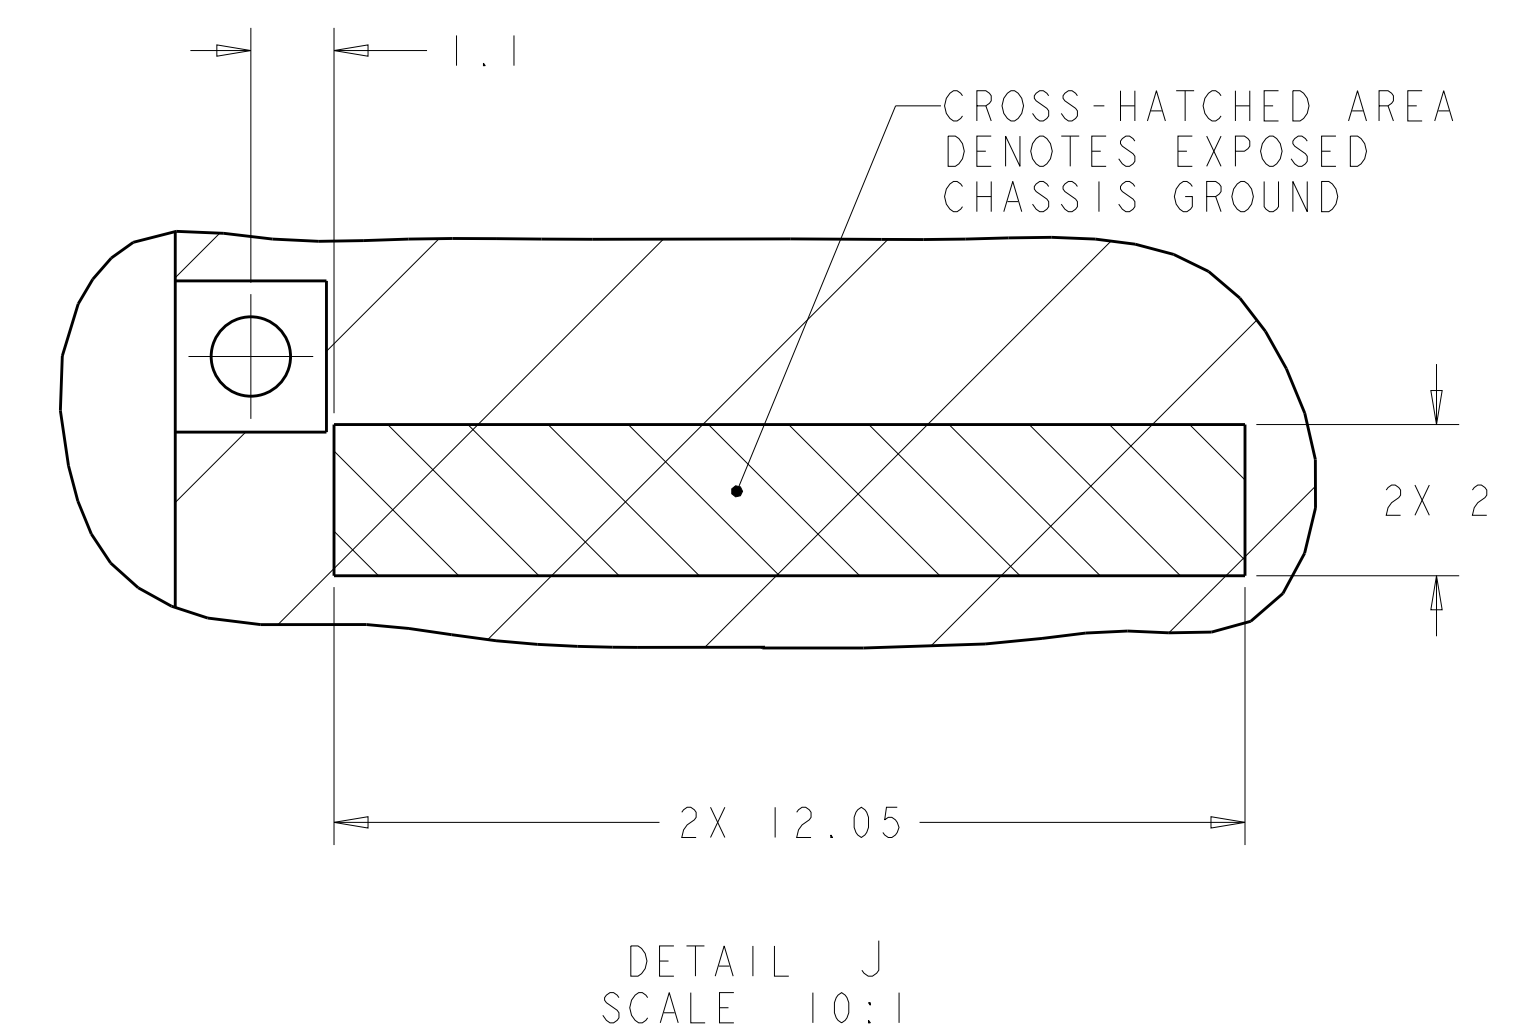

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN C. VALENTINE		060C12011		 TE Connectivity	
DIMENSIONS:		CIR M. SCHMITT		060C12011			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. SCHMITT		060C12011		NAME	
mm		PRODUCT SPEC		SFP+ ENHANCED 1X2 CAGE ASSEMBLY, PRESS-FIT, EMI SPRINGS, HEAT SINK		RESTRICTED TO	
		108-2364		APPLICATION SPEC		SIZE	
MATERIAL		FINISH		WEIGHT		CAGE CODE	
				Customer Drawing		DRAWING NO	
				A1		00779	
				SCALE		6:1	
				SHEET		4 OF 4	
				REV		B	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.