




Chip Inductors - 0402HP Series (1005)

- Higher Q and lower DCR than other 0402 inductors
- Very high SRF values – as high as 16 GHz
- Excellent current handling capability – up to 2300 mA
- 52 inductance values from 1.0 to 220 nH

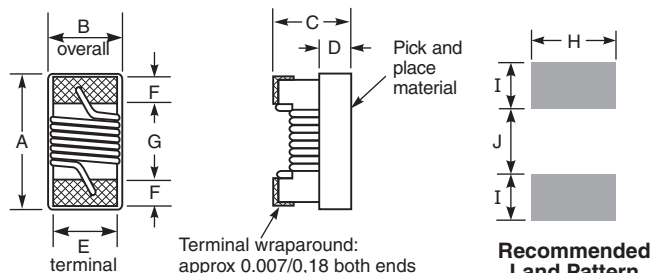

	A max	B (min – max)	C max	
0402HP	0.043	0.020 – 0.028	0.024	inches
	1,09	0,51 – 0,71	0,61	mm

	A max	B	C max	
0402HPH	0.044	0.026 ±0.002	0.026	inches
	1,12	0,66 ±0,051	0,66	mm

D	E	F	G	H	I	J	
0.010	0.020	0.008	0.024	0.026	0.014	0.020	inches
0,25	0,51	0,20	0,61	0,66	0,36	0,51	mm

Note: Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.

Core material Ceramic

Environmental RoHS compliant, halogen free optional

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 0.7 – 1.0 mg

Ambient temperature –40°C to +125°C with Irms current, +125°C to +140°C with derated current

Storage temperature Component: –40°C to +140°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)


Failures in Time (FIT) / Mean Time Between Failures (MTBF)

One per billion hours / one billion hours, calculated per Telcordia SR-332


Packaging 2000 or 5000 per 7" reel. Paper tape: 8 mm wide, 0.66 mm thick, 2 mm pocket spacing

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf


Current Derating

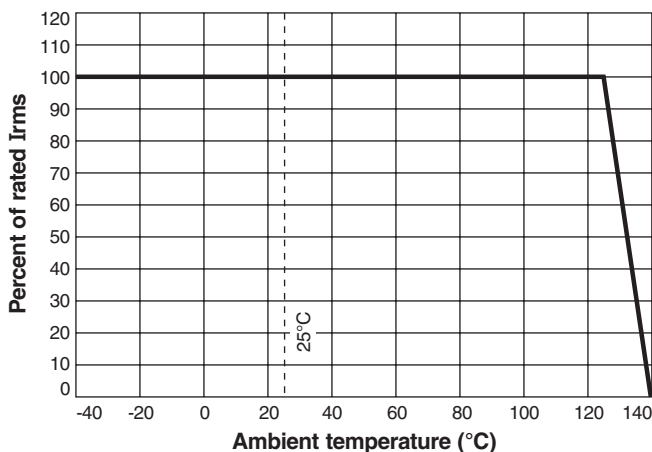

Typical Q vs Frequency

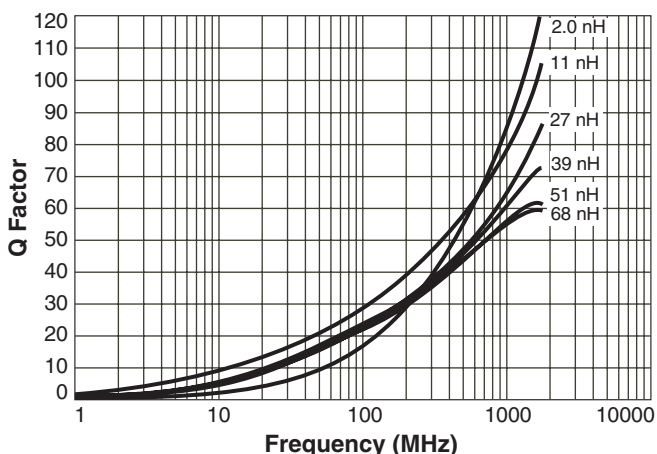

Typical L vs Frequency

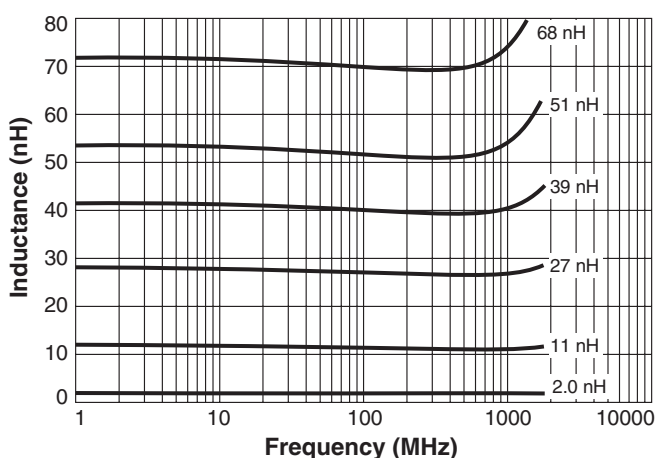

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
 UK +44-1236-730595 sales@coilcraft-europe.com
 Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
 China +86-21-6218 8074 sales@coilcraft.com.cn
 Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 526-1 Revised 08/08/13

© Coilcraft Inc. 2013

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



0402HP Series (1005)

Designer's Kits C403A and B contain 20 each of 5% values
Designer's Kits C403A-2 and B-2 contain 20 each of 2% values

Part number ¹	Inductance ² (nH)	Percent tolerance ³	Test freq (MHz)	900 MHz		1.7 GHz		SRF typ ⁵ (GHz)	DCR max ⁶ (Ohms)	Irms ⁷ (mA)
				L typ	Q typ ⁴	L typ	Q typ ⁴			
0402HP-1N0XJL	1.0	5	250	0.97	46	0.99	72	16.0	0.030	2300
0402HP-2N0XJL	2.0	5	250	1.96	58	1.98	85	15.2	0.038	2100
0402HP-2N2XJL	2.2	5	250	2.17	60	2.17	86	15.1	0.038	2100
0402HP-2N4X L	2.4	5,3,2	250	2.37	60	2.38	83	14.0	0.042	2000
0402HP-2N7X L	2.7	5,3,2	250	2.66	62	2.68	85	13.0	0.085	1500
0402HP-3N3X L	3.3	5,3,2	250	3.26	66	3.28	95	12.8	0.045	1700
0402HP-3N6X L	3.6	5,3,2	250	3.56	65	3.58	94	11.7	0.045	1700
0402HP-3N9X L	3.9	5,3,2	250	3.87	64	3.91	98	9.50	0.045	1700
0402HP-4N3X L	4.3	5,3,2	250	4.26	63	4.33	90	7.15	0.050	1600
0402HP-4N7X L	4.7	5,3,2	250	4.67	58	4.74	83	6.85	0.075	1500
0402HP-5N1X L	5.1	5,3,2	250	5.07	54	5.16	76	6.80	0.125	1200
0402HP-5N6X L	5.6	5,3,2	250	5.56	73	5.66	105	6.50	0.055	1600
0402HP-6N2X L	6.2	5,3,2	250	6.18	73	6.25	100	5.80	0.055	1600
0402HP-6N8X L	6.8	5,3,2	250	6.78	68	6.97	94	5.80	0.070	1500
0402HP-7N5X L	7.5	5,3,2	250	7.49	60	7.77	82	5.40	0.100	1400
0402HP-8N2X L	8.2	5,3,2	250	8.10	68	8.40	95	5.40	0.065	1500
0402HP-8N7X L	8.7	5,3,2	250	8.73	66	9.04	95	5.00	0.070	1500
0402HP-9N0X L	9.0	5,3,2	250	8.99	67	9.21	92	5.00	0.080	1400
0402HP-9N5X L	9.5	5,3,2	250	9.52	64	9.97	90	4.70	0.090	1400
0402HP-10NX L	10	5,3,2	250	9.98	62	10.4	90	4.70	0.110	1300
0402HP-11NX L	11	5,3,2	250	11.0	68	11.6	98	4.70	0.065	1400
0402HP-12NX L	12	5,3,2	250	12.0	66	12.6	100	4.40	0.100	1200
0402HP-13NX L	13	5,3,2	250	13.1	62	13.9	82	4.20	0.155	870
0402HP-15NX L	15	5,3,2	250	15.1	62	16.0	85	3.90	0.115	1100
0402HP-16NX L	16	5,3,2	250	16.2	57	17.3	77	3.70	0.150	850
0402HP-18NX L	18	5,3,2	250	18.2	58	19.5	74	3.55	0.120	900
0402HP-19NX L	19	5,3,2	250	19.2	61	20.7	88	3.50	0.145	850
0402HP-20NX L	20	5,3,2	250	20.3	58	22.0	76	3.50	0.185	780
0402HP-21NX L	21	5,3,2	250	21.3	48	23.2	62	1.70	0.460	450
0402HP-22NX L	22	5,3,2	250	22.3	60	24.4	74	3.30	0.160	800
0402HP-23NX L	23	5,3,2	250	23.3	60	25.5	77	3.30	0.160	800
0402HP-24NX L	24	5,3,2	250	24.5	55	27.1	71	3.15	0.210	700
0402HP-25NX L	25	5,3,2	250	25.5	57	28.3	73	3.15	0.260	700
0402HP-26NX L	26	5,3,2	250	26.6	56	29.3	74	3.15	0.290	700
0402HP-27NX L	27	5,3,2	250	27.3	62	29.5	86	3.20	0.350	450
0402HP-30NX L	30	5,3,2	250	30.8	61	35.0	87	2.90	0.350	450
0402HP-33NX L	33	5,3,2	250	34.0	61	38.3	80	2.80	0.330	490
0402HP-36NX L	36	5,3,2	250	37.1	59	42.2	76	2.80	0.390	480
0402HP-37NX L	37	5,3,2	250	38.2	57	44.0	72	2.70	0.480	470
0402HP-39NX L	39	5,3,2	250	40.5	56	47.0	84	2.60	0.430	450
0402HP-40NX L	40	5,3,2	250	41.3	56	47.4	75	2.60	0.430	450
0402HP-43NX L	43	5,3,2	250	45.0	52	54.1	68	2.50	0.520	450
0402HP-47NX L	47	5,3,2	250	49.0	48	58.9	62	2.40	0.580	420
0402HP-51NX L	51	5,3,2	250	49.1	52	58.8	59	2.30	0.700	360
0402HPH-56NX L	56	5,3,2	250	58.8	56	72.2	64	2.07	0.900	330
0402HPH-68NX L	68	5,3,2	250	72.2	56	91.4	64	1.84	1.00	320
0402HPH-82NX L	82	5,3,2	250	89.7	52	—	—	1.75	1.10	315
0402HPH-R10X L	100	5,3,2	250	—	—	—	—	1.58	1.20	310
0402HPH-R12X L	120	5,3,2	250	—	—	—	—	1.25	1.20	310
0402HPH-R15X L	150	5,3,2	100	—	—	—	—	1.14	2.0	240
0402HPH-R18X L	180	5,3,2	100	—	—	—	—	1.08	2.1	240
0402HPH-R22X L	220	5,3,2	100	—	—	—	—	0.96	3.1	160

1. When ordering, specify **tolerance**, **termination** and **packaging** codes:

0402HP-82NXJLW

Tolerance: G = 2% H = 3% J = 5%

(Table shows stock tolerances in bold.)

Termination: L = RoHS compliant silver-palladium-platinum-glass frit.

E = Halogen free component. RoHS compliant silver-

palladium-platinum-glass frit terminations.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5)
or S = non-RoHS tin-lead (63/37).

Packaging: W = 7" machine-ready reel. EIA-481 punched paper
tape (2000 parts per full reel).

Q = 7" machine-ready reel. EIA-481 punched paper
tape (5000 parts per full reel).

U = Less than full reel. In tape, but not machine ready.

To have a leader and trailer added (\$25 charge),
use code letter W instead.

2. Inductance measured at test frequency using a Coilcraft SMD-F fixture
in an Agilent/HP 4286 impedance analyzer with Coilcraft-provided cor-
relation pieces.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured using an Agilent/HP 4287A with an Agilent/HP 16197 test
fixture.

5. SRF measured using an Agilent/HP 8722ES network analyzer and a
Coilcraft SMD-D test fixture.

6. DCR measured on a micro-ohmmeter and a Coilcraft CCF858 test
fixture.

7. Current that causes a 15°C temperature rise from 25°C ambient.

8. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 526-2 Revised 08/08/13

© Coilcraft Inc. 2013

This product may not be used in medical or high
risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.