IP67 CKS SEALED ROTARY SWITCH

GENERAL ELECTRICAL & MECHANICAL SPECIFICATION

Switch Rating:	150mA@250V ac/dc resistive load 1A @ 24V dc
Life:	>10,000 Cycles
Operating Temperature:	-30ºC to +85 ºC
Proof Voltage:	1,500Vac (Initial)
Insulation Resistance:	>999 MΩ at 500Vdc (Initial)
Contact Resistance:	<20 mΩ (initial)
Operating Torque (nominal)	Standard 10.5 ± 1 N cm Light Action 5.5 ± 0.5 N cm
End Stop Torque (nominal):	0.80 Nm
Moulding Material:	Polyamide 6.6 G.F. V0 RATED
Contact/Terminal Material:	Brass CZ108 Ag Plated

RoHS COMPLIANT

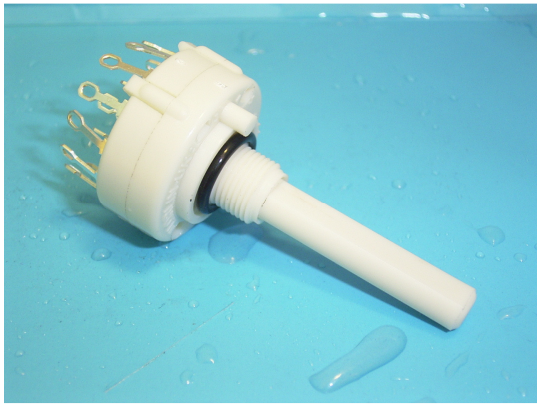

GENERAL FEATURES & OPTIONS

- Made in UK
- Cost effective single wafer switch
- Moulded 27.5mm diameter
- Standard 30º indexing
- Solder or Printed Circuit Board Terminals
- Up to 4 poles per switch
- Maximum 12 positions
- Moulded in UL94 V0 material.
- Optional reinforcement ring.
- Shorting (make before break 30º indexing only) or non shorting (break before make) contacts.
- Special options: 60ºor 90º indexing, continuous rotation. Fixed stop, gold flash or gold plated contacts, and spindles with special flats.
- CKS same form, fit & function to the CK range
- Dampened indexing & reduced shaft play gives smooth feel.
- Front panel sealed to IP66 – protected against powerful water jets
- Front panel sealed to IP67 – protected against the effects of temporary immersion in 1 meter of water. (ancillaries required)

CKS ROTARY SWITCH SPECIFICATION SHEET

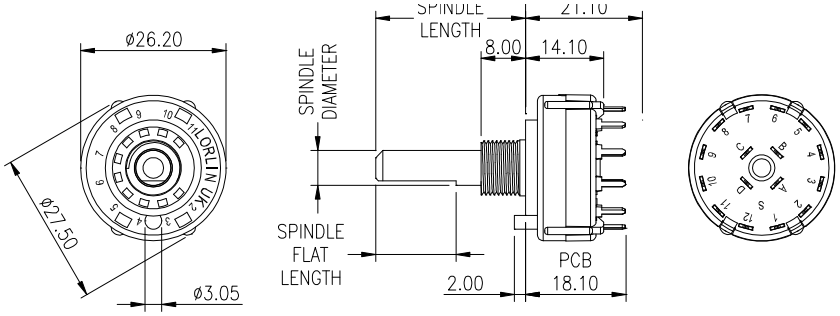





CUSTOMER PANEL (MIN 3mm) MOUNTING DETAILS. LUG MUST BE BLIND HOLE IN PANEL

PANEL SEAL ACHIEVED WITH DIA 9.0 x 2.0 SECTION O RING SUPPLIED WITH HARDWARE. MINIMAL GREASE SHOULD BE APPLIED TO SURFACES TO ENSURE GOOD SEAL

PRINTED CIRCUIT BOARD HOLE LAYOUT VIEWED FROM FRONT OF PCB

BASIC TYPES	SPINDLE DIAMETER	SPINDLE LENGTH FROM MOUNTING FACE	8mm LONG BUSH	SPINDLE FLAT LENGTH	ANGLE OF SPINDLE FLAT	SPINDLE FLAT THICKNESS
IMPERIAL	6.35mm	38mm	9.52 x 32TPI	30mm	90º	5.5mm
METRIC	6.00mm	50mm	M10 x 0.75	No Flat	---	---

Lorlin Electronics Ltd, Harwood Industrial Estate, Harwood rd, Littlehampton, W. Sussex BN17 7AT England
Tel (+44) 01903 725121 Fax (+44) 01903 726808 E-mail sales@lorlin.co.uk / www.lorlin.co.uk

CKS ROTARY SWITCH

30° INDEXING









60° INDEXING









90° INDEXING







IMPORTANT WAFERS FLATS & SLOTS VIEWED FROM THE FRONT OF SWITCH IN EXTREME ANTICLOCKWISE POSITION (POSITION 1)

SPINDLE FLAT ANGLE - AVAILABLE IN 15° INCREMENTS



SCREWDRIVER SLOT - AVAILABLE IN 45° INCREMENTS



ORDERING CODE FOR NON-STANDARD SWITCHES

EXISTING CK PARTS MAY BE ORDERED AS SEALED TYPE BY CHANGING PART NUMBER TO START WITH CKS

C	K	S								

SPINDLE LENGTH FMF IN FULL MM

Index Angles & NO. OF POLES		
A	30°	1Pole
B		2
C		3
D		4
E	60°	1Pole
F		2
G		3
H		4
I	90°	1Pole
J		2
K		3

NO OF WAYS (POSITIONS)	
A	2
B	3
C	4
D	5
E	6
F	7
G	8
H	9
I	10
J	11
K	12
Z	No Stop

	MBB or BBM	Contact Type	Contact Plating
A	BBM	Solder	SILVER
B	MBB	Solder	
C	BBM	PCB	
D	MBB	PCB	
E	BBM	Solder	GOLD PLATE
F	MBB	Solder	
G	BBM	PCB	
H	MBB	PCB	
I	BBM	Solder	GOLD FLASH
J	MBB	Solder	
K	BBM	PCB	
L	MBB	PCB	

	SPINDLE DIAM.	SPINDLE FLAT DEPTH	BUSH DIAM.
A	6mm	Nil	M10
B	6mm	5mm	M10
C	6.35mm	Nil	9.52 mm
D	6.35mm	5.5mm	9.52 mm

LENGTH OF SPINDLE FLAT			
A	2	N	15
B	3	O	No Flat
C	4	P	16
D	5	Q	17
E	6	R	18
F	7	S	19
G	8	T	20
H	9	U	21
I	10	V	22
J	11	W	23
K	12	X	24
L	13	Y	25
M	14	Z	Full

ANGLE OF FLAT (º)			
A	0	N	195
B	15	O	
C	30	P	210
D	45	Q	225
E	60	R	240
F	75	S	255
G	90	T	270
H	105	U	285
I	120	V	300
J	135	W	315
K	150	X	330
L	165	Y	345
M	180		

PLEASE COMPLETE THE SPECIFICATION DRAWING IF YOUR DETAILS CANNOT BE FULLFILLED BY USING THE ORDERING CODE & CONFIRM WITH LORLIN SALES BEFORE ORDERING. TOOLING CHARGES CAN APPLY FOR SPINDLES THAT DO NOT HAVE FLATS THAT RUN THE FULL SPINDLE LENGTH

Lorlin Electronics Ltd, Harwood Industrial Estate, Harwood rd, Littlehampton, W. Sussex BN17 7AT England
Tel (+44) 01903 725121 Fax (+44) 01903 726808 E-mail sales@lorlin.co.uk / www.lorlin.co.uk

CKS ROTARY SWITCH

SPECIFICATION SHEET

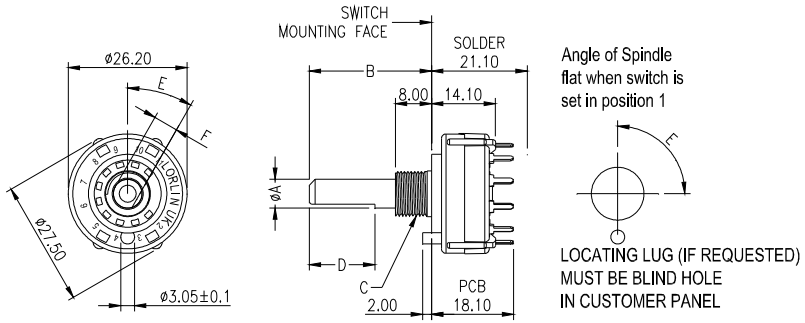

CUSTOMER TO COMPLETE OR DELETE AS REQUIRED

	A	B	C
IMPERIAL	Ø6.35		Ø9.52 x 32TPI
METRIC	Ø6.00		M10 x 0.75

	D	E	F
IMPERIAL			
METRIC			

INDEXING	INDEXING	INDEXING	INDEXING
			
1 POLE	2 POLE	3 POLE	4 POLE
POSITIONS	POSITIONS	POSITIONS	POSITIONS
MBB BBM SOL PCB	MBB BBM SOL PCB	MBB BBM SOL PCB	MBB BBM SOL PCB

IMPORTANT! WAFERS FLATS & SLOTS VIEWED FROM THE FRONT OF SWITCH IN EXTREME ANTICLOCKWISE POSITION (POSITION 1)

SPECIAL REQUIREMENTS

OPTIONS Stops are adjustable 2-12 positions. Continuous rotation (No Stops) available. Make before break (MBB) or Break before Make (BBM) rotors available. Solder Tag (SOL) or PCB pin (PCB) – indicate on wafer.

CUSTOMER: DATE: CUSTOMER REFERENCE NUMBER:

Lorlin Electronics Ltd, Harwood Industrial Estate, Harwood rd, Littlehampton, W. Sussex BN17 7AT England
Tel (+44) 01903 725121 Fax (+44) 01903 726808 E-mail sales@lorlin.co.uk / www.lorlin.co.uk

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.