


11.5kW 3-Phase Metered PDU, 240-220V (36 C13 & 9 C19), IEC-309 16/20A Red, 415-380V Input, 6ft Cord, 0U Vertical

MODEL NUMBER: PDU3XMV6G20

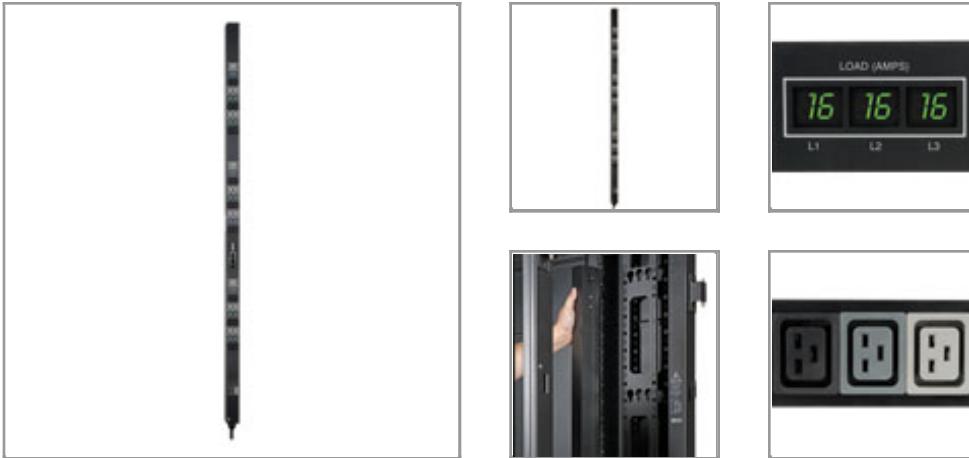

Highlights

- Metered 11.5kW 3 Phase 415/240V, 400/230V, 380/220V input / output PDU
- Set of 3 digital meters reports output load level per phase in amps
- 70in / 1778mm 0U vertical format, toolless button-mount installation
- IEC-309 Red 16/20A (3P+N+E) 3 phase input; 6ft 1.8m line cord
- 36 C13 & 9 C19 single phase outlets; Included cord retention brackets

Package Includes

- Metered rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

Description

Tripp Lite 3 phase Metered PDU / Power Distribution Units offer real-time local reporting of current levels in amps via set of 3 built-in digital meters. Enables visual monitoring of PDU current levels to preserve proper loading balance and prevent circuit overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

Features

- 11.5kW Metered Power Distribution Unit (PDU)
- 415/400/380V IEC-309 Red 16/20A (3P+N+E) 3-phase input connection
- 240/230/220V output with 36 C13 & 9 C19 single phase output receptacles
- Supports 50/60Hz worldwide applications with CE and North American certifications
- 0U / 1778mm vertical rackmount installation supported
- Outlets are arranged in 3 metered 15 outlet load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included) for other mounting applications
- TAA Compliant Version Available - Order Tripp Lite [PDU3XMV6G20TAA](#)

Specifications

| OVERVIEW | |
|----------|---------|
| PDU Type | Metered |



| OUTPUT | |
|--|--|
| Output Capacity Details | 11.5kW (415/240V), 11.1kW (400/230V), 10.5kW (380/220V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max (10A CE) per C13 outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (36) C13; (9) C19 |
| Output Nominal Voltage | 220 (380V input); 230 (400V input); 240 (415V input) |
| Overload Protection | n/a |
| INPUT | |
| PDU Input Voltage | 380; 400; 415 |
| Recommended Electrical Service | 16A 400/230V with IEC309 16A Red (3P+N+E) outlet; 20A 415/240V with IEC309 20A Red (3P+N+E) outlet |
| Maximum Input Amps | 16 |
| PDU Plug Type | IEC-309 16/20A RED (3P+N+E) |
| Input Cord Length (ft.) | 6 |
| Input Cord Length (m) | 1.8 |
| Input Phase | 3-Phase |
| USER INTERFACE, ALERTS & CONTROLS | |
| Reported Load Segments | Supports local monitoring of current for each output phase (16A balanced max per output load banks L1, L2 and L3); Outlets are color-coded and labelled for easy phase and load bank identification; L1-N feeds black outlets; L2-N feeds dark-gray outlets; L3-N feeds light-gray outlets |
| Front Panel LCD Display | Set of 3 digital meters report per-phase output current in amps (L1, L2, L3) |
| PHYSICAL | |
| Shipping Dimensions (hwd / in.) | 6.1 x 4.3 x 75.8 |
| Shipping Dimensions (hwd / cm) | 15.5 x 10.9 x 192.5 |
| Shipping Weight (lbs.) | 13.8 |
| Shipping Weight (kg) | 6.2 |
| Unit Dimensions (hwd / in.) | 70 x 2.2 x 1.93 |
| Unit Dimensions (hwd / cm) | 177.8 x 5.6 x 4.9 |
| Unit Weight (lbs.) | 9 |
| Unit Weight (kg) | 4.1 |
| Material of Construction | Metal |
| Form Factors Supported | Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | 0U; Vertical |



| ENVIRONMENTAL | |
|-------------------------------------|---|
| Storage Temperature Range | 5 to 122F (-15 to 50C) |
| Relative Humidity | 5 to 95% non-condensing |
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |
| CERTIFICATIONS | |
| TAA Compliant Option | TAA Compliant Version Available - Order Tripp Lite PDU3XMV6G20TAA |
| Certifications | Tested to UL (USA), CSA (Canada), NOM (Mexico), CE (EU), Class A (Emissions), RoHS (Hazardous Substances) |
| WARRANTY | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.