

PRODUCT OVERVIEW

The HPR4XXC Series uses advanced circuit design and packaging technology to realize superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. The HPR4XXC Series reduces beat-frequency oscillation problems when used with high frequency isolation amplifiers. Reduced parts count and high efficiency add to the reliability of the HPR4XXC Series.

The high efficiency of the HPR4XXC Series means less internal power dissipation, as low as 190mW. With less heat to dissipate the HPR4XXC Series can operate at higher temperatures with no degradation of reliable operation. In addition, the high efficiency of the HPR4XXC Series means the series is able to offer greater than 10 W/inch³ of output power density. Operation down to no load will not impact the reliability of the series, although this product has a ≥ 1 mA minimum load for specifications purposes.

The HPR4XXC Series provides high isolation in a very small package. The use of surface mounted devices and manufacturing technologies makes it possible to offer premium performance and low cost.

FEATURES

- High Isolation Voltage: 3000 VPK Test
- Single-In-Line Package (SIP)
- Internal Input and Output
- Low Cost
- Non-Conductive Case
- High Output Power Density: 10 Watts/Inch³
- Extended Temperature Range: -25°C to +85°C
- High Efficiency to 79%
- RoHS Compliant

SPECIFICATIONS All specifications are typical at $T_A = +25^\circ\text{C}$ nominal input voltage unless otherwise specified.

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT (mA)			REFLECTED RIPPLE CURRENT (mA _{p-p})	EFFICIENCY (%)
				NO LOAD (mA)	RATED TYP	LOAD MAX		
HPR400C	5	5	150	20	216	235	10	69
HPR401C	5	12	62	20	212	235	5	70
HPR402C	5	15	50	20	212	235	5	71
HPR403C	5	± 5	± 75	20	218	245	5	68
HPR404C	5	± 12	± 30	20	212	235	5	68
HPR405C	5	± 15	± 25	20	220	220	5	75
HPR406C	12	5	150	10	90	100	5	69
HPR407C	12	12	62	10	81	90	5	77
HPR408C	12	15	50	10	81	90	5	77
HPR409C	12	± 5	± 75	10	88	98	5	71
HPR410C	12	± 12	± 30	10	81	90	5	74
HPR411C	12	± 15	± 25	10	81	90	5	77
HPR412C	15	5	150	8	72	80	5	69
HPR413C	15	12	62	8	72	80	5	69
HPR414C	15	15	50	8	72	80	5	69
HPR415C	15	± 5	± 75	8	72	80	5	69
HPR416C	15	± 12	± 30	8	63	70	5	76
HPR417C	15	± 15	± 25	8	63	66	5	79
HPR418C	24	5	150	8	48	53	15	65
HPR419C	24	12	62	8	48	53	15	65
HPR420C	24	15	50	8	45	50	15	69
HPR421C	24	± 5	± 75	8	45	50	15	69
HPR422C	24	± 12	± 30	8	45	50	15	67
HPR423C	24	± 15	± 25	8	45	50	15	69

Note: Other input to output voltages may be available. Please contact Murata Power Solutions.



For full details go to
www.murata-ps.com/rohs

SPECIFICATIONS, ALL MODELS

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage unless otherwise specified.

	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
OUTPUT	INPUT					
	Voltage Range		4.5	5	5.5	VDC
			10.8	12	13.2	VDC
			13.5	15	16.5	VDC
			21.6	24	26.4	VDC
	OUTPUT					
	Rated Power				750	mW
	Voltage Setpoint Accuracy	Rated Load, Nominal V_{IN}			± 5	%
	Ripple & Noise	BW = DC to 10MHz		150	200	mVp-p
		BW = 10Hz to 2MHz		30	40	mVrms
Voltage (Over Input Voltage Range)	1mA to Rated Current, $V_{OUT} = 5V$		4.75		7	VDC
	1mA to Rated Current, $V_{OUT} = 12V$		11.40		15	VDC
	1mA to Rated Current, $V_{OUT} = 15V$		14.25		18	VDC
Temperature Coefficient			.01	.05	%/ $^\circ\text{C}$	
REGULATION						
Load Regulation (All other modes)	Rated Load to 1mA Load			3	%	
GENERAL						
ISOLATION						
Rated Voltage			1000		VDC	
Test Voltage	60 Hz, 60 Seconds		3000		Vpk	
Resistance			10		$\text{G}\Omega$	
Capacitance				25	100	pF
Leakage Current	$V_{ISO} = 240\text{VAC}$, 60Hz			2	7	μArms
Switching Frequency				170		kHz
Frequency Change	Over Line and Load			24		%
Package Weight					3	g
MTTF per MIL-HDBK-217, Rev. F*	Circuit Stress Method					
Ground Benign	$T_A = +25^\circ\text{C}$		7.9			MHr
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-20			2		
TEMPERATURE						
Specification			-25	+25	+85	$^\circ\text{C}$
Operation			-40		+100	$^\circ\text{C}$
Storage			-40		+110	$^\circ\text{C}$

SOLDERING INFORMATION


The HPR4XXC devices are intended for wave soldering or manual soldering.

They are not intended to be subject to surface mount processes under any circumstances.


The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C . Care should be taken to control manual soldering limits identical to that of wave soldering.

TYPICAL PERFORMANCE CURVES

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage and nominal load.

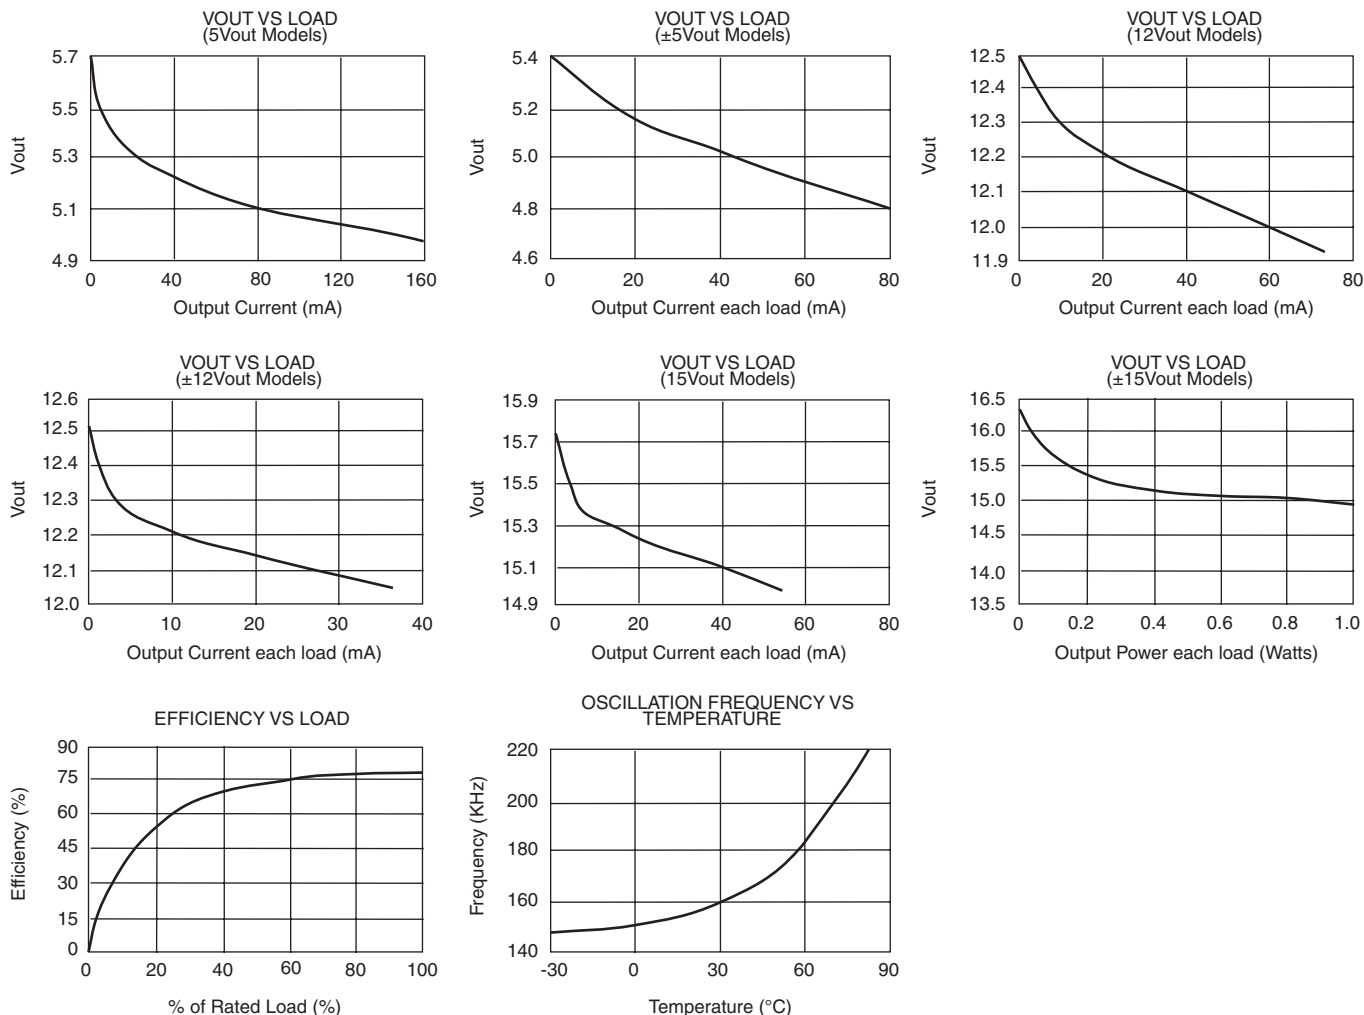


SAFE OPERATING AREA

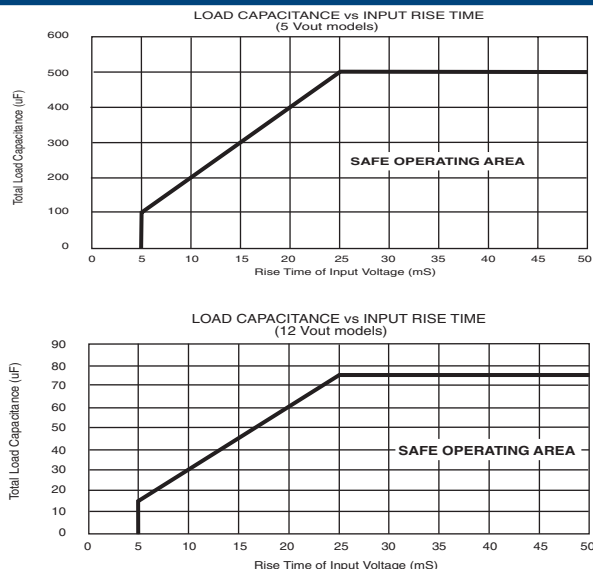

NOTES:

- 1.) When operated within the SAFE OPERATING AREA as defined above curves, the output voltage of HPR4XXC devices is guaranteed to be within 95% of its steady-state value within 100 milliseconds after the input voltage has reached 95% of its steady-state value.
- 2.) For dual output models, total load capacitance is the sum of the capacitances on the plus and minus outputs.

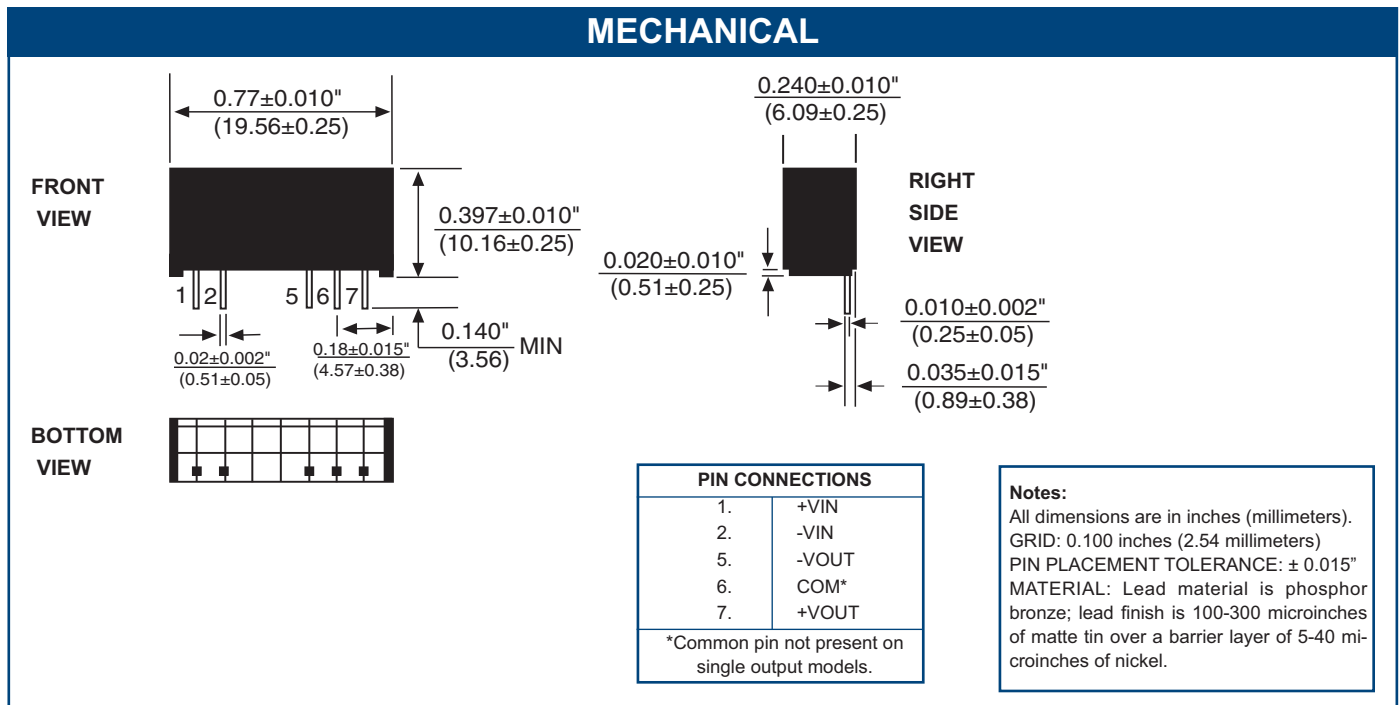

ABSOLUTE MAXIMUM RATINGS

Internal Power Dissipation.....450mW
 ShortCircuitDuration.....Momentary
 Lead Temperature (soldering, 10 seconds max ...+300°C*)

*NOTE: Refer to Reflow Profile for SMD Models.

ORDERING INFORMATION

Device Family _____ **HPR** **4XX** **C**
 HPR Indicates DC/DC Converter
 Model Number _____
 Selected from Table of Electrical Characteristics
 RoHS Compliant Version _____



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.